


Add the configuration file to github

1-Create Repository

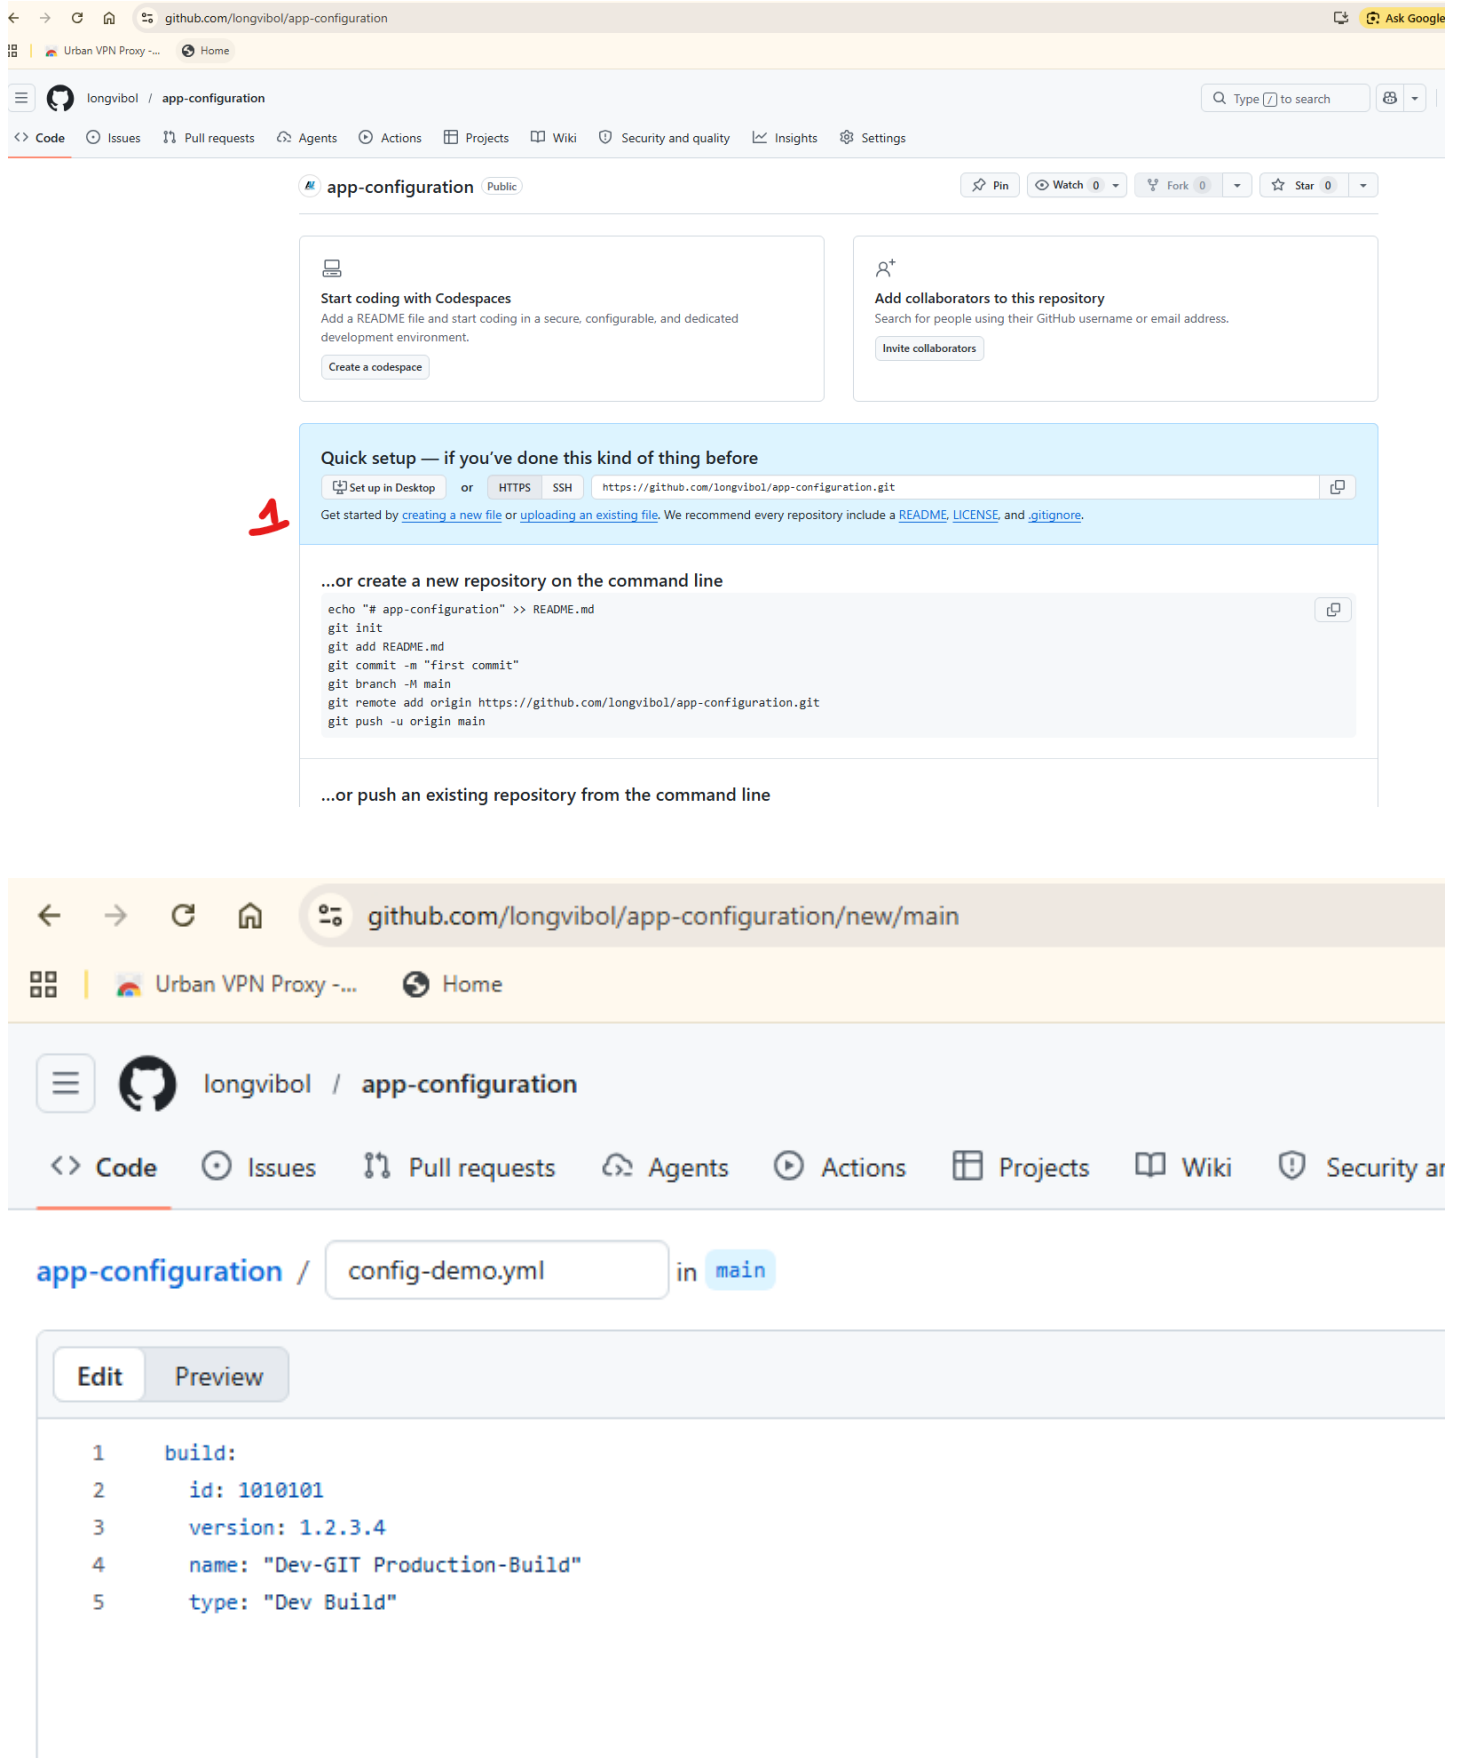

The image shows two screenshots of the GitHub web interface. The top screenshot shows the 'app-configuration' repository page with options to start coding with Codespaces, add collaborators, and a 'Quick setup' section. A red number '1' is next to the 'Quick setup' section. The bottom screenshot shows the 'new/main' page for the repository, where a file named 'config-demo.yml' is being edited in the 'main' branch. The file content is as follows:

```
1 build:
2   id: 1010101
3   version: 1.2.3.4
4   name: "Dev-GIT Production-Build"
5   type: "Dev Build"
```


- We can create many file to have configuration: dev, prod, default

2- Map from the git hub to the Spring boot: config server

- Add : `@EnableConfigServer`


```
1 package com.demo.configserver;
2
3 import org.springframework.boot.SpringApplication;
4
5 @SpringBootApplication
6 @EnableConfigServer
7 public class ConfigserverApplication {
8
9     public static void main(String[] args) {
10         SpringApplication.run(ConfigserverApplication.class, args);
11     }
12 }
```

- Access to url : <http://localhost:8888/configdemo/default>

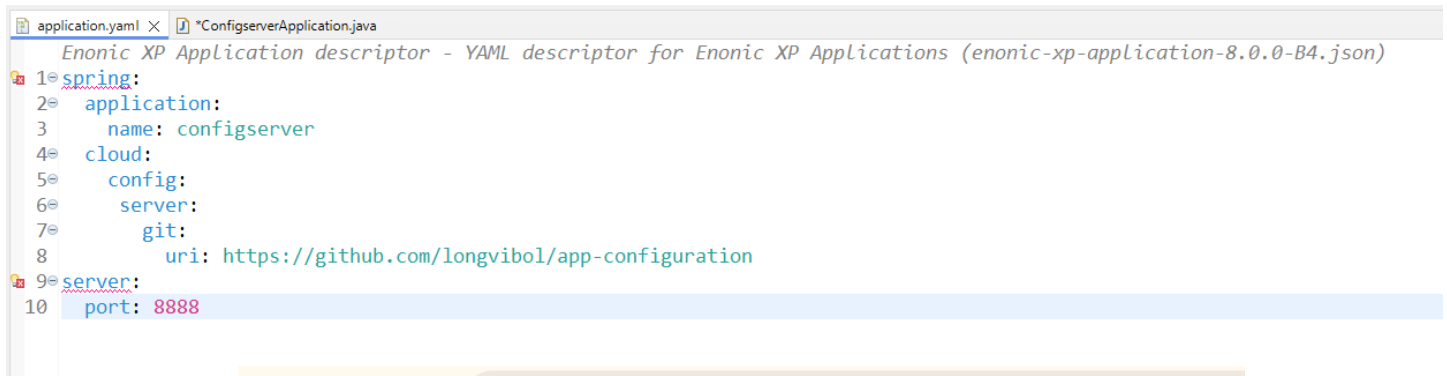

The screenshot shows an IDE with two files open: `application.yml` and `*ConfigserverApplication.java`. The `application.yml` file contains the following configuration:

```
1 spring:
2   application:
3     name: configserver
4   cloud:
5     config:
6       server:
7         git:
8           uri: https://github.com/longvibol/app-configuration
9   server:
10    port: 8888
```

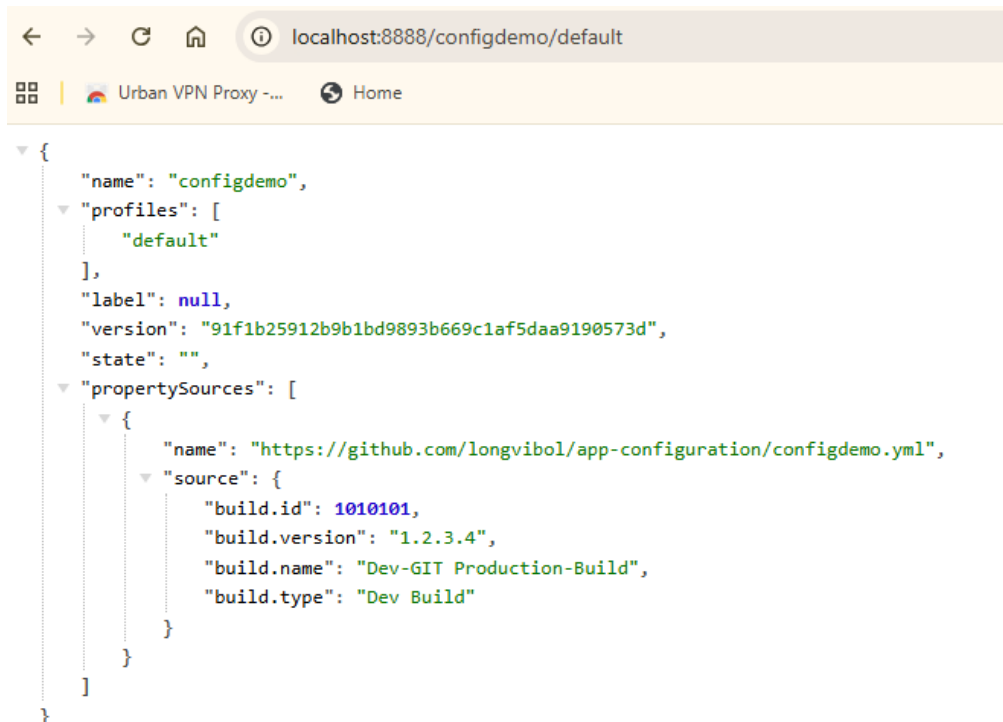

If we check the log:

2026-05-28T15:33:51.391+07:00 INFO 16924 --- [configserver] [nio-8888-exec-1]
o.s.c.c.s.e.NativeEnvironmentRepository : Adding property source: Config resource
'file [C:\Users\home\AppData\Local\Temp\config-repo-
3943239808996779000\configdemo.yml]' via location
'file:/C:/Users/home/AppData/Local/Temp/config-repo-3943239808996779000/'

- หน้าที่การ store the file into the AppData and fetch the configuration from the github

3- Create other configurations

The screenshot shows a GitHub repository named 'app-configuration' (Public). The repository has 1 branch (main) and 0 tags. A red arrow points to the 'Add file' button. The commit history shows three commits by 'longvibol':

- configdemo-dev.yml: Create configdemo-dev.yml (now)
- configdemo-prod.yml: Create configdemo-prod.yml (now)
- configdemo.yml: Rename config-demo.yml to configdemo.yml (40 minutes ago)

Below the commit history is a section for 'README' with a button to 'Add a README'.

On the left, the 'Files' section shows the repository structure:

- main
- configdemo-dev.yml (highlighted)
- configdemo-prod.yml
- configdemo.yml

On the right, the details for 'app-configuration / configdemo-dev.yml' are shown, including the commit by 'longvibol' and the file content:

```
1 build:
2   id: 101
3   version: 1.2.3
4   name: "Dev-Build"
5   type: "Development Build"
```

- <http://localhost:8888/configdemo/dev>
- <http://localhost:8888/configdemo/prod>
- <http://localhost:8888/configdemo/default>

```
{
  "name": "configdemo",
  "profiles": [
    "dev"
  ],
  "label": null,
  "version": "af02453c116e5b39caf92101e25142650c149b87",
  "state": "",
  "propertySources": [
    {
      "name": "https://github.com/longvibol/app-configuration/configdemo-dev.yml",
      "source": {
        "build.id": 101,
        "build.version": "1.2.3",
        "build.name": "Dev-Build",
        "build.type": "Development Build"
      }
    },
    {
      "name": "https://github.com/longvibol/app-configuration/configdemo.yml",
      "source": {
        "build.id": 1010101,
        "build.version": "1.2.3.4",
        "build.name": "Dev-GIT Production-Build",
        "build.type": "Dev Build"
      }
    }
  ]
}
```