

Configuration Server and Client

1-Server Config

```
1 package com.demo.configserver;  
2  
3+ import org.springframework.boot.SpringApplication;..  
6  
7 @SpringBootApplication  
8 @EnableConfigServer  
9 public class ConfigserverApplication {  
10  
11+ public static void main(String[] args) {  
12     SpringApplication.run(ConfigserverApplication.class, args);  
13 }  
14 }
```

2-Client Config : pom.xml

```
<?xml version="1.0" encoding="UTF-8"?>  
<project xmlns="http://maven.apache.org/POM/4.0.0"  
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.xsd">  
  <modelVersion>4.0.0</modelVersion>  
  <parent>  
    <groupId>org.springframework.boot</groupId>  
    <artifactId>spring-boot-starter-parent</artifactId>  
    <version>4.0.6</version>  
    <relativePath></relativePath>  
  </parent>  
  <groupId>com.info</groupId>  
  <artifactId>config-client</artifactId>  
  <version>0.0.1-SNAPSHOT</version>  
  <name>config-client</name>  
  <description>Spring Cloud Config Client</description>  
  <properties>  
    <java.version>25</java.version>  
    <spring-cloud.version>2025.1.1</spring-cloud.version>  
  </properties>  
  <dependencies>  
    <!-- Web API -->  
    <dependency>  
      <groupId>org.springframework.boot</groupId>  
      <artifactId>spring-boot-starter-web</artifactId>  
    </dependency>  
    <!-- Spring Cloud Config Client -->  
    <dependency>  
      <groupId>org.springframework.cloud</groupId>  
      <artifactId>spring-cloud-starter-config</artifactId>  
    </dependency>  
    <!-- Lombok -->  
    <dependency>  
      <groupId>org.projectlombok</groupId>  
      <artifactId>lombok</artifactId>  
      <optional>true</optional>  
    </dependency>  
    <!-- Test -->  
    <dependency>  
      <groupId>org.springframework.boot</groupId>  
      <artifactId>spring-boot-starter-test</artifactId>  
      <scope>test</scope>  
    </dependency>  
  </dependencies>  
  <dependencyManagement>  
    <dependencies>  
      <dependency>  
        <groupId>org.springframework.cloud</groupId>  
        <artifactId>spring-cloud-dependencies</artifactId>  
        <version>${spring-cloud.version}</version>  
        <type>pom</type>  
        <scope>import</scope>  
      </dependency>  
    </dependencies>  
  </dependencyManagement>  
  <build>  
    <plugins>  
      <plugin>  
        <groupId>org.springframework.boot</groupId>  
        <artifactId>spring-boot-maven-plugin</artifactId>  
      </plugin>  
      <plugin>  
        <groupId>org.apache.maven.plugins</groupId>  
        <artifactId>maven-compiler-plugin</artifactId>  
        <configuration>  
          <annotationProcessorPaths>  
            <path>  
              <groupId>org.projectlombok</groupId>  
              <artifactId>lombok</artifactId>  
            </path>  
          </annotationProcessorPaths>  
        </configuration>  
      </plugin>  
    </plugins>  
  </build>  
</project>
```

3-Client Side setup

- Application.yml (where we connection to the server side)

spring:

application:

name: configdemo

profiles:

active: default

config:

import: optional:configserver:http://localhost:8888

build:

id: \${ID}


version: \${VERSION}

name: \${NAME}

- import: optional:configserver:http://localhost:8888 (is the server url where we connect to the server config)

4- Testing

- GET: <http://localhost:8888/configdemo/dev>

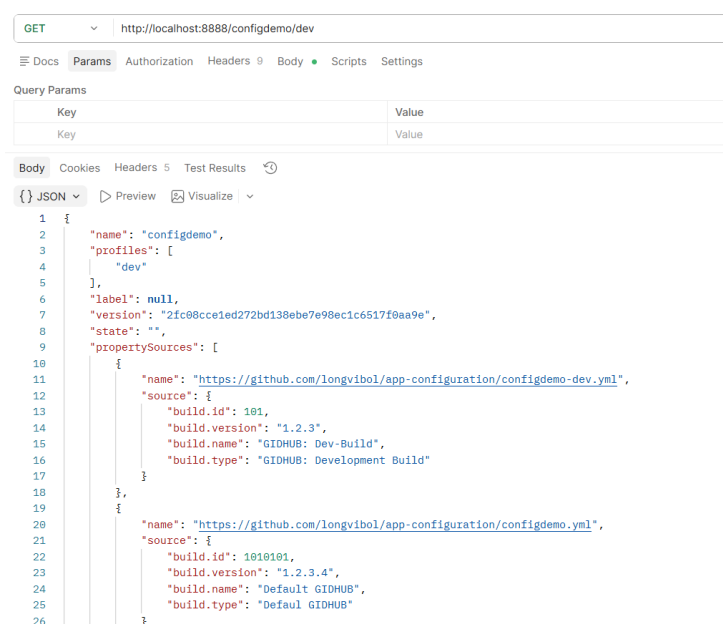

- GET: <http://localhost:8080/build-info>

Note: in the importance is anotatin @RefreshScope

```
1 package com.info.config;
2
3 import org.springframework.beans.factory.annotation.Value;
4
5
6 @RestController
7 // @AllArgsConstructor
8 @RefreshScope
9 public class BuildInfoController {
10
11     @Value("${build.id:default}")
12     private String buildId;
13
14     @Value("${build.version:default}")
15     private String buildVersion;
16
17     @Value("${build.name:default}")
18     private String buildName;
19
20     @GetMapping("/build-info")
21     public String getBuildInfo() {
22         return "Build ID: " + buildId + ", Version: " + buildVersion + ", Name: " + buildName;
23     }
24 }
25
26
27
```

```
1 spring:
2   application:
3     name: configdemo
4   profiles:
5     active: prod
6   config:
7     import: optional:configserver:http://localhost:8888
8
9 build:
10   id: ${ID}
11   version: ${VERSION}
12   name: ${NAME}
13
14 management:
15   endpoints:
16     web:
17       exposure:
18         include: refresh
```

spring:

application:

name: configdemo

profiles:

active: prod

config:

import: optional:configserver:http://localhost:8888

build:

id: \${ID}

version: \${VERSION}

name: \${NAME}

management:

endpoints:

web:

exposure:

include: refresh

@RestController

//@AllArgsConstructor

@RefreshScope

public class BuildInfoController {

 @Value("\${build.id:default}")

private String buildId;

 @Value("\${build.version:default}")

private String buildVersion;

 @Value("\${build.name:default}")

private String buildName;

 @GetMapping("/build-info")

public String getBuildInfo() {

return "Build ID: " + buildId + ", Version: " + buildVersion + ", Name: " + buildName;

 }

}