



dt1

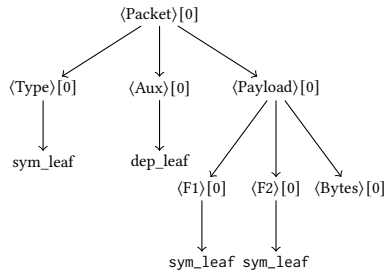

search_depth = 1
visited = {dt2}

dt2 (top of decision stack)

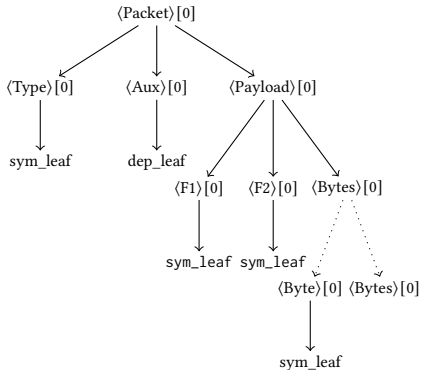

search_depth = 2
visited = $\emptyset$

```

assertedConstraints = {
  // Assertion level 1
  Packet0_Type0 = 0x01 ∨
  Packet0_Type0 = 0x02,
  ...
  // Assertion level 2
  Packet0_Payload0_Bytes0_Byte0
  bvult 0x88
  ...
}
bd? = false
assertionLevel = 2
  
```