



# **ITEXMO SMS API DOCUMENTATION**

## **V5**

# TABLE OF CONTENTS

|                               |    |
|-------------------------------|----|
| OVERVIEW                      | 1  |
| PREREQUISITES                 | 1  |
| REQUEST HEADERS               | 2  |
| SENDING A MESSAGE API         | 6  |
| SENDING MULTIPLE MESSAGES API | 10 |
| SENDING OTP MESSAGE API       | 13 |
| RECEIVE DELIVERY REPORTS      | 16 |
| QUERY API                     | 20 |
| RECIPIENT STATUS API          | 42 |
| SMS LENGTH CALCULATION        | 49 |

# OVERVIEW

ITEXMO SMS SERVICES INC. is made to help its clients integrate messaging (SMS) capabilities to their system. All connections in our API require authentication and are secured by TLS/SSL.

This paper provides the complete list of the APIs where clients can send, manage and/or view their messages.

The latest ITEXMO SMS API (with endpoint ***api.itexmo.com***) features a RESTful architecture and supports JSON media type.

# PREREQUISITES

Following are the prerequisites for ITEXMO SMS API integration

- ***api.itexmo.com***
  - o All the requests should contain ITEXMO credentials (Email and Password) for authentication;
  - o The requesting system should have an active APICODE in our system;
  - o Requests must contain all the valid information to perform operation on ITEXMO.

# REQUEST HEADERS

Requests to our API must contain ITEXMO credentials in request params. API requests are authenticated by the following HTTP params.

***api.itexmo.com***

| Parameter | Expected Value                       | Description                             | Example                |
|-----------|--------------------------------------|-----------------------------------------|------------------------|
| Email     | Required,<br>String, Email<br>format | Email of active<br>ITEXMO account       | itexmoclient@gmail.com |
| Password  | Required, String                     | Password of<br>active ITEXMO<br>account | 123456789ABCD          |

Those are two parameters needed to access the ITEXMO API. All other parameters are properly validated in the request. If client use a wrong value or missing a required parameter, then API will provide the appropriate error messages.

**Note:** If the client doesn't want to include the following ITEXMO credentials in the requested params, the client can use an Authorization Header- Basic Auth which the latest API (***api.itexmo.com***) supports.

## Adding Basic Auth using PHP cURL

([api.itexmo.com](https://api.itexmo.com))

```
$endpoint = 'https://api.itexmo.com/api/broadcast';
$email = 'itexmoclient@gmail.com'; // Client email
$password = '123456789ABCD'; // Client password
$ch = curl_init($endpoint); // Initiate cURL
$headers = array(
    'Content-Type: application/json',
    'Authorization: Basic ' . base64_encode("$email:$password")
); // Create the headers array containing authorization
curl_setopt($ch, CURLOPT_HTTPHEADER, $headers); // Set the headers
// Set other cURL options here such as http method, data, etc.
$response = curl_exec($ch); // Execute the cURL request if
    (curl_errno($ch)) { // Check for errors.
        echo curl_error($ch); // If an error occurred
    }
echo $response; // Print out the response
curl_close($ch); // Close cURL
```

## Adding Basic Auth using Laravel Guzzle


([api.itexmo.com](http://api.itexmo.com))

```
...  
$content = [  
    "ApiCode" => "APICODEABCD1234",  
    // Declare other data for contents  
]; // Must contain the data for the request  
$endpoint = 'https://api.itexmo.com/api/broadcast';  
$email = 'itexmoclient@gmail.com'; // Client email  
$password = '123456789ABCD'; // Client password  
$client = new \GuzzleHttp\Client();  
$response = $client->post($endpoint, [  
    'headers' => [  
        'Content-Type' => 'application/json', 'Accept' =>  
            'application/json',  
        'Authorization' => 'Basic ' . base64_encode("$email:$password")  
    ],  
    'body' => json_encode($content)  
]);  
...
```

## Adding Basic Auth using Postman

(*api.itexmo.com*)

Select POST method. Set the request url. In the Authorization Menu, select Basic Auth type. Type the email in username field and password in password field. Assuming the Body Menu has necessary and valid data, clicking Send will return the expected response.

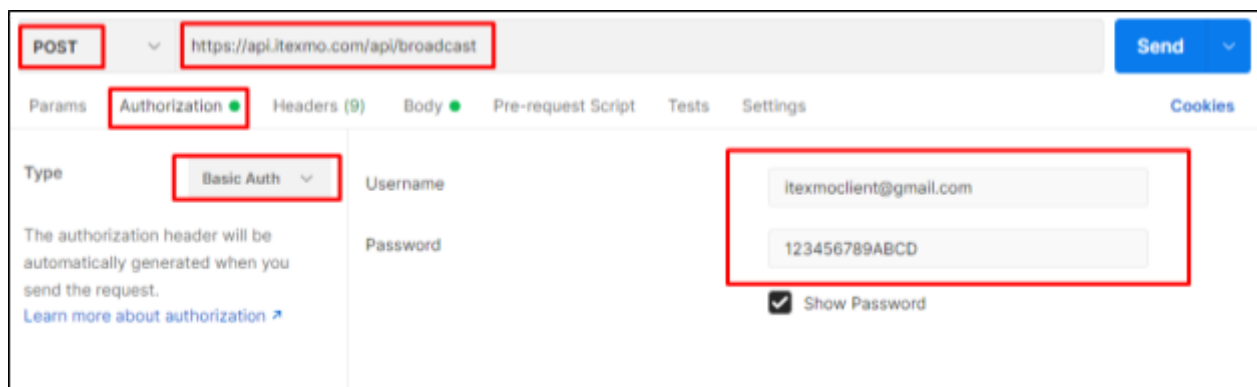

**Note:** For reference, ApiCodes with server type of Direct are called Sender ID ApiCodes, while the rest of ApiCodes with different server type (Shared or Dedicated) is called Non-Sender ID ApiCodes.

# SENDING A MESSAGE API

This can be used by an authorized ITEXMO account to send a message directly to a recipient/s either with senderid or without.

Sending A Message API requests are protected by TLS and uses the following base URL:

POST: <https://api.itexmo.com/api/broadcast>

Following are the requests to call the Sending A Message API:

***api.itexmo.com***

| Parameter | Expected Value                 | Description                                            | Example                |
|-----------|--------------------------------|--------------------------------------------------------|------------------------|
| Email     | Required, String, Email format | Email of active ITEXMO account                         | itexmoclient@gmail.com |
| Password  | Required, String               | Password of active ITEXMO account                      | 123456789ABCD          |
| ApiCode   | Required, String               | Active ApiCode purchased under client's ITEXMO account | PR-SAMPL123456_ABCDE   |



|            |                                  |                                                                                                                                                                                                                      |                                   |
|------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| SenderId   | Optional<br>, String             | Only for senderid package type of ApiCode, the registered brand in Telco.<br>If left blank, system will use the first found registered Sender ID under client's ApiCode.<br>If none registered, will use ITEXMO SMS. | ITEXMO SMS                        |
| ClientId   | Optional,<br>String (Alpha-Dash) | Client's transaction id, maximum of 50 characters                                                                                                                                                                    | 123ABC                            |
| Recipients | Required,<br>Array, Unique       | Recipient/s number<br>(maximum: 250)                                                                                                                                                                                 | ["09123456789",<br>"09123456788"] |
| Message    | Required,<br>String              | Message content                                                                                                                                                                                                      | Test message.                     |

**Note:** In *api.itexmo.com*, if client provides both Email and Password in the request parameters and in authorization header, the request parameters will be ignored and the basic authentication values will be used.

**Note:** For Trial APICode users, you can send messages using specific templates:

- "Just a sample message for testing purposes."
- "You're receiving this as a sample message."
- "This is a test message. No action is needed."
- "Sample message: please disregard."
- "This message is only a sample."
- "Hello! This is a trial message."

Any other message template will not work.

**Note:** For Trial APICode users, only this route will work. Attempting to use other routes with a Trial APICode will result to an error message.

## Sample JSON Content (RAW)

*itexmo.com*

```
{
  "ApiCode": "PR-SAMPL123456_ABCDE ", "passwd":
    "123456789ABCD",
  "Numbers": [
    "09123456789",
    "09123456788"
  ],
  "Message": "Test message.", "SenderID":
    "ITEXMO SMS"
}
```

*api.itexmo.com*

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Recipients": [
    "09123456789",
    "09123456788"
  ],
  "Message": "Test message.",
  "ApiCode": "PR-SAMPL123456_ABCDE", "SenderId":
    "ITEXMO SMS"
}
```

# SENDING MULTIPLE MESSAGES API

This can be used by an authorized ITEXMO account with active APICODE to send different messages directly to various recipients either with senderid or without.

Sending Multiple Message API requests are protected by TLS and uses the following base URL:

Production: <https://api.itexmo.com/api/broadcast-2d>

Following are the requests to call the Sending Multiple Message API:

| Parameter | Expected Value                 | Description                                                                                                | Example                                                                         |
|-----------|--------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Email     | Required, String, Email format | Email of active ITEXMO account                                                                             | itexmoclient@gmail.com                                                          |
| Password  | Required, String               | Password of active ITEXMO account                                                                          | 123456789ABCD                                                                   |
| ApiCode   | Required, String               | Active ApiCode purchased under client's ITEXMO account                                                     | PR-SAMPL123456_ABCDE                                                            |
| Contents  | Required, Array                | Contains the recipient and corresponding message (maximum: 250)<br><br>Must have unique recipient in every | [{<br>"Message":<br>"Test message 1.",<br>"Recipient":<br>"09123456789"<br>}, { |

|               |                                  |                                                                                                                                                                                                                                     |                                                                                   |
|---------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|               |                                  | request.                                                                                                                                                                                                                            | <pre> "Message":   "Test message 2.", "Recipient":   "09123456788" }] </pre>      |
| SenderId      | Optional<br>, String             | <p>Only for senderid package type of ApiCode, the registered brand in Telco.</p> <p>If left blank, system will use the first found registered Sender ID under client's ApiCode.</p> <p>If none registered, will use ITEXMO SMS.</p> | ITEXMO SMS                                                                        |
| ClientId      | Optional,<br>String (Alpha-Dash) | Client's transaction id, maximum of 50 characters                                                                                                                                                                                   | 123ABC                                                                            |
| PriorityLevel | Optional<br>, String             | <p>The priority level of message. The default is NORMAL. HIGH means the request will be prioritized among client's other request.</p>                                                                                               | <p>HIGH</p> <p>* Only for non-senderid package with dedicated type of server.</p> |

## Sample JSON Content (RAW)

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Contents": [
    {
      "Message": "Test message 1.", "Recipient":
        "09123456789"
    },
    {
      "Message": "Test message 2.", "Recipient":
        "09123456788"
    }
  ],
  "ApiCode": "PR-SAMPL123456_ABCDE", "SenderId":
    "ITEXMO SMS"
}
```

# SENDING OTP MESSAGE API

This can be used by an authorized ITEXMO account with DIRECT SERVER TYPE APICODE (with Sender ID) to send OTP message directly to a recipient.

Sending OTP Message API requests are protected by TLS and uses the following base URL:

New Production: <https://api.itexmo.com/api/broadcast-otp>

Following are the requests to call the Sending Multiple Message API:

***api.itexmo.com***

| Parameter | Expected Value                 | Description                                            | Example                |
|-----------|--------------------------------|--------------------------------------------------------|------------------------|
| Email     | Required, String, Email format | Email of active ITEXMO account                         | itexmoclient@gmail.com |
| Password  | Required, String               | Password of active ITEXMO account                      | 123456789ABCD          |
| ApiCode   | Required, String               | Active ApiCode purchased under client's ITEXMO account | PR-SAMPL123456_ABCDE   |

|            |                                      |                                                                                                                                                                        |                 |
|------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| SenderId   | Optional<br>, String                 | The registered brand in Telco.<br>If left blank, system will use the first found registered Sender ID under client's ApiCode. If none registered, will use ITEXMO SMS. | ITEXMO SMS      |
| ClientId   | Optional<br>, String<br>(Alpha-Dash) | Client's transaction id, maximum of 50 characters                                                                                                                      | 123ABC          |
| Recipients | Required<br>, Array                  | Recipient/s number (maximum: 1)                                                                                                                                        | ["09123456789"] |
| Message    | Required<br>, String                 | Message content                                                                                                                                                        | OTP 12345.      |



## Sample JSON Content (RAW)

*itexmo.com*

```
{
  "ApiCode": "PR-SAMPL123456_ABCDE ", "passwd":
    "123456789ABCD",
  "Numbers": ["09123456789"],
  "Message": "Test message.", "SenderID":
    "ITEXMO SMS"
}
```

*api.itexmo.com*


**Note:** OTP messages are expected to be short in character length. With this, our system allows maximum of 160 characters for OTP regardless of the maximum characters client's apicode is allowed to.

```
itexmoclient@gmail.com", "Password":
  "123456789ABCD",
  "Recipients": [
    "09123456789"
  ],
  "Message": "OTP 12345.",
  "ApiCode": "PR-SAMPL123456_ABCDE", "SenderId":
    "ITEMXO SMS"
}
```

## RECEIVE DELIVERY REPORTS

This can be used by an authorized ITEXMO account to send message/s directly to recipient/s with senderid and received a delivery report.

Whenever client sends a request through our APIs, our system provide a Long ID which serves as the reference number for every request our system processed. That only gives information from our side. If the client wanted additional information from the side of recipient/s of their request, our system can provide an acknowledgement or delivery reports. For the client to understand more how this works, check the diagram below.

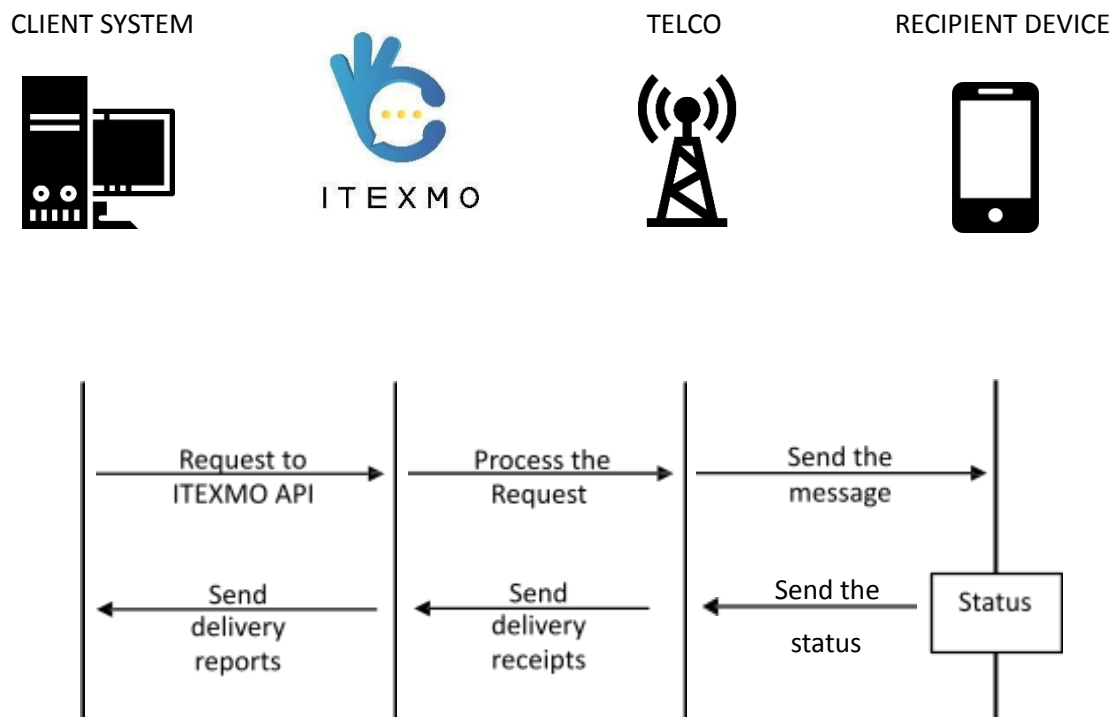

Sending Message With Delivery Reports are protected by TLS and uses the following base URL:

New Production: <https://api.itexmo.com/api/broadcast>  
<https://api.itexmo.com/api/broadcast-2d>  
<https://api.itexmo.com/api/broadcast-otp>

Noticeable above that the base URL is the same with the API we provided from previous pages. This means that the request parameters are the same but with additional.

Following are the additional request parameters when client want to receive a delivery report:

***api.itexmo.com***

| Parameter          | Expected Value | Description                                                         | Example                                                                               |
|--------------------|----------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| DeliveryReportsURL | URL Format     | The URL in which our system will push data for the delivery report. | <a href="https://client.com/delivery-reports">https://client.com/delivery-reports</a> |

Possible values of Delivery Status- **DELIVERED** (delivered to destination), **EXPIRED** (validity period- 8 hrs. has expired), **DELETED** (message has been deleted), **UNDELIVERABLE** (undelivered), **ACCEPTED** (accepted by Telco), **UNKNOWN** (invalid), and **REJECTED** (not accepted).

The URL provided in the DeliveryReportsURL/ DeliveryURL params should handle the data our system will push. Check the details below:

**METHOD:** POST

**CONTENT TYPE:** FORM URL ENCODED (application/x-www-form-urlencoded)

|                    |                     |    |                                                      |
|--------------------|---------------------|----|------------------------------------------------------|
| <b>PARAMETERS:</b> | 'LongID'            | => | ReferenceID of the request                           |
|                    | 'Recipient'         | => | Recipient of the message                             |
|                    | 'Status'            | => | Status of the message                                |
|                    |                     | => |                                                      |
|                    | 'NetworkSubmitTime' | => | Time when platform submits the request to the Telco. |
|                    | 'ClientSubmitTime'  | => | Time the platform receives the request               |
|                    | 'DoneTime'          | => | Expiration time for the request (8 hours)            |

**Note:** For multiple recipients in a request, our system will send individual delivery reports for each recipient in the request.

## Sample JSON Content (RAW)

*itexmo.com*

```
{
  "ApiCode": "PR-SAMPL123456_ABCDE ", "passwd":
    "123456789ABCD",
  "Numbers": ["09123456789"],
  "Message": "Test message 12345.", "SenderID":
    "ITEXMO SMS",
  "DeliveryReports": "1"
  "DeliveryURL": "https://client.com/delivery-reports"
}
```

*api.itexmo.com*

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Contents": [
    {
      "Message": "Test message 1.", "Recipient":
        "09123456789"
    },
    {
      "Message": "Test message 2.", "Recipient":
        "09123456788"
    }
  ],
  "ApiCode": "PR-SAMPL123456_ABCDE", "SenderId":
    "ITEXMO SMS"
  "DeliveryReportsURL": "https://client.com/delivery-reports"
}
```

# QUERY API

This can be used by an authorized ITEXMO account with active APICODE to query various data.

Query API requests are protected by TLS and uses the following base URL:

Production: <https://api.itexmo.com/api/query>

Following are the requests to call the Sending Multiple Message API:

| Parameter | Expected Value                                                                         | Description                                                                                      | Example                |
|-----------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------|
| Email     | Required, String, Email format                                                         | Email of active ITEXMO account                                                                   | itexmoclient@gmail.com |
| Password  | Required, String                                                                       | Password of active ITEXMO account                                                                | 123456789ABCD          |
| ApiCode   | Required, String                                                                       | Active ApiCode purchased under client's ITEXMO account                                           | PR-SAMPL123456_ABCDE   |
| Action    | Required, Any from the following:<br>1. ServerStatus<br>2. ApiCodeInfo<br>3. SMSReport | ServerStatus- return information about the server of client's ApiCode such as type, status, etc. | ServerStatus           |

|  |                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                |  |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | <p>For clients with ApiCode under Postpaid Plan, use the following:</p> <ol style="list-style-type: none"> <li>1. PostpaidServerStatus</li> <li>2. PostpaidApiCodeInfo</li> <li>3. PostpaidPendingSMS</li> <li>4. PostpaidSMSReport</li> </ol> | <p>ApiCodeInfo- return information about the ApiCode client availed such as plan, character limit, messages left, total credit usage, filtering status, and expiration date.</p> <p>PendingSMS- return the count of pending messages and its corresponding</p> |  |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

|  |  |                                                                                                                                                                                                                                                                                                                            |  |
|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  |  | <p>information such as recipient, message content, sender id, delivery report url, and long id.</p> <p>SMSReport- return the count of SMS sent belonging to the Client or Reference ID and its corresponding information such as recipient, message, credit used, reference id, time requested, time sent, delay, etc.</p> |  |
|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

## Sample JSON Content (RAW)

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Action ": "ServerStatus",
  "ApiCode": "PR-SAMPL123456_ABCDE"
}

{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Action ": "SMSReport",
  "ApiCode": "PR-SAMPL123456_ABCDE", "Referenceld":
    "PRSAM19394137945432625844"
}

{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "Action ": "SMSReport",
  "ApiCode": "PR-SAMPL123456_ABCDE",
  "Clientld": "123ABC"
}
```



## SAMPLE RESPONSE

- **Successful request** (*api.itexmo.com*)- 200 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": false,
    "TotalSMS": 2,
  "Accepted": 2,
  "TotalCreditUsed": 2,
  "Failed": 0, "DeliveryReportStatus":
    "Pushing",
  "ReferenceId": "PRSAM19394137945432625844"
}
```

|                             |                                                                                                       |
|-----------------------------|-------------------------------------------------------------------------------------------------------|
| <b>DateTime</b>             | return the date and time of the response.                                                             |
| <b>Error</b>                | <b>true</b> if request failed, <b>false</b> if successful.                                            |
| <b>TotalSMS</b>             | returns the count of recipients in the request.                                                       |
| <b>Accepted</b>             | returns the count of valid recipients accepted.                                                       |
| <b>TotalCreditUsed</b>      | returns the credit used (1 credit per 160 character) multiplied to the value of Accepted.             |
| <b>Failed</b>               | return the count of failed SMS.                                                                       |
| <b>DeliveryReportStatus</b> | return "Pushing" if delivery reports were possible for client's apicode, return "Rejected" otherwise. |
| <b>ReferenceId</b>          | returns the long ID value.                                                                            |

**Note:** Error may return **false** but still have failed SMS. Example: among 10 recipients, 9 are valid the other 1 is not. The response will be:

```
"Error": false,
... "Failed": 1,
"FailedList": [
  {
    ...
  }
]
...
```

- **Successful request** (*itexmo.com*)- 200 Status Code

```
{
  "Result": "Success", "Accepted": 1,
  "Failed": 0,
  "TotalSMS": 1,
  "TotalCreditUsed": 1, "Reports":
    "Pushing",
  "RefID": "PRSAM19394137945432625844"
}
```

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Result</b>          | returns the result of request.                                                                          |
| <b>Accepted</b>        | returns the count of valid recipients accepted.                                                         |
| <b>Failed</b>          | returns the count of failed SMS.                                                                        |
| <b>TotalSMS</b>        | returns the count of recipients in the request.                                                         |
| <b>TotalCreditUsed</b> | returns the credit used (1 credit per 160 characters for GSM-7BIT) multiplied to the value of Accepted. |
| <b>Reports</b>         | return "Pushing" if delivery reports were possible for client's apicode, return "Rejected" otherwise.   |
| <b>Referenceld</b>     | returns the long ID value.                                                                              |

**Note:** The old production (*itexmo.com*) returns Invalid Response for invalid request. Example:

```
{
  "Result": 401,
  "Error": 3
}
```

To know more about the description of Error Code please check [HYPERLINK "https://itexmo.com/Developers/apidocs.php"](https://itexmo.com/Developers/apidocs.php) \h <https://itexmo.com/Developers/apidocs.php>.

- **Successful request (Query- ServerStatus) - 200 Status Code**

```
{  
  "DateTime": "2022-01-06 14:34:16", "ApiCode":  
    "PR-SAMPL123456_ABCDE",  
  "ServerType": "DIRECT",  
    "ServerStatus": "ONLINE"  
}
```

- **Successful request (Query- ApiCodeInfo) - 200 Status Code**

```
{  
  "DateTime": "2022-01-06 14:34:16", "ApiCode":  
    "PR-SAMPL123456_ABCDE",  
  "CurrentPlan": " 100K Initial", "MaxCharacters": 640,  
  "MessagesLeft": 409995,  
  "TotalCreditUsed": 5, "MessageFiltering": "YES",  
    "ExpirationDate": "2023-01-05  
12:53:00",  
}
```

- **Successful request (Query- PendingSMS) - 200 Status Code**

```
{
  "Count": 2,
  "Contents": [
    {
      "Recipient": "09123456789", "Message": "Test
        message 1.", "SenderID":
        "ITEXMO SMS",
      "DeliveryReportURL": null,
      "ReferenceID": "PRSAM19394137945432625844"
    }, {
      "Recipient": "09123456788", "Message": "Test
        message 2.", "SenderID":
        "ITEXMO SMS",
      "DeliveryReportURL": null,
      "ReferenceID": "PRSAM19394137945432625845"
    }
  ]
}
```

- **Successful request (Query- SMSReport) - 200 Status Code**

```
{
  "Count": 1,
  "Contents": [
    {
      "Recipient": "09123456789", "Message": "Test message 1.",
      "CreditUsed": 1,
      "SenderID": "ITEXMO SMS",
      "PricePerCredit": "0.5",
      "TotalPrice": "0.5", "DeliveryStatus": "DELIVERED", "Type":
        "OTP",
      "ReferenceID": "PRSAM19394137945432625844", "TimeRequested": "2022-01-06
        14:34:16",
      "TimeSent": "2022-01-06 14:34:16",
      "Delay": 0
    }
  ]
}
```

```
{
  "Count": 1,
  "Contents": [
    {
      "Recipient": "09123456789", "Message": "Test
        message 1.", "CreditUsed": 1,
      "ReferenceID": "DESAM19394137945953625882", "TimeRequested":
        "2022-01-06 14:34:16",
      "TimeSent": "2022-01-06 14:34:18",
      "Delay": 2
    }
  ]
}
```

## Other Responses *(api.itexmo.com)*

- Missing email - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "ITEXMO email is required."  
}
```

- Missing password - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "ITEXMO password is required."  
}
```

- Missing email and password - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "ITEXMO email and password is required."  
}
```

- Invalid email or password - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "The credentials do not match our records. Kindly review your  
ITEXMO credentials."  
}
```

- Email of account is not yet verified - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "User email is not yet verified."  
}
```

- Account information is not yet complete and phone is not verified - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "Account is not yet fully verified."  
}
```

- ITEXMO account is not active or suspended - 400 Status Code

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "Account is not active."  
}
```



- Delivery Reports URL is not in URL format - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": {
    "DeliveryReportsURL": [
      "The delivery reports u r l must be a valid URL."
    ]
  }
}
```

- Missing required parameters - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": {
    "Recipients": [
      "The recipients field is required."
    ],
    "Message": [
      "The message field is required."
    ],
    "ApiCode": [
      "The api code field is required."
    ],
  }
}
```

- Recipient data format is invalid - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message":
    "Recipients": [
      "The recipients must be an array."
    ],
}
```

- Invalid number for single recipient - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Invalid number."
}
```

- Invalid number for multiple recipient (all are invalid) - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": [
    {
      "Recipient": "123",
      "Message": "Invalid number."
    },
    {
      "Recipient": "456",
      "Message": "Invalid number."
    }
  ]
}
```

- Invalid ApiCode - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "ApiCode not found."
}
```

- Expired ApiCode - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "ApiCode is expired."
}
```

- Inactive/suspended ApiCode - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "ApiCode is inactive/suspended."
}
```

- ITEXMO error - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "ITEXMO error. Contact support at HYPERLINK \h support@itexmo.com."
}
```

- Message length exceed allowed length - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Maximum allowed characters for message reached."
}
```

- For **Non Sender ID**, if daily limit reached - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Maximum message per day reached. This will be reset by 12MN."
}
```

- For **Sender ID**, if SMS credits is zero - *400 Status Code*

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "No more SMS credits left. Please top up to continue."
}
```

- For **Sender ID**, uses an unregistered Sender ID - *400 Status Code*

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Invalid or not registered Sender ID."
}
```

- Exceeded the 250 limits for Recipients - *400 Status Code*

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Maximum recipient count exceeded. Found 360 recipients.
Allowed recipient count is 250."
}
```

- For **Sender ID**, sms credits not zero but not enough - *400 Status Code*

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Insufficient SMS credits. Credits left 10. You are trying to send
237."
}
```

- For **OTP**, exceeded maximum character allowed - *400 Status Code*

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "Allowed maximum length for OTP is 160. You are trying to send a  
message with 161 characters."  
}
```

- For **OTP** and **Non-Sender ID** - *400 Status Code*

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "OTP API is not supported for Non-Sender ID ApiCodes."  
}
```

- Invalid contents (Sending Multiple Message API) - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": [
    {
      "Content": {
        "Recipient": "123",
        "Message": "Test message."
      },
      "Message": "Invalid number."
    },
    {
      "Content": {
        "Recipient": "09123456789",
        "Message": null
      },
      "Message": "Missing Message data."
    }
  ]
}
```

- Successful request but with failed SMS (Sending A Message API) - 200 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": false,
  "TotalSMS": 3,
  "Accepted": 2,
  "TotalCreditUsed": 2,
  "Failed": 1,
  "FailedList": [
    {
      "Recipient": "123",
      "Message": "Invalid number."
    }
  ],
  "DeliveryReportsStatus": "Pushing",
  "ReferenceId": "PRSAM19394137945432625844"
}
```

(Sending A Message API)

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": false,
  "TotalSMS": 3,
  "Accepted": 2,
  "TotalCreditUsed": 2,
  "Failed": 1,
  "FailedList": [
    {
      "Recipient": "09123456789",
      "Message": "Duplicate number."
    }
  ],
  "DeliveryReportsStatus": "Rejected",
  "ReferenceId": "PRSAM19394137945432625844"
}
```



(Sending Multiple Message API) - 200 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": false,
  "TotalSMS": 2,
  "Accepted": 1,
  "TotalCreditUsed": 1,
  "Failed": 1,
  "FailedList": [
    {
      "Content": {
        "Recipient": "09123456789",
        "Message": ""
      },
      "Message": "Message is empty."
    }
  ],
  "DeliveryReportsStatus": "Pushing",
  "ReferenceId": "PRSAM19394137945432625844"
}
```

- For **Query**, missing action - 400 Status Code

```
{
  "DateTime": "2022-01-06 14:34:16",
  "Error": true,
  "Message": "Action is required."
}
```

- For **Query**, invalid action - *400 Status Code*

```
{  
  "DateTime": "2022-01-06 14:34:16",  
  "Error": true,  
  "Message": "Action is invalid."  
}
```

## RECIPIENT STATUS API

This can be used by an authorized ITEXMO account with active APICODE to query various data. This is only available on ***api.itexmo.com***.

Recipient Status API requests are protected by TLS and uses the following base URL:

Production: <https://api.itexmo.com/api/sms-reports>

Following are the requests to call the Sending Multiple Message API:

| Parameter | Expected Value                 | Description                                                                                                 | Example                |
|-----------|--------------------------------|-------------------------------------------------------------------------------------------------------------|------------------------|
| Email     | Required, String, Email format | Email of active ITEXMO account                                                                              | itexmoclient@gmail.com |
| Password  | Required, String               | Password of active ITEXMO account                                                                           | 123456789ABCD          |
| ApiCode   | Required, String               | Active ApiCode purchased under client's ITEXMO account                                                      | PR-SAMPL123456_ABCDE   |
| DateFrom  | Optional, Date Format          | Retrieve data from specific starting point. If there is no supplied date_from, system will use current date | 2024-08-29             |

|            |                                        |                                                                                                                                                                     |                                                |
|------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| DateTo     | Optional, Date Format                  | Retrieve data from specified end point. If there is no supplied date_from, system will use current date                                                             | 2024-08-30                                     |
| SenderId   | Optional, String                       | Retrieve data based on this keyword.<br>Case-sensitive and must be exact.                                                                                           | ITEXMO SMS                                     |
| Recipients | Optional, Array, Unique, Number Format | Retrieve data based on the provided number of recipient/s. Keep the input to the 09XXXXXXXXXX format.                                                               | ["099999999999", "099988888888"]               |
| Fields     | Optional, String                       | Fields to be included in the response such as: "Referenceld", "ClientId", "SenderId", "Recipient", "Message", "CreditUsed", "DeliveryStatus", and "CreatedDateTime" | ["Referenceld", "Recipient", "DeliveryStatus"] |
| Page       | Required, Integer                      | Page number to limit the count of data being displayed per page. There is a current limit of 30 records per page.                                                   | 1                                              |

|             |                  |                                                                                                                                                                                    |                               |
|-------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Referenceld | Optional, String | The Referenceld of an SMS Request. The system will pull data related to this Referenceld.<br>(Reference ID only accounts for an entire SMS Request and not individual recipients). | PRSAM19394137<br>945432625844 |
|-------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|

## Sample JSON Content (RAW)

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "ApiCode": "PR-SAMPL123456_ABCDE",
  "Page": 1
}
```

## SAMPLE RESPONSE

- **Successful request** (*api.itexmo.com*)- 200 Status Code

```
"Status": 200,
"Error": false,
"Data": {
  "CurrentPage": 1,
  "Data": [
    {
      "ReferenceId": "PRSAM19394137945432625844",
      "SenderId": "ITEXMO SMS",
      "Recipient": "09999999999",
      "DeliveryStatus": "DELIVERED"
    },
    {
      "ReferenceId": "PRSAM19394137945432625844",
      "SenderId": "ITEXMO SMS",
      "Recipient": "09998888888",
      "DeliveryStatus": "DELIVERED"
    }
  ],
  "FirstPageUrl": "http://api.itexmo.com/api/sms-reports?page=1",
  "From": 1,
  "LastPage": 1,
  ...
}
```

## Sample JSON Content (RAW)

```
{
  "Email": " HYPERLINK
    "mailto:itexmoclient@gmail.com" \h
    itexmoclient@gmail.com", "Password":
    "123456789ABCD",
  "ApiCode": "PR-SAMPL123456_ABCDE",
  "DateFrom": "2024-08-01",
  "DateTo": "2024-08-02",
  "SenderId": "ITEXMO SMS",
  "Recipients": ["09999999999"],
  "Fields":
    ["ReferenceId","ClientId","SenderId","Recipient","Message","CreditUsed","
    DeliveryStatus","CreatedDateTime"],
  "Page": 1
}
```

## SAMPLE RESPONSE

- **Successful request** (*api.itexmo.com*)- 200 Status Code

```
"Status": 200,
"Error": false,
"Data": {
  "CurrentPage": 1,
  "Data": [
    {
      "ReferenceId": "PRSAM19394137945432625844",
      "ClientId": "123ABC",
      "SenderId": "ITEXMO SMS",
      "Recipient": "09999999999",
      "Message": "Test Input BROADCAST MK 08-02-2024",
      "CreditUsed": 1,
      "DeliveryStatus": "DELIVERED",
      "CreatedDateTime": "2024-08-02 14:28:04"
    },
    {
      "ReferenceId": "PRSAM19394137945432625845",
      "ClientId": "123ABC",
      "SenderId": "ITEXMO SMS",
      "Recipient": "09999999999",
      "Message": "Test Input BROADCAST MK 08-10-2024",
      "CreditUsed": 1,
      "DeliveryStatus": "DELIVERED",
      "CreatedDateTime": "2024-08-10 10:44:04"
    }
  ],
  "FirstPageUrl": "http://api.itexmo.com/api/sms-reports?page=1",
  "From": 1,
  "LastPage": 1,
  ...
}
```



- **Other Responses** (*api.itexmo.com*)

- Invalid field - 400 Status Code

```
"Status": 400,  
"Error": true,  
"Data": [],  
  "Message": {  
    "Fields.0": [  
      "The field is invalid."  
    ]  
  },  
  "DateTime": "2024-09-02 17:11:25"
```

- Invalid recipient - 400 Status Code

```
"Status": 400,  
"Error": true,  
"Data": [],  
  "Message": {  
    "Recipients.0": [  
      "The recipients must be in numeric format."  
    ]  
  },  
  "DateTime": "2024-09-02 17:11:25"
```

- Invalid date format - 400 Status Code

```
"Status": 400,  
"Error": true,  
"Data": [],  
  "Message": {  
    "DateFrom": [  
      "The date_from format is invalid."  
    ]  
  },  
  "DateTime": "2024-09-02 17:11:25"
```

## SMS LENGTH CALCULATION

This section discussed the way our API calculates the length of the message client want to send. This length will determine the credits used/deducted from client's ApiCode SMS credits.

First, we define the type of encoding of SMS our system supports.

- GSM-7BIT ("")

This is the standard character encoding for usage on GSM networks. Most commonly letters and symbols in various language are accepted in this encoding. The maximum character count GSM-7BIT can carry is 160 characters if one part only and 153 characters per part if more than 1 part.

Our system calculates SMS length with the above encoding. If the message client is trying to send has special characters, it automatically converts the calculation with UTF16, if none, GSM-7BIT, never both.

To fully understand, let's check this example. Client sent a message with 90 characters without special characters, that is 1 SMS Credit. Client sent again with 160 characters without special characters again, still 1 SMS Credits. If client sent a message more than 160 characters, like 161, the SMS Credits equivalent is 2 (153/153 character for part 1, 8/153 characters for part 2).

Just remember if the message without special character and is more than 160 characters, the rule will be 153 per part. Any messages sent with special characters or emoticons will be rejected on the API; but if ever delivered, will reflect as different characters due to encoding changes.

As of 2026, ITEXMO no longer supports UTF16. Please make sure to use GSM-7BIT to avoid issues with encoding and message templates changing.