



MONASH University

Enhancing Forecast Reconciliation: A Study of Alternative Covariance Estimators

Vincent Su

B.Com. (Hons), Monash University

Supervised by

Dr. Shanika Wickramasuriya
and Prof. George Athanasopoulos

A thesis submitted for the degree of
Bachelor of Commerce (Honours)
at Monash University
Department of Econometrics and Business Statistics

25 October 2025

Abstract

A collection of time series connected via a set of linear constraints is known as hierarchical time series. Forecasting these series without respecting the hierarchical nature of the data can lead to incoherent forecasts across aggregation levels and, in practice, reduced accuracy. Forecast reconciliation corrects this by adjusting base forecasts to satisfy such constraints. Among modern reconciliation methods, Minimum Trace (MinT) is widely used, however, it requires a good estimate of the forecast error covariance matrix. The current practice uses linear shrinkage towards a diagonal target. Furthermore, the covariance estimate is based on in-sample 1-step-ahead forecast errors, then proportionally scale it to approximate h -step-ahead covariance matrix. This raises the question of the method’s appropriateness for all real-world applications. We study the shortcomings of current practice and assess the impacts of alternative covariance estimators on MinT, including the NOVELIST estimator (shrinkage towards a soft-thresholded target), PC-adjusted shrinkage (which utilises latent factor structures), and horizon-specific estimators that relax proportional scaling. We evaluate the accuracy of MinT using these covariance estimates for both point and probabilistic reconciled forecasts, and demonstrate their effectiveness and improvements over the shrinkage estimator in a complex, large-hierarchical dataset.

Keywords: *Coherent forecasts, Hierarchical time series, Covariance estimation, Australian tourism, Aggregation.*

Acknowledgements

I would like to express my sincere gratitude to my supervisors, Prof. George Athanasopoulos and Dr. Shanika Wickramasuriya, for their invaluable guidance, support, and encouragement throughout my Honours research journey. Their guidance and insights have been instrumental not only in shaping this thesis but also in my personal and academic development, helping me understand what it means to be a researcher. Despite their own commitments, they always made time to assist me whenever I knocked on their office doors. I also thank them for the laughs and light-hearted moments during our weekly meetings, which made the process enjoyable.

I wish to thank Assoc. Prof. Natalia Bailey for being a wonderful Honours coordinator, always ready to help, providing constructive comments after each milestone, and organising the Honours seminar series throughout the year. She also provided valuable advice when I was initially considering pursuing Honours, and I believe I made the right choice. I am also grateful to Prof. Jiti Gao for his advice regarding my decision to pursue Honours.

I am grateful to my friends and peers, as well as to the professors and lecturers, for their insightful classes throughout my Honours studies. I would also like to thank the Monash University Department of Econometrics and Business Statistics for providing a supportive and stimulating academic environment.

Finally, I would like to thank my family for their unwavering support and encouragement throughout my academic journey, allowing me to focus on my studies and research.

Table of contents

| | |
|--------------------------------------------------------------------------|-----------|
| Abstract | 2 |
| Acknowledgements | 3 |
| 1 Introduction | 5 |
| 2 Theoretical Framework | 7 |
| 2.1 Hierarchical Time Series and Reconciliation | 7 |
| 2.2 The Minimum Trace Reconciliation | 9 |
| 2.3 Shrinkage Estimator for MinT | 11 |
| Problem 1: Uniform shrinkage | 12 |
| Problem 2: Latent factors | 12 |
| Problem 3: Proportional scaling | 13 |
| 3 Covariance Estimation Approaches | 13 |
| 3.1 NOVELIST Estimator | 13 |
| 3.2 PC-adjusted Estimator | 15 |
| 3.3 Scaled Variance | 16 |
| 3.4 Constructing from h -step-ahead Residuals | 16 |
| Summary of MinT with Covariance Estimators | 17 |
| 4 Evaluation of Point and Probabilistic Forecasts | 17 |
| 5 Simulation | 19 |
| 5.1 General Design | 19 |
| 5.2 Exploring Effects of Hierarchy's Size | 20 |
| 5.3 Other Data-Generating Processes | 26 |
| 6 Forecasting Australian Domestic Tourism | 27 |
| 7 Conclusions and Future Work | 35 |
| 8 Appendix | 36 |
| 8.1 Appendix: Simulation Supplementary | 36 |
| 8.2 Appendix: Description of Australian Geographical Hierarchy | 38 |
| 8.3 Appendix: Reproducibility | 40 |
| References | 41 |

1 Introduction

In time series forecasting, aggregation occurs in a variety of settings. For example, Starbucks Corporation operates in many countries, and each country has multiple cities where they have outlets. The sales data is structured *hierarchically*: the top level is the company’s total sales, which disaggregates into sales by country, then sales by city within each country, and finally down to sales by individual outlet within each city. As a result, there are over 50,000 sales series across all *aggregation levels*, and decision makers need forecasts at each level to manage inventory and plan marketing strategies effectively. The hierarchy can become even more complex when considering the sales of different product categories (e.g., beverages, food) and the sales of products within each category (e.g., lattes, cappuccinos) at each aggregation level. In this case, the structure is called a *grouped structure*, where the aggregation paths are not unique. Such structures also arise in many other decision-making contexts, from supply chains (Angam et al., 2025; Seaman & Bowman, 2022) and energy planning (Di Modica et al., 2021), to macroeconomics (El Gemayel et al., 2022; Li et al., 2019) and tourism analysis (Athanasopoulos et al., 2009). Stakeholders in these settings need forecasts at several aggregation levels to allocate resources and manage risk.

In practice, when forecasts are produced for all series (often called *base forecasts*), they typically violate the aggregation constraints observed in the data (e.g., the sum of all countries’ sales forecasts does not equal the total sales forecast). Such forecasts are called *incoherent*. Incoherence undermines downstream decisions that require internal consistency and can degrade forecasting performance. To tackle this problem, forecast reconciliation was introduced. Forecast reconciliation, a post-processing step, utilises the information from the hierarchical structure and data to adjust the initially produced base forecasts, so that the resulting *reconciled forecasts* are *coherent* (i.e., respecting the aggregation constraints). It was first introduced by Hyndman et al. (2011), and later developed by Erven & Cugliari (2015), Hyndman et al. (2016), Ben Taieb & Koo (2019), Wickramasuriya et al. (2019), Wickramasuriya et al. (2020), and others who focus on point forecast reconciliation (more accurately, reconciling the means of predictive distributions). Recognising the importance of probabilistic forecasting, probabilistic forecast reconciliation was studied by Shang & Hyndman (2017), Jeon et al. (2019), and Ben Taieb et al. (2021), and later formally defined by Panagiotelis et al. (2023). Athanasopoulos et al. (2024) provide a comprehensive review of the literature on forecast reconciliation.

Among the modern methods, the Min Trace (MinT) approach developed by Wickramasuriya et al. (2019) is widely used due to its strong theoretical properties for minimising total reconciled forecast error variance, computational efficiency, and robust empirical performance. MinT is later extended to probabilistic reconciliation by Wickramasuriya (2024), showing that it also

minimises the negative log score of the reconciled distribution under Gaussian assumptions. Wickramasuriya et al. (2019) also argued that modeling spatial autocorrelations directly from the start would be challenging, as in this case of a large collection of time series. Post-processing reconciliation has the advantage of implicitly modeling this spatial autocorrelation structure, especially true for MinT. MinT is implemented in popular R and Python software ecosystems (Nixtla, 2025; O’Hara-Wild et al., 2024).

A central difficulty for MinT is estimating the covariance matrix of base-forecast errors, particularly beyond one-step forecast horizons. This is a high-dimensional estimation problem in which the number of series often exceeds the time dimension. A common practice, following Wickramasuriya et al. (2019), is to estimate the 1-step-ahead covariance from the residuals, using linear shrinkage toward a diagonal target (Schäfer & Strimmer, 2005). Then, proportionally scale this estimate to approximate the multi-step-ahead covariance matrix. While convenient and guaranteed to produce a positive-definite estimate, this practice has three important shortcomings. First, the shrinkage is uniform across off-diagonals, applying a single penalty that may over-shrink genuine dependence and under-shrink noise. Second, many hierarchical data sets exhibit strong latent low-rank structures that can be explicitly exploited. Third, the proportionality relationship between the h -step-ahead and 1-step-ahead forecast error covariance matrices might not hold when error dynamics change with horizon.

These limitations matter because the theoretical advantages of MinT depend on the quality of the covariance estimate available in finite samples. Despite its central role, there has been limited work on tailored covariance estimation for reconciliation. An exception is the recent double-shrinkage proposal in Carrara et al. (2025), which introduces an additional target designed to encode conditional dependence suggested by the hierarchy. This line of work still remains at an early stage and does not fully address the aforementioned limitations.

Meanwhile, there has been substantial progress in high-dimensional covariance estimation that can be leveraged for MinT. Building on shrinkage, Huang & Fryzlewicz (2019) proposed NOVELIST, which shrinks toward a soft-thresholded target rather than a diagonal one, improving flexibility to sparse targets. Extending beyond linear shrinkage, Ledoit & Wolf (2012) (and further developed by Ledoit & Wolf (2020)) introduced nonlinear shrinkage that replaces sample eigenvalues with data-driven nonlinear transformations of themselves. In a complementary direction, Fan et al. (2013) introduced factor-based estimators that explicitly preserve latent low-rank structure while thresholding the idiosyncratic component. Related thresholding approaches, including hard thresholding (Bickel & Levina, 2008), generalised thresholding (Rothman et al., 2009), and adaptive thresholding (Cai & Liu, 2011), have also been developed. This growing toolkit provides multiple pathways to maximise the performance of MinT.

This paper focuses on covariance estimation for MinT. We examine the shortcomings of the standard shrinkage plus scaling practice and introduce alternative estimators that address these issues individually and in combination. Specifically, we study NOVELIST as a more adaptive target-based shrinkage; principal-component-adjusted (PC-adjusted) estimators that exploit latent factor structures; and horizon-specific estimators that relax proportional scaling, including direct estimation from multi-step residuals. We evaluate MinT under these alternatives for both point and probabilistic reconciliation. In a large, complex real-world hierarchy, our findings reveal three main insights. First, NOVELIST improves probabilistic performance relative to linear shrinkage, including higher empirical coverage. Second, PC-adjusted estimators consistently outperform other estimators when common components are strong, for both point and probabilistic metrics. Third, proportional scaling of the one-step covariance remains a competitive baseline, indicating that the assumption may not be universally invalid.

The remainder of the paper is organised as follows. Section 2 sets out the framework for hierarchical time series, forecast reconciliation, and MinT, and motivates the need for improved covariance estimation. Section 3 presents the covariance estimators considered, outlining their strengths and limitations in the reconciliation context. Section 4 defines the evaluation metrics for point and probabilistic reconciliation. Section 5 details the simulation design and examines the performance of NOVELIST compared to shrinkage. Section 6 dives into a real-world application with all proposed methods and highlights behaviours not observed in the simplified simulations.

2 Theoretical Framework

2.1 Hierarchical Time Series and Reconciliation

Hierarchical time series are multivariate time series $\mathbf{y}_t \in \mathbb{R}^n$ organised in a structure where the series adheres to linear constraints. Figure 1 illustrates a simple two-level hierarchical structure with one top-level series $y_{Tot,t}$, disaggregating down to two level-1 series $(y_{A,t}, y_{B,t})'$, and to four bottom-level series $(y_{A1,t}, y_{A2,t}, y_{B1,t}, y_{B2,t})'$. Here, the *aggregation constraints* imply that $y_{Tot,t} = y_{A,t} + y_{B,t}$, $y_{A,t} = y_{A1,t} + y_{A2,t}$, and $y_{B,t} = y_{B1,t} + y_{B2,t}$, for all time points t .

The bottom-level (or most disaggregated) series are denoted as $\mathbf{b}_t \in \mathbb{R}^{n_b}$. Thus, the full vector of all series in the hierarchy can be represented as:

$$\mathbf{y}_t = \mathbf{S}\mathbf{b}_t,$$

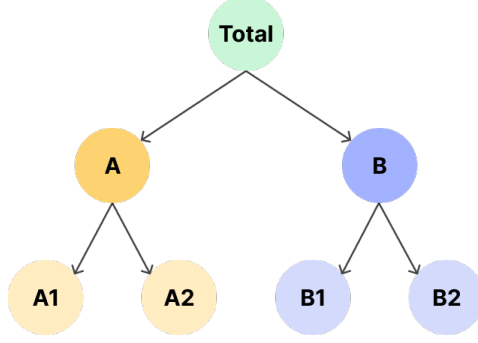


Figure 1: A 2-level hierarchical tree structure

where $\mathbf{S} \in \mathbb{R}^{n \times n_b}$ is a summing matrix that aggregates the bottom-level to all-level series. The summing matrix \mathbf{S} for the tree structure in Figure 1 is:

$$\mathbf{S} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 1 \\ \mathbf{I}_4 \end{bmatrix},$$

where \mathbf{I}_4 is the 4×4 identity matrix. The matrix \mathbf{S} encodes the aggregation constraints implied by the structure. Hence, the columns of \mathbf{S} span a linear subspace. Any observation \mathbf{y}_t that lies inside this subspace is called *coherent*, while those outside are *incoherent*. We refer to the subspace spanned by \mathbf{S} as the *coherent subspace* $\mathfrak{s} \in \mathbb{R}^{n_b}$.

This representation extends beyond hierarchical (nested) structures. When attributes of interest are crossed, such as the company sales at any aggregation level (company-wise, city-wise, or outlet-wise) is also considered by kinds of products, the structure is described as a *grouped structure*. In grouped systems, as illustrated in Figure 2, aggregation and disaggregation paths are not unique, but the linear constraints can still be written compactly through a summing matrix \mathbf{S} . For simplicity, we refer to both structures as hierarchical structure and distinguish between them when needed.

In practice, when we produce h -step-ahead forecasts for each individual series, referred to as *base forecasts* $\hat{\mathbf{y}}_{t+h|t}$, they generally violate the aggregation constraints, and thus are incoherent. Coherency can be restored by linearly projecting the base forecasts onto the coherent subspace \mathfrak{s} using a projection matrix \mathbf{P} : $\tilde{\mathbf{y}}_{t+h|t} = \mathbf{P}\hat{\mathbf{y}}_{t+h|t}$, where $\tilde{\mathbf{y}}_{t+h|t}$ are h -step-ahead *reconciled forecasts*.

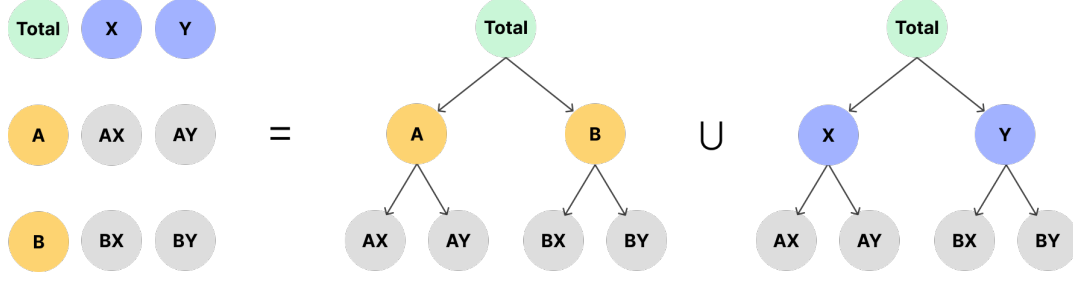


Figure 2: A 2-level grouped structure, which can be considered as the union of two hierarchical trees with common top and bottom level series

Many existing reconciliation methods including the OLS from Hyndman et al. (2011), WLS from Hyndman et al. (2016), and MinT from Wickramasuriya et al. (2019) express the projection matrix as $\mathbf{P} = \mathbf{S}\mathbf{G}$, for a suitable $n_b \times n$ mapping matrix \mathbf{G} . The role of this matrix is to map the base forecasts of all levels $\hat{\mathbf{y}}_{t+h|t}$ down into the bottom level, which is then aggregated to the higher levels by premultiplying with \mathbf{S} . Since the projection matrix \mathbf{P} is idempotent, \mathbf{G} must satisfy the condition $\mathbf{S}\mathbf{G}\mathbf{S} = \mathbf{S}$. Within this class, a broad family of mapping matrices is given by: $\mathbf{G} = (\mathbf{S}'\mathbf{M}^{-1}\mathbf{S})^{-1}\mathbf{S}'\mathbf{M}^{-1}$, for some positive definite matrix $\mathbf{M} \in \mathbb{R}^{n \times n}$ (Panagiotelis et al., 2021).

When setting $\mathbf{M} = \mathbf{I}_n$, the \mathbf{P} matrix reduces to the OLS reconciliation $\mathbf{S}(\mathbf{S}'\mathbf{S})^{-1}\mathbf{S}'$, which corresponds to an orthogonal projection onto \mathfrak{s} . For a general positive definite matrix \mathbf{M} , \mathbf{P} is idempotent but not necessarily symmetric, resulting in an oblique projection. Thus, the choice of \mathbf{M} determines the projection direction and, in turn, how disagreements among levels are resolved.

This projection view extends seamlessly from point to probabilistic forecast reconciliation. Given an h -step-ahead base forecast density with mean $\hat{\mathbf{y}}_{t+h|t}$ and covariance \mathbf{W}_h , via the linear projection, the resulting reconciled forecast density has mean $\tilde{\mathbf{y}}_{t+h|t} = \mathbf{P}\hat{\mathbf{y}}_{t+h|t}$ and covariance $\mathbf{P}\mathbf{W}_h\mathbf{P}'$. Figure 3 schematically illustrates this projection. Reconciliation takes the (possibly elliptical) base forecast distribution and “pushes” the entire mass linearly onto the coherent subspace, resulting in the reconciled forecast distribution.

2.2 The Minimum Trace Reconciliation

Wickramasuriya et al. (2019) showed that by setting $\mathbf{M} = \mathbf{W}_h = \mathbb{E}(\hat{\mathbf{e}}_{t+h|t} \hat{\mathbf{e}}'_{t+h|t})$, the covariance matrix of the h -step-ahead base forecast errors $\hat{\mathbf{e}}_{t+h|t} = \mathbf{y}_{t+h} - \hat{\mathbf{y}}_{t+h|t}$, we essentially minimise the total variance of the reconciled forecast errors across all series. Equivalently,

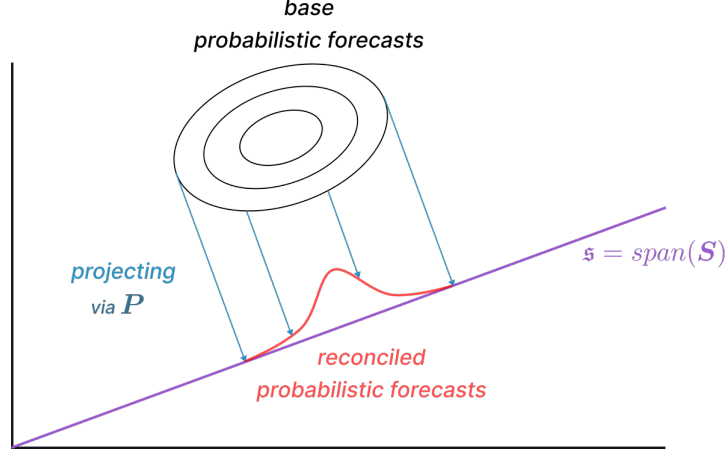


Figure 3: Geometry of probabilistic forecast reconciliation. The base forecast distribution is projected orthogonally onto the coherent subspace (purple line), resulting in the reconciled forecast distribution (red). The projection is defined by the projection matrix \mathbf{P} . Note that this figure is a schematic since most applications are high-dimensional.

MinT is the unique linear-unbiased reconciler that minimises the trace of $Var[\mathbf{y}_{t+h} - \tilde{\mathbf{y}}_{t+h|t}] = \mathbf{S}\mathbf{G}_h\mathbf{W}_h\mathbf{G}_h'\mathbf{S}'$. This method is thus called Minimum Trace reconciliation. The matrix \mathbf{G}_h is thus given by:

$$\mathbf{G}_h = (\mathbf{S}'\mathbf{W}_h^{-1}\mathbf{S})^{-1}\mathbf{S}'\mathbf{W}_h^{-1},$$

provided that \mathbf{W}_h is positive definite.

Although originally developed for point reconciliation, Wickramasuriya (2024) showed that MinT extends naturally to the probabilistic setting when base predictive distributions are Gaussian. If h -step-ahead base forecast distribution is $\mathcal{N}(\hat{\mathbf{y}}_{t+h|t}, \mathbf{W}_h)$, then reconciliation gives a reconciled forecast distribution of $\mathcal{N}(\tilde{\mathbf{y}}_{t+h|t}, \mathbf{S}\mathbf{G}_h\mathbf{W}_h\mathbf{G}_h'\mathbf{S}')$. Within the class of linear-unbiased reconcilers, MinT also minimises the negative log score (equivalently, the Gaussian log predictive score) of the reconciled distribution.

In this paper we adopt the Gaussian framework to compare the impacts of different covariance estimators for MinT in both point and probabilistic reconciliation. It is also worth to mention that the methods can be extended to non-Gaussian settings by bootstrapping (Gamakumara, 2020; Panagiotelis et al., 2023), which is beyond the scope of this paper.

2.3 Shrinkage Estimator for MinT

The performance of MinT hinges on a reliable, positive-definite estimate of \mathbf{W}_h , which comes in both the mapping matrix \mathbf{G}_h and the reconciled forecast error variance $\mathbf{S}\mathbf{G}_h'\mathbf{W}_h\mathbf{G}_h'\mathbf{S}'$.

However, the covariance matrix \mathbf{W}_h is often not available in closed-form, and is challenging to estimate in high-dimensional setting where the number of series n is larger than the time dimension T . To tackle this issue, the original paper by Wickramasuriya et al. (2019) assumed a proportionality relationship $\hat{\mathbf{W}}_h^g = k_h g(\hat{\mathbf{W}}_1)$, where $\hat{\mathbf{W}}_1$ is the sample covariance matrix of the in-sample 1-step-ahead base forecast errors (to approximate \mathbf{W}_1) and $k_h > 0$ is a scaling constant (which will be algebraically cancelled out in point-forecast reconciliation). The function $g(\cdot)$ is a covariance estimator that produces a positive-definite matrix, the main focus of this paper.

The recommended choice for $g(\cdot)$ in the original work is the shrinkage estimator with diagonal target from Schäfer & Strimmer (2005):

$$\hat{\mathbf{W}}_1^S = \lambda_S \mathbf{D}_1 + (1 - \lambda_S) \hat{\mathbf{W}}_1,$$

where $\mathbf{D}_1 = \text{diag}(\hat{\mathbf{W}}_1)$ is the diagonal matrix comprising the diagonal elements of $\hat{\mathbf{W}}_1$ (i.e., the sample variances). We refer to any $\lambda_S \in [0, 1]$ as the shrinkage intensity of the shrinkage estimator. This approach shrinks the covariance matrix $\hat{\mathbf{W}}_1$ towards the diagonal target $\text{diag}(\hat{\mathbf{W}}_1)$, meaning the off-diagonal elements are shrunk towards zero while the diagonal ones remain unchanged.

Schäfer & Strimmer (2005) also provided a closed-form estimate of the optimal shrinkage intensity parameter λ_S :

$$\hat{\lambda}_S = \frac{\sum_{i \neq j} \widehat{\text{Var}}(\hat{r}_{ij})}{\sum_{i \neq j} \hat{r}_{ij}^2},$$

where \hat{r}_{ij} is the i, j -th element of $\hat{\mathbf{R}}_1$, the 1-step-ahead sample correlation matrix (obtained from $\hat{\mathbf{W}}_1$). The optimal estimate is obtained by minimising $MSE(\hat{\mathbf{W}}_1) = \text{Bias}(\hat{\mathbf{W}}_1)^2 + \text{Var}(\hat{\mathbf{W}}_1)$. More specifically, we trade a small bias for a substantial variance reduction, which is especially valuable in high dimension.

Despite its simplicity and guaranteed positive-definiteness, MinT coupled with diagonal-target shrinkage presents three important limitations.

Problem 1: Uniform shrinkage

Linear shrinkage shrinks all off-diagonal elements of $\hat{\mathbf{W}}_1$ towards zeros with equal weights $1 - \lambda_S$. The resulting penalty is global and non-adaptive: strong, genuinely systematic correlations are shrunk at the same rate as weak, noisy ones. In hierarchical and grouped systems, this can be problematic. Aggregation naturally induces stronger dependence among related nodes (for example, a region and a neighbouring region, or a region and its parent state), while many unrelated pairs exhibit near-zero correlations. A uniform penalty may over-shrink informative co-movements or under-shrink idiosyncratic noise, reducing reconciliation efficiency.

Problem 2: Latent factors

Many real-world hierarchical data sets may exhibit a prominent low-rank (factor) structure. A clear example is the Australian domestic overnight trips ([Tourism Research Australia, 2024](#)), where the national trips are disaggregated into states and territories, and further into regions. The tourism activities might be driven by a few common factors, such as economic conditions, fuel prices, or major events, which might be left in the forecast errors after fitting the base models.

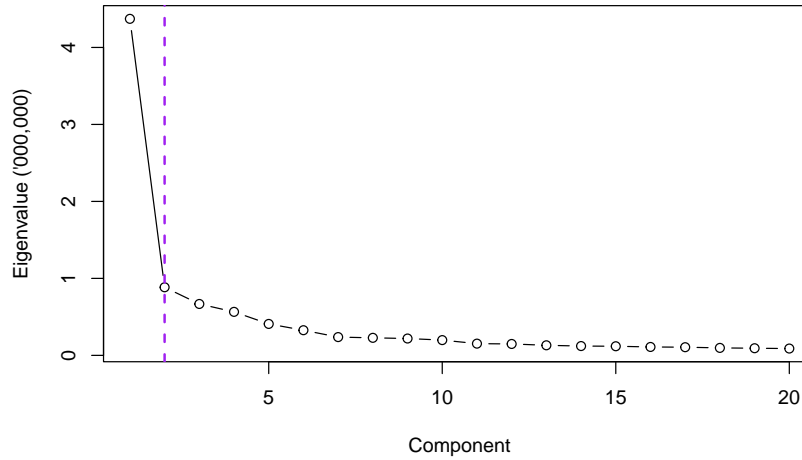


Figure 4: Scree plot of the eigenvalues of the 1-step-ahead forecast error covariance matrix from the Australian domestic tourism dataset. The point of inflection occurs around the second largest eigenvalue.

Figure 4 illustrates the largest eigenvalues from the one-step forecast error correlation matrix $\hat{\mathbf{R}}_1$, typically showing a marked elbow after a few principal components (largest eigenvalues), indicating strong latent structure. Diagonal-target shrinkage is factor-unaware: it neither

preserves the low-rank common subspace nor differentially shrinks the idiosyncratic remainder, and so can be inefficient when common factors dominate.

Problem 3: Proportional scaling

The proportionality relationship $\hat{\mathbf{W}}_h^g = k_h g(\hat{\mathbf{W}}_1)$ enforces horizon-invariant cross-series dependence of the forecast errors up to a scalar factor. In many applications, the structure of the error covariance might change with horizon due to evolving error dynamics or horizon-specific interactions among series. Proportional scaling may therefore misrepresent multi-step dependence.

Additionally, while the scalar factor cancels in point reconciliation, it directly controls dispersion in probabilistic reconciliation and can lead to miscalibrated predictive distributions. However, we will not explore this issue in this paper, and leave it for future research.

In the next sections, we introduce alternative covariance estimators that address these limitations individually and in combination.

3 Covariance Estimation Approaches

3.1 NOVELIST Estimator

To tackle the Problem 1 of uniform shrinkage, we consider the NOVELIST estimator from Huang & Fryzlewicz (2019). The NOVELIST (NOVEL Integration of the Sample and Thresholded Covariance) estimator introduces extra parameter, the threshold δ , to control the sparsity level in the target toward which the sample covariance matrix is shrunk. By soft-thresholding small correlations before shrinkage, NOVELIST preserves strong signals while attenuating weak, noisy ones, addressing the uniform, non-adaptive nature of diagonal-target shrinkage.

The construction proceeds in two steps. First, apply elementwise soft-thresholding to the sample correlation matrix; second, shrink the sample correlation toward this thresholded target. The NOVELIST estimator for covariance matrix is given by:

$$\hat{\mathbf{W}}_1^N = \lambda_\delta \hat{\mathbf{W}}_{1,\delta} + (1 - \lambda_\delta) \hat{\mathbf{W}}_1,$$

where $\hat{\mathbf{W}}_{1,\delta}$ is the thresholded covariance matrix of $\hat{\mathbf{W}}_1$. As working with correlations avoids rescaling issues and keeps diagonal entries at one, we rewrite it in terms of correlations:

$$\hat{\mathbf{R}}_1^N = \lambda_\delta \hat{\mathbf{R}}_{1,\delta} + (1 - \lambda_\delta) \hat{\mathbf{R}}_1, \quad (1)$$

where, $\hat{\mathbf{R}}_{1,\delta}$ is the thresholded correlation matrix. Each element is regularised by:

$$\hat{r}_{1,ij}^\delta = \text{sign}(\hat{r}_{1,ij}) \max(|\hat{r}_{1,ij}| - \delta, 0), \quad (2)$$

where $\delta \in [0, 1]$. For a given threshold δ , Huang & Fryzlewicz (2019) derived an analytical expression for the optimal shrinkage intensity parameter $\lambda(\delta)$, following similar logic to Schäfer & Strimmer (2005). It can be computed as:

$$\hat{\lambda}(\delta) = \frac{\sum_{i \neq j} \widehat{Var}(\hat{r}_{1,ij}) \mathbf{1}(|\hat{r}_{1,ij}| \leq \delta)}{\sum_{i \neq j} (\hat{r}_{1,ij} - \hat{r}_{1,ij}^\delta)^2}, \quad (3)$$

where $\mathbf{1}(\cdot)$ is the indicator function.

On the other hand, the optimal threshold $\hat{\delta}$ does not have a closed-form solution, and is obtained by rolling-window cross-validation procedure. The idea is to find the threshold $\hat{\delta}$, with the corresponding $\hat{\lambda} = \hat{\lambda}(\hat{\delta})$ and $\hat{\mathbf{R}}_1^N(\hat{\delta}, \hat{\lambda})$, that minimises the average out-of-sample 1-step-ahead mean squared reconciled forecast errors over all windows. The formal algorithm is given in Algorithm 1.

Note that when $\delta \in [\max_{i \neq j} |\hat{r}_{1,ij}|, 1]$, the NOVELIST estimator collapses to the shrinkage estimator, and when $\delta = 0$, it becomes the sample covariance matrix. An additional concern is that the estimator is not guaranteed to be positive definite, but we can use Higham (2002) algorithm to compute the nearest positive definite matrix if needed.

Algorithm 1 Cross-validation procedure

- 1: **Input:** Observations and fitted values $\mathbf{y}_t, \hat{\mathbf{y}}_t \in \mathbb{R}^n$ for $t = 1, \dots, T$ ¹, set of threshold candidates Δ , window size v .
 - 2: $\hat{\mathbf{e}}_t = \mathbf{y}_t - \hat{\mathbf{y}}_t$ for $t = 1, \dots, T$
 - 3: **for** $i = v : T - 1$ **do**
 - 4: $j = i - v + 1$
 - 5: $\hat{\mathbf{W}}_1 = \frac{1}{v} \sum_{t=j}^i \hat{\mathbf{e}}_t \hat{\mathbf{e}}_t'$
 - 6: $\hat{\mathbf{D}}_1 = \text{diag}(\hat{\mathbf{W}}_1)$
 - 7: $\hat{\mathbf{R}}_1 = \hat{\mathbf{D}}_1^{-1/2} \hat{\mathbf{W}}_1 \hat{\mathbf{D}}_1^{-1/2}$
 - 8: **for** $\delta \in \Delta$ **do**
 - 9: Compute thresholded correlation $\hat{\mathbf{R}}_{1,\delta}$ using Equation 2
 - 10: Compute shrinkage parameter $\hat{\lambda}_\delta$ using Equation 3
 - 11: Compute $\hat{\mathbf{R}}_{1,\delta}^N$ using Equation 1
 - 12: $\hat{\mathbf{W}}_{1,\delta}^N = \hat{\mathbf{D}}_1^{1/2} \hat{\mathbf{R}}_{1,\delta}^N \hat{\mathbf{D}}_1^{1/2}$
 - 13: $\mathbf{G} = (\mathbf{S}' \hat{\mathbf{W}}_{1,\delta}^{N-1} \mathbf{S})^{-1} \mathbf{S}' \hat{\mathbf{W}}_{1,\delta}^{N-1}$
 - 14: Reconciled forecasts $\tilde{\mathbf{y}}_{i+1} = \mathbf{S} \mathbf{G} \hat{\mathbf{y}}_{i+1}$
 - 15: $\tilde{\mathbf{e}}_{i+1,\delta} = \mathbf{y}_{i+1} - \tilde{\mathbf{y}}_{i+1}$
 - 16: **end for**
 - 17: **end for**
 - 18: $MSE_\delta = \frac{1}{T-v} \sum_{i=v}^{T-1} (\tilde{\mathbf{e}}_{i+1,\delta})^2$ for each $\delta \in \Delta$
 - 19: $\hat{\delta} = \arg \min_{\delta \in \Delta} MSE_\delta$
 - 20: **Output:** Estimate of optimal threshold parameter $\hat{\delta}$
-

Remark. Minimising a multi-step-ahead forecast error metric in the cross-validation procedure often yields a $\hat{\delta}$ that is close to the 1-step-ahead case.

3.2 PC-adjusted Estimator

To address Problem 2 and exploit latent common components explicitly, the PC-adjusted (Principal-Component-adjusted) method takes the latent factors directly into its construction. It starts by decomposing the covariance matrix $\hat{\mathbf{W}}_1$ into a prominent principle components part (low-rank) and a orthogonal complement part $\hat{\mathbf{\Upsilon}}$ (the covariance matrix after removing the first K principal components). Then we can apply either shrinkage or NOVELIST estimator to $\hat{\mathbf{W}}_1^K$:

¹It is only required to fit the base models once on the whole training data $\{\mathbf{y}_t\}_{t=1}^T$, and obtain the in-sample fitted values $\{\hat{\mathbf{y}}_t\}_{t=1}^T$.

$$\hat{\mathbf{W}}_1^{g,K} = \sum_{k=1}^K \hat{\gamma}_k \hat{\boldsymbol{\xi}}_k \hat{\boldsymbol{\xi}}_k' + g(\hat{\Upsilon})$$

where $g(\cdot)$ is either the shrinkage or NOVELIST estimator, $\hat{\gamma}_k$ and $\hat{\boldsymbol{\xi}}_k$ are the k -th largest eigenvalue and the corresponding eigenvector of the sample covariance matrix, respectively.

Similar to the NOVELIST estimator, its PC-adjusted variant $\hat{\mathbf{W}}_1^{N,K}$ requires a cross-validation procedure to select the threshold parameter and adjustment to obtain positive definiteness. The reconciled forecasts for each cross-validation window are obtained using MinT with $\hat{\mathbf{W}}_1^{N,K}$.

3.3 Scaled Variance

To address the potential issue of Problem 3 of proportionality relationship $\hat{\mathbf{W}}_h^g = k_h g(\hat{\mathbf{W}}_1)$ not holding in practice. A simple relaxation retains the 1-step-ahead correlation structure but allows the variances to scale differently with horizon. The scaled variance estimator is given by:

$$\hat{\mathbf{W}}_h^{g,sv} = \mathbf{D}_h^{1/2} \hat{\mathbf{R}}_1^g \mathbf{D}_h^{1/2}, \quad \hat{\mathbf{R}}_1^g = \mathbf{D}_1^{-1/2} g(\hat{\mathbf{W}}_1) \mathbf{D}_1^{-1/2},$$

where \mathbf{D}_h is a diagonal matrix comprising $\hat{\sigma}_{1,h}^2, \dots, \hat{\sigma}_{n,h}^2$ on its diagonal, and $\hat{\sigma}_{i,h}^2$ is h -step-ahead base forecast error variance of the i -th series. $\hat{\mathbf{R}}_1^g$ is the estimated one-step correlation matrix, obtained from either shrinkage or NOVELIST covariance estimate.

When NOVELIST is used to produce h -step-ahead reconciled forecasts, the cross-validation procedure is modified to evaluate the out-of-sample h -step-ahead reconciled forecasts for each window and estimate optimal threshold parameter (instead of evaluating 1-step-ahead reconciled forecasts). The reconciled forecasts are obtained using MinT with $\hat{\mathbf{W}}_h^{N,sv}$.

3.4 Constructing from h -step-ahead Residuals

Another alternative is to directly estimate the covariance matrix from the h -step-ahead base forecast errors, without assuming any proportionality relationship:

$$\hat{\mathbf{W}}_h^g = g(\hat{\mathbf{W}}_h),$$

where $\hat{\mathbf{W}}_h$ is the covariance matrix of in-sample h -step-ahead base forecast errors, and $g(\cdot)$ is either the shrinkage or NOVELIST estimator.

Similarly, if NOVELIST is used, the cross-validation procedure is modified to evaluate the out-of-sample h -step-ahead reconciled forecasts for each window. The reconciled forecasts are obtained using MinT with $\hat{\mathbf{W}}_h^N$.

Summary of MinT with Covariance Estimators

The covariance estimators explored in this paper are summarised in the table below. The abbreviations will be used in the following sections.

Table 1: Summary of covariance estimators for MinT reconciliation

| Covariance estimators used | Abbreviation |
|--------------------------------------------|--------------|
| Shrinkage | MinT-S |
| NOVELIST | MinT-N |
| PC-adjusted Shrinkage with K PCs | MinT-S(PCK) |
| PC-adjusted NOVELIST with K PCs | MinT-N(PCK) |
| Scaled Variance Shrinkage | MinT-S(sv) |
| Scaled Variance NOVELIST | MinT-N(sv) |
| Constructed from h -step-ahead Shrinkage | MinT-S(hcov) |
| Constructed from h -step-ahead NOVELIST | MinT-N(hcov) |

4 Evaluation of Point and Probabilistic Forecasts

This section summarises the scoring rules used to evaluate the point and probabilistic forecast accuracy in Section 5 and Section 6.

For point forecasts, we use the mean squared error to evaluate the accuracy of different reconciliation methods: $MSE = \frac{1}{n} \sum_{i=1}^n (y_{i,t+h} - \tilde{y}_{i,t+h|t})^2$, where $y_{i,t+h}$ is the realised value of series i at time $t+h$, and $\tilde{y}_{i,t+h|t}$ is the reconciled point forecast.

Meanwhile, to assess the quality of the probabilistic forecasts, it is common to use proper scoring rules. A scoring rule is a function $S(\cdot, \cdot)$ taking a predictive distribution as its first argument and a realisation as its second argument, then returns a numerical score. We follow

a convention that lower scores are better. A scoring rule is said to be *proper* if $\mathbb{E}_Q[S(Q, y)] \leq \mathbb{E}_Q[S(F, y)]$ for all F , where F is a predictive distribution produced by forecasting model, Q is the true distribution of the realisation y , and \mathbb{E}_Q is the expectation with respect to Q . Hence, the expected score is minimised when the forecast distribution matches the true distribution.

We employ Winkler score and continuous ranked probability score as our univariate scoring rules, and energy score as the multivariate scoring rule. All three are proper scoring rules. In this paper, we only evaluate 1-step-ahead probabilistic forecasts, and thus we drop the subscript t and h for simplicity.

Winkler score (WS). If the $100(1 - \alpha)\%$ prediction interval of i -th series is $[l_i, u_i]$ (the $\alpha/2$ and $1 - \alpha/2$ quantiles), then the Winkler score is defined as:

$$WS_\alpha(l_i, u_i; y_i) = (u_i - l_i) + \frac{2}{\alpha}(l_i - y_i)\mathbf{1}(y_i < l_i) + \frac{2}{\alpha}(y_i - u_i)\mathbf{1}(y_i > u_i),$$

where y_i is the observed value of i -th series. The Winkler score rewards narrow intervals that contain the observation, and penalises intervals that do not contain the observation.

Continuous ranked probability score (CRPS). The CRPS is defined as the squared difference between the predictive cumulative distribution function (CDF) F_i and the empirical CDF of the observation y_i of series i :

$$CRPS(F_i, y_i) = \int_{-\infty}^{\infty} (F_i(x) - \mathbf{1}(x \geq y_i))^2 dx.$$

When the predictive distribution is Gaussian with mean μ_i and standard deviation σ_i , the CRPS has a closed-form expression:

$$CRPS(F_i, y_i) = \sigma_i \left[z_i (2\Phi(z_i) - 1) + 2\phi(z_i) - \frac{1}{\sqrt{\pi}} \right],$$

where $z_i = \frac{y_i - \mu_i}{\sigma_i}$, and $\Phi(\cdot)$ and $\phi(\cdot)$ are the CDF and PDF (probability density function) of a standard normal distribution, respectively.

Energy score (ES). The energy score is a multivariate generalisation of the CRPS. It is defined as:

$$ES(F, \mathbf{y}) = \mathbb{E}_F \|\mathbf{X} - \mathbf{y}\|^\beta - \frac{1}{2} \mathbb{E}_F \|\mathbf{X} - \mathbf{X}'\|^\beta,$$

where \mathbf{X} and \mathbf{X}' are independent random vectors having multivariate distribution F , \mathbf{y} is the observed vector, $\|\cdot\|$ is the Euclidean norm, and $\beta \in (0, 2]$. We set $\beta = 1$ following common convention.

Since the closed-form expression of the ES is not available, we approximate it using Monte Carlo samples $\{\mathbf{x}_1, \dots, \mathbf{x}_M\}$ drawn from F :

$$\widehat{ES}(F, \mathbf{y}) = \frac{1}{M} \sum_{m=1}^M \|\mathbf{x}_m - \mathbf{y}\| - \frac{1}{2M(M-1)} \sum_{m=1}^M \|\mathbf{x}_m - \mathbf{x}_m^*\|,$$

where \mathbf{x}_m^* is a randomly selected sample from $\{\mathbf{x}_1, \dots, \mathbf{x}_M\} \setminus \{\mathbf{x}_m\}$. In our experiments, we use $M = 10000$ samples to approximate the ES.

5 Simulation

5.1 General Design

The general design of data-generating process for bottom-level series is a stationary VAR(1) process, with the following structure:

$$\mathbf{b}_t = \mathbf{A}\mathbf{b}_{t-1} + \boldsymbol{\epsilon}_t,$$

where \mathbf{A} is a $n_b \times n_b$ block diagonal matrix of autoregressive coefficients $\mathbf{A} = \text{diag}(\mathbf{A}_1, \dots, \mathbf{A}_M)$, with each \mathbf{A}_m being a $n_{b,m} \times n_{b,m}$ matrix. The block diagonal structure ensures that the time series are grouped into M groups (blocks), with each group having its own autoregressive coefficients. This aims to simulate the interdependencies between the time series within each group, where reconciliation will be expected to better capture these compared to independent base forecasts.

$\boldsymbol{\epsilon}_t$ is a Gaussian innovation process, with covariance matrix $\boldsymbol{\Sigma}$. The covariance matrix $\boldsymbol{\Sigma}$ is generated specifically using the Algorithm 1 in Hardin et al. (2013):

1. A compound symmetric correlation matrix is used for each block of size $n_{b,m}$ in \mathbf{A}_m , where the correlation entries ρ_j for each block m are sampled from a uniform distribution between 0 and 1. They are within group baseline correlations.

2. A constant correlation, which is smaller than $\min\{\rho_1, \rho_2, \dots, \rho_M\}$, is imposed on the entries between different blocks. It serves as between group baseline correlations.
3. We select a constant ε such that $0 \leq \varepsilon < 1 - \max\{\rho_1, \rho_2, \dots, \rho_M\}$ to control the noise intensity. We then generate n_b unit vectors $\mathbf{u}_1, \dots, \mathbf{u}_{n_b}$ and obtain a entry-wise noise element as $\varepsilon \mathbf{u}_i' \mathbf{u}_j$ for the i, j -th entry. These entry-wise noise elements are added on top of the baseline correlation matrix (except the diagonal entries), creating a noisy positive correlation matrix \mathbf{R}^+ .
4. The covariance matrix $\mathbf{\Sigma}^+$ is then constructed by $\mathbf{\Sigma}^+ = \mathbf{D}\mathbf{R}^+\mathbf{D}$, where $\mathbf{D} = \text{diag}(\sigma_1, \dots, \sigma_{n_b})$ is a diagonal matrix of standard deviations. Each σ_i is uniformly sampled from the range of $[\sqrt{2}, \sqrt{6}]$, for all n_b series.

These steps result in a positive covariance matrix $\mathbf{\Sigma}^+$ where all the elements are positive. To allow a mixture of positive and negative covariance, we randomly flip the signs of them, but need to maintain the positive definiteness. This can be done by pre- and post-multiplying $\mathbf{\Sigma}$ by a random diagonal matrix \mathbf{V} with diagonal entries sampled from $\{-1, 1\}$ with equal probability. The final covariance matrix is given by $\mathbf{\Sigma} = \mathbf{V}\mathbf{\Sigma}^+\mathbf{V}$.

For all hierarchies in our experiments, we simulate two panel lengths, $T = 50$ (“short”) and $T = 300$ (“long”), generating extra four observations ($T + 1$ to $T + 4$) to serve as an out-of-sample test set. We perform 500 Monte Carlo replications for each configuration. In each replication, we fit univariate ARIMA models to the training observations using the automatic AICc minimization algorithm of Hyndman & Khandakar (2008), implemented in the *fabletools* package (O’Hara-Wild et al., 2024), generating 1–4-step base forecasts. We then reconcile the base forecasts using different reconciliation methods and evaluate their point and probabilistic forecast accuracy on the test set.

5.2 Exploring Effects of Hierarchy’s Size

In our main experiments, we examine how MinT combined with the different estimators performs as the hierarchy expands. We generate synthetic data from the VAR(1) framework described earlier, varying the number of bottom-level series, n_b , across two structures: a “small” structure with six groups of six bottom-level series ($n_b = 6 \times 6 = 36$), and a “large” configuration with two groups of fifty bottom-level series ($n_b = 2 \times 50 = 100$).

In the 36-series case, each block of six forms a level-1 aggregate, and those six aggregates form the total. The 100-series design employs a deliberately intricate aggregation path to stress-test

reconciliation methods. We first sum the one hundred bottom series into ten intermediate series by grouping them in contiguous blocks of ten. These ten series are then organised into three level-2 aggregates—four, three, and four series, respectively—before finally summing to a single top node. This asymmetric hierarchy creates overlapping correlation patterns: some level-2 series share bottom-level groups, while others draw from both, emulating practical scenarios such as regional sales aggregations that span multiple product categories or overlapping territories. The aggregation paths for both structures are illustrated in Figure 5.

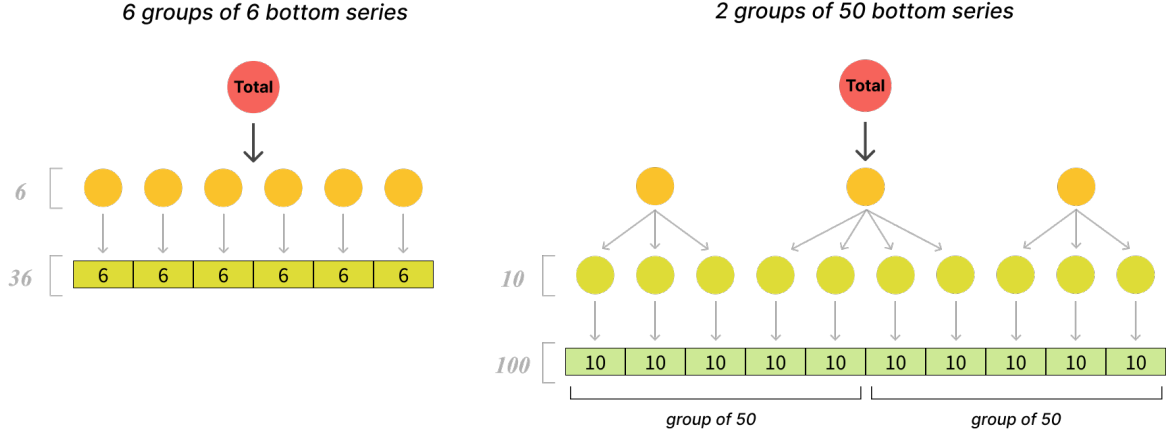


Figure 5: Aggregation structures used in the simulation experiments: 6 groups of 6 (left) and 2 groups of 50 (right)

The VAR(1) and correlation configurations for the 6 by 6 case and 2 by 50 case are illustrated in Figure 6 and Figure 7, respectively. The block diagonal structure of the VAR(1) coefficient matrices \mathbf{A} reflects the grouping of series, and the correlation matrices- show higher correlations among series within the same group.

Figure Figure 8 illustrates the relative improvements in mean squared error (MSE) of reconciled forecasts over the incoherent base forecasts, across the two structures (small and large) and time series lengths (short and long). We evaluate ten different MinT variants based on the covariance estimators discussed in Table 1, with visual distinctions made through colors, line types, and point shapes. MinT with shrinkage (*MinT-S*) and its variants are colored in mint green, while MinT with NOVELIST (*MinT-N*) and its variants are in purple. The solid lines represent vanilla *MinT-S* and *MinT-N*; the dashed lines with dot points denote the PC-adjusted variants (e.g. *MinT-S(PC1)*, *MinT-N(PC2)*); and the dotted or dashed-dotted lines indicate the scaled variance and h -step-ahead residual versions (e.g. *MinT-S(SV)*, *MinT-N(hcov)*).

The first key observation is that methods with shrinkage slightly outperform those with NOV-

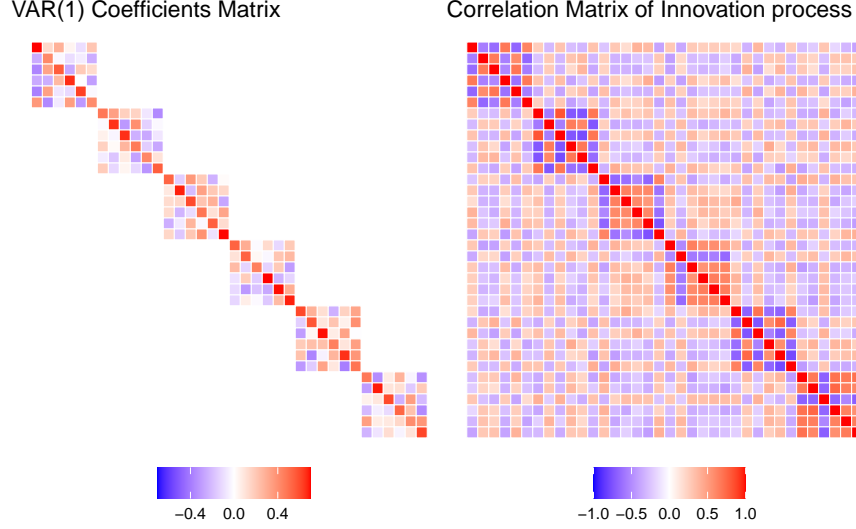


Figure 6: The VAR(1) coefficients matrix (left) and correlation matrix of the innovation process (right) for the 6 groups of 6 structure.

ELIST across all scenarios, although the differences are small. Second, the PC-adjusted variants (using one and two principal components) do not yield improvements over the vanilla versions. This is expected since the synthetic data-generating process does not simulate from strong latent factors. Lastly, the scaled variance and h -step-ahead residual approaches do not enhance performance as the forecast horizon increases, suggesting that the proportionality assumption may not be severely violated in this VAR(1) setup.

When looking into each Monte Carlo replication, we find that there are instances where the NOVELIST estimator collapses to the shrinkage estimator due to a large optimal threshold $\hat{\delta}$ being selected in the cross-validation step, resulting in a diagonal shrinkage target.

Moving on to probabilistic forecasts, we evaluate the performance of reconciliation methods using the energy score, a proper scoring rule for multivariate predictive distributions. Figure 9 presents the percentage relative improvement in energy score for 1-step-ahead forecasts. Across both hierarchies and time dimensions, the MinT methods consistently outperform the base forecasts. Meanwhile, the differences among *MinT-S* and *MinT-N* variants are small, except for the 6 by 6 case with 50 observations, where shrinkage has a pronounced edge. The PC-adjusted variants again degrade performance as we add more principal components. The scaled variance and h -step-ahead residuals approaches are not available since we only evaluate

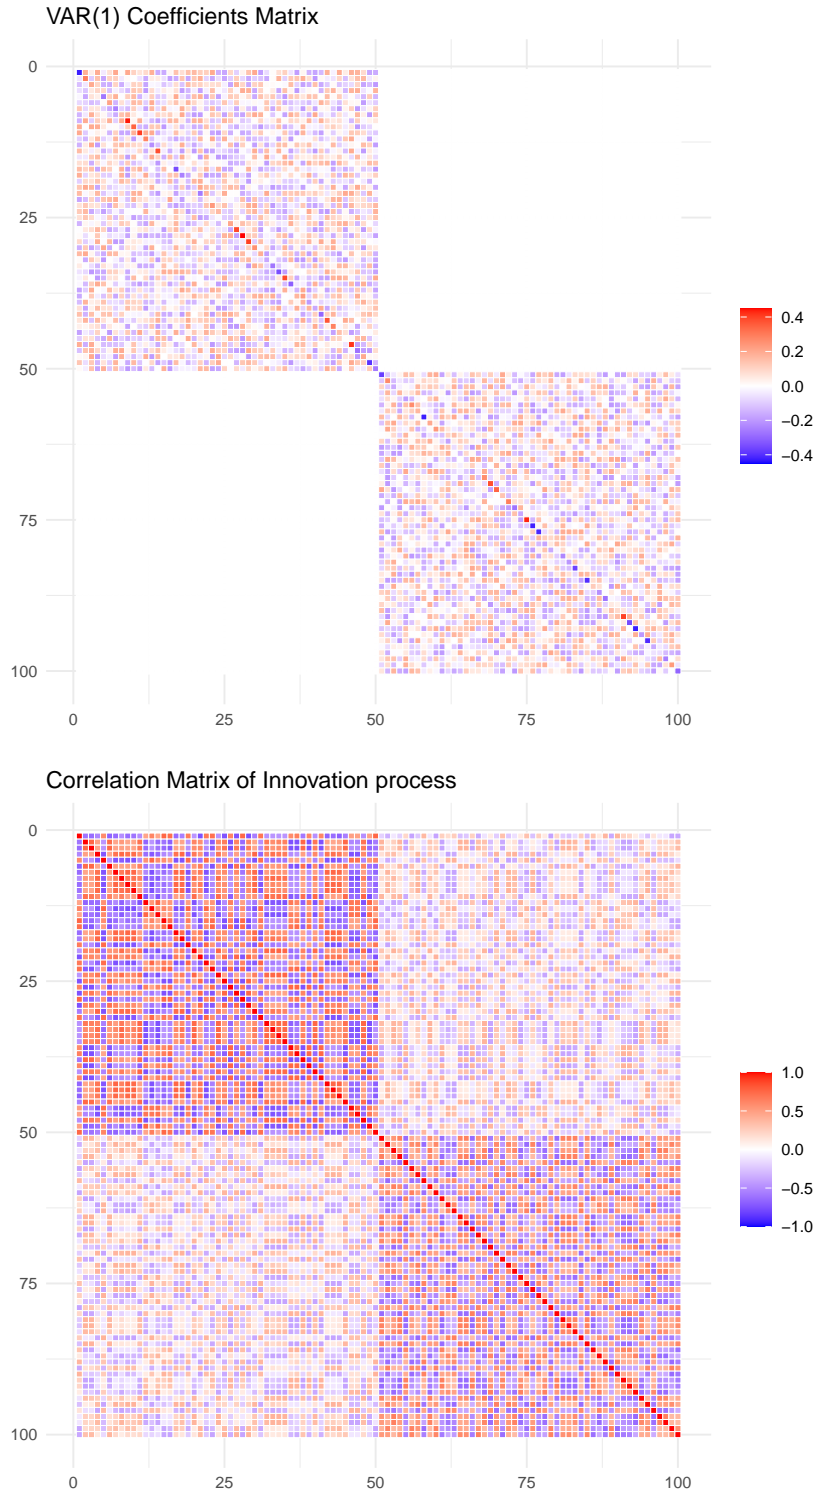


Figure 7: The VAR(1) coefficients matrix (top) and correlation matrix of the innovation process (bottom) for the 2 groups of 50 structure.

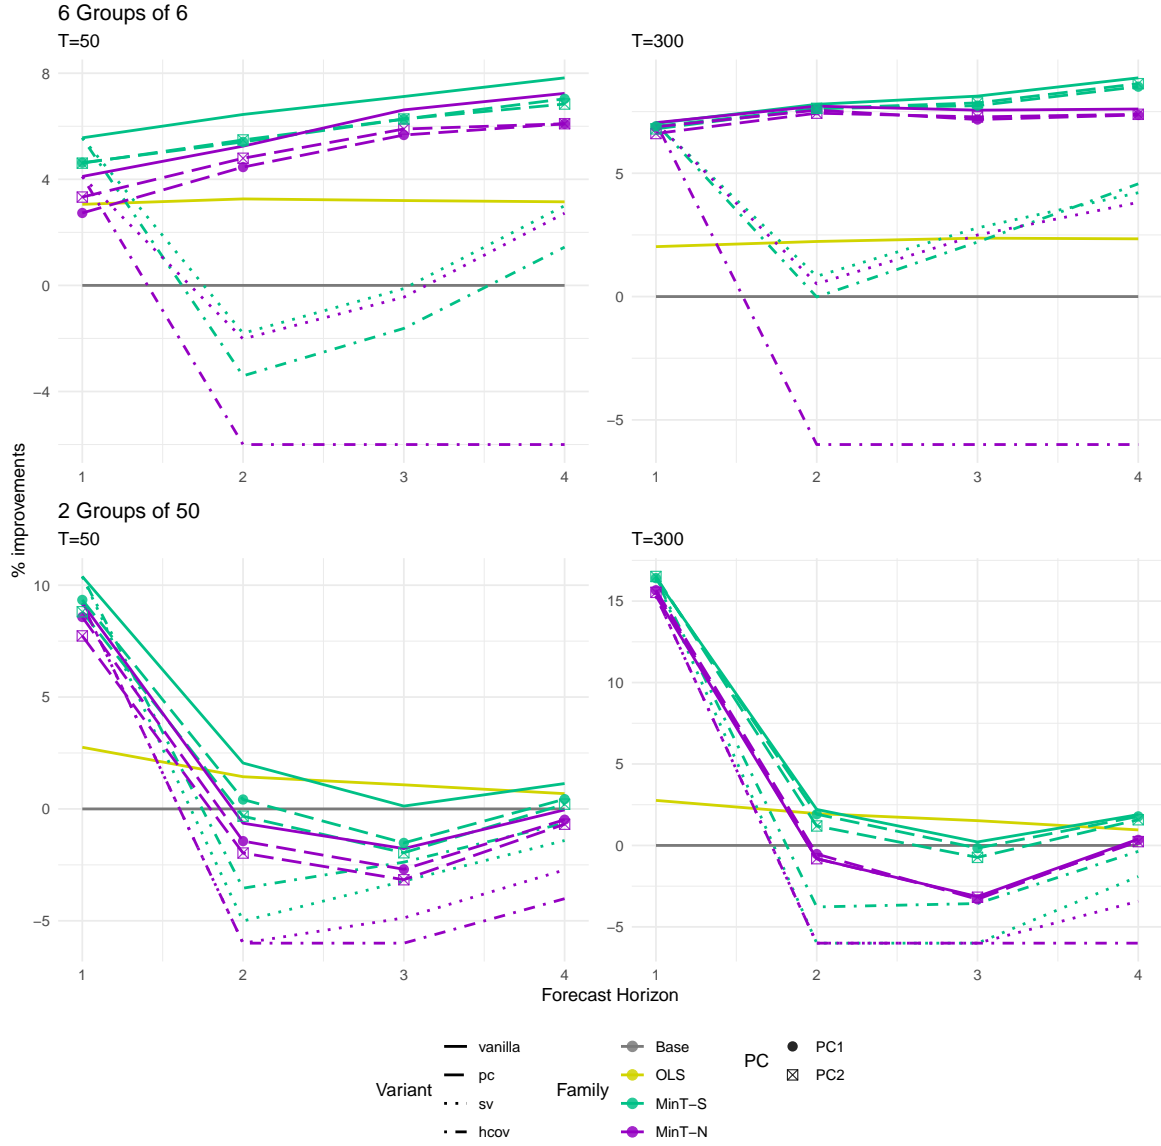


Figure 8: Percentage relative improvement in MSE of reconciled forecasts over the base forecasts in the 6 by 6 case (top row) and the 2 by 50 case (bottom row), $T=50$ (left column) and $T=300$ (right column), for 1- to 4-step-ahead forecasts. The positive (negative) entries indicate a decrease (increase) in MSE relative to base. The negative improvements beyond 6% are capped.

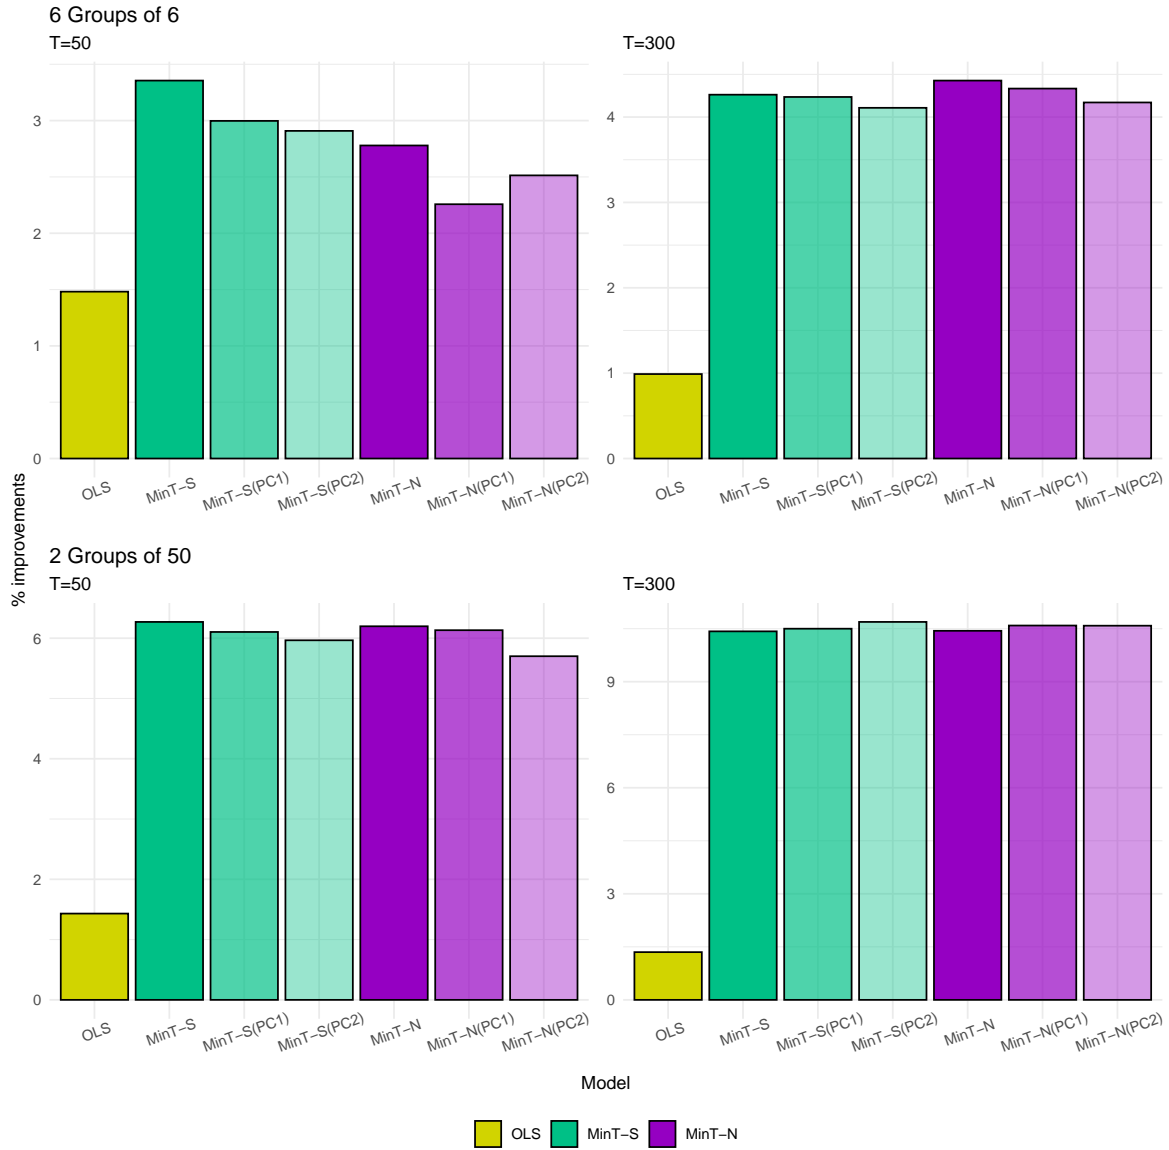


Figure 9: Percentage relative improvement in Energy score in both hierarchies and time dimensions, for 1-step-ahead forecasts. The positive entries indicate a decrease in Energy score relative to base.

1-step-ahead covariance estimates.

Other scoring rules, such as the Winkler score and CRPS, yield similar conclusions. More detailed results are provided in Appendix Section 8.1.

5.3 Other Data-Generating Processes

In attempts to differentiate the performance of NOVELIST from the shrinkage estimator, we also simulate from a sparse covariance matrix for the previous section’s 2 groups of 50 bottom series setting, as illustrated in Figure 10. The sparse covariance matrix is obtained by randomly choosing 40% of the bottom series and setting their correlations with all other series to zero, resulting in a grid-like sparse structure. The VAR(1) coefficient matrix remains the same as in the dense case. The idea is to allow NOVELIST to exploit the sparsity in the covariance structure, since it can control the sparsity of the shrinkage target via the thresholding parameter δ . However, no profound insights can be drawn from the results (provided in Appendix Section 8.1).

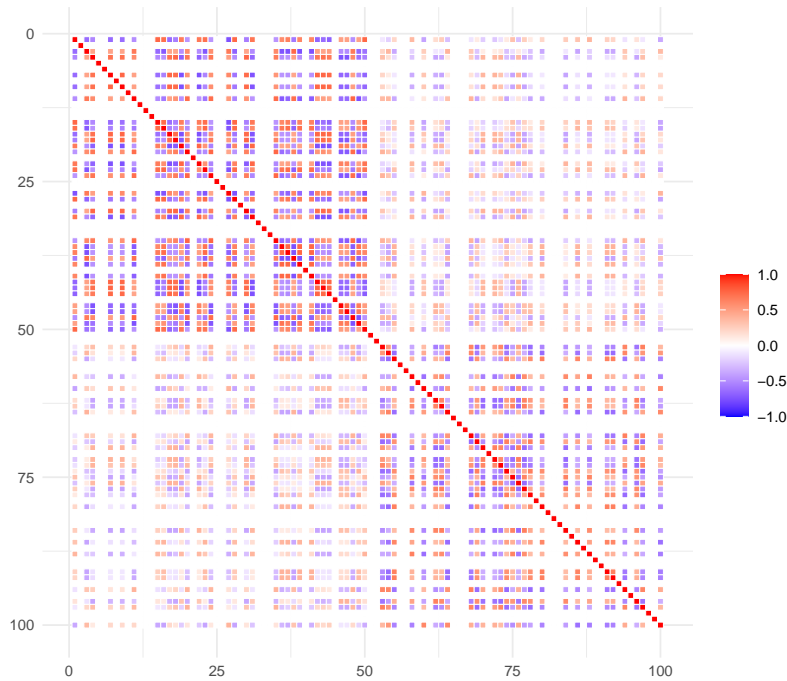


Figure 10: Sparse correlation matrix of the innovation process for 2 groups of 50 structure.

Additional designs (varying block sizes, grouped structure, aggregation paths, correlation configurations) also failed to separate NOVELIST from Shrinkage. Their nearly identical performance under these synthetic scenarios suggests that our current simulation may not unveil the full advantages of the thresholding estimators. Nevertheless, we have not explored settings where PC variants or using h -step-ahead residuals approaches would have an edge.

These findings motivate our turn to empirical data in the next section, where latent structural features, regime shifts, and noisy, intermittent series may possibly reveal performance differences.

6 Forecasting Australian Domestic Tourism

Forecasting domestic tourism flows is of great economic and policy significance, as policymakers and stakeholders rely on accurate forecasts to make informed decisions regarding resource allocation, infrastructure development, and marketing strategies. The domestic tourism flows in Australia exhibit a natural hierarchical and grouped structure, driven both by geography and by purpose of travel. At the top of this hierarchy lies the national total, which is split into the seven states and territories. Each state is further subdivided into tourism zones, which in turn break down into 77 regions. A complete illustration of this geographic hierarchy appears in Appendix Section 8.2. Intersecting this geographic hierarchy is a second dimension: policymakers are also interested in travel motives. This partitions tourism flows into four categories: holiday, business, visiting friends and relatives, and other. Altogether, this yields a grouped structure of 560 series, from the most disaggregated regional-purpose cells up to the full national aggregate. Table 2 depicts this structure.

Table 2: Hierarchical and grouped structure of Australian domestic tourism flows

| Geographical division | Number of series per geographical division | Number of series per purpose | Total number of series |
|-----------------------|--------------------------------------------|------------------------------|------------------------|
| Australia | 1 | 4 | 5 |
| States | 7 | 28 | 35 |
| Zones | 27 | 108 | 135 |
| Regions | 77 | 308 | 385 |
| Total | 112 | 448 | 560 |

We quantify tourism demand via “visitor nights”, the total number of nights spent by Australians away from home. The data is collected via the National Visitor Survey, managed by Tourism Research Australia, using computer-assisted telephone interviews from nearly 120,000 Australian residents aged 15 years and over (*Tourism Research Australia, 2024*).

The data are monthly time series spanning from January 1998 to December 2016, resulting in 228 observations per series. This gives a challenging high-dimensional forecasting problem with a number of series (560) doubling the number of observations, which is ideal for evaluating reconciliation approaches that rely on high-dimensional covariance estimation. The extreme dimensionality over sample size mirrors many contemporary business problems, for instance, Starbucks Corporation sales. Tourism demand is also economically vital yet highly volatile, with geographical and purpose-specific patterns creating a realistic stress-test for reconciliation algorithms.

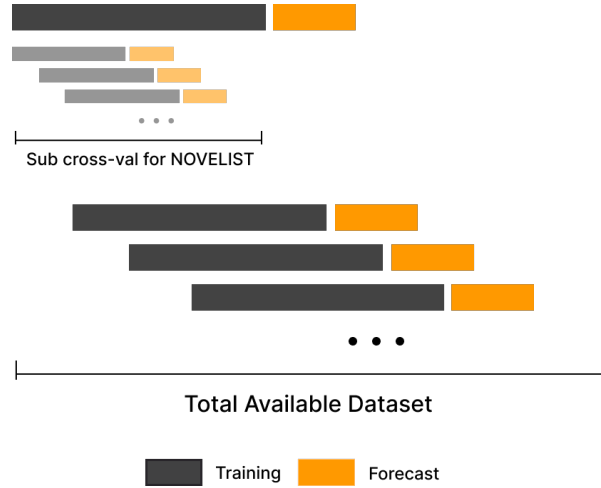


Figure 11: Rolling-window cross-validation scheme for evaluating forecasting performance in Australia tourism data

To assess forecasting performance between models, we adopt a rolling-window cross-validation scheme. Beginning with the first 120 monthly observations (January 1998-December 2005) as the initial training set, we obtain the best-fitted ARIMA model for each of the 560 series via the automatic algorithm by minimising AICc from Hyndman & Khandakar (2008), implemented in the *fabletools* package (O’Hara-Wild et al., 2024). The 1- to 12-step-ahead base forecasts are then generated by these ARIMA models, and then reconciled using multiple approaches. To estimate the NOVELIST and its variants, we implement an extra cross-validation procedure within this training window, as described in Algorithm 1. We then roll the training window forward by one month and refit all models, re-estimate reconciliation variants, and produce an-

other batch of 1- to 12-step-ahead forecasts, repeating until the training set reaches December 2015. In total, this results in 97 out-of-sample windows. The entire procedure is illustrated in Figure 11.

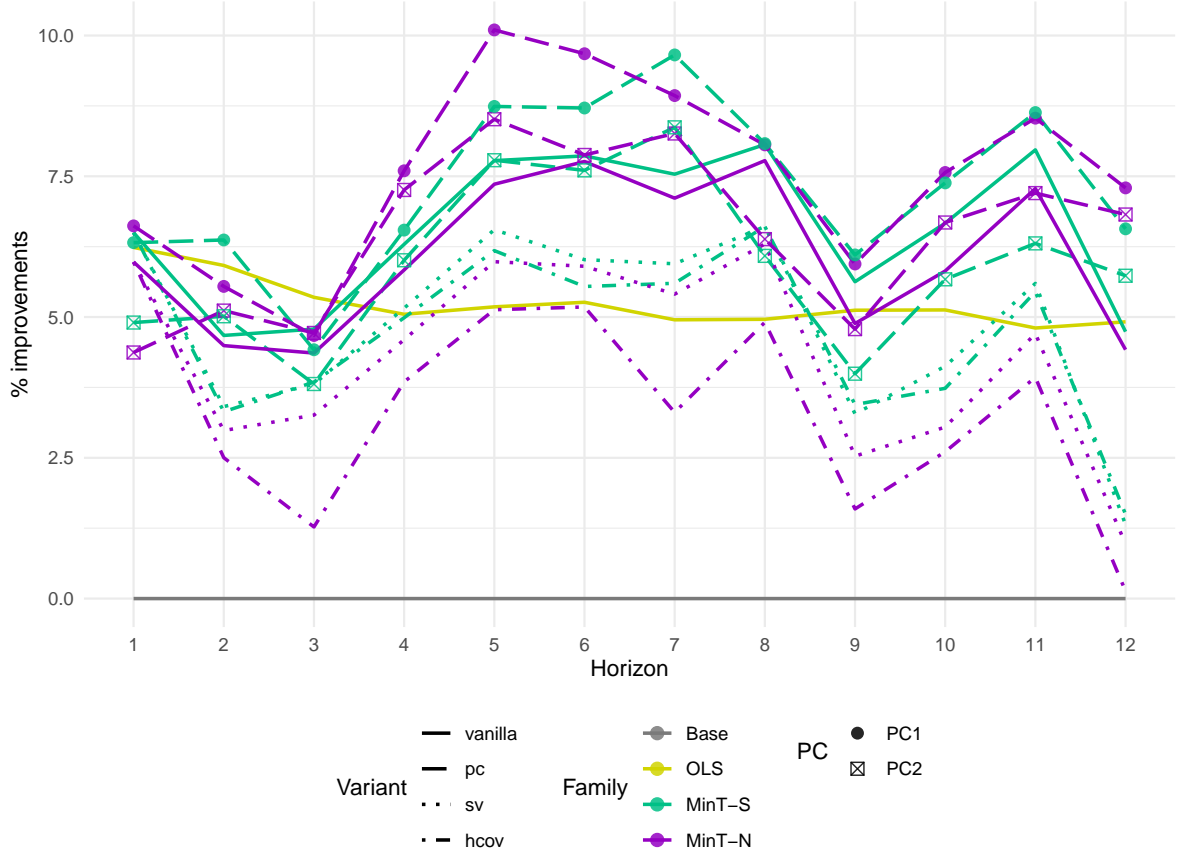


Figure 12: Percentage relative improvement in the mean squared error (MSE) of different reconciled forecasts over the base forecasts for the Australian domestic tourism data, for 1 to 12 steps ahead forecasts. The positive entries indicate an decrease in MSE.

Figure 12 reports percentage relative improvements in MSE of reconciled forecasts over the incoherent base ARIMA forecasts, across horizons from 1 to 12 months. We evaluate ten MinT variants (as defined in Table 1), similar to the simulation’s Figure 8. The MinT with shrinkage (*MinT-S*) and its variants are colored in mint green, while MinT with NOVELIST (*MinT-N*) and its variants are in purple. Solid lines represent “vanilla” *MinT-S* and *MinT-N*; dashed lines with dot points denote the PC-adjusted variants (e.g. *MinT-S(PC1)*, *MinT-N(PC2)*); and dotted or dashed-dotted lines indicate the scaled variance and h -step-ahead residual versions (e.g. *MinT-S(SV)*, *MinT-N(hcov)*).

Three patterns stand out. First, the vanilla *MinT-S* (solid green) slightly outperforms *MinT-N* (solid purple) at most horizons, although the gap is small. Second, variants that alter the multi-step covariance, either via scaled variance or direct h -step residual covariances, underperform standard MinT, suggesting that extra estimation at horizon $h > 1$ is not rewarded in this empirical analysis. Most importantly, incorporating a single dominant factor via PC-adjustment (dashed line with round points) delivers the best performance among all methods. Both *MinT-S(PC1)* and *MinT-N(PC1)* consistently beat their unadjusted counterparts across horizons. However, adding more than one PC brings no additional benefit and can erode performance, likely due to injecting idiosyncratic noise from weaker components.

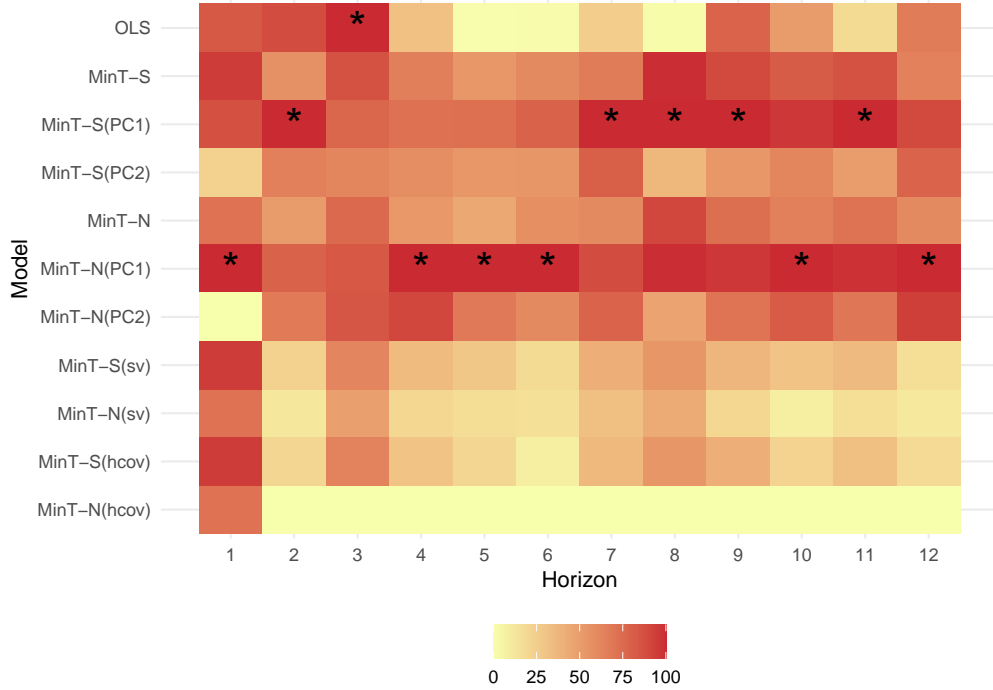


Figure 13: Heatmap of relative improvement in the mean squared error (MSE) of different reconciled forecasts over the base forecasts for the Australian domestic tourism data, for 1 to 12 steps ahead forecasts. The values are scaled to the range of 0 to 100 for better visualisation, with darker colors indicating greater improvement and best performance is noted by a star. This re-scaling does not affect relative rankings among methods.

Figure 13 complements the line plot with a heatmap that standardises each method's MSE improvement to a 0–100 scale to enhance visual discrimination across horizons. Darker shades indicate larger improvements. The heatmap highlights the pattern from the line plot: *MinT-N(PC1)* and *MinT-S(PC1)* exhibit the highest concentration of dark cells and are repeatedly

marked as the best method across horizons (star markers). Overall, the results underscore the consistent gains from PC adjustment and highlight the diminishing returns from more complex covariance treatments (lighter cells for scaled variance and h -step residuals).

Turning to probabilistic forecasts (1-step-ahead forecasts), Figure 14 shows that *MinT-N* variants (purple bars) consistently outperform *MinT-S* variants (green bars) across univariate and multivariate scores. The PC1-adjusted variants again yield improvements over their vanilla counterparts, with *MinT-N(PC1)* leading overall. In the multivariate evaluation, the Energy score places *OLS* close to the PC1-adjusted MinT methods. One surprising finding is that all MinT variants produce inferior forecasts compared to the base forecasts when considering 95% Winkler score, while *OLS* performs best.

To dissect the 95% Winkler score results, Figure 15 breaks down performance by hierarchical level, and examines empirical coverage of the 95% prediction intervals. The left panel shows that *MinT-S* produces inferior forecasts compared to the base forecasts at all levels, especially in higher aggregated levels. From our inspection, this is due to the overly shrunk variances from the shrinkage estimator, leading to narrow prediction intervals. The right panel confirms this, as *MinT-S* has the lowest empirical coverage across all levels, indicating that its prediction intervals fail to capture the true observations adequately and result in poor Winkler scores. *MinT-N* has relatively good coverage and improved Winkler score at bottom levels, but still is inferior at higher levels. The PC-adjusted variants seem to strike a better balance, improving overall coverage and relative Winkler scores over the base.

The summary radar graph in Figure 16 consolidates these findings. Among the selected MinT variants considering probabilistic criteria, *MinT-N(PC1)* (yellow polygon) clearly leads across CRPS, Winkler score at 80% and 95% intervals, and Energy score, extending the improvements seen in the single-metric panels. Except for the Winkler score at 95% interval, all MinT variants outperform the base forecasts.

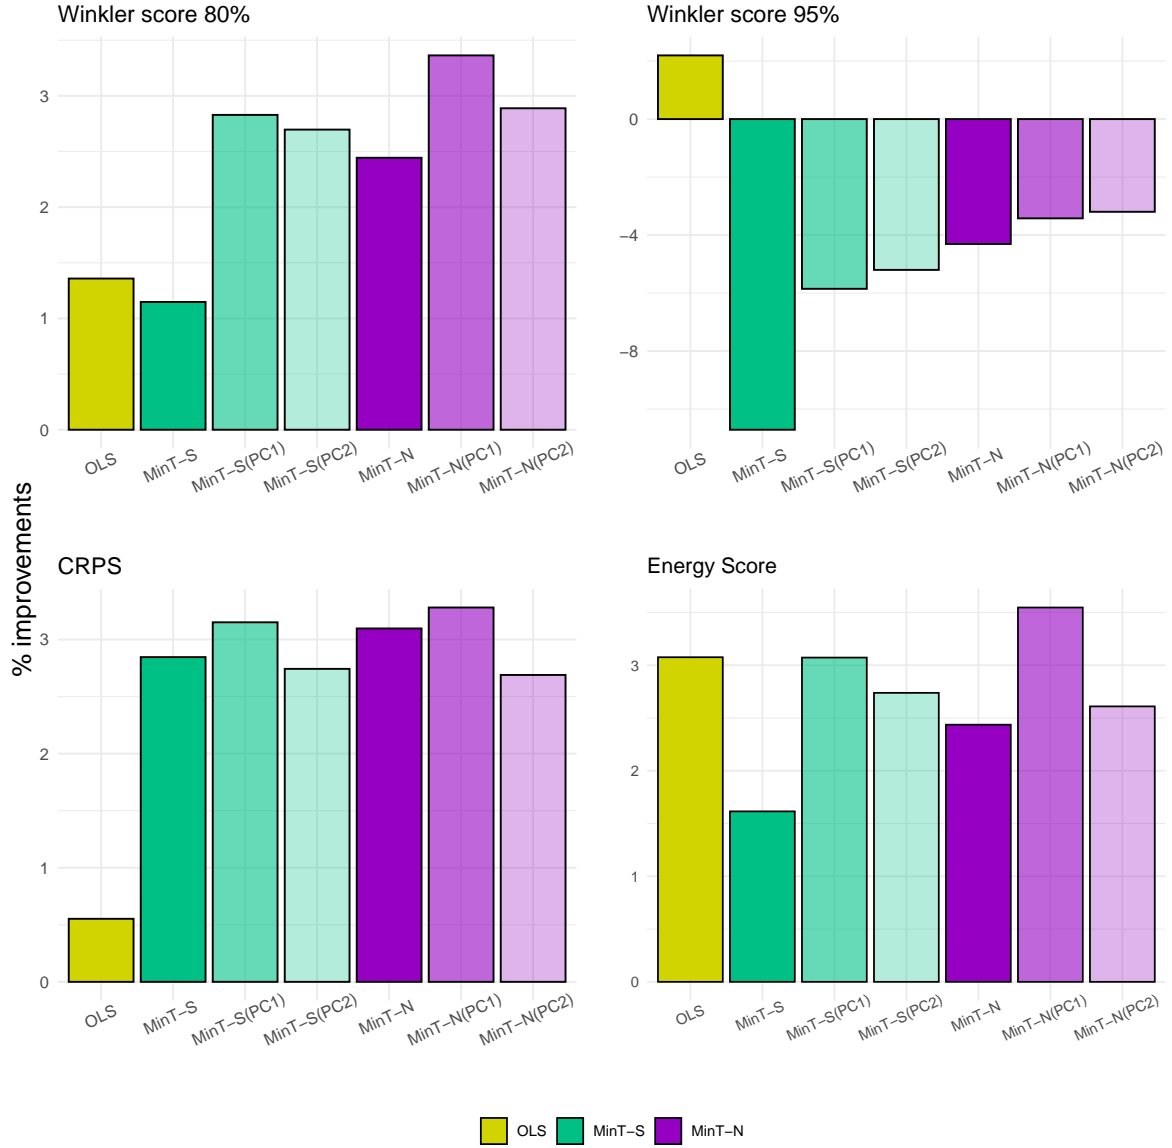


Figure 14: Percentage relative improvement in the Winkler score at 80% and 95% nominal coverage, CRPS, and Energy score of multiple reconciled forecasts over the base forecasts for the Australian domestic tourism data, for 1-step-ahead forecasts. The positive (negative) entries indicate a decrease (increase) in the probabilistic scores relative to base.

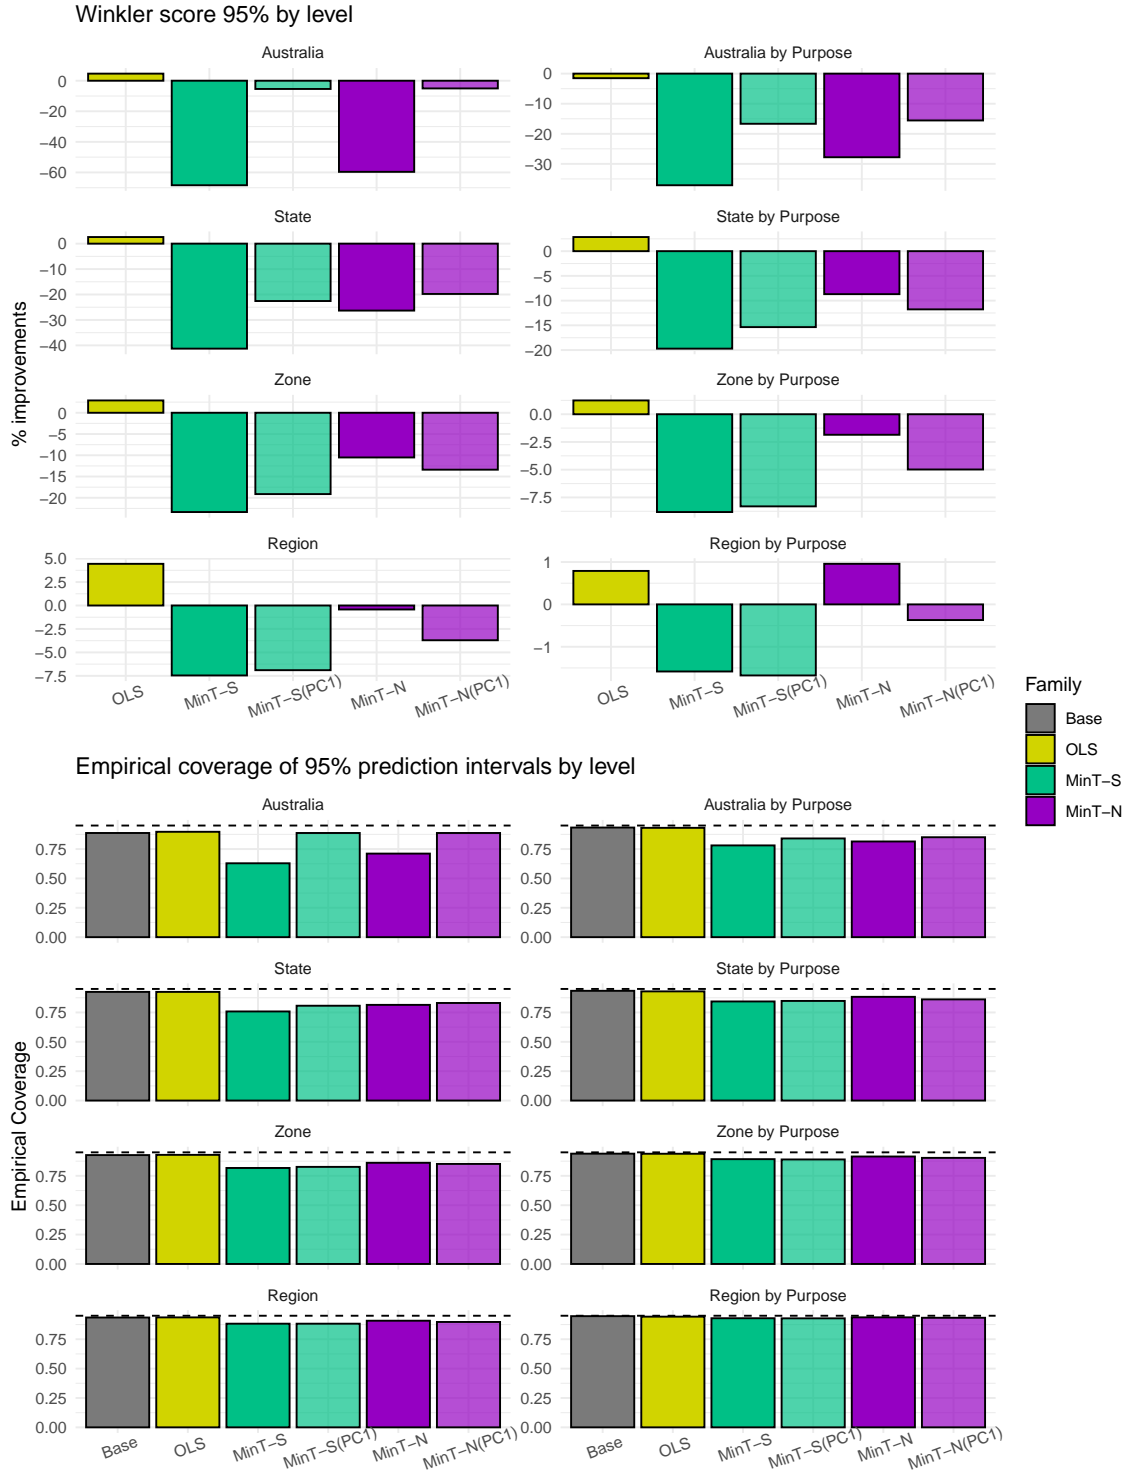


Figure 15: Percentage relative improvement in Winkler score at 95% nominal coverage by aggregation level (left), and empirical coverage of 95% prediction intervals by aggregation level (right).

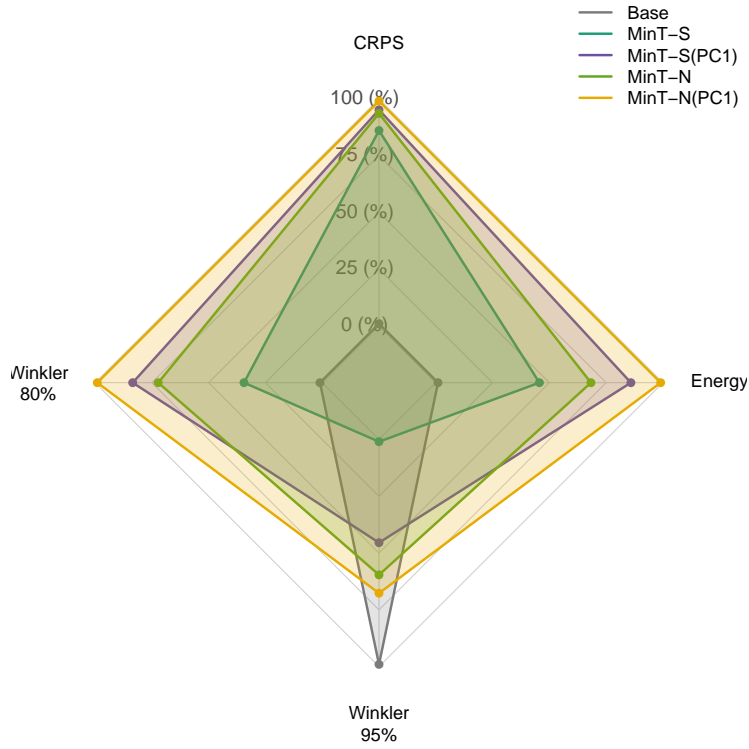


Figure 16: Radar plot of relative improvements in probabilistic scores (Winkler score at 80% and 95% intervals, CRPS, and Energy) over the base forecasts. The scores are scaled to a range of 0 to 100, with larger values indicating better performance. The outermost polygon represents the best possible score (100) and the innermost polygon represents the worst possible score (0). Only the top 4 MinT approaches are shown, together with the base forecasts.

7 Conclusions and Future Work

This paper tackles a central bottleneck in Minimum Trace (MinT) reconciliation: obtaining reliable, positive-definite estimates of the base-forecast error covariance. The original practice, following Wickramasuriya et al. (2019), estimates the one-step covariance via diagonal-target shrinkage and obtains multi-step horizons by proportional scaling. We identified three limitations of this approach: (1) uniform shrinkage, (2) lack of factor awareness, and (3) horizon-invariant dependence. We thus explored alternatives that address them individually and in combination. Specifically, we adopt NOVELIST to introduce a more flexible shrinkage target; develop PC-adjusted variants of shrinkage and NOVELIST to preserve dominant latent components in the data; and consider multi-step covariance constructions that relax the proportional scaling assumption.

Empirical evidence from Australian domestic tourism yields several insights. For point reconciliation, shrinkage (and its PC-adjusted version) remains a robust default choice, while NOVELIST demonstrates improved performance for probabilistic forecasts. Across both settings, adjusting for a single dominant principal component consistently enhances performance, indicating its utility when such latent structures are present. More complex adjustments, such as incorporating multiple principal components or horizon-specific covariances, tend to introduce additional idiosyncratic noise without notable benefits.

Several limitations and directions for future work remain. First, more intricate simulation designs are needed to further highlight the differences between shrinkage and NOVELIST, particularly under explicit factor models and varying sparsity/noise levels. Second, our current PC-adjusted implementations do not standardise series before factor extraction, which may lead to higher-level series largely influencing the principal components. Third, we can explore alternative methods that leverage cross-series information or eigenvalue/eigenvector structures. Fourth, the observed inferior performance of MinT with shrinkage under the Winkler 95% score at higher aggregation levels needs detailed investigation. Finally, evaluating genuinely h -step probabilistic reconciliation remains an open avenue, including how to best regularise multi-step covariances given limited effective samples.

All data generation, covariance estimation, and reconciliation routines were implemented in the ReconCov R package and is available under an open-source license on GitHub (Su, 2025). Regarding reproducibility, see Appendix Section 8.3.

8 Appendix

8.1 Appendix: Simulation Supplementary

Supplementary figures for simulation study in Section 5.2.

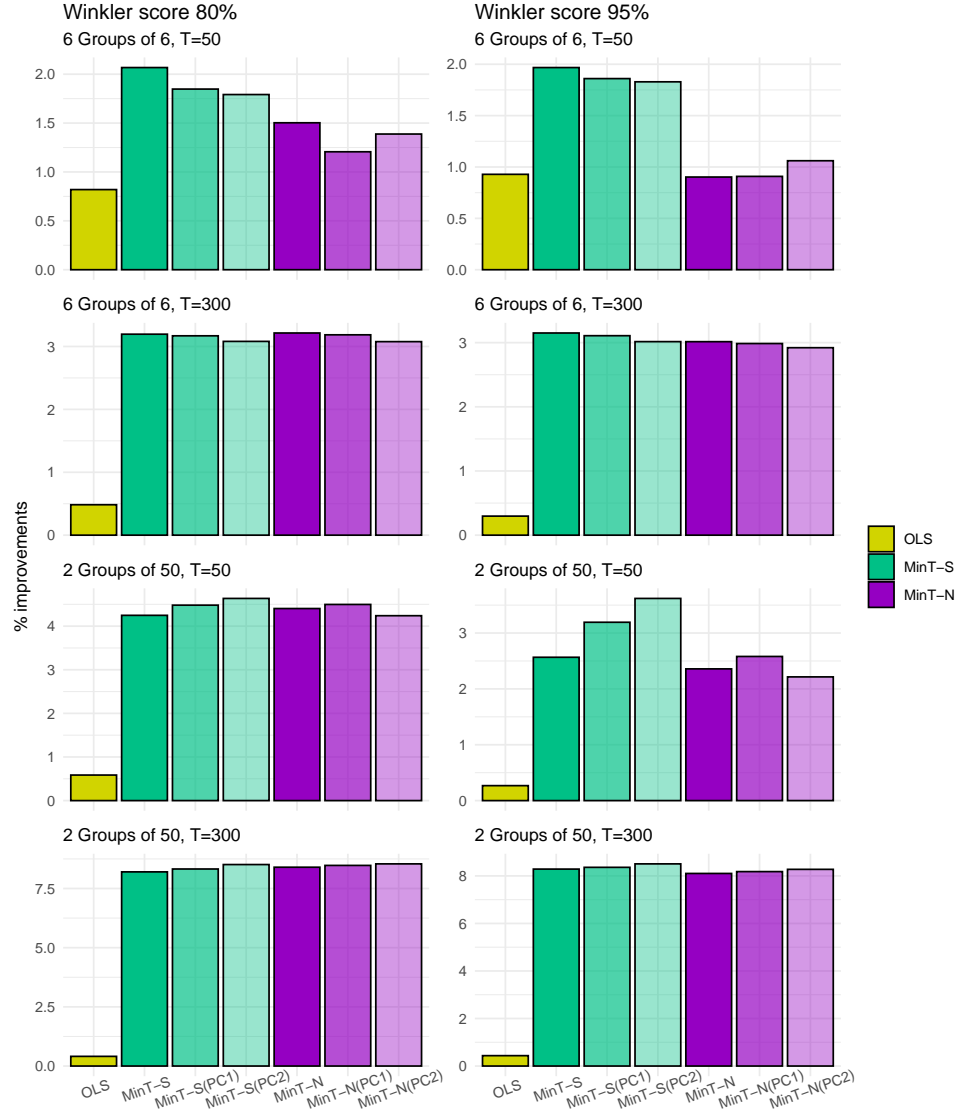


Figure 17: Percentage relative improvement in the Winkler score at 80% (left column) and 95% (right column) nominal coverage of different 1-step-ahead reconciled forecasts over the base forecasts for both hierarchical structures and time series lengths. The positive entries indicate a decrease in Winkler score relative to base.

To complement the main simulation probabilistic forecast results (using Energy score) in Section 5.2, Figure 17 presents percentage relative improvements in Winkler scores at 80% and 95% nominal coverage for 1-step-ahead forecasts across both hierarchical structures (small and large) and time series lengths (short and long). The patterns largely mirror those observed with the Energy score in Figure 9.

Supplementary figure for simulation study with sparse covariance structure in Section 5.3.

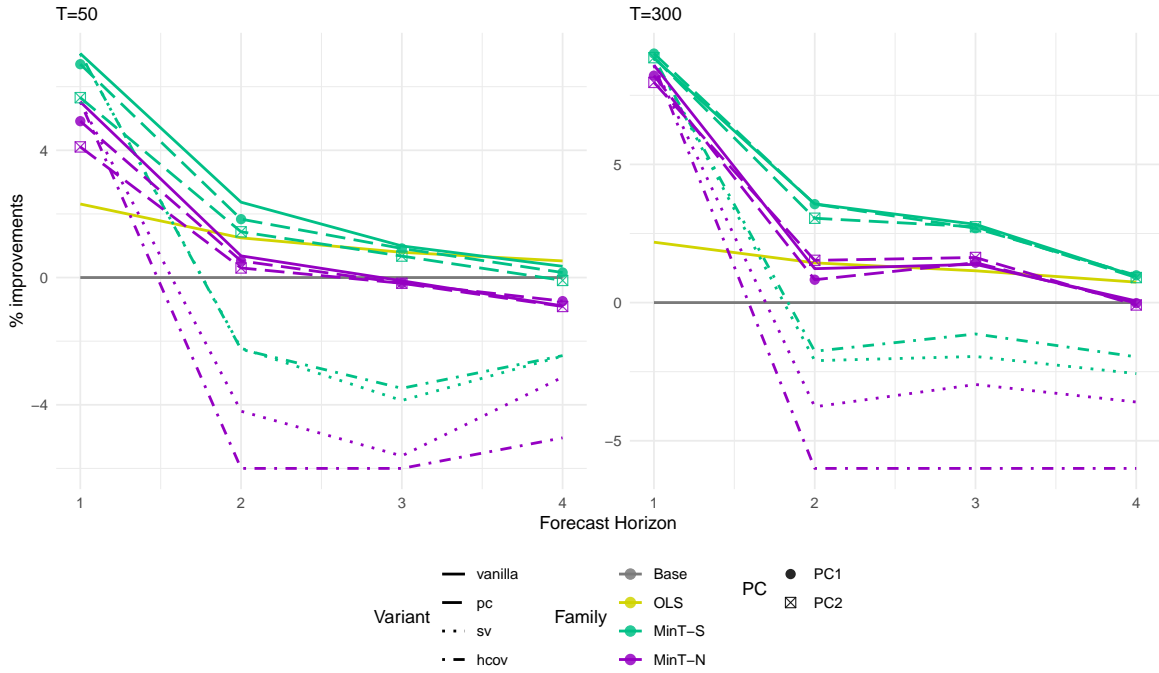


Figure 18: Percentage relative improvement in MSE of 1-to-12-step reconciled forecasts for sparse covariance (of the innovation process) setting, for the large 2-groups-of-50 hierarchy and both time series lengths. The positive entries indicate a decrease in MSE.

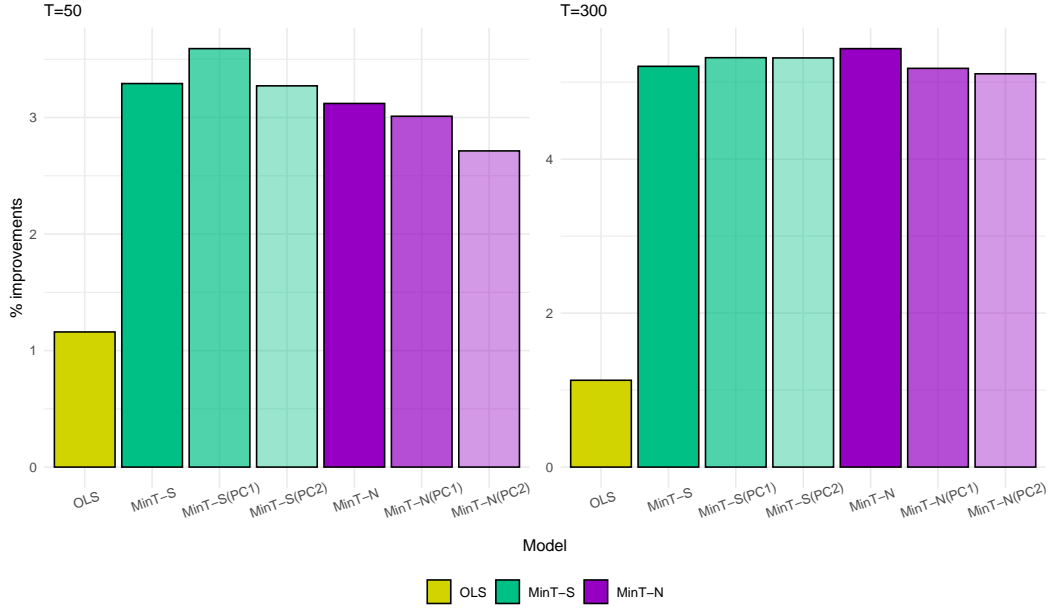


Figure 19: Percentage relative improvement in Energy score of 1-step reconciled forecasts for sparse covariance (of the innovation process) setting, for the large 2-groups-of-50 hierarchy and both time series lengths. The positive entries indicate a decrease in Energy score.

8.2 Appendix: Description of Australian Geographical Hierarchy

Table 3: Geographical divisions of Australia.

| Series | Name | Label | Series | Name | Label |
|--------|---------------|-------|--------|-----------------------------|-------|
| 1 | Australia | Total | 57 | Bundaberg | CAA |
| 2 | NSW | A | 58 | Capricorn | CAB |
| 3 | NT | B | 59 | Fraser Coast | CAC |
| 4 | QLD | C | 60 | Gladstone | CAD |
| 5 | SA | D | 61 | Mackay | CAE |
| 6 | TAS | E | 62 | Southern Queensland Country | CAF |
| 7 | VIC | F | 63 | Outback Queensland | CBA |
| 8 | WA | G | 64 | Brisbane | CCA |
| 9 | ACT | AA | 65 | Gold Coast | CCB |
| 10 | Metro NSW | AB | 66 | Sunshine Coast | CCC |
| 11 | Nth Coast NSW | AC | 67 | Townsville | CDA |
| 12 | Nth NSW | AD | 68 | Tropical North Queensland | CDB |

| | | | | | |
|----|--------------------------|-----|-----|---------------------------------|-----|
| 13 | Sth Coast NSW | AE | 69 | Whitsundays | CDC |
| 14 | Sth NSW | AF | 70 | Clare Valley | DAA |
| 15 | Central NT | BA | 71 | Flinders Ranges and Outback | DAB |
| 16 | Nth Coast NT | BB | 72 | Murray River, Lakes and Coorong | DAC |
| 17 | Central Coast QLD | CA | 73 | Riverland | DAD |
| 18 | Inland QLD | CB | 74 | Adelaide | DBA |
| 19 | Metro QLD | CC | 75 | Adelaide Hills | DBB |
| 20 | Nth Coast QLD | CD | 76 | Barossa | DBC |
| 21 | Inland SA | DA | 77 | Fleurieu Peninsula | DCA |
| 22 | Metro SA | DB | 78 | Kangaroo Island | DCB |
| 23 | Sth Coast SA | DC | 79 | Limestone Coast | DCC |
| 24 | West Coast SA | DD | 80 | Eyre Peninsula | DDA |
| 25 | Nth East TAS | EA | 81 | Yorke Peninsula | DDB |
| 26 | Nth West TAS | EB | 82 | East Coast | EAA |
| 27 | Sth TAS | EC | 83 | Launceston and the North | EAB |
| 28 | East Coast VIC | FA | 84 | North West | EBA |
| 29 | Metro VIC | FB | 85 | West Coast | EBB |
| 30 | Nth East VIC | FC | 86 | Hobart and the South | ECA |
| 31 | Nth West VIC | FD | 87 | Gippsland | FAA |
| 32 | West Coast VIC | FE | 88 | Lakes | FAB |
| 33 | Nth WA | GA | 89 | Phillip Island | FAC |
| 34 | Sth WA | GB | 90 | Geelong and the Bellarine | FBA |
| 35 | West Coast WA | GC | 91 | Melbourne | FBB |
| 36 | Canberra | AAA | 92 | Peninsula | FBC |
| 37 | Central Coast | ABA | 93 | Central Murray | FCA |
| 38 | Sydney | ABB | 94 | Goulburn | FCB |
| 39 | Hunter | ACA | 95 | High Country | FCC |
| 40 | North Coast NSW | ACB | 96 | Melbourne East | FCD |
| 41 | Blue Mountains | ADA | 97 | Murray East | FCE |
| 42 | Central NSW | ADB | 98 | Upper Yarra | FCF |
| 43 | New England North West | ADC | 99 | Ballarat | FDA |
| 44 | Outback NSW | ADD | 100 | Bendigo Loddon | FDB |
| 45 | South Coast | AEA | 101 | Central Highlands | FDC |
| 46 | Capital Country | AFA | 102 | Macedon | FDD |
| 47 | Riverina | AFB | 103 | Mallee | FDE |
| 48 | Snowy Mountains | AFC | 104 | Spa Country | FDF |
| 49 | The Murray | AFD | 105 | Western Grampians | FDG |
| 50 | Alice Springs | BAA | 106 | Wimmera | FDH |
| 51 | Barkly | BAB | 107 | Great Ocean Road | FEA |
| 52 | Lasseter | BAC | 108 | Australia's North West | GAA |
| 53 | MacDonnell | BAD | 109 | Australia's Golden Outback | GBA |
| 54 | Darwin | BBA | 110 | Australia's Coral Coast | GCA |
| 55 | Katherine Daly | BBB | 111 | Australia's South West | GCB |
| 56 | Litchfield Kakadu Arnhem | BBC | 112 | Destination Perth | GCC |

8.3 Appendix: Reproducibility

This research project has 3 Github repositories:

1. **ReconCov**: The main *R package* implements the studied covariance estimators, MinT reconciliation, general data-generating process functions. Refer to (Su, 2025) for installation and documentation.
2. **Recon_Honours_Analysis**: This repository contains all R codes to produce the simulation studies and empirical analysis in this thesis (including scripts to run on a high-performance cluster), along with wrangling, processing, and analysing the results data. It depends on the *ReconCov* package. It is available at https://github.com/lordtahdus/Recon_Honours_Analysis
3. **Recon_Honours_Thesis**: This repository contains the thesis manuscript in Quarto format, along with all figures and tables. The access is upon request. https://github.com/lordtahdus/Recon_Honours_Thesis

Please contact the author via email `Vincent.Su@monash.edu` for specific navigation or questions regarding the code repositories.

References

- Angam, B., Beretta, A., De Poorter, E., Duvinage, M., & Peralta, D. (2025). Forecast reconciliation for vaccine supply chain optimization. In *Communications in computer and information science* (pp. 101–118). Springer Nature Switzerland. https://doi.org/10.1007/978-3-031-74650-5/_6
- Athanasopoulos, G., Ahmed, R. A., & Hyndman, R. J. (2009). Hierarchical forecasts for australian domestic tourism. *International Journal of Forecasting*, 25(1), 146–166. <https://doi.org/10.1016/j.ijforecast.2008.07.004>
- Athanasopoulos, G., Hyndman, R. J., Kourentzes, N., & Panagiotelis, A. (2024). *Forecast reconciliation: A review*. 40(2), 430–456. <https://www.sciencedirect.com/science/article/pii/S0169207023001097>
- Ben Taieb, S., & Koo, B. (2019). Regularized regression for hierarchical forecasting without unbiasedness conditions. *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. <https://doi.org/10.1145/3292500.3330976>
- Ben Taieb, S., Taylor, J. W., & Hyndman, R. J. (2021). Hierarchical probabilistic forecasting of electricity demand with smart meter data. *Journal of the American Statistical Association*, 116(533), 27–43. <https://doi.org/10.1080/01621459.2020.1736081>
- Bickel, P. J., & Levina, E. (2008). Covariance regularization by thresholding. *Annals of Statistics*, 36(6), 2577–2604. <https://doi.org/10.1214/08-aos600>
- Cai, T., & Liu, W. (2011). Adaptive thresholding for sparse covariance matrix estimation. *Journal of the American Statistical Association*, 106(494), 672–684. <https://doi.org/10.1198/jasa.2011.tm10560>
- Carrara, C., Zambon, L., Azzimonti, D., & Corani, G. (2025). A novel shrinkage estimator of the covariance matrix for hierarchical time series. In *Italian statistical society series on advances in statistics* (pp. 140–145). Springer Nature Switzerland. https://doi.org/10.1007/978-3-031-96736-8/_24
- Di Modica, C., Pinson, P., & Ben Taieb, S. (2021). Online forecast reconciliation in wind power prediction. *Electric Power Systems Research*, 190(106637), 106637. <https://doi.org/10.1016/j.epsr.2020.106637>
- El Gemayel, J., Lafarguette, R., Itd, K. M., et al. (2022). *United arab emirates: Technical assistance reportliquidity management and forecasting*.
- Erven, T. van, & Cugliari, J. (2015). Game-theoretically optimal reconciliation of contemporaneous hierarchical time series forecasts. In *Modeling and stochastic learning for forecasting in high dimensions* (pp. 297–317). Springer International Publishing. https://doi.org/10.1007/978-3-319-18732-7/_15
- Fan, J., Liao, Y., & Mincheva, M. (2013). Large covariance estimation by thresholding princi-

- pal orthogonal complements. *Journal of the Royal Statistical Society. Series B, Statistical Methodology*, 75(4), 603–680. <https://doi.org/10.1111/rssb.12016>
- Gamakumara, P. (2020). *Probabilistic forecast reconciliation: Theory and applications* [PhD thesis, Monash University]. <https://doi.org/10.26180/5e4ca9d0c4b9d>
- Hardin, J., Garcia, S. R., & Golan, D. (2013). A method for generating realistic correlation matrices. *The Annals of Applied Statistics*, 7(3), 1733–1762. <https://www.jstor.org/stable/23566492>
- Higham, N. (2002). Computing the nearest correlation matrix—a problem from finance. *Ima Journal of Numerical Analysis*, 22, 329–343. <https://doi.org/10.1093/IMANUM/22.3.329>
- Huang, N., & Fryzlewicz, P. (2019). NOVELIST estimator of large correlation and covariance matrices and their inverses. *Test (Madrid, Spain)*, 28(3), 694–727. <https://doi.org/10.1007/s11749-018-0592-4>
- Hyndman, R. J., Ahmed, R. A., Athanasopoulos, G., & Shang, H. L. (2011). Optimal combination forecasts for hierarchical time series. *Computational Statistics & Data Analysis*, 55(9), 2579–2589. <https://doi.org/10.1016/j.csda.2011.03.006>
- Hyndman, R. J., & Khandakar, Y. (2008). Automatic time series forecasting: The forecast package for R. *Journal of Statistical Software*, 27, 1–22. <https://doi.org/10.18637/JSS.V027.I03>
- Hyndman, R. J., Lee, A. J., & Wang, E. (2016). Fast computation of reconciled forecasts for hierarchical and grouped time series. *Computational Statistics & Data Analysis*, 97, 16–32. <https://doi.org/10.1016/j.csda.2015.11.007>
- Jeon, J., Panagiotelis, A., & Petropoulos, F. (2019). Probabilistic forecast reconciliation with applications to wind power and electric load. *European Journal of Operational Research*, 279(2), 364–379. <https://doi.org/10.1016/j.ejor.2019.05.020>
- Ledoit, O., & Wolf, M. (2012). Nonlinear shrinkage estimation of large-dimensional covariance matrices. *Annals of Statistics*. <https://doi.org/10.1214/12-AOS989>
- Ledoit, O., & Wolf, M. (2020). Analytical nonlinear shrinkage of large-dimensional covariance matrices. *Annals of Statistics*, 48(5), 3043–3065. <https://doi.org/10.1214/19-AOS1921>
- Li, H., Li, H., Lu, Y., & Panagiotelis, A. (2019). A forecast reconciliation approach to cause-of-death mortality modeling. *Insurance, Mathematics & Economics*, 86, 122–133. <https://doi.org/10.1016/j.insmatheco.2019.02.011>
- Nixtla. (2025). *Time series forecasting software*. <https://www.nixtla.io/>
- O’Hara-Wild, M., Hyndman, R. J., & Wang, E. (2024). *Fabletools R package* (Version v0.5.0). <https://fabletools.tidyverts.org/>
- Panagiotelis, A., Athanasopoulos, G., Gamakumara, P., & Hyndman, R. J. (2021). Forecast reconciliation: A geometric view with new insights on bias correction. *International Journal of Forecasting*, 37(1), 343–359. <https://doi.org/10.1016/j.ijforecast.2020.06.004>

- Panagiotelis, A., Gamakumara, P., Athanasopoulos, G., & Hyndman, R. J. (2023). Probabilistic forecast reconciliation: Properties, evaluation and score optimisation. *European Journal of Operational Research*, 306(2), 693–706. <https://doi.org/10.1016/j.ejor.2022.07.040>
- Rothman, A. J., Levina, E., & Zhu, J. (2009). Generalized thresholding of large covariance matrices. *Journal of the American Statistical Association*, 104(485), 177–186. <https://doi.org/10.1198/jasa.2009.0101>
- Schäfer, J., & Strimmer, K. (2005). A shrinkage approach to large-scale covariance matrix estimation and implications for functional genomics. *Statistical Applications in Genetics and Molecular Biology*, 4(1), Article32. <https://doi.org/10.2202/1544-6115.1175>
- Seaman, B., & Bowman, J. (2022). Applicability of the M5 to forecasting at walmart. *International Journal of Forecasting*, 38(4), 1468–1472. <https://doi.org/10.1016/j.ijforecast.2021.06.002>
- Shang, H. L., & Hyndman, R. J. (2017). Grouped functional time series forecasting: An application to age-specific mortality rates. *Journal of Computational and Graphical Statistics: A Joint Publication of American Statistical Association, Institute of Mathematical Statistics, Interface Foundation of North America*, 26(2), 330–343. <https://doi.org/10.1080/10618600.2016.1237877>
- Su, V. (2025). *ReconCov R package* (Version beta). <https://github.com/lordtahdus/ReconCov>
- Tourism research australia*. (2024). <https://www.tra.gov.au/>.
- Wickramasuriya, S. L. (2024). Probabilistic forecast reconciliation under the gaussian framework. *Journal of Business & Economic Statistics: A Publication of the American Statistical Association*, 42(1), 272–285. <https://doi.org/10.1080/07350015.2023.2181176>
- Wickramasuriya, S. L., Athanasopoulos, G., & Hyndman, R. J. (2019). Optimal forecast reconciliation for hierarchical and grouped time series through trace minimization. *Journal of the American Statistical Association*, 114(526), 804–819. <https://doi.org/10.1080/01621459.2018.1448825>
- Wickramasuriya, S. L., Turlach, B. A., & Hyndman, R. J. (2020). Optimal non-negative forecast reconciliation. *Statistics and Computing*, 30(5), 1167–1182. <https://doi.org/10.1007/s11222-020-09930-0>