

STANDARD OPERATING PROCEDURES

# OFP C172 FR

## Flight Planning Application User Manual

|            |                                                                   |
|------------|-------------------------------------------------------------------|
| DOCUMENT   | OFP-SOP – Application User Manual                                 |
| REVISION   | Rev. 2 – DRAFT for review (figures updated to the 2026 interface) |
| DATE       | 09 OCT 2026                                                       |
| AIRCRAFT   | Reims Cessna “Reims Rocket” – I-CCAF (FR172J), I-CCAB (FR172H)    |
| OPERATIONS | VFR flight planning                                               |
| OUTPUTS    | Operational Flight Plan (OFP, A4) · NAV-FLIGHTPLAN (A5)           |

This manual describes how to operate the application. It does not replace the Aircraft Flight Manual, the Operations Manual or the flight school SOPs. The documents produced are an aid to planning; responsibility for the flight remains with the Pilot in Command.

# Contents

|                   |                                                            |    |
|-------------------|------------------------------------------------------------|----|
|                   | <b>Conventions</b>                                         | 3  |
|                   | <b>Abbreviations</b>                                       | 3  |
| <b>SECTION 1</b>  | <b>General</b>                                             | 5  |
|                   | 1.1 Purpose                                                | 5  |
|                   | 1.2 Scope and applicability                                | 5  |
|                   | 1.3 System overview                                        | 5  |
|                   | 1.4 Data sources                                           | 5  |
|                   | 1.5 Responsibilities                                       | 5  |
|                   | 1.6 Data storage                                           | 6  |
| <b>SECTION 2</b>  | <b>Data Ingestion – Import Page</b>                        | 7  |
|                   | 2.1 Pre-requisites                                         | 7  |
|                   | 2.2 Procedure                                              | 7  |
| <b>SECTION 3</b>  | <b>Pre-flight Data Entry – Wizard</b>                      | 9  |
|                   | 3.0 Wizard navigation                                      | 9  |
|                   | 3.1 Step 1 – Flight & Aircraft                             | 9  |
|                   | 3.2 Step 2 – Route & Fuel                                  | 11 |
|                   | 3.3 Step 3 – Mass & Balance                                | 14 |
|                   | 3.4 Step 4 – Performance                                   | 15 |
|                   | 3.5 Step 5 – Navlog                                        | 17 |
|                   | 3.6 Step 6 – Destination Charts                            | 18 |
|                   | 3.7 Step 7 – Briefing                                      | 19 |
|                   | 3.8 Step 8 – NOTAM & Weather                               | 20 |
| <b>SECTION 4</b>  | <b>System Outputs &amp; Dispatch</b>                       | 22 |
|                   | 4.1 Menu                                                   | 22 |
|                   | 4.2 Operational Flight Plan (A4)                           | 22 |
|                   | 4.3 NAV-FLIGHTPLAN (A5)                                    | 26 |
|                   | 4.4 Dashboard – Saved flights                              | 28 |
| <b>SECTION 5</b>  | <b>Operational Notes – Safety &amp; Performance Limits</b> | 30 |
|                   | 5.1 Aircraft applicability                                 | 30 |
|                   | 5.2 Performance limits                                     | 30 |
|                   | 5.3 Fuel planning as implemented                           | 30 |
|                   | 5.4 Navigation data                                        | 30 |
|                   | 5.5 Daylight check                                         | 31 |
|                   | 5.6 Documents and storage                                  | 31 |
| <b>APPENDIX A</b> | <b>Pre-Departure Cross-Check</b>                           | 32 |

# Conventions

## PROCEDURE VERBS

|             |                                                                              |
|-------------|------------------------------------------------------------------------------|
| LOAD        | Upload a file (drag and drop or tap the drop zone).                          |
| INPUT       | Type a value.                                                                |
| SELECT      | Choose from a list, tab, tick box or menu.                                   |
| VERIFY      | Check that a value filled in by the application is present and plausible.    |
| CROSS-CHECK | Compare a value with an independent source (AIP, AFM, briefing, ForeFlight). |
| CORRECT     | Overwrite a value filled in by the application.                              |
| REVIEW      | Read every message shown and act on each one.                                |

## FIELD CLASSIFICATION

|                                                 |                                                                                              |
|-------------------------------------------------|----------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> M MANDATORY | Pilot input required. Without it the related output is missing or wrong.                     |
| <input checked="" type="checkbox"/> A AUTO      | Imported or computed by the application. Editable unless shown greyed out. Must be VERIFIED. |
| <input type="checkbox"/> O OPTIONAL             | Not required for a valid output.                                                             |

The application does not block progress on empty fields. The classification above is the operating standard of this manual, not a software lock.

## FIGURES AND CALLOUTS

Figures are taken from the application in the light theme, with a real flight (LILN – T&G LILE – LILN, alternate LIMF). Lettered markers **A** **B** ... identify the elements described in the legend under each figure and in the procedure that cites it. The figure button ↗ enlarges a figure on screen.

## NOTES, CAUTIONS AND WARNINGS

|                |                                                   |
|----------------|---------------------------------------------------|
| <b>WARNING</b> | Could affect the safety of the flight if ignored. |
| <b>CAUTION</b> | Could produce a wrong or incomplete document.     |
| <b>NOTE</b>    | Additional information.                           |

## ABBREVIATIONS

|             |                                   |            |                                      |
|-------------|-----------------------------------|------------|--------------------------------------|
| AFM         | Aircraft Flight Manual            | AIP        | Aeronautical Information Publication |
| ALTN        | Alternate aerodrome               | ARR / DEST | Arrival / destination aerodrome      |
| ATO         | Actual time over                  | BEW        | Basic empty weight                   |
| CG          | Centre of gravity                 | C/S        | Callsign                             |
| DA / PA     | Density / pressure altitude       | DEP        | Departure aerodrome                  |
| ECT         | End of evening civil twilight     | EET        | Estimated elapsed time (leg)         |
| ETO         | Estimated time over               | FF         | Fuel flow                            |
| FOB         | Fuel on board                     | GS         | Ground speed                         |
| LDA         | Landing distance available        | MAP        | Manifold pressure                    |
| MLAW / MTOW | Maximum landing / take-off weight | OFP        | Operational flight plan              |

|                    |                                   |                |                  |
|--------------------|-----------------------------------|----------------|------------------|
| <b>PIC</b>         | Pilot in command                  | <b>POB</b>     | Persons on board |
| <b>POH</b>         | Pilot's Operating Handbook        | <b>SR / SS</b> | Sunrise / sunset |
| <b>T&amp;G</b>     | Touch and go                      | <b>TAS</b>     | True airspeed    |
| <b>TEM</b>         | Threat and error management       | <b>TOC</b>     | Top of climb     |
| <b>TODA / TORA</b> | Take-off distance / run available | <b>TOW</b>     | Take-off weight  |
| <b>UTC</b>         | Coordinated universal time        | <b>ZFW</b>     | Zero fuel weight |

SECTION 1

General


1.1 Purpose

The application converts the route prepared in ForeFlight and the weather briefing into the two documents carried in flight: the **Operational Flight Plan (OFP)** and the **NAV-FLIGHTPLAN**. All performance, fuel and mass figures are computed from the AFM of the selected aircraft; every intermediate result is shown so that it can be checked.

1.2 Scope and applicability

- Aircraft: Reims Cessna "Reims Rocket", Continental IO-360-D: **I-CCAF** (FR172J, AFM Edition 3) and **I-CCAB** (FR172H, AFM Edition 2). The two AFMs differ only in VR, VY, stall speeds and VA: the application uses those of the aircraft selected in Step 1.
- Operations: VFR flight planning. Final reserve is selectable for VFR (30 min) or IFR (45 min).
- Units: fuel in **litres**, fuel flow in **L/h**, speeds in **MPH** (as in the AFM), distances in **NM**, times in **UTC**.

1.3 System overview

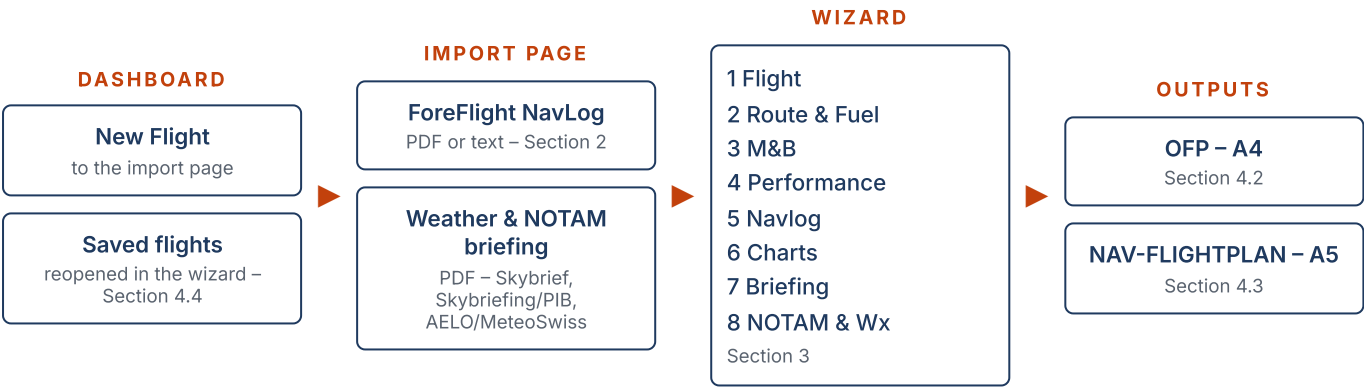

1.4 Data sources

| DATA                                                | SOURCE                                                                   |
|-----------------------------------------------------|--------------------------------------------------------------------------|
| Cruise power, TAS, fuel flow                        | AFM fig. 5-1, interpolated between 2500 / 5000 / 7500 / 10000 / 15000 ft |
| Climb time, fuel (incl. start-up and take-off)      | AFM fig. 5-6, 1157 kg; climb distance derived from the same data         |
| Take-off / landing distances                        | AFM fig. 5-4 / 5-5                                                       |
| Basic empty weight, moments, arms                   | Flying club W. & B. Loading Form (Rev. 17)                               |
| Aerodrome position, elevation, runways, frequencies | OurAirports database (physical runway length only)                       |
| Route, checkpoints, tracks, distances               | ForeFlight NavLog                                                        |
| METAR, SPECI, TAF, NOTAM, SIGMET/AIRMET, charts     | Weather briefing PDF                                                     |

1.5 Responsibilities

The PIC is responsible for the correctness of every input, for every cross-check required by this manual, and for the decision to fly. The application does not navigate, does not decide and does not replace the AFM or the AIP.

---

## 1.6 Data storage

Access is restricted: accounts are created by the administrator (Section 2.1). Flights are stored only when the pilot uses **Save to Standby** (Section 4.4). They are saved to the pilot's account, are available on any device after signing in and are not visible to other users. A copy is kept on the device in use, so work can continue without a connection: changes are sent when the connection is restored.

SECTION 2

Data Ingestion – Import Page

2.1 Pre-requisites

1. **INPUT** the e-mail and password provided by the administrator to sign in. At the first sign-in, replace the temporary password with your own (at least 10 characters). The **Dashboard** opens (Section 4.4).
2. **PREPARE** the route in ForeFlight and export the **NavLog** (PDF or text).
3. **DOWNLOAD** the **weather and NOTAM briefing** PDF covering departure, destination, alternate and route.
4. **SELECT New Flight** on the Dashboard: the Import page opens. ← **Dashboard** at the top of the Import page goes back without importing.

2.2 Procedure


1. **LOAD** the ForeFlight NavLog in the NavLog drop zone **A**. Load it first: its ICAO codes are used to sort the briefing.
2. **VERIFY** the NavLog summary **B**: number of waypoints, total distance and the waypoint table. For a return flight the application states that DEP and ARR are the same aerodrome.

NOTE

Only airports, route and distance are taken from the NavLog. ForeFlight speeds and fuel figures are not used: the AFM figures take precedence.

3. **LOAD** the briefing PDF in the briefing drop zone **A**.
4. **VERIFY** the briefing summary **B**: issue date and time (UTC) and, for each aerodrome, the availability of METAR, TAF and the number of NOTAMs. N/A means not contained in the briefing.

Figure 2.1 – NavLog Ingestion

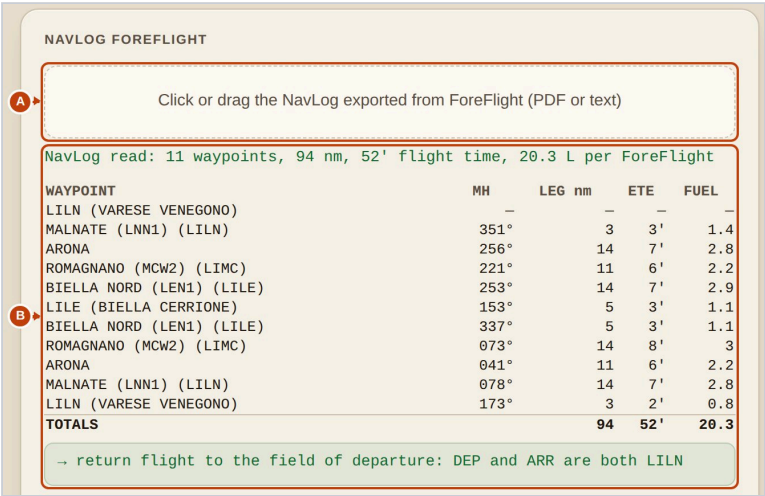


- NavLog read: 11 waypoints, 94 NM, return flight to the departure aerodrome.
- A** NavLog drop zone

LOAD the ForeFlight NavLog
- B** NavLog summary and waypoint table

VERIFY waypoints and distance table

Figure 2.2 – Weather Briefing Ingestion

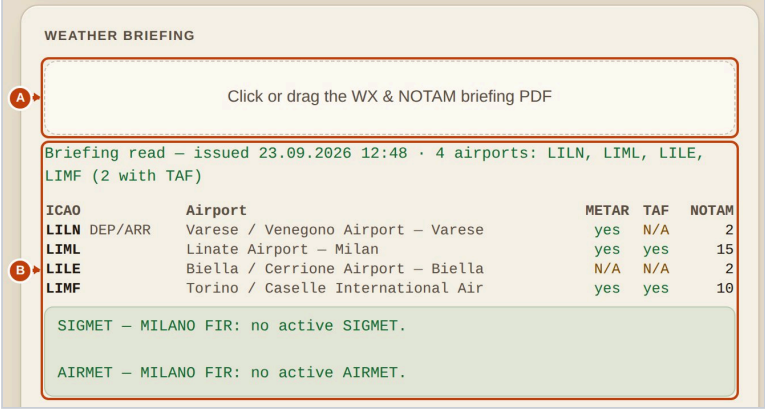

- Four aerodromes found in the briefing, two of them with TAF.
- A** Briefing drop zone


LOAD the briefing PDF
- B** Briefing summary and aerodrome table

VERIFY issue time and coverage table

- 5. **CONFIRM** both STATUS items are green **A**
- 6. **SELECT** Continue **B** to open the wizard.

**CAUTION**  
Skip and enter manually **C** opens the wizard without imported data. Route, distances and all weather and NOTAM fields must then be entered by hand.

Figure 2.3 – Import Status

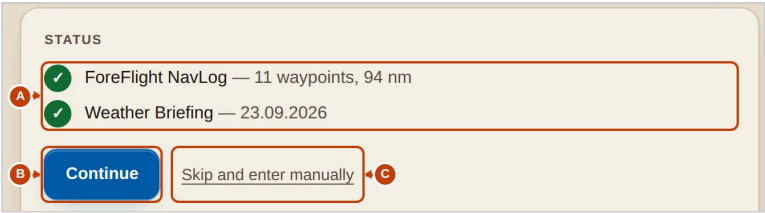

Both files read: the wizard can be opened.

|          |                                |                          |
|----------|--------------------------------|--------------------------|
| <b>A</b> | <b>Status</b>                  | CONFIRM both items green |
| <b>B</b> | <b>Continue</b>                | SELECT to proceed        |
| <b>C</b> | <b>Skip and enter manually</b> | Manual entry only        |

SECTION 3


Pre-flight Data Entry – Wizard

3.0 Wizard navigation

- 1. **SELECT** a step pill **A** to go to any step, or use **Back** / **Next** at the bottom of the page.
- 2. **SELECT** the theme button **B** to change the display: dark, light and night, in turn. The icon shows the next one. Night uses dim reds only, to preserve dark adaptation in the cockpit; on screen the document preview is shown as dark paper with red ink. The theme does not affect the PDF documents.
- 3. **SELECT** the menu **C** for documents and saved flights (Section 4.1).

**CAUTION**  
A tick on a step pill only means that the step is behind the current one. It does **not** mean that the step is complete or correct.

Figure 3.1 – Wizard Header

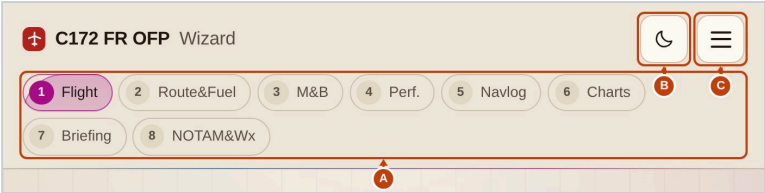

Step pills, theme button and menu.

|                         |                              |
|-------------------------|------------------------------|
| <b>A</b> Step pills 1–8 | Navigate between steps       |
| <b>B</b> Theme button   | Dark / light / night display |
| <b>C</b> Menu           | Documents and flights        |

3.1 Step 1 – Flight & Aircraft

DATA ENTRY

| FIELD                                               | CLASS    | SOURCE                                     | PILOT ACTION               |
|-----------------------------------------------------|----------|--------------------------------------------|----------------------------|
| DEP / ARR                                           | <b>A</b> | NavLog                                     | VERIFY                     |
| Aerodrome data (name, position, elevation, runways) | <b>A</b> | OurAirports                                | VERIFY                     |
| ALTN                                                | <b>M</b> | Pilot                                      | INPUT                      |
| Touch & Go + ICAO                                   | <b>O</b> | Proposed from route                        | SELECT if landing en route |
| Aircraft (registration)                             | <b>M</b> | I-CCAF default; Other = typed by the pilot | SELECT                     |
| Flight Mission                                      | <b>O</b> | Pilot                                      | INPUT                      |
| Route                                               | <b>A</b> | NavLog                                     | VERIFY                     |
| OFF, TO (UTC)                                       | <b>M</b> | Pilot                                      | SELECT                     |
| LDG, BLOCK, FLT                                     | <b>A</b> | Computed                                   | VERIFY                     |
| ON                                                  | <b>A</b> | Proposed, editable                         | VERIFY / CORRECT           |

1. **VERIFY** DEP and ARR **A** as imported from the NavLog.

2. **VERIFY** the aerodrome data line next to each code **B**: name, coordinates, elevation and runways. The line appears automatically when the four-letter code is complete. No line = code not found: CROSS-CHECK the ICAO code.

3. **INPUT** the alternate ICAO code **C**. Its weather, NOTAMs, distance and runway data are filled in automatically.

4. **SELECT** Touch & Go **D** only if a landing en route is planned. The application proposes the aerodromes found along the route **E**.

5. **SELECT** the aircraft **F**. Mass & Balance (Step 3) follows this choice. Select **Other** only for an aircraft not in the list or after a re-weighing: type its registration in the box that appears.

6. **INPUT** the flight mission **G** (optional).

6. **SELECT** the off-blocks time OFF **A** and the take-off time TO **B**, in UTC, 5-minute steps.

7. **VERIFY** LDG **C** = TO + Flight Time computed in Step 2.

8. **VERIFY** ON **D** = LDG + the departure taxi time. CORRECT it if required: once set by hand it no longer updates; set it back to --:-- to restore automatic mode.

9. **VERIFY** BLOCK = ON – OFF and FLT = LDG – TO **E**.

10. **REVIEW** the DAYLIGHT check **F**. It requires the flight date (Step 8).

**WARNING**

Times are **UTC**. Times entered in local time make the daylight check wrong by the UTC offset.

Figure 3.2 – Aerodromes and Mission

DEP  
LILN Varese-Venegono Airport  
45.7422 8.8882 · elev 1100 ft · 17/1420m 35/1420m

ARR  
LILN Varese-Venegono Airport  
45.7422 8.8882 · elev 1100 ft · 17/1420m 35/1420m

ALTN  
LIMF Turin Airport  
45.2008 7.6496 · elev 989 ft · 18/3300m 36/3300m

☒ Touch & Go LILE Biella-Cerrione Airfield  
45.4953 8.1028 · elev 920 ft · 16/1320m 34/1320m

There is an airport along the route: LILE (Biella-Cerrione Airfield). Tick Touch & Go if you land there: the flight plan adds that airport's weather, NOTAMs and runway calculations.

Aircraft: I-CCAF Flight Mission: VFR navigation training

Aerodrome codes with the data looked up automatically.

|          |                            |                              |
|----------|----------------------------|------------------------------|
| <b>A</b> | DEP / ARR                  | VERIFY                       |
| <b>B</b> | Aerodrome data line        | VERIFY elevation and runways |
| <b>C</b> | ALTN                       | INPUT                        |
| <b>D</b> | Touch & Go                 | SELECT if applicable         |
| <b>E</b> | Aerodromes along the route | Information                  |
| <b>F</b> | Aircraft                   | SELECT                       |
| <b>G</b> | Flight Mission             | INPUT (optional)             |

Figure 3.3 – Estimated Times and Daylight Check

ESTIMATED TIMES (UTC)

OFF: 08 : 30 TO: 08 : 45

LDG (TO + FT): 0956 ON (proposed): 10 : 05

BLOCK (calculated): 0135 FLT (calculated): 0111

→ BLOCK = ON - OFF = 0135 · FLT = LDG - TO = 0111

→ DAYLIGHT 23.09.2026 (UTC)

TO 0845Z LILN SR 0513 SS 1720 ECT 1750 SS -8:35  
LDG 0956Z LILN SR 0513 SS 1720 ECT 1750 SS -7:24  
ALTN 1033Z LIMF SR 0518 SS 1725 ECT 1754 SS -6:52

Take-off, landing at destination and landing at the alternate, each checked against its own aerodrome.

|          |                |                  |
|----------|----------------|------------------|
| <b>A</b> | OFF            | SELECT (UTC)     |
| <b>B</b> | TO             | SELECT (UTC)     |
| <b>C</b> | LDG            | VERIFY           |
| <b>D</b> | ON             | VERIFY / CORRECT |
| <b>E</b> | BLOCK / FLT    | VERIFY           |
| <b>F</b> | DAYLIGHT check | REVIEW           |

## DAYLIGHT CHECK – STATUS

| INDICATION                            | MEANING                                          | ACTION             |
|---------------------------------------|--------------------------------------------------|--------------------|
| SS -h:mm                              | Daylight; margin to sunset                       | VERIFY margin      |
| AFTER SUNSET (+h:mm) / BEFORE SUNRISE | Within civil twilight (amber)                    | REVIEW plan        |
| NIGHT                                 | After end / before start of civil twilight (red) | REVIEW plan        |
| not computed                          | Date, TO time, Trip time or coordinates missing  | INPUT missing data |

### 3.2 Step 2 – Route & Fuel

## DATA ENTRY

| FIELD                         | CLASS | SOURCE                                  | PILOT ACTION     |
|-------------------------------|-------|-----------------------------------------|------------------|
| Cruise Altitude               | M     | Pilot                                   | INPUT            |
| RPM, MAP                      | M     | AFM fig. 5-1 combinations only          | SELECT           |
| Trip distance                 | A     | NavLog                                  | VERIFY           |
| Cruise GS                     | A     | TAS of the selected setting (still air) | CORRECT for wind |
| Trip fuel flow                | A     | AFM fig. 5-1                            | VERIFY           |
| Alternate distance            | A     | Great circle ARR-ALTN                   | VERIFY / CORRECT |
| Alternate altitude            | M     | Pilot                                   | INPUT            |
| Alternate GS, FF, Flight Time | A     | 22 inHg / 2400 RPM, locked              | VERIFY           |
| Flight Rules                  | M     | VFR default                             | SELECT           |
| Taxi time and fuel            | A     | Step 1 times, 7.5 L/h                   | VERIFY           |
| Fuel On Board                 | O     | Pilot (actual uplift)                   | INPUT            |
| Extra (L)                     | O     | Pilot, if FOB empty                     | INPUT            |

- INPUT** the cruise altitude **A**. RPM and MAP stay greyed out until it is entered.
- SELECT** RPM and MAP **B**. Only the combinations published by the AFM at that altitude are offered.
- VERIFY** the power line **C**: % power, TAS and fuel flow.
- VERIFY** the climb line **D**: from DEP elevation to cruise altitude, time, distance and fuel (start-up and take-off included).

Figure 3.4 – Cruise Power Setting

Selecting the setting fills in Trip GS and fuel flow.

|          |                 |        |
|----------|-----------------|--------|
| <b>A</b> | Cruise Altitude | INPUT  |
| <b>B</b> | RPM / MAP       | SELECT |
| <b>C</b> | Power line      | VERIFY |
| <b>D</b> | Climb line      | VERIFY |

5.

VERIFY

the Trip distance

A

from the NavLog.
6.

CORRECT

the cruise GS

B

for the forecast wind. The proposed value is the TAS of the setting.
7.

VERIFY

the fuel flow

C

.
8.

VERIFY

the Trip line

D

: climb + cruise = Trip time and fuel, and the TOC position.

WARNING

An uncorrected GS assumes still air. With a headwind, Trip time and fuel are underestimated.

CAUTION

If the climb is longer than the trip, the line reads **Cruise altitude not reached**. REVIEW altitude or distance.

9.

VERIFY

the alternate distance

A

(great circle ARR–ALTN). CORRECT it for the planned routing.
10.

INPUT

the alternate altitude

B

.
11.

VERIFY

GS and fuel flow

C

, fixed at 22 inHg / 2400 RPM, and the computed Flight Time

D

.
12.

VERIFY

the alternate line

E

: setting, time and fuel.

Figure 3.5 – Trip

TRIP

Distance (nm, from NavLog)

Cruise GS (MPH)

Fuel flow (L/h)

A

94

132

C

36.3

D

→ climb to 4500 ft: 5.8 NM, 5 min, 9.50 L + cruise 88.2 NM, 46 min at 36.30 L/h + aerodromes 20 min (4 × 5) = Trip 71 min · 49.51 L · TOC 3 NM after MALNATE

Trip = climb (AFM fig. 5-6) + cruise from the top of climb.

|   |                   |                  |
|---|-------------------|------------------|
| A | Distance          | VERIFY           |
| B | Cruise GS         | CORRECT for wind |
| C | Fuel flow         | VERIFY           |
| D | Trip line and TOC | VERIFY           |

Figure 3.6 – Alternate

ALTERNATE

The alternate always uses the standard setting 22 inHg / 2400 RPM: the GS and Fuel Flow below are those of that setting at the stated altitude and cannot be edited by hand.

Distance (nm)

GS (MPH)

Fuel flow (L/h)

A

61

132

C

36.3

Altitude (ft)

Flight Time (min, calculated)

B

4500

D

37

E

→ 22" / 2400 RPM = 62% · TAS 132 MPH · 36.3 L/h · time 32+5 = 37 min · fuel 22.39 L

The alternate always uses 22 inHg / 2400 RPM.

|   |                          |                  |
|---|--------------------------|------------------|
| A | Distance                 | VERIFY / CORRECT |
| B | Altitude                 | INPUT            |
| C | GS / fuel flow (locked)  | VERIFY           |
| D | Flight Time (calculated) | VERIFY           |
| E | Alternate line           | VERIFY           |

- 13. **SELECT** the flight rules **A**: VFR = 30 min final reserve, IFR = 45 min.
- 14. **VERIFY** the reserves line **B**: Contingency = max(5% of Trip, 15 min); Final Reserve at cruise fuel flow.
- 15. **VERIFY** the Plan Block against the 174 L usable **C**.
- 16. **VERIFY** the taxi time and fuel **D**, derived from OFF-TO and LDG-ON at 7.5 L/h.

**CAUTION**  
ABOVE the 174 L usable on the Plan Block line: the plan exceeds tank capacity.

- 17. **INPUT** the fuel on board after uplift **A** (optional). It is used only to compute the extra fuel and is not printed.
- 18. **INPUT** the extra fuel **B** by hand if FOB is left empty.
- 19. **VERIFY** the line **C**: minimum required, extra litres and minutes.

**WARNING**  
FOB ... **INSUFFICIENT** in red: the fuel on board is below the minimum required.

Figure 3.7 – Reserves & Margins

RESERVES & MARGINS

Contingency = MAX(5% of Trip, 15' at the cruise Fuel Flow). Final Reserve = 30' (VFR) or 45' (IFR), at the same Fuel Flow.

Flight Rules

A

VFR

B

→ Contingency = max(5% trip, 15') = 15 min · 9.07 L · Final Reserve = 30 min · 18.15 L

C

→ Plan Block 120 L = 86.40 kg (31.70 USG) · tank remaining 54 L

Taxi (min, calculated)

Taxi (L, calculated)

D

24

3

→ 15 min off-blocks-takeoff + 9 min landing-on-blocks = taxi 24 min · 3 L at 7.50 L/h

Reserves, tank capacity and taxi are computed, not entered.

|          |                             |        |
|----------|-----------------------------|--------|
| <b>A</b> | Flight Rules                | SELECT |
| <b>B</b> | Contingency / Final Reserve | VERIFY |
| <b>C</b> | Plan Block vs usable fuel   | VERIFY |
| <b>D</b> | Taxi                        | VERIFY |

Figure 3.8 – Fuel On Board & Extra

FUEL ON BOARD & EXTRA

Fuel On Board — uplifted (L)

A

120

How much fuel is actually in the tanks. It is used **only** to compute the extra over the required minimum: **it does not appear in the final document**. Left empty, the extra remains the figure entered by hand below.

Extra (L)

FT Extra (min)

B

17.88

30

C

→ minimum required 102.12 L · extra 17.88 L = 30 min at the cruise fuel flow

With FOB entered, the extra is FOB minus the minimum required.

|          |                      |                    |
|----------|----------------------|--------------------|
| <b>A</b> | Fuel On Board        | INPUT (optional)   |
| <b>B</b> | Extra (L)            | INPUT if FOB empty |
| <b>C</b> | Minimum / extra line | VERIFY             |

### 3.3 Step 3 – Mass & Balance

#### DATA ENTRY

| FIELD                      | CLASS                            | SOURCE                                  | PILOT ACTION     |
|----------------------------|----------------------------------|-----------------------------------------|------------------|
| Aircraft                   | <input type="button" value="A"/> | Selected in Step 1                      | VERIFY           |
| Basic Empty Weight, Moment | <input type="button" value="A"/> | Club W&B form; editable only with Other | VERIFY           |
| Pilot + front pax          | <input type="button" value="M"/> | Pilot                                   | INPUT            |
| Rear pax                   | <input type="button" value="O"/> | Pilot                                   | INPUT if carried |
| Baggage (max 91 kg)        | <input type="button" value="O"/> | Pilot                                   | INPUT if carried |
| EPOB / POB                 | <input type="button" value="M"/> | Pilot                                   | INPUT            |
| Fuel masses                | <input type="button" value="A"/> | Step 2 (1 L = 0.72 kg)                  | VERIFY           |
| MZFW, MTOW, MLAW           | <input type="button" value="A"/> | AFM limits                              | VERIFY           |
| Remarks (M&B)              | <input type="button" value="O"/> | Pilot                                   | INPUT            |

- VERIFY** the aircraft **A**, selected in Step 1. Empty weight and moment **B** are filled in and locked. With **Other** (Step 1) they are entered by hand, for example after a re-weighing.

Figure 3.9 – Aircraft and Empty Weight

Empty weight and moment from the flying club form.

|          |                               |        |
|----------|-------------------------------|--------|
| <b>A</b> | <b>Aircraft (from Step 1)</b> | VERIFY |
| <b>B</b> | <b>BEW / moment (locked)</b>  | VERIFY |

- INPUT** pilot and front passenger mass **A**.
- INPUT** rear passengers **B** and baggage **C** if carried. Baggage limit 91 kg.
- INPUT** persons on board **D**.
- VERIFY** the ZFW line **E**.

Figure 3.10 – Loading

Fuel is not entered here: it comes from Step 2.

|          |                          |                  |
|----------|--------------------------|------------------|
| <b>A</b> | <b>Pilot + front pax</b> | INPUT            |
| <b>B</b> | <b>Rear pax</b>          | INPUT if carried |
| <b>C</b> | <b>Baggage</b>           | INPUT if carried |
| <b>D</b> | <b>EPOB / POB</b>        | INPUT            |
| <b>E</b> | <b>ZFW line</b>          | VERIFY           |

6. **VERIFY** the mass check **A**: masses within limits.
7. **VERIFY** the CG check **B**: CG at take-off within the envelope and the category available (UTILITY / NORMAL).
8. **VERIFY** the CG envelope chart: take-off, destination landing and alternate landing points inside the envelope.

**WARNING**

Any mass or CG message other than **within limits** must be resolved before flight.

**Figure 3.11 – Mass & Balance Result**

| Item                       | kg     | arm m | kg-m   |
|----------------------------|--------|-------|--------|
| BASIC EMPTY WEIGHT         | 734    | 0.925 | 679    |
| PILOT AND FRONT PASSENGER  | 160    | 0.940 | 150.40 |
| REAR PASSENGERS            | 0      | –     | 0      |
| BAGGAGE                    | 8      | 2.410 | 19.28  |
| ZERO FUEL WEIGHT           | 902    | 0.941 | 848.68 |
| TAXI FUEL                  | 2.16   | 1.230 | 2.66   |
| TRIP FUEL                  | 35.65  | 1.230 | 43.85  |
| ALTERNATE FUEL             | 16.12  | 1.230 | 19.83  |
| HOLDING / RESERVE          | 13.07  | 1.230 | 16.07  |
| FUEL ON BOARD              | 86.40  | 1.230 | 106.27 |
| RAMP WEIGHT                | 988.40 | 0.966 | 954.95 |
| TAKE OFF WEIGHT            | 986.24 | 0.966 | 952.30 |
| DEST. LDG WEIGHT           | 950.59 | 0.956 | 908.45 |
| ALTN. LDG WEIGHT (no res.) | 921.40 | 0.947 | 872.55 |

**A** → masses within limits

**B** → CG at takeoff 0.966 m (limits 0.946–1.2 m) · available category: UTILITY and NORMAL

| MZFW | MTOW | MLAW |
|------|------|------|
| 1157 | 1157 | 1157 |

Loading sheet with the arms of the club form and the AFM limits.

|                          |        |
|--------------------------|--------|
| <b>A</b> Mass check      | VERIFY |
| <b>B</b> CG and category | VERIFY |

### 3.4 Step 4 – Performance

#### DATA ENTRY

| FIELD                   | CLASS    | SOURCE                         | PILOT ACTION          |
|-------------------------|----------|--------------------------------|-----------------------|
| Display Unit            | <b>O</b> | MPH default                    | SELECT (display only) |
| Runway Surface          | <b>M</b> | Asphalt, dry default           | SELECT                |
| Runway (each aerodrome) | <b>M</b> | None pre-selected              | SELECT                |
| Elevation, RWY heading  | <b>A</b> | OurAirports                    | VERIFY                |
| TORA / TODA / LDA       | <b>A</b> | OurAirports physical length    | CROSS-CHECK with AIP  |
| QNH, Temp, Wind         | <b>A</b> | Own METAR (or nearest station) | VERIFY                |
| Runway (OFP)            | <b>A</b> | Runway selected                | VERIFY                |

1. **SELECT** the display unit **A** (MPH or knots). Calculations do not change.
2. **SELECT** the runway surface **B**: asphalt dry, grass dry, or wet / contaminated.

**CAUTION**

Wet / contaminated: the AFM publishes no data and no increment is applied. A red warning is shown.

**Figure 3.12 – Speeds and Surface**

**SPEEDS**

Display Unit

**A** MPH

Runway Surface

**B** Asphalt, dry

|                         |        |
|-------------------------|--------|
| <b>A</b> Display Unit   | SELECT |
| <b>B</b> Runway Surface | SELECT |

Each phase has its own tab **A**: **DEP** (take-off), **ARR** (landing), **ALT** (alternate landing) and **ENR** (touch and go, shown only when selected in Step 1). A dot on a tab indicates a warning for that phase.

3. **SELECT** each tab **A** in turn and carry out items 4 to 8.
4. **SELECT** the runway **B**. No runway is pre-selected: select it from the wind of the day.

5. **VERIFY** the elevation **C** and the runway heading.
6. **CROSS-CHECK** TORA and TODA (LDA for landing) **D** with the AIP. They are pre-filled with the physical runway length.
7. **VERIFY** QNH, temperature and wind **E**, and their source **F**.
8. **VERIFY** the result card **G**: pressure and density altitude, head/crosswind against the limit, distances required and margin.

Figure 3.13 – Take-off and Landing Data – DEP Tab

DEP

ARR

ALT

ENR

DEPARTURE — TAKEOFF

Airport

LILN

Runway

17 — 1420

Runway (OFP)

17

Elevation (ft)

1100

RWY Heading (°M)

170

TORA (m)

1420

TODA (m)

1420

QNH (hPa)

1023

Temp (°C)

22

Wind From (°M)

190

Wind (kt)

5

QNH, temperature and wind from the LILN METAR.

DEP TAKEOFF — LILN 17 · 986 KG

Flap 10° · VR 63 MPH · VY 82 MPH

PRESSURE ALTITUDE

837 ft

DENSITY ALTITUDE

1865 ft

ISA DEVIATION

+8.7 °C

HEADWIND

4.7 kt

CROSSWIND

1.7 kt from the right

T/O limit 20 kt

QNH 1023 · 22°C

Takeoff run

151 m

TORR · TO LIFT-OFF

495 ft

Within limits — 1269 m margin, 11% of 1420 m

Takeoff distance

271 m

TODR · TO CLEAR 15 M

889 ft

Within limits — 1149 m margin, 19% of 1420 m

Inputs on the left, result card on the right. Wind, QNH and temperature come from the LILN METAR.

|                                                 |                |                            |                      |
|-------------------------------------------------|----------------|----------------------------|----------------------|
| <b>A</b> Phase tabs<br>DEP / ARR /<br>ALT / ENR | SELECT each    | <b>B</b> Runway            | SELECT               |
| <b>C</b> Elevation                              | VERIFY         | <b>D</b> TORA / TODA       | CROSS-CHECK with AIP |
| <b>E</b> QNH / Temp /<br>Wind                   | VERIFY         | <b>F</b> Weather<br>source | VERIFY               |
| <b>G</b> Result card                            | VERIFY margins |                            |                      |

9. **REVIEW** every message in **Checks & Warnings** **A**. Red = the result does not cover the condition (e.g. tailwind, wet runway, standard weather used).

**NOTE**

An aerodrome without METAR uses standard values (1013 hPa, 15 °C, calm) and is marked in red. If a station with METAR exists within 30 NM, a button offers its values.

**NOTE**

Touch and go: landing and take-off are both computed with the take-off mass (conservative).

**Figure 3.14 – Checks & Warnings**

**CHECKS & WARNINGS**

|                                                                                                                     |                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TAILWIND</b> T&G landing — Landing: the AFM publishes no tailwind data. The distances are for zero wind.         | <b>TAILWIND</b> T&G takeoff — Takeoff: the AFM publishes no tailwind data. The distances shown are for zero wind and are shorter than the actual ones. |
| <b>WEATHER</b> LILE: QNH, temperature and wind taken from the LIMF METAR, 26 NM away — this airport has no station. | <b>LANDING MASS</b> The landing table is published at 1157 kg only and is used whatever the mass: at lower masses it is conservative.                  |

Example: tailwind on the T&G runway and weather taken from a nearby station.

**Checks & Warnings**

REVIEW every item

### 3.5 Step 5 – Navlog

**DATA ENTRY**

| FIELD                  | CLASS                 | SOURCE                    | PILOT ACTION                  |
|------------------------|-----------------------|---------------------------|-------------------------------|
| GS / fuel flow navplan | <input type="radio"/> | Step 2 values if empty    | INPUT only to override        |
| Freq.                  | <input type="radio"/> | OurAirports (number only) | VERIFY                        |
| C/S                    | <input type="radio"/> | Pilot                     | INPUT                         |
| Checkpoint, MT, Dist.  | <input type="radio"/> | NavLog                    | VERIFY                        |
| Alt.                   | <input type="radio"/> | Cruise altitude           | VERIFY / CORRECT per waypoint |
| EET, ETO, Fuel         | <input type="radio"/> | Computed                  | VERIFY                        |
| Remarks                | <input type="radio"/> | Pilot                     | INPUT                         |

1. **VERIFY** GS and fuel flow **A** **B**. Leave empty to use the Step 2 values.

**Figure 3.15 – Navlog Speed & Fuel Flow**

**SPEED & FUEL FLOW**

|                         |                                |
|-------------------------|--------------------------------|
| <b>GS navplan (MPH)</b> | <b>Fuel flow navplan (L/h)</b> |
| from power setting      | from power setting             |

**GS navplan**

Leave empty or INPUT

**Fuel flow navplan**

Leave empty or INPUT

- SELECT** + Row **A** to add a checkpoint, × to delete one.
- SELECT** Fill Frequencies **B** to repeat the frequency look-up. **VERIFY** frequencies **C**.
- INPUT** callsigns **D** (not in any database).
- VERIFY** checkpoints, magnetic tracks and distances **E**.
- VERIFY** the altitude of each waypoint **F**; **CORRECT** where different from cruise.
- VERIFY** EET per leg, ETO (minutes after TO) and fuel **G**. A leg from or to an aerodrome reads e.g. 7/+5: 7 min en route + 5 aerodrome minutes (Section 5.3), already included in ETO, Trip and fuel.
- INPUT** remarks **H** (optional).
- CROSS-CHECK** the totals line **I** with the Trip of Step 2: time and fuel must be the same.

Figure 3.16 – Navlog Legs

LEGS

A

+ Row

B

Fill Frequencies

| <div>C</div> FREQ. | <div>D</div> C/S | <div>E</div> CHECKPOINT | MT  | DIST. | <div>F</div> ALT. | <div>G</div> EET | ETO | FUEL   | <div>H</div> REMARKS |   |
|--------------------|------------------|-------------------------|-----|-------|-------------------|------------------|-----|--------|----------------------|---|
| 128.55             | RDO              | LILN                    |     |       | 4500              | 0'               | 45' | 0 L    |                      | x |
|                    |                  | MALNATE                 | 351 | 3     | 4500              | 2/+5             | 52' | 7.94 L |                      | x |
|                    |                  | ARONA                   | 256 | 14    | 4500              | 8'               | 00' | 8.13 L |                      | x |
|                    |                  | ROMAGNANO               | 221 | 11    | 4500              | 6'               | 06' | 3.48 L |                      | x |
|                    |                  | BIELLA NORD             | 253 | 14    | 4500              | 7'               | 13' | 4.43 L |                      | x |
| 123.05             | RDO              | LILE                    | 153 | 5     | 4500              | 3/+5             | 21' | 4.61 L | T&G                  | x |
|                    |                  | BIELLA NORD             | 337 | 5     | 4500              | 3/+5             | 29' | 4.61 L |                      | x |
|                    |                  | ROMAGNANO               | 073 | 14    | 4500              | 7'               | 36' | 4.43 L |                      | x |
|                    |                  | ARONA                   | 041 | 11    | 4500              | 6'               | 42' | 3.48 L |                      | x |
|                    |                  | MALNATE                 | 078 | 14    | 4500              | 7'               | 49' | 4.43 L |                      | x |
| 128.55             |                  | LILN                    | 173 | 3     | 4500              | 2/+5             | 56' | 3.97 L |                      | x |

I

→ 11 legs · 94 nm · 1h11 · 49.51 L at GS 132 MPH and 36.30 L/h

Times and fuel are recomputed from the selected power setting, not copied from ForeFlight; the climb is split over the legs by distance.

|                                      |                       |                               |                  |
|--------------------------------------|-----------------------|-------------------------------|------------------|
| <div>A</div> + Row                   | Add checkpoint        | <div>B</div> Fill Frequencies | Repeat look-up   |
| <div>C</div> Freq.                   | VERIFY                | <div>D</div> C/S              | INPUT            |
| <div>E</div> Checkpoint / MT / Dist. | VERIFY                | <div>F</div> Alt.             | VERIFY / CORRECT |
| <div>G</div> EET / ETO / Fuel        | VERIFY                | <div>H</div> Remarks          | INPUT (optional) |
| <div>I</div> Totals line             | CROSS-CHECK with Trip |                               |                  |

NOTE

A leg longer than 10 minutes shows an advisory message (turning points ideally every 6–8 minutes). It does not block the wizard and does not change the navlog.

3.6 Step 6 – Destination Charts

1. **LOAD** up to 2 images or PDFs (aerodrome or approach charts) (optional).
2. **INPUT** the operational notes as required: Track, Runway, Altitudes, Clearance, Timing, On ground, Radios, Specials (optional).

Charts and notes are printed on the DEST CHARTS page of the OFP. Graphic pages of the briefing (e.g. significant weather, wind charts) are added to the OFP automatically, one per page.

3.7 Step 7 – Briefing

A briefing by phase of flight, written before departure, that gives a structure to everything that has to be done in flight. All fields are optional free text and nothing is checked by the application; they are printed on the BRIEFING page of the OFP (Section 4.2).

DATA ENTRY

| FIELD                                 | CLASS                 | SOURCE | PILOT ACTION                      |
|---------------------------------------|-----------------------|--------|-----------------------------------|
| Procedure (DEP, ENR, T&G, DEST, ALTN) | <input type="radio"/> | Pilot  | INPUT                             |
| Possible threats                      | <input type="radio"/> | Pilot  | INPUT                             |
| Mitigation                            | <input type="radio"/> | Pilot  | INPUT                             |
| Aircraft status                       | <input type="radio"/> | Pilot  | INPUT if equipment is inoperative |
| Remarks                               | <input type="radio"/> | Pilot  | INPUT if applicable               |

1. **INPUT** for the phase the **procedure** **A**:  
what will be flown, e.g. runway, routing, reporting points, altitudes, frequencies.
2. **INPUT** the **possible threats** **B** of that phase, e.g. weather, terrain, traffic, airspace, aircraft, pilot.
3. **INPUT** the **mitigation** **C**: what will be done to keep each threat under control.
4. **INPUT** the same three fields for Enroute, Touch & Go, Destination and Alternate. The Touch & Go block is shown only when Touch & Go is selected in Step 1; each heading shows the aerodrome code.

Figure 3.17 – Briefing – Departure

DEPARTURE LILN

Dep procedure

A

RWY 35: climb on runway heading to 1500 ft, exit via the mandatory VFR reporting point, then climb to 4500 ft. Squawk 7000.

Poss. threats

B

Traffic converging on the reporting point; obstacles on the climb-out.

Mitigation

C

Listen out on the frequency before line-up, landing light ON; climb gradient checked against the obstacles.

Example. Every phase has the same three fields.

|          |                         |       |
|----------|-------------------------|-------|
| <b>A</b> | <b>Procedure</b>        | INPUT |
| <b>B</b> | <b>Possible threats</b> | INPUT |
| <b>C</b> | <b>Mitigation</b>       | INPUT |

- 1. **INPUT Aircraft status** **A** only when instruments or equipment are temporarily inoperative, stating which aids will therefore not be available in flight.
- 2. **INPUT Remarks** **B** only for important information on the conduct of the flight that is not related to the routing: exam flight, solo flight, dual command, SPIC flight.

**NOTE**  
Keep the text short and in the order it will be used: the BRIEFING page is read in flight.

Figure 3.18 – Aircraft Status and Remarks

**AIRCRAFT STATUS**

**A** ADF INOP (placarded): NDB not usable.

Instruments or equipment temporarily inoperative, and therefore aids that will not be available in flight (e.g. ADF INOP: NDB not usable).

**REMARKS**

**B** Solo flight.

Important information on the conduct of the flight that has nothing to do with the routing: exam flight, solo flight, dual command, SPIC flight.

Example.

|                          |                     |
|--------------------------|---------------------|
| <b>A</b> Aircraft status | INPUT if applicable |
| <b>B</b> Remarks         | INPUT if applicable |

3.8 Step 8 – NOTAM & Weather

DATA ENTRY

| FIELD                                  | CLASS    | SOURCE                            | PILOT ACTION        |
|----------------------------------------|----------|-----------------------------------|---------------------|
| Briefing PDF                           | <b>A</b> | Loaded at import; can be reloaded | LOAD only to update |
| Date (DD.MM.YYYY)                      | <b>M</b> | Briefing                          | VERIFY / INPUT      |
| Time (UTC), Validity                   | <b>A</b> | Briefing                          | VERIFY              |
| METAR, SPECI, TAF, NOTAM per aerodrome | <b>A</b> | Briefing                          | VERIFY              |
| Enroute NOTAMs, SIGMET / AIRMET        | <b>A</b> | Briefing                          | VERIFY              |
| PIC name                               | <b>M</b> | Pilot                             | INPUT               |

- 1. **LOAD** a newer briefing **A** only to update the weather.
- 2. **VERIFY** the status line **B**: aerodromes found and those not on the route.
- 3. **VERIFY** the date **C**. It is printed on the OFP and used by the daylight check. **INPUT** it if no briefing was loaded.
- 4. **VERIFY** issue time **D** and validity **E**.

**NOTE**  
If the briefing was issued on the day before the flight, the date shown is the issue date.

Figure 3.19 – Briefing Data

**A** Click or drag the WX & NOTAM briefing PDF

**B** Briefing read (skybrief) – airports found: LILN, LIML, LILE, LIMF · 0 fields filled in · off route: LIML

Date (DD.MM.YYYY)

**C** 23.09.2026

Time (HH:MM UTC)

**D** 12:48

Validity / period

**E** extracted from the PDF, if present

|                             |                |
|-----------------------------|----------------|
| <b>A</b> Briefing drop zone | LOAD to update |
| <b>B</b> Status line        | VERIFY         |
| <b>C</b> Date               | VERIFY / INPUT |
| <b>D</b> Time (UTC)         | VERIFY         |
| <b>E</b> Validity           | VERIFY         |

5. **VERIFY** for each aerodrome (DEP, ARR, T&G, ALTN) METAR **A**, SPECI **B**, TAF **C** and NOTAM **D**: correct aerodrome, current issue.
6. **VERIFY** the Enroute NOTAM and SIGMET / AIRMET boxes. An absence must be stated (e.g. "no active SIGMET"): an empty box is not information.
7. **INPUT** the PIC name. It is printed on every page of the OFP and on the NAV-FLIGHTPLAN.

**NOTE**

N/A – not available in the briefing is an explicit statement that the report is not contained in the briefing.

Figure 3.20 – Aerodrome Weather & NOTAM

DEPARTURE AIRPORT (LILN)

METAR

A

METAR LILN 231220Z AUTO 19005KT //// // 22/10 Q1023=

SPECI

B

TAF

C

N/A – not available in the briefing

NOTAM

D

C0792/26 27 Jul 12:00Z – 03 Oct 16:00Z TESTO ITALIANO: CAUSA PRESENZA GRU LE DISTANZE DICHIARATE CAMBIANO COME SEGUE: RWY17: TORA 1118M, TODA 1142M, ASDA 1176M, LDA 1420M.

One block per aerodrome. Text edited by hand is not overwritten by a later import.

|          |              |        |
|----------|--------------|--------|
| <b>A</b> | <b>METAR</b> | VERIFY |
| <b>B</b> | <b>SPECI</b> | VERIFY |
| <b>C</b> | <b>TAF</b>   | VERIFY |
| <b>D</b> | <b>NOTAM</b> | VERIFY |

## SECTION 4


## System Outputs &amp; Dispatch

## 4.1 Menu

| ITEM     | FUNCTION                 |                                                                         |
|----------|--------------------------|-------------------------------------------------------------------------|
| <b>A</b> | Dashboard                | Back to the Dashboard (Section 4.4). The flight plan stays open.        |
| <b>B</b> | New Flight Plan          | Closes the flight plan and opens the import page. Unsaved data is lost. |
| <b>C</b> | Save to Standby          | Saves the flight to your account                                        |
| <b>D</b> | Document Preview         | Shows the OFP on screen                                                 |
| <b>E</b> | Download OFP PDF         | A4 OFP. To print it, use the print function of the PDF viewer.          |
| <b>F</b> | Download Navlog PDF      | A5 NAV-FLIGHTPLAN (separate document)                                   |
| <b>G</b> | Download Club Navlog PDF | The flying club Navigation Log, two A4 pages (Section 4.3)              |
| <b>H</b> | User Manual              | This manual, in a new tab                                               |

Below these items the menu shows the signed-in user, **Users** (administrator only), **Change password** and **Sign out**. Users and Change password open in a new tab. On the Dashboard the menu shows only New Flight Plan, User Manual and the account items.

Figure 4.1 – Main Menu

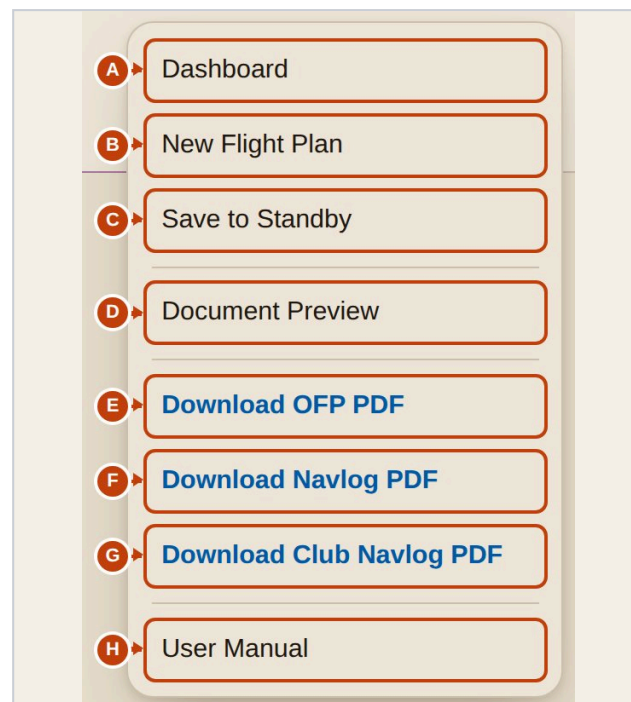

Menu at the top right of the wizard.

## 4.2 Operational Flight Plan (A4)

## OFP PAGE STRUCTURE (NUMBER OF PAGES VARIES WITH NOTAMS AND CHARTS)

| PAGE             | CONTENT                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------|
| OFP              | Flight data, estimated / actual times, route, cruise altitude, fuel plan, alternate summary, daylight check      |
| MASS AND BALANCE | Loading sheet, limits, CG envelope chart, remarks, PIC signature                                                 |
| PERFORMANCE      | Masses, V-speeds, take-off and landing distances and margins, cruise power setting, TOC, AFM cruise table        |
| DEST CHARTS      | Charts and operational notes (Step 6)                                                                            |
| BRIEFING         | Briefing by phase (DEP, ENR, T&G, DEST, ALTN): procedure, threats, mitigation; aircraft status, remarks (Step 7) |
| WEATHER          | METAR / SPECI / TAF by aerodrome, SIGMET / AIRMET                                                                |
| NOTAM            | NOTAM by aerodrome and enroute                                                                                   |
| Charts           | Graphic pages of the briefing, if any                                                                            |

Figure 4.2 – OFP – Page 1

| LILN-LILN CESSNA C172 FR I-CCAF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------|-----------|-----------|--------|----------|-------|--------|------|------|--------|------|-------|--------|-----------|-------|--------|-------------------------------------------------|------|--------|-------|-------|--------|------|------|----|------------------------------------------------|--|--|
| OFP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <div style="border: 1px solid black; padding: 5px;"> <b>FLT MISSION:</b> VFR navigation training<br/> <b>DEP:</b> LILN<br/> <b>T&amp;G:</b> LILE<br/> <b>ARR:</b> LILN<br/> <b>ALTN:</b> LIMF                 </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;"></th> <th style="width: 25%;">ESTIMATED</th> <th style="width: 60%;">ACTUAL</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>0830</td> <td>.....Z</td> </tr> <tr> <td>TO</td> <td>0845</td> <td>.....Z</td> </tr> <tr> <td>LDG</td> <td>0936</td> <td>.....Z</td> </tr> <tr> <td>ON</td> <td>0950</td> <td>.....Z</td> </tr> <tr> <td>BLOCK</td> <td>0120</td> <td>.....Z</td> </tr> <tr> <td>FLT</td> <td>0051</td> <td>.....Z</td> </tr> </tbody> </table> |        |          |           | ESTIMATED | ACTUAL | OFF      | 0830  | .....Z | TO   | 0845 | .....Z | LDG  | 0936  | .....Z | ON        | 0950  | .....Z | BLOCK                                           | 0120 | .....Z | FLT   | 0051  | .....Z |      |      |    |                                                |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ESTIMATED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ACTUAL |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| OFF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0830                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| TO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0845                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| LDG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0936                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0950                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| BLOCK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0120                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| FLT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0051                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | .....Z |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <div style="border: 1px solid black; padding: 5px;"> <b>ROUTE:</b> MALNATE ARONA ROMAGNANO BIELLA NORD LILE BIELLA NORD ROMAGNANO ARONA MALNATE<br/> <b>CRUISE ALTITUDE:</b> 4500 ft                 </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 35%;"></th> <th style="width: 30%;">FUEL(L)</th> <th style="width: 35%;">TIME</th> </tr> </thead> <tbody> <tr> <td>TRIP</td> <td>37.41</td> <td>51</td> </tr> <tr> <td>CONT</td> <td>9.07</td> <td>15</td> </tr> <tr> <td>ALTN</td> <td>19.36</td> <td>32</td> </tr> <tr> <td>FINAL RES</td> <td>18.15</td> <td>30</td> </tr> <tr> <td colspan="3" style="border-top: 1px solid black; padding-top: 5px;"> <b>MIN BLOCK</b>                      83.99                      128                             </td> </tr> <tr> <td>EXTRA</td> <td>32.38</td> <td>54</td> </tr> <tr> <td>TAXI</td> <td>3.63</td> <td>29</td> </tr> <tr> <td colspan="3" style="border-top: 1px solid black; padding-top: 5px;"> <b>PLAN BLOCK</b>                      120                      211                             </td> </tr> </tbody> </table> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           | FUEL(L)   | TIME   | TRIP     | 37.41 | 51     | CONT | 9.07 | 15     | ALTN | 19.36 | 32     | FINAL RES | 18.15 | 30     | <b>MIN BLOCK</b> 83.99                      128 |      |        | EXTRA | 32.38 | 54     | TAXI | 3.63 | 29 | <b>PLAN BLOCK</b> 120                      211 |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | FUEL(L)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | TIME   |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| TRIP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 37.41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 51     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| CONT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9.07                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 15     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| ALTN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 19.36                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 32     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| FINAL RES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 18.15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 30     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <b>MIN BLOCK</b> 83.99                      128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| EXTRA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 32.38                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 54     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| TAXI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.63                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 29     |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <b>PLAN BLOCK</b> 120                      211                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <div style="border: 1px solid black; padding: 5px;"> <b>BLOCK =</b> .....<br/> <b>ACT USD=</b> .....                 </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <div style="border: 1px solid black; padding: 5px;"> <b>PLAN BLOCK = 120 L = 86.40 kg (31.70 USG)</b><br/> <b>USABLE = 174 L (46 USG)</b> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 35%;">ALTERNATE</th> <th style="width: 20%;">DIST</th> <th style="width: 20%;">TIME</th> <th style="width: 25%;">ALTITUDE</th> </tr> </thead> <tbody> <tr> <td>LIMF</td> <td>61</td> <td>32</td> <td>4500</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          | ALTERNATE | DIST      | TIME   | ALTITUDE | LIMF  | 61     | 32   | 4500 |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| ALTERNATE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | DIST                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | TIME   | ALTITUDE |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| LIMF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 61                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 32     | 4500     |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |
| <div style="border: 1px solid black; padding: 5px;"> <b>DAYLIGHT 23.09.2026 (UTC)</b><br/> <b>TO</b> 0845Z LILN SR 0513 SS 1720 ECT 1750 SS -8:35<br/> <b>LDG</b> 0936Z LILN SR 0513 SS 1720 ECT 1750 SS -7:44<br/> <b>ALTN</b> 1008Z LIMF SR 0518 SS 1725 ECT 1754 SS -7:17                 </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |          |           |           |        |          |       |        |      |      |        |      |       |        |           |       |        |                                                 |      |        |       |       |        |      |      |    |                                                |  |  |

The ACTUAL column and the BLOCK / ACT USD lines are completed by hand.

|                                    |                        |                                       |                               |
|------------------------------------|------------------------|---------------------------------------|-------------------------------|
| <b>A</b> Flight data               | DEP / T&G / ARR / ALTN | <b>B</b> Estimated / actual times     | Record ACTUAL in flight (UTC) |
| <b>C</b> Route and cruise altitude | VERIFY                 | <b>D</b> Fuel plan                    | CROSS-CHECK with Step 2       |
| <b>E</b> BLOCK / ACT USD           | Complete by hand       | <b>F</b> Plan block mass, usable fuel | VERIFY                        |
| <b>G</b> Alternate summary         | VERIFY                 | <b>H</b> Daylight check               | REVIEW                        |

Figure 4.3 – OFP – Mass and Balance

| MASS AND BALANCE                                                |            |              |               |
|-----------------------------------------------------------------|------------|--------------|---------------|
| A/C I-CCAF POB 2                                                |            |              |               |
|                                                                 | WEIGHT kg  | ARM m        | MOMENT kg*m   |
| <b>WEIGHT CALCULATION</b>                                       |            |              |               |
| BASIC EMPTY WEIGHT                                              | 734        | 0.925        | 679           |
| PILOT AND FRONT PASSENGER                                       | 160        | 0.940        | 150.40        |
| REAR PASSENGERS                                                 | 0          | --           | 0             |
| BAGGAGE                                                         | 8          | 2.410        | 19.28         |
| <b>ZERO FUEL WEIGHT</b>                                         | <b>902</b> | <b>0.941</b> | <b>848.68</b> |
| <b>FUEL CALCULATION</b>                                         |            |              |               |
| TAXI FUEL                                                       | 2.61       | 1.230        | 3.21          |
| TRIP FUEL                                                       | 26.94      | 1.230        | 33.13         |
| ALTERNATE FUEL                                                  | 13.94      | 1.230        | 17.15         |
| HOLDING / RESERVE                                               | 13.07      | 1.230        | 16.07         |
| FUEL ON BOARD                                                   | 86.40      | 1.230        | 106.27        |
| <b>RESULT</b>                                                   |            |              |               |
| RAMP WEIGHT                                                     | 988.40     | 0.966        | 954.95        |
| TAKE OFF WEIGHT                                                 | 985.79     | 0.965        | 951.74        |
| DEST. LDG WEIGHT                                                | 958.85     | 0.958        | 918.61        |
| ALTN. LDG WEIGHT (no res.)                                      | 931.84     | 0.950        | 885.39        |
| LIMITS: MTOW/MLW 1157 kg - BAGGAGE 91 kg - FUEL 174 L (46 USG)  |            |              |               |
| CG T/O 0.965 m - NORMAL envelope 0.946-1.2 m - WITHIN LIMITS    |            |              |               |
| CATEGORY AVAILABLE: UTILITY and NORMAL - VA at 986 kg = 110 MPH |            |              |               |

Followed on the same page by the CG envelope chart, remarks and PIC signature.

|                             |        |                           |                      |
|-----------------------------|--------|---------------------------|----------------------|
| <b>A</b> Weight calculation | VERIFY | <b>B</b> Fuel calculation | VERIFY               |
| <b>C</b> Result             | VERIFY | <b>D</b> Limits and CG    | VERIFY within limits |

Figure 4.4 – OFP – Performance

**PERFORMANCE**

TOW 968 kg   LAW 941 kg   ALTN 914 kg ← **A**

\*ADD +5 KTS AT VREF SPEEDS

VNE 161   VNO 127   VFE 87 KIAS   XWIND T/O 20 kt   LDG 15 kt

VA 120 MPH at 1157 kg -> 109 MPH at 968 kg (TOW)

**B** →

| MPH          | DEP | DEST | ALTN |
|--------------|-----|------|------|
| VR - 15 m    | 62  | -    | -    |
| VY best rate | 82  | -    | -    |
| V best glide | 85  | 85   | 85   |
| Vref flap 40 | -   | 73   | 73   |

**AFM PUBLISHED SPEEDS (MPH)**

|                | 850 kg           | 1000 kg | 1157 kg |
|----------------|------------------|---------|---------|
| VR - 15 m      | 58               | 63      | 68      |
| VY at SL       | 80               | 82      | 85      |
| ROC SL ft/min  | 1420             | 1120    | 880     |
| V best glide   | 85 MPH           |         |         |
| Vref flap 40   | 73 MPH           |         |         |
| Stall UP/20/40 | 61 / 55 / 53 MPH |         |         |

**TAKE-OFF & LANDING DISTANCES**

**C** →

| PHASE    | AIRPORT/RWY | MASS   | QNH / T / WIND       | PA / DA       | HW / XW       | GND ROLL | 15 m  |
|----------|-------------|--------|----------------------|---------------|---------------|----------|-------|
| T/O DEP  | LILN 17     | 968 kg | 1023 / 22C / 190-5kt | 837 / 1865 ft | HW4.7 / XW1.7 | 145 m    | 262 m |
| LDG T&G  | LILE 16     | 968 kg | 1024 / 22C / 0-3kt   | 630 / 1609 ft | TW2.8 / XW1   | 192 m    | 393 m |
| T/O T&G  | LILE 16     | 968 kg | 1024 / 22C / 0-3kt   | 630 / 1609 ft | TW2.8 / XW1   | 168 m    | 293 m |
| LDG DEST | LILN 17     | 941 kg | 1023 / 22C / 190-5kt | 837 / 1865 ft | HW4.7 / XW1.7 | 175 m    | 358 m |
| LDG ALTN | LIMF 36     | 914 kg | 1024 / 22C / 0-3kt   | 699 / 1695 ft | HW3 / XW0     | 181 m    | 370 m |

**D** →

| PHASE    | DIST | AVAILABLE | REQUIRED | USED | MARGIN |
|----------|------|-----------|----------|------|--------|
| T/O DEP  | TORA | 1420 m    | 145 m    | 10%  | 1275 m |
| T/O DEP  | TODA | 1420 m    | 262 m    | 18%  | 1158 m |
| LDG T&G  | LDA  | 1320 m    | 393 m    | 30%  | 927 m  |
| T/O T&G  | TORA | 1320 m    | 168 m    | 13%  | 1152 m |
| T/O T&G  | TODA | 1320 m    | 293 m    | 22%  | 1027 m |
| LDG DEST | LDA  | 1420 m    | 358 m    | 25%  | 1062 m |
| LDG ALTN | LDA  | 3300 m    | 370 m    | 11%  | 2930 m |

**CRUISE POWER SETTING - 4500 ft**

**E** →

| PHASE     | ALTITUDE     | MAP | RPM  | POWER | TAS     | FUEL FLOW | TIME / L         |
|-----------|--------------|-----|------|-------|---------|-----------|------------------|
| CLIMB     | 1100-4500 ft | -   | -    | full  | -       | -         | 5 min / 9.50 L   |
| CRUISE    | 4500 ft      | 22" | 2400 | 62%   | 132 MPH | 36.3 L/h  | -                |
| ALTERNATE | 4500 ft      | 22" | 2400 | 62%   | 132 MPH | 36.3 L/h  | 32 min / 19.36 L |

**TOC 3 NM after MALNATE (climb 6 NM)** ← **F**

**G** →

| 2200 RPM |    |     |      | 2300 RPM |    |     |      | 2400 RPM |    |     |      | 2500 RPM |    |     |      | 2600 RPM |    |     |      |
|----------|----|-----|------|----------|----|-----|------|----------|----|-----|------|----------|----|-----|------|----------|----|-----|------|
| MP       | %  | MPH | L/h  | MP       | %  | MPH | L/h  | MP       | %  | MPH | L/h  | MP       | %  | MPH | L/h  | MP       | %  | MPH | L/h  |
| 23       | 58 | 128 | 33.8 | 23       | 62 | 132 | 36.3 | 23       | 67 | 136 | 38.6 | 23       | 71 | 140 | 41.2 | 23       | 74 | 143 | 42.9 |
| 22       | 54 | 123 | 31.8 | 22       | 58 | 128 | 33.8 | 22       | 62 | 132 | 36.3 | 22       | 67 | 136 | 38.6 | 22       | 70 | 139 | 40.1 |
| 21       | 50 | 119 | 29.6 |          |    |     |      |          |    |     |      |          |    |     |      | 21       | 65 | 135 | 37.5 |
| 20       | 46 | 113 | 27.7 |          |    |     |      |          |    |     |      |          |    |     |      |          |    |     |      |
| 19       | 43 | 107 | 25.8 |          |    |     |      |          |    |     |      |          |    |     |      |          |    |     |      |
| 18       | 39 | 99  | 23.9 |          |    |     |      |          |    |     |      |          |    |     |      |          |    |     |      |

**A** Masses  
(TOW / LAW /  
ALTN)

VERIFY

**B** V-speeds by  
aerodrome

VERIFY

**C** Take-off and  
landing  
distances

VERIFY

**D** Distances  
available /  
required /  
margin

CROSS-CHECK

**E** Cruise power  
setting

VERIFY

**F** TOC position

VERIFY

**G** AFM cruise  
table

Reference

### 4.3 NAV-FLIGHTPLAN (A5)

1. **SELECT** Download Navlog PDF from the menu. It is a separate document and never part of the OFP.
2. **VERIFY** the header **A**: aircraft, pilot, date, GS, QNH and runway.
3. **RECORD** off-blocks and on-blocks times **B** by hand.
4. **VERIFY** the legs **C**.
5. **RECORD** ATO **D** in flight at each checkpoint.
6. **VERIFY** the alternate row **E** and the fuel calculation box **F**.

Figure 4.5 – NAV-FLIGHTPLAN

| NAV-FLIGHTPLAN            |        |                         |     |                 |      |                  |             |             |         |
|---------------------------|--------|-------------------------|-----|-----------------|------|------------------|-------------|-------------|---------|
| <b>ACFT IDENT:</b> I-CCAF |        | <b>Date:</b> 23.09.2026 |     | <b>Off Bl.:</b> |      | <b>QNH:</b> 1023 |             |             |         |
| <b>Pilot:</b> PIC NAME    |        | <b>GS:</b> 115kt        |     | <b>Bl. on:</b>  |      | <b>RWY:</b> 17   |             |             |         |
| Freq.                     | C/S    | Checkpoint              | MT  | Dist.           | Alt. | EET              | ETO         | ATO         | Remarks |
| 128.55                    | VENEGO | LILN                    |     |                 | 4500 | 0'               | 45'         |             |         |
|                           |        | MALNATE                 | 351 | 3               | 4500 | 2'               | 47'         |             |         |
|                           |        | ARONA                   | 256 | 14              | 4500 | 8'               | 55'         |             |         |
|                           |        | ROMAGNANO               | 221 | 11              | 4500 | 6'               | 01'         |             |         |
|                           |        | BIELLA NORD             | 253 | 14              | 4500 | 7'               | 08'         |             |         |
| 123.05                    | BIELLA | LILE                    | 153 | 5               | 4500 | 3'               | 11'         |             | T&G     |
|                           |        | BIELLA NORD             | 337 | 5               | 4500 | 3'               | 14'         |             |         |
|                           |        | ROMAGNANO               | 073 | 14              | 4500 | 7'               | 21'         |             |         |
|                           |        | ARONA                   | 041 | 11              | 4500 | 6'               | 27'         |             |         |
|                           |        | MALNATE                 | 078 | 14              | 4500 | 7'               | 34'         |             |         |
| 128.55                    |        | LILN                    | 173 | 3               | 4500 | 2'               | 36'         |             |         |
| <b>Alternate:</b> LIMF    |        |                         | 61  |                 | 4500 | 32'              |             |             |         |
| <b>Fuel calc.</b>         |        |                         |     |                 |      | <b>I/h:</b> 36   | <b>Time</b> | <b>Fuel</b> |         |
|                           |        |                         |     |                 |      | Trip             | 00:51       | 37          |         |
|                           |        |                         |     |                 |      | Alternate        | 00:32       | 19          |         |
|                           |        |                         |     |                 |      | Reserve          | 00:30       | 18          |         |
|                           |        |                         |     |                 |      | Minimum          | 02:08       | 83          |         |
|                           |        |                         |     |                 |      | Extra fuel       | 00:54       | 32          |         |
|                           |        |                         |     |                 |      | Block fuel       | 03:31       | 120         |         |

A5 document for the cockpit.

**A** Header

VERIFY

**C** Legs

VERIFY

**E** Alternate row

VERIFY

**B** Off Bl. / Bl. on

Record by hand

**D** ATO

Record in flight

**F** Fuel

calculation

VERIFY

**Download Club Navlog PDF** produces the same navigation log on the flying club form (Aeroclub di Varese, Navigation Log): one PDF of two A4 landscape pages, front and back, to be printed double-sided. It does not replace the NAV-FLIGHTPLAN, which remains the navigation log of the application.

1. **SELECT** Download Club Navlog PDF from the menu.
2. **VERIFY** the main table (right side of the front): checkpoints, NAV AIDS (Ident = callsign, Freq), MC, ALT, DIST and FUEL per leg and remaining, ETE and ETO, as in the NAV-FLIGHTPLAN. Up to 13 checkpoints fit; up to 6 more continue in the left table, above the Dest. Airport row.
3. **VERIFY** the alternate (left side of the front): one leg from destination to alternate. The MC is computed from the great circle and the WMM2025 magnetic variation, and is marked as to be verified.
4. **VERIFY** the back: weather by aerodrome from the METAR; weight and balance with the take-off fuel; fuel calculation; take-off data (DEP) and landing data (DEST).
5. **RECORD** block times, RETO and ATO by hand.

## NOTE

Differences from the club form as printed by hand: CLIMB fuel is the AFM fig. 5-6 block (start-up and take-off included), so no rate is given; DESC. is not published in the AFM; APP. is the 5 minutes per aerodrome; the contingency, which the form does not have, is included in MINIMUM FOB and stated in the Note. ASDA (required) is the take-off ground roll plus the landing ground roll. Emax is the best glide speed. ASDA declared, VX, VLO and VLE are left blank.

### CAUTION

The form is an aid to flight preparation and does not replace the AFM, the SOP or the AIP. Every pre-filled value must be verified by the pilot before use.

**Figure 4.6 – Club Navlog – Front**

[illegible]

Main table on the right, alternate on the left.

Figure 4.7 – Club Navlog – Back

| WEATHER BRIEFING |       |             |            |        |       |      |
|------------------|-------|-------------|------------|--------|-------|------|
| STATION          | TIME  | WIND        | VISIBILITY | CLOUDS | TEMP. | QNH  |
| LILN             | 0720Z | 170 / 08 KT | CAVOK      | CAVOK  | 16/07 | 1018 |
| LILE             | 0720Z | 150 / 06 KT | CAVOK      | CAVOK  | 17/06 | 1018 |
| LIMF             | 0720Z | 190 / 07 KT | 9999       | FEW040 | 18/08 | 1017 |
|                  |       | /           |            |        |       |      |
|                  |       | /           |            |        |       |      |
|                  |       | /           |            |        |       |      |

| WEIGHT AND BALANCE    |                  |   |                     |
|-----------------------|------------------|---|---------------------|
|                       | WEIGHT           | X | ARM = MOMENT        |
| AIRCRAFT EMPTY WEIGHT | 734.0 kg         |   | 0.925 m             |
| FRONT PASSENGERS      | 165.0 kg         |   | 0.940 m             |
| REAR PASSENGERS       | 75.0 kg          |   | 1.860 m             |
| FUEL                  | 98.6 kg          |   | 1.230 m             |
| BAGGAGE               | 12.0 kg          |   | 2.410 m             |
| <b>ATOW</b>           | <b>1084.6 kg</b> |   | <b>TOTAL MOMENT</b> |
|                       |                  |   | <b>1123.8 kg m</b>  |

| TAKE OFF DATA   |                 |                 |                  |
|-----------------|-----------------|-----------------|------------------|
| FIELD ELEV.     | RWY             | RWY COND.       | FLAP             |
| 1100 ft         | 17              | ASPHALT, DRY    | VR               |
| QNH             | O.A.T.          | WIND            | VX               |
| 1018 hPa        | 16°C            | 170/08 KT       |                  |
| M.T.O.W.        | A.T.O.W.        | WIND/C          | VY               |
| 1157 kg         | 1085 kg         | H 8.0 X 0.0     | 84               |
|                 | <b>Va</b>       | 114             | <b>VFE</b>       |
|                 | <b>Emax</b>     | 85              | <b>VLO</b>       |
| TORA (Declared) | TODA (Declared) | ASDA (Declared) | LDA (Declared)   |
| 1420 m          | 1420 m          |                 | 1420 m           |
| Ground roll     | T/off distance  | ASDA            | Landing Distance |
| 163 m           | 289 m           | 326 m           | 333 m            |

| FUEL CALCULATION                                                                                                                                                                                                                                                                           |                 |                    |                           |                 |                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------------|-----------------|--------------------|
| DESTINATION                                                                                                                                                                                                                                                                                |                 |                    | ALTERNATE                 |                 |                    |
| Rate                                                                                                                                                                                                                                                                                       | Time in Minutes | Gall./LT. Required | Rate                      | Time in Minutes | Gall./LT. Required |
| CLIMB AFM                                                                                                                                                                                                                                                                                  | 5               | 9.50               | CLIMB                     | -               | -                  |
| CRUISE 36.30                                                                                                                                                                                                                                                                               | 46              | 27.85              | CRUISE 36.30              | 32              | 19.36              |
| DESC.                                                                                                                                                                                                                                                                                      | -               | -                  | DESC.                     | -               | -                  |
| APP 36.30                                                                                                                                                                                                                                                                                  | 20              | 12.10              | APP 36.30                 | 5               | 3.03               |
| <b>Total to Destination</b>                                                                                                                                                                                                                                                                |                 | <b>49.45</b>       | <b>Total to Alternate</b> |                 | <b>22.39</b>       |
| Note:<br>Fuel in litres (1 L = 0.72 kg).<br>CLIMB: AFM fig. 5-6, start-up and take-off included.<br>APP.: 5 min per aerodrome.<br>CONTINGENCY 15 min, 9.07 L: included in MINIMUM FOB.<br>MINIMUM FOB = DEST + CONT + ALTN + FINAL RES + TAXI<br>W&B fuel: take-off fuel 137 L = 98.64 kg. |                 |                    | FINAL RESERVE 30 MIN      |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | TAXI/RUN-UP               |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | MINIMUM FOB               |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | ACTUAL FOB                |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | EXTRA FOB                 |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | 18.15                     |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | 3                         |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | 102.06                    |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | 140                       |                 |                    |
|                                                                                                                                                                                                                                                                                            |                 |                    | 37.94                     |                 |                    |

| LANDING DATA    |                 |                 |                  |
|-----------------|-----------------|-----------------|------------------|
| FIELD ELEV.     | RWY             | RWY COND.       | FLAP             |
| 1100 ft         | 17              | ASPHALT, DRY    | Vapp             |
| QNH             | O.A.T.          | WIND            | VFE              |
| 1017 hPa        | 17°C            | 180/10 KT       |                  |
| M.L.W.          | A.L.W.          | WIND/C          | VLO              |
| 1157 kg         | 1049 kg         | H 9.8 X 1.7 R   |                  |
|                 | <b>Va</b>       | 112             | <b>VLE</b>       |
|                 | <b>Emax</b>     | 85              | <b>Vref Land</b> |
| TORA (Declared) | TODA (Declared) | ASDA (Declared) | LDA (Declared)   |
| 1420 m          | 1420 m          |                 | 1420 m           |
| Ground roll     | T/off distance  | ASDA            | Landing Distance |
| 156 m           | 257 m           | 297 m           | 318 m            |

1

Weather, weight and balance, fuel calculation, take-off and landing data.

## 4.4 Dashboard – Saved flights

The Dashboard is the first page after signing in. **New Flight** opens the Import page (Section 2); saved flights are reopened from their cards. While a flight plan is open in the wizard, **Back to the open flight plan** returns to it. Reloading the page also shows the Dashboard first.

- 1. **SELECT Save to Standby** to store the flight, for example while waiting for the weather. The Dashboard opens.
- 2. **LOAD** the briefing PDF on the standby card **B** to finalise the flight: it moves to READY TO FLY **D**.
- 3. **SELECT Edit data** **C** to reopen a standby flight in the wizard.
- 4. **LOAD** a newer briefing on a completed card **E** to update its weather.
- 5. **SELECT View OFF** **F** to reopen a completed flight in the wizard.

**NOTE**  
Opening a saved flight or starting a new one closes the flight plan open in the wizard: save it first with **Save to Standby**.

**CAUTION**  
Saved flights are stored in your account. On a shared device, select **Sign out** at the end of the session: it removes the local copy from the device. Graphic weather charts are not stored with the flight.

Figure 4.8 – Dashboard



|   |                    |                     |
|---|--------------------|---------------------|
| A | Standby badge      | Awaiting weather    |
| B | Load briefing      | Finalise            |
| C | Edit data          | Reopen              |
| D | Ready to fly badge | Weather loaded      |
| E | Update WX          | LOAD newer briefing |
| F | View OFF           | Reopen              |

## SECTION 5

## Operational Notes – Safety &amp; Performance Limits

## 5.1 Aircraft applicability

**WARNING**

AFM data are those of the Reims FR172J (I-CCAF) and FR172H (I-CCAB); empty masses and moments are those of the two aircraft. With **Other**, speeds are those of the FR172J. Used for any other aircraft the results are not approximate: they are wrong.

## 5.2 Performance limits

| ITEM                      | LIMITATION                                                                        | EFFECT                                                                                                             |
|---------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Declared distances        | TORA / TODA / LDA pre-filled with the physical runway length (OurAirports)        | <b>Must</b> be corrected from the AIP where stopway, clearway or displaced threshold exist, or NOTAM changes apply |
| Tailwind                  | The AFM publishes no tailwind data                                                | Distances are for zero wind and <b>shorter than actual</b> (red warning)                                           |
| Wet / contaminated runway | No AFM data                                                                       | No increment applied (red warning)                                                                                 |
| Grass runway              | AFM grass increment                                                               | Applied when "Grass, dry" is selected                                                                              |
| Landing mass              | Landing table published at 1157 kg only                                           | Conservative at lower masses                                                                                       |
| Touch and go              | Computed with the take-off mass                                                   | Conservative                                                                                                       |
| Headwind credit           | Limited to the range of the AFM table / note                                      | Grey advisory when limited                                                                                         |
| V-speeds                  | AFM table, no interpolation, conservative rounding                                | —                                                                                                                  |
| Weather for performance   | Own METAR; nearest station within 30 NM on request; otherwise ISA standard values | Standard values flagged in red                                                                                     |

## 5.3 Fuel planning as implemented

| ITEM          | METHOD                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Trip          | Climb from DEP elevation to cruise altitude (AFM fig. 5-6, 1157 kg, start-up and take-off included) + cruise over the remaining distance at the selected GS and fuel flow. Descent is not modelled separately (included in cruise). + <b>aerodrome minutes</b> : 5 min for each leg from or to an aerodrome (first and last leg; the two legs around an en-route aerodrome only if Touch & Go is selected), at cruise fuel flow. |
| Contingency   | max(5% of Trip, 15 min at cruise fuel flow)                                                                                                                                                                                                                                                                                                                                                                                      |
| Alternate     | Cruise, 22 inHg / 2400 RPM at the alternate altitude, over the alternate distance, + 5 aerodrome minutes. No climb allowance.                                                                                                                                                                                                                                                                                                    |
| Final reserve | 30 min (VFR) or 45 min (IFR) at cruise fuel flow                                                                                                                                                                                                                                                                                                                                                                                 |
| Taxi          | (TO – OFF) + (ON – LDG) at 7.5 L/h                                                                                                                                                                                                                                                                                                                                                                                               |
| Units         | 1 L = 0.72 kg; 174 L (46 USG) usable                                                                                                                                                                                                                                                                                                                                                                                             |

## 5.4 Navigation data

- Cruise GS is TAS (still air) until corrected for wind by the pilot.
- The alternate distance is a great-circle distance.

- Frequencies are the number only, from OurAirports: CROSS-CHECK with current charts / AIP.
- Navlog times and fuel are recomputed by the application; their totals equal the Trip.

## 5.5 Daylight check

- Sunrise / sunset: upper limb at  $-0.833^\circ$ ; civil twilight: centre at  $-6^\circ$  (night as defined in Regulation (EU) 923/2012).
- Rounded conservatively: sunset and end of twilight to the minute before, sunrise to the minute after.
- Uses the flight date of Step 8 and the UTC times of Step 1. No elevation correction (as in published tables).

## 5.6 Documents and storage

- The OFP is printed from the downloaded PDF, with the PDF viewer.
- Saved flights are stored in the pilot's account and are visible only to that pilot. On a shared device, **Sign out** at the end of the session.
- The A5 NAV-FLIGHTPLAN is a separate document and must be downloaded separately.

**The documents produced are an aid to planning. Responsibility for the flight remains with the Pilot in Command.**

## APPENDIX A

## Pre-Departure Cross-Check

Carry out before printing the documents. Each item refers to the section where the check is described.

| ITEM            | CHECK                                                                            | REF.      | ✓                        |
|-----------------|----------------------------------------------------------------------------------|-----------|--------------------------|
| Times           | OFF / TO in UTC; LDG, ON, BLOCK, FLT plausible                                   | 3.1       | <input type="checkbox"/> |
| Daylight        | TO, LDG and ALTN landing reviewed; no unaccepted AFTER SUNSET / NIGHT            | 3.1       | <input type="checkbox"/> |
| Cruise          | Altitude, RPM, MAP selected; GS corrected for wind                               | 3.2       | <input type="checkbox"/> |
| Climb           | Cruise altitude reached; TOC position plausible                                  | 3.2       | <input type="checkbox"/> |
| Alternate       | ALTN entered; distance and altitude verified                                     | 3.2       | <input type="checkbox"/> |
| Fuel            | Plan Block within 174 L usable; FOB not INSUFFICIENT                             | 3.2       | <input type="checkbox"/> |
| Mass & balance  | Masses within limits; CG within envelope at take-off and both landings           | 3.3       | <input type="checkbox"/> |
| Runways         | Runway selected on every tab; TORA / TODA / LDA cross-checked with AIP and NOTAM | 3.4       | <input type="checkbox"/> |
| Performance     | All margins positive; every Checks & Warnings item reviewed                      | 3.4       | <input type="checkbox"/> |
| Navlog          | Totals equal Trip time and fuel; frequencies verified                            | 3.5       | <input type="checkbox"/> |
| Weather & NOTAM | Correct aerodrome and current issue in every box; SIGMET / AIRMET box not empty  | 3.8       | <input type="checkbox"/> |
| Date / PIC      | Flight date and PIC name entered                                                 | 3.8       | <input type="checkbox"/> |
| Documents       | OFP and NAV-FLIGHTPLAN downloaded / printed; OFP signed                          | 4.2 / 4.3 | <input type="checkbox"/> |