

Lecture 2: Image generation overview

DHBW, Computer graphics

Lovro Bosnar

18.1.2023.

Goal of Computer graphics


- Any interactive virtual environment, animation, application, development and research in computer graphics → **synthesizing images**



Graphics and computer games
<https://www.rockstargames.com/reddeadredemption2/>




Graphics and animated film
<https://www.pixar.com/soul>

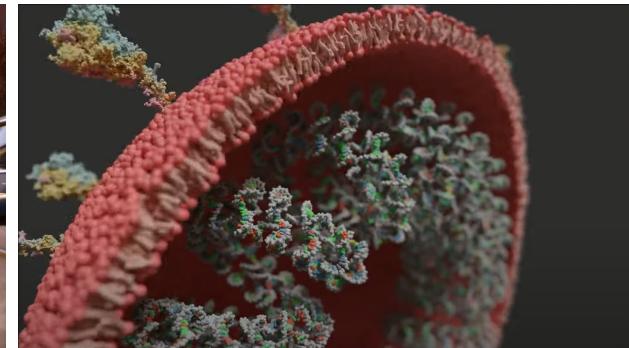

Graphics and scientific visualization
https://www.youtube.com/watch?v=adhTmwYwOjA&ab_channel=Blender



Image synthesis: intuition

- Analogy with photography:
 - Light source emits light
 - Light travels through the space, interacts with objects
 - Small amount of light reflects into camera → image

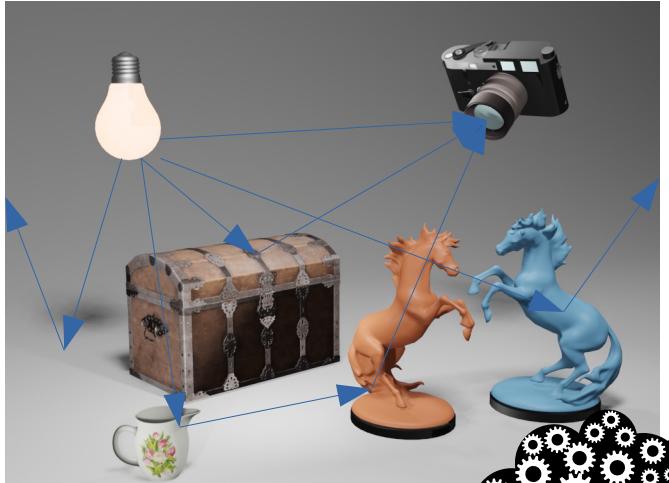

Fundamental image synthesis questions

- How to represent real world objects, lights and cameras in a computer?
 - 3D scene modeling
- How to generate image based on computer representation of those elements?
 - Rendering and image

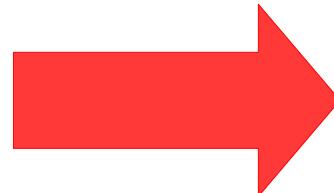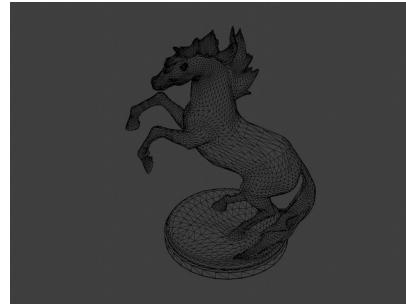


Art of computer graphics

- Decompose real world objects and phenomena into separate models and processes which can be modeled and then again combined into a virtual world.
 - All of those parts are deeply intertwined and one doesn't make sense without another.
 - Example: without light we can't see objects and without objects we can't see light.




Simplification of a real world

- Computer graphics problems are solved using **simulation and approximation**.
 - The real world objects and phenomena is simulated and approximated to achieve desired outcomes for specific application.
- Description of a real world in a 3D scene must be **discretized** for display
 - Real world and 3D scene are continuous, synthesizing images means creating discrete image: array of pixels

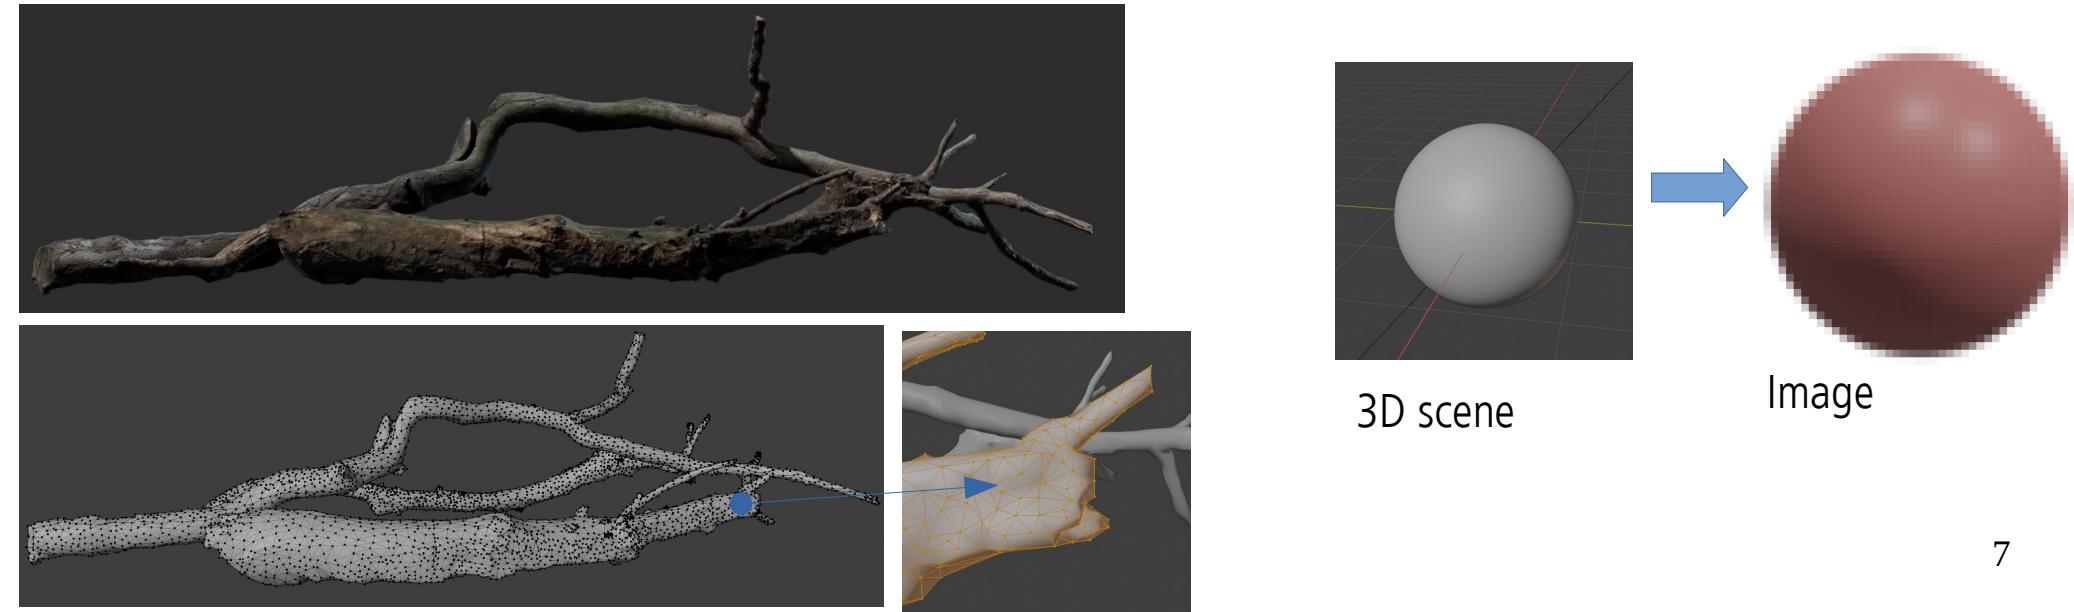

Pillars of computer graphics

- To synthesize an image:
 - We need a description of a **3D scene** which contains objects, lights and cameras
 - A way to transform a 3D scene into 2D array of pixels – **rendering**
 - A way of storing 2D array of pixels for raster display – **image**

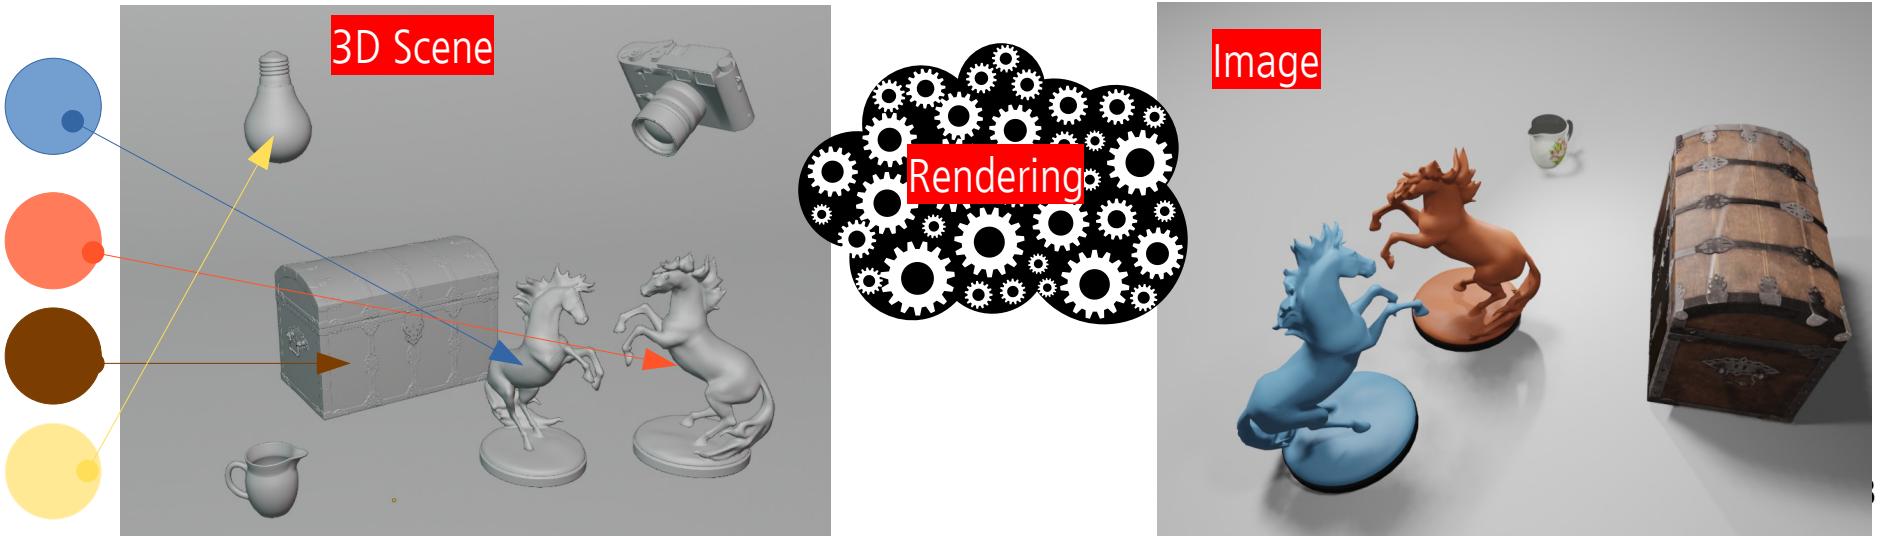

Modeling and rendering

- Computer graphics is concerned with:
 - Techniques and methods for **modeling** of **3D scene**: what will be rendered
 - Development of **rendering** algorithms for creating image out of a 3D scene
 - Storing and displaying **images**

Modeling and rendering are intertwined

- Rendering process must “understand” how 3D scene is represented
- Modeling of 3D scene relies on representations which are understood by rendering algorithm

3D Scene Modeling

A start of image generation journey: "what we render"

3D scene modeling

- In order to generate an **image** we need something to **render** → a **3D scene**:
 - **Objects**: what we want to visualize
 - **Cameras**: from where and how are we viewing the objects
 - **Light sources**: enable us to see objects → light reflected to camera

3D space

- To define any object in 3D scene we need to introduce a concept of **3D space**.
 - 3D space is represented with 3 coordinate axis: **Cartesian coordinate system**
 - This main coordinate system is called **world**.

World coordinate system

- All objects have unique **transform** in this world coordinate system:
 - Position
 - Rotation
 - Scale

Objects in 3D scene

- Modeling 3D scene object is separated into modeling:
 - Object shape
 - Object material




Shape



Shape and material




Object shape

- Object shape is needed for:
 - Defining object form, size, etc.
 - Placing object correctly in the scene with respect to other objects
 - Determining which objects are occluded and areas into which shadow is cast by an object
 - Determining visibility


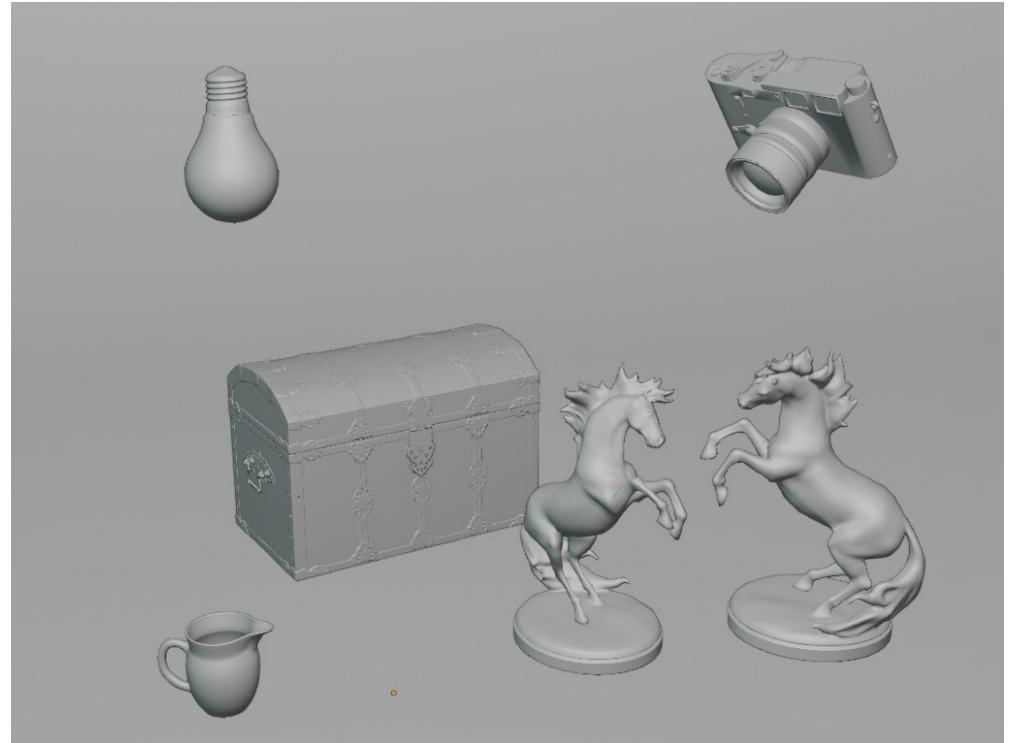


Shape representation

- We start by defining **points** (x,y,z) in 3D space.
- To define a **surface**, simplest way is to connect points to form a **polygon**.
 - Most commonly used polygons are **triangles**.

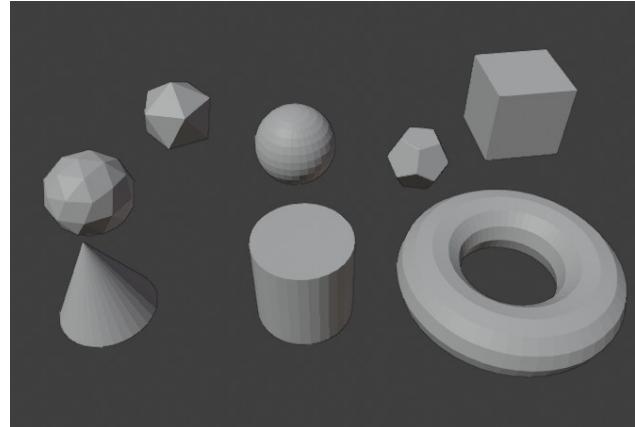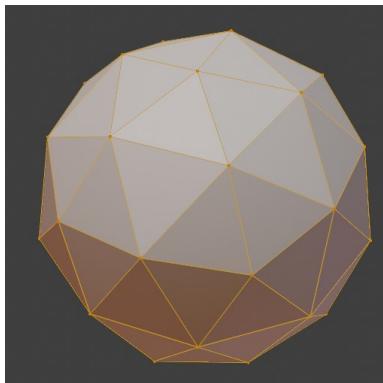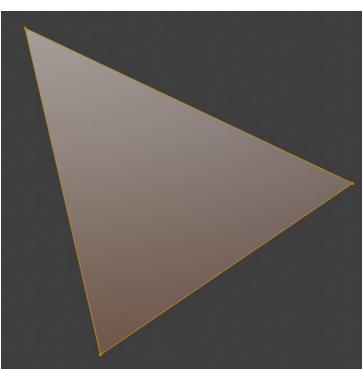


Triangle shape representation: triangle mesh

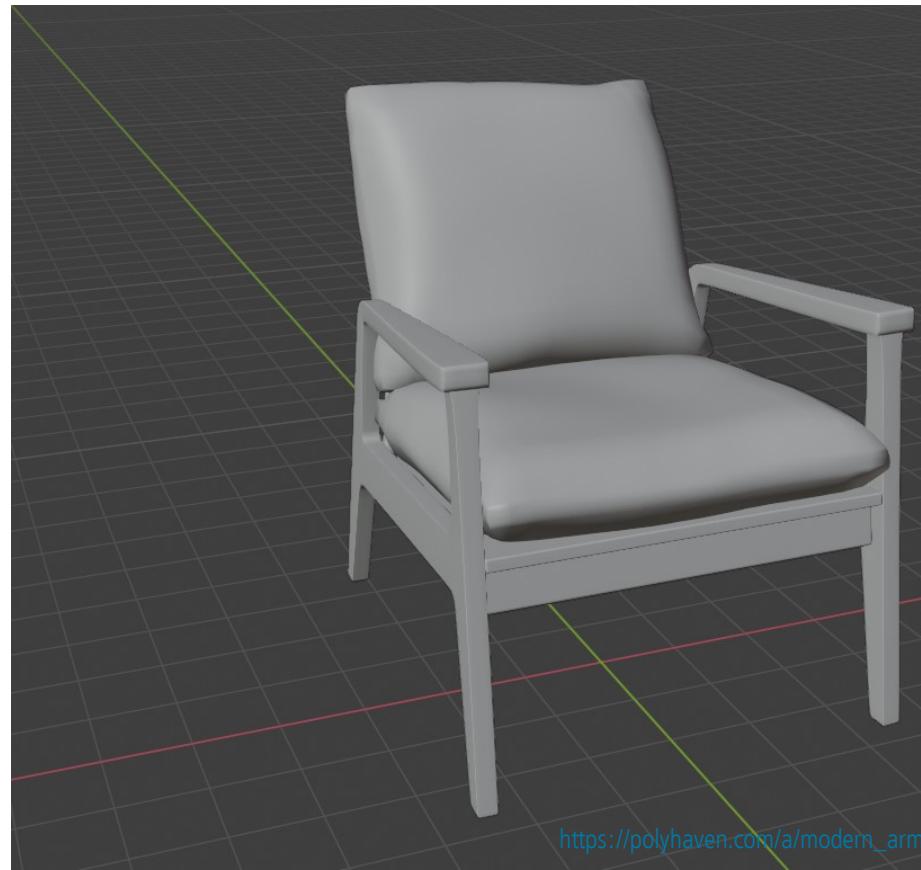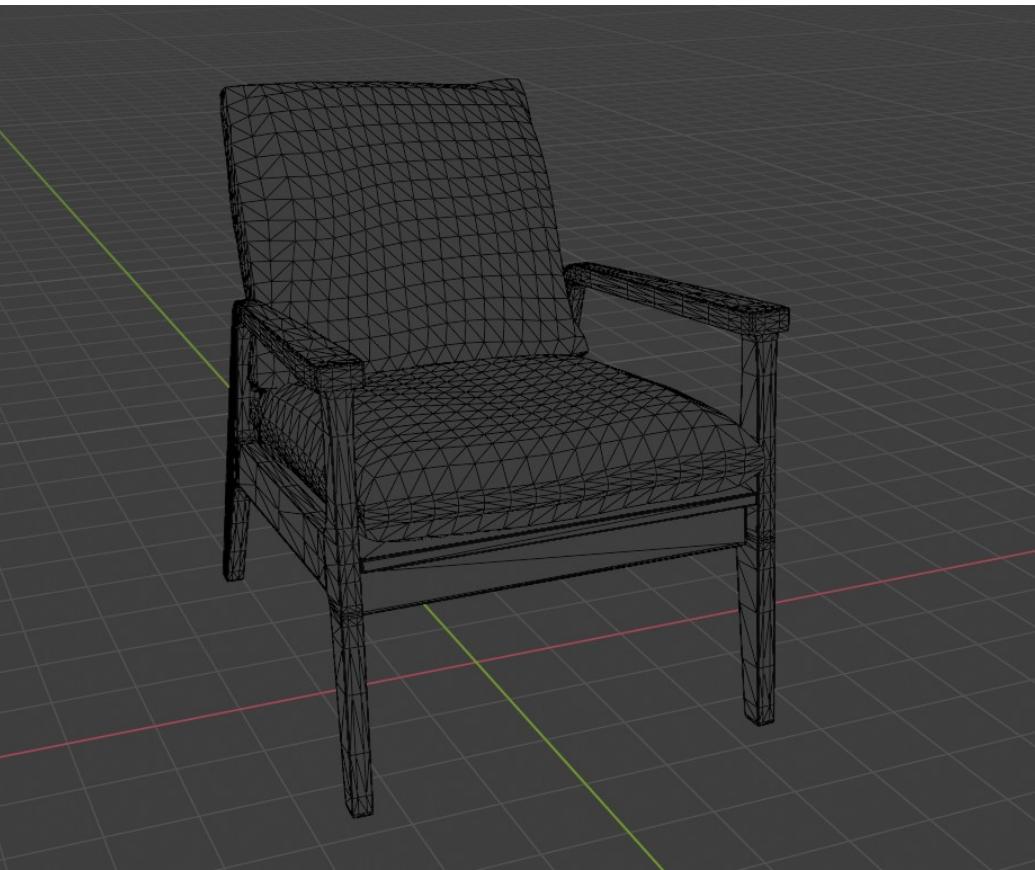




Why triangles?

- Are objects that we have seen created using triangles?
 - NO!
- Modeling is often done using different shape representations
 - It is very often that different shape representations are turned into triangles before/during rendering stage - using **triangulation**.
- Triangle is most widely used **primitive** for surface shape representation
 - Simple
 - Efficient for storage and transfer
 - Efficient for rendering

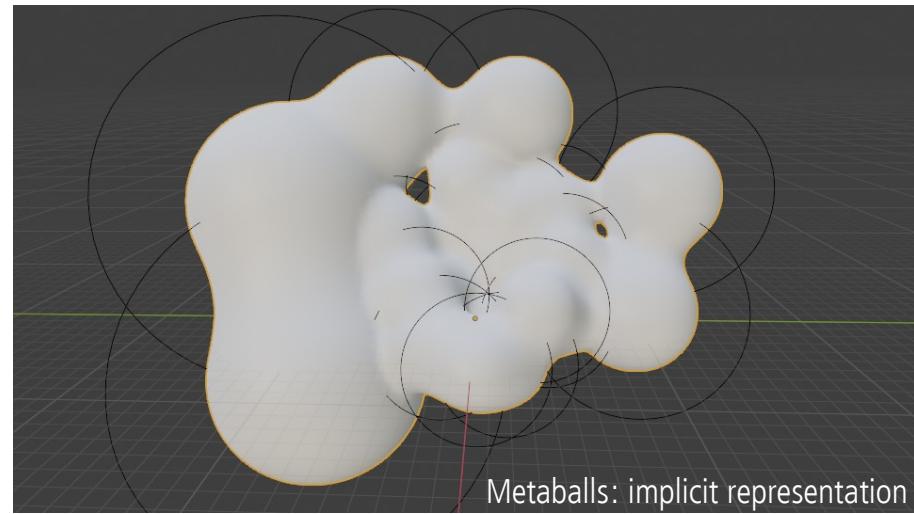

↓ Triangulation

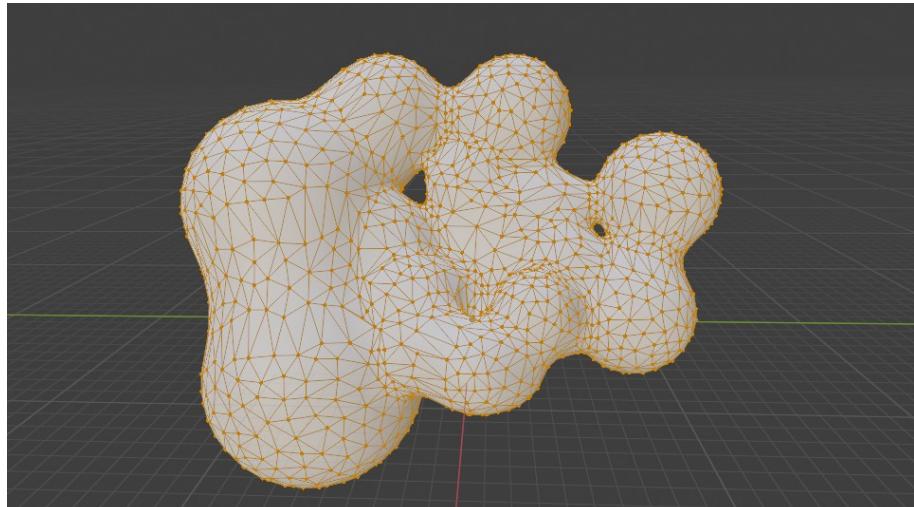

Other shape representations

- Various representations for 3D models exists.
 - Some are better for **modeling**
 - Other are better for **rendering** (triangulated mesh).

Shape representations for modeling

- In professional software, various shape representations for efficient modeling exist.



Hair modeling using parametric curves:

<https://developer.nvidia.com/gpugems/gpugems2/part-iii-high-quality-rendering/chapter-23-hair-animation-and-rendering-nalu-demo>



Implicit surface representation:


<https://www.shadertoy.com/view/ld3Gz2>



Quad mesh


Parametric surfaces:

<https://forums.cgsociety.org/t/audi-r8-v10-2010-nurbs-model-with-rhino-3d/1761843/3>

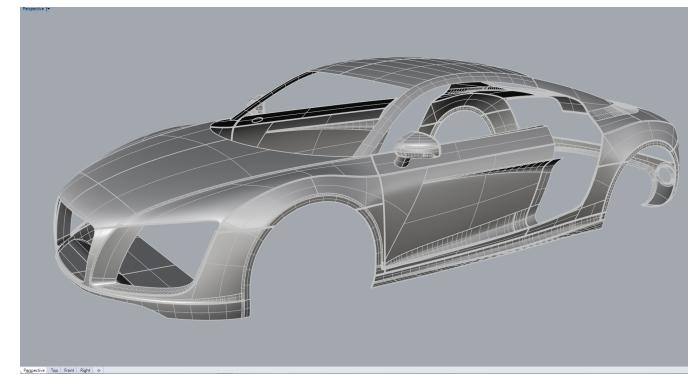

Shape representations for rendering

- Almost always prior rendering, different shape representations are converted to triangulated mesh for efficient rendering.
 - One representation for rendering makes rendering process highly efficient
 - Graphics cards (graphics processing units, GPU) is highly efficient for processing triangles
 - Lot of research and hardware development was focused onto efficient rendering of triangles*.

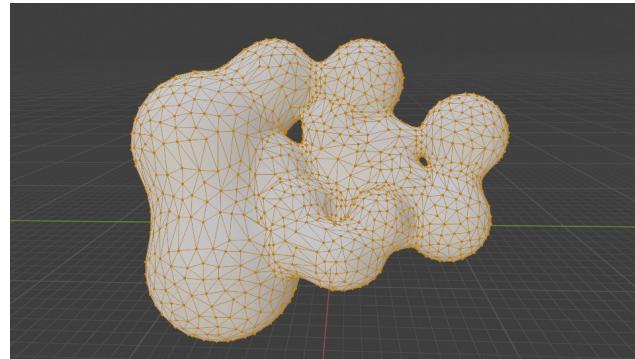

* It is easy to imagine that different rendering primitive is used. But due to historical events this turned out to be a triangle. What is important to note is that mapping of various representations to triangle mesh is possible and thus it is not important which is the rendering primitive as long as it supports various representations.

Object material


- Shape defines what is visible, material defines how it looks.







Material modeling



3D objects: appearance




Shape

Shape + Material:
object appearance
greatly depends on
material.




Material and shape

Material and shape can be modeled separately.

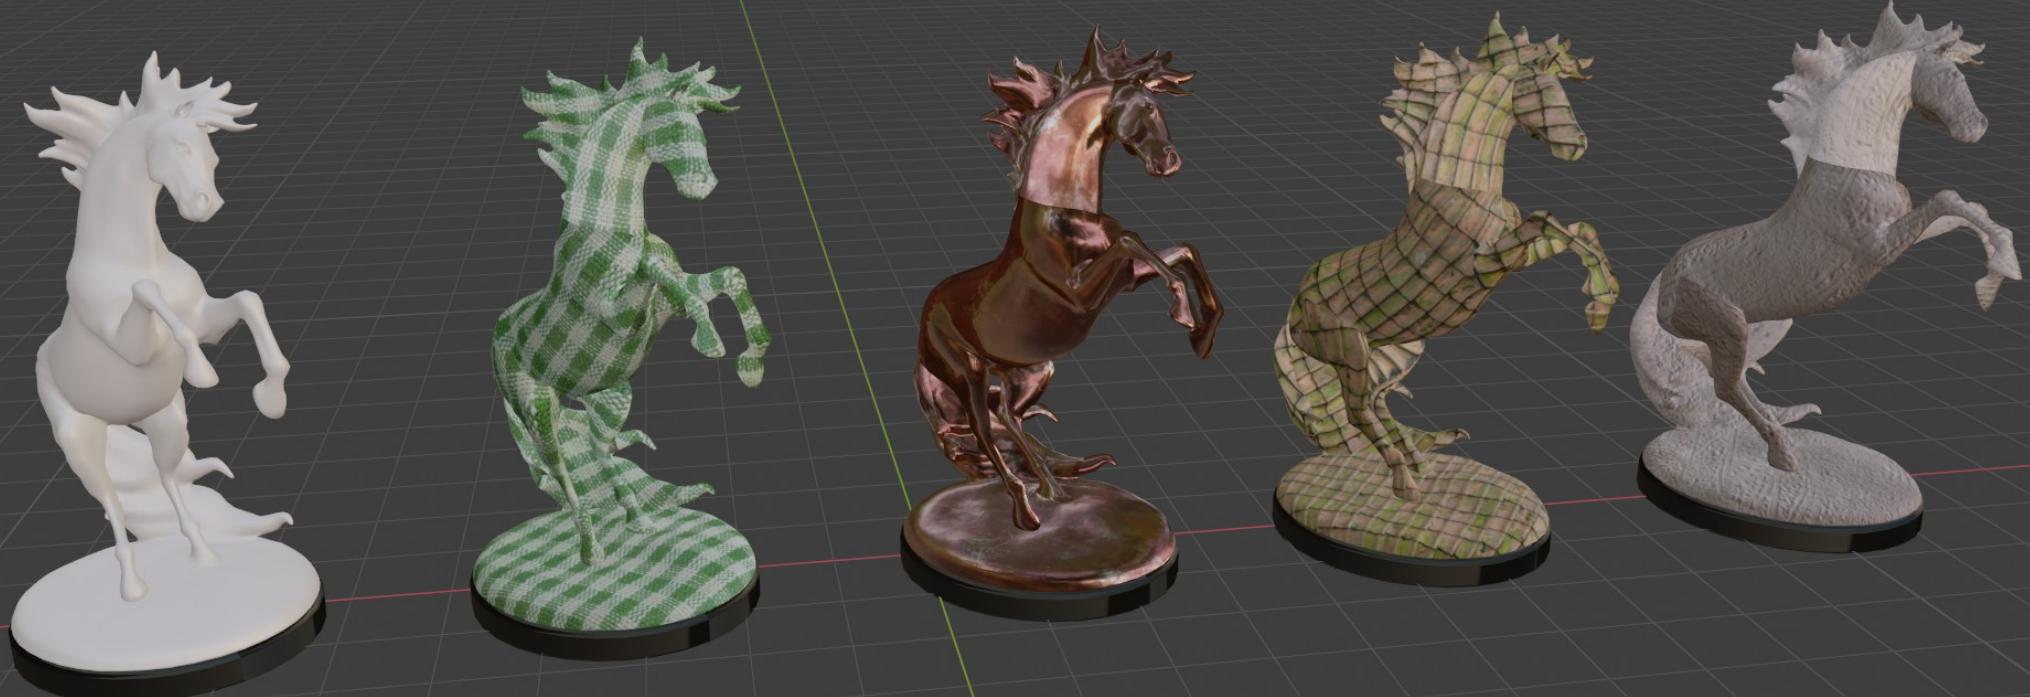

Material

- Defines **light-matter** interaction → **object appearance**
- Material modeling is decomposed into:
 - How light scatters on surface → **scattering model**
 - Variation of scattering function parameters and small scale geometry over surface → **texture**

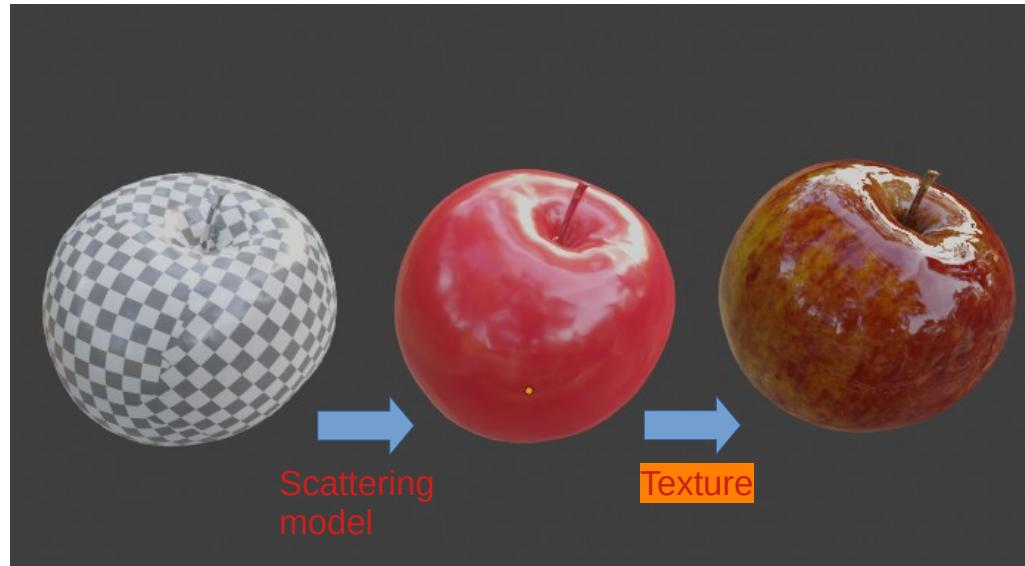

Material



- Uniform material parameters
- Material is defined using only **scattering model***



- Varying material parameters
- Material is defined using scattering function and texture


Material: scattering model

- Defines if object appears like:
 - Metal
 - Plastic
 - Glass
 - Glossy
 - Matte
 - Reflective
 - Transmissive
 - Etc.



Material: texture

- Gives look and feel to the object:
 - Wood
 - Dirt
 - Cloth
 - Fabric
 - Rock
 - Brick
 - Plaster
 - Finishing
 - Imperfections
 - Etc.

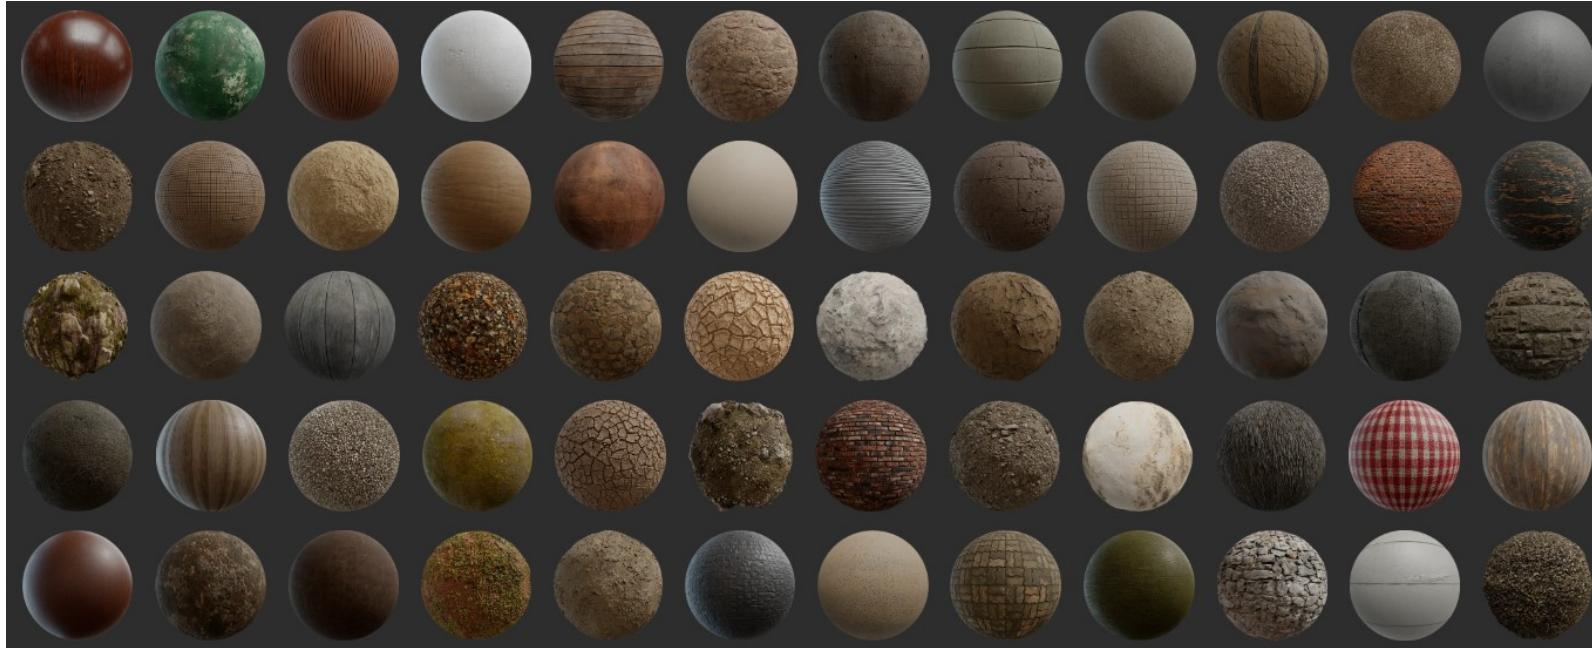



Material

- Generally, material defines:
 - How light travels between objects: participating media, e.g., fog
 - How light interacts with surfaces: surface scattering, e.g., metals
 - How light interacts sub-surface, e.g., wax, leafs



Creating 3D scene objects

- Interactive modeling using digital content creation (DCC) tools:
 - Blender and Houdini

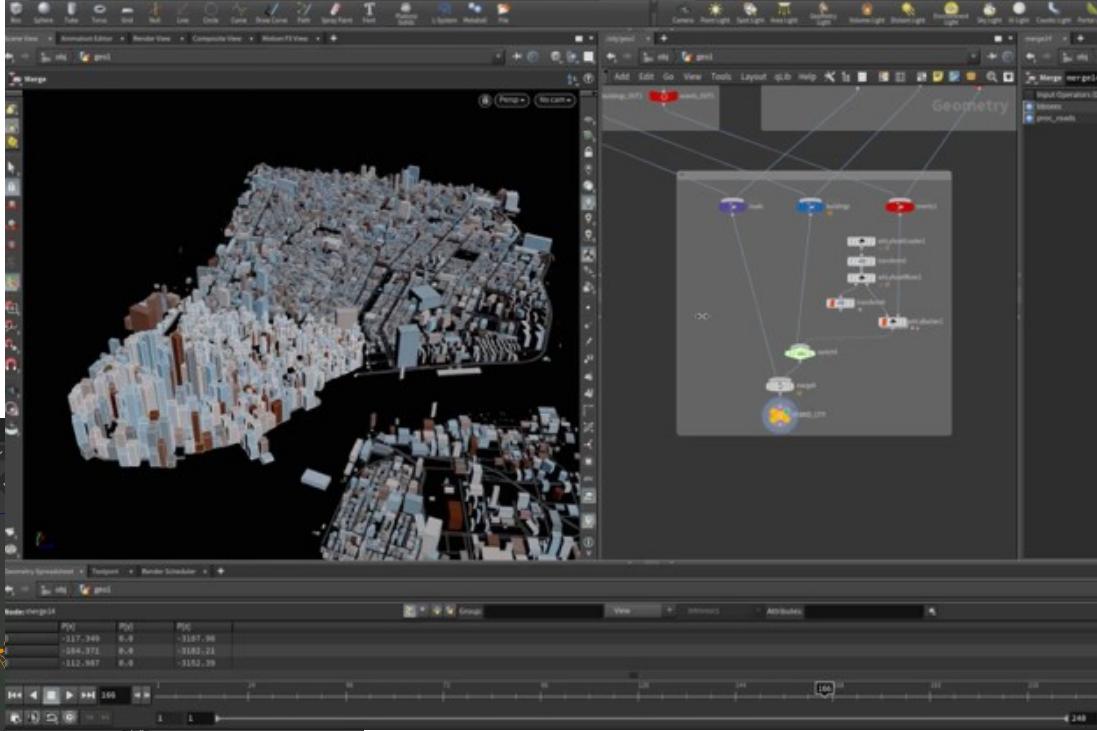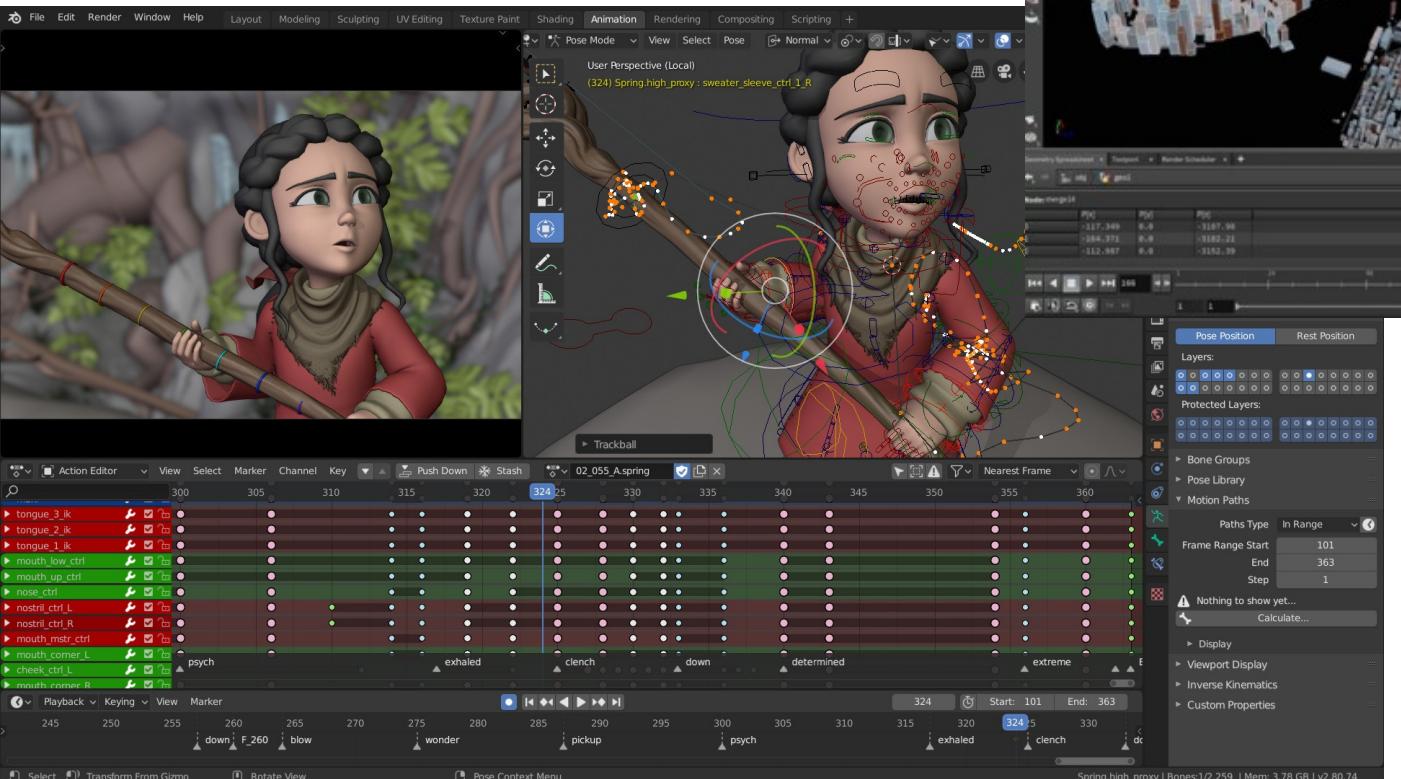

<https://www.sidefx.com/products/houdini/>

Autodesk modeling tools:
<https://www.autodesk.com/>

Cinema 4D:
<https://www.maxon.net/en/cinema-4d>

38

<https://www.blender.org/>

Creating 3D scene objects

- 3D scanning can be used to “import” real object into digital world.




<https://quixel.com/megascans/home/>



<https://www.myminifactory.com/object/3d-print-bust-of-antinous-as-dionysus-50345>


Creating 3D scene objects

- Simulations
 - Some objects are very hard to model by hand and capture from a real world.
 - Procedural and physical simulations are employed to generate shape.

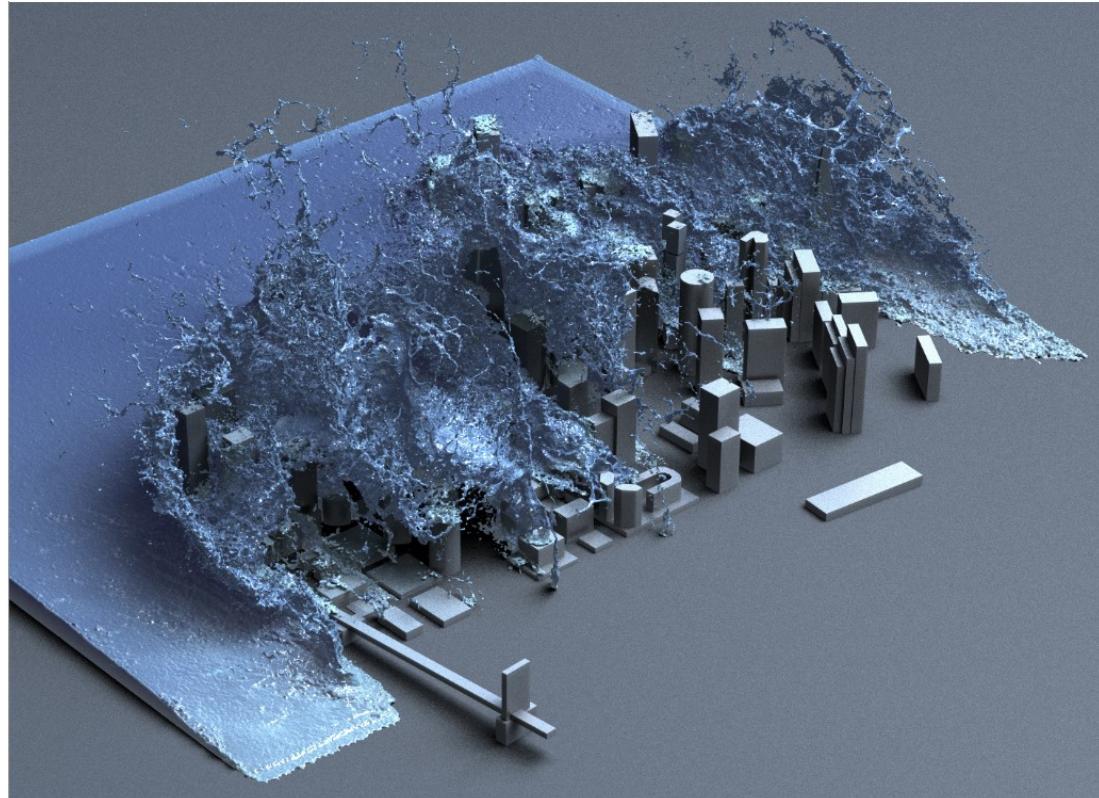

https://people.csail.mit.edu/kuiwu/gvdb_sim.html

Light in 3D scene

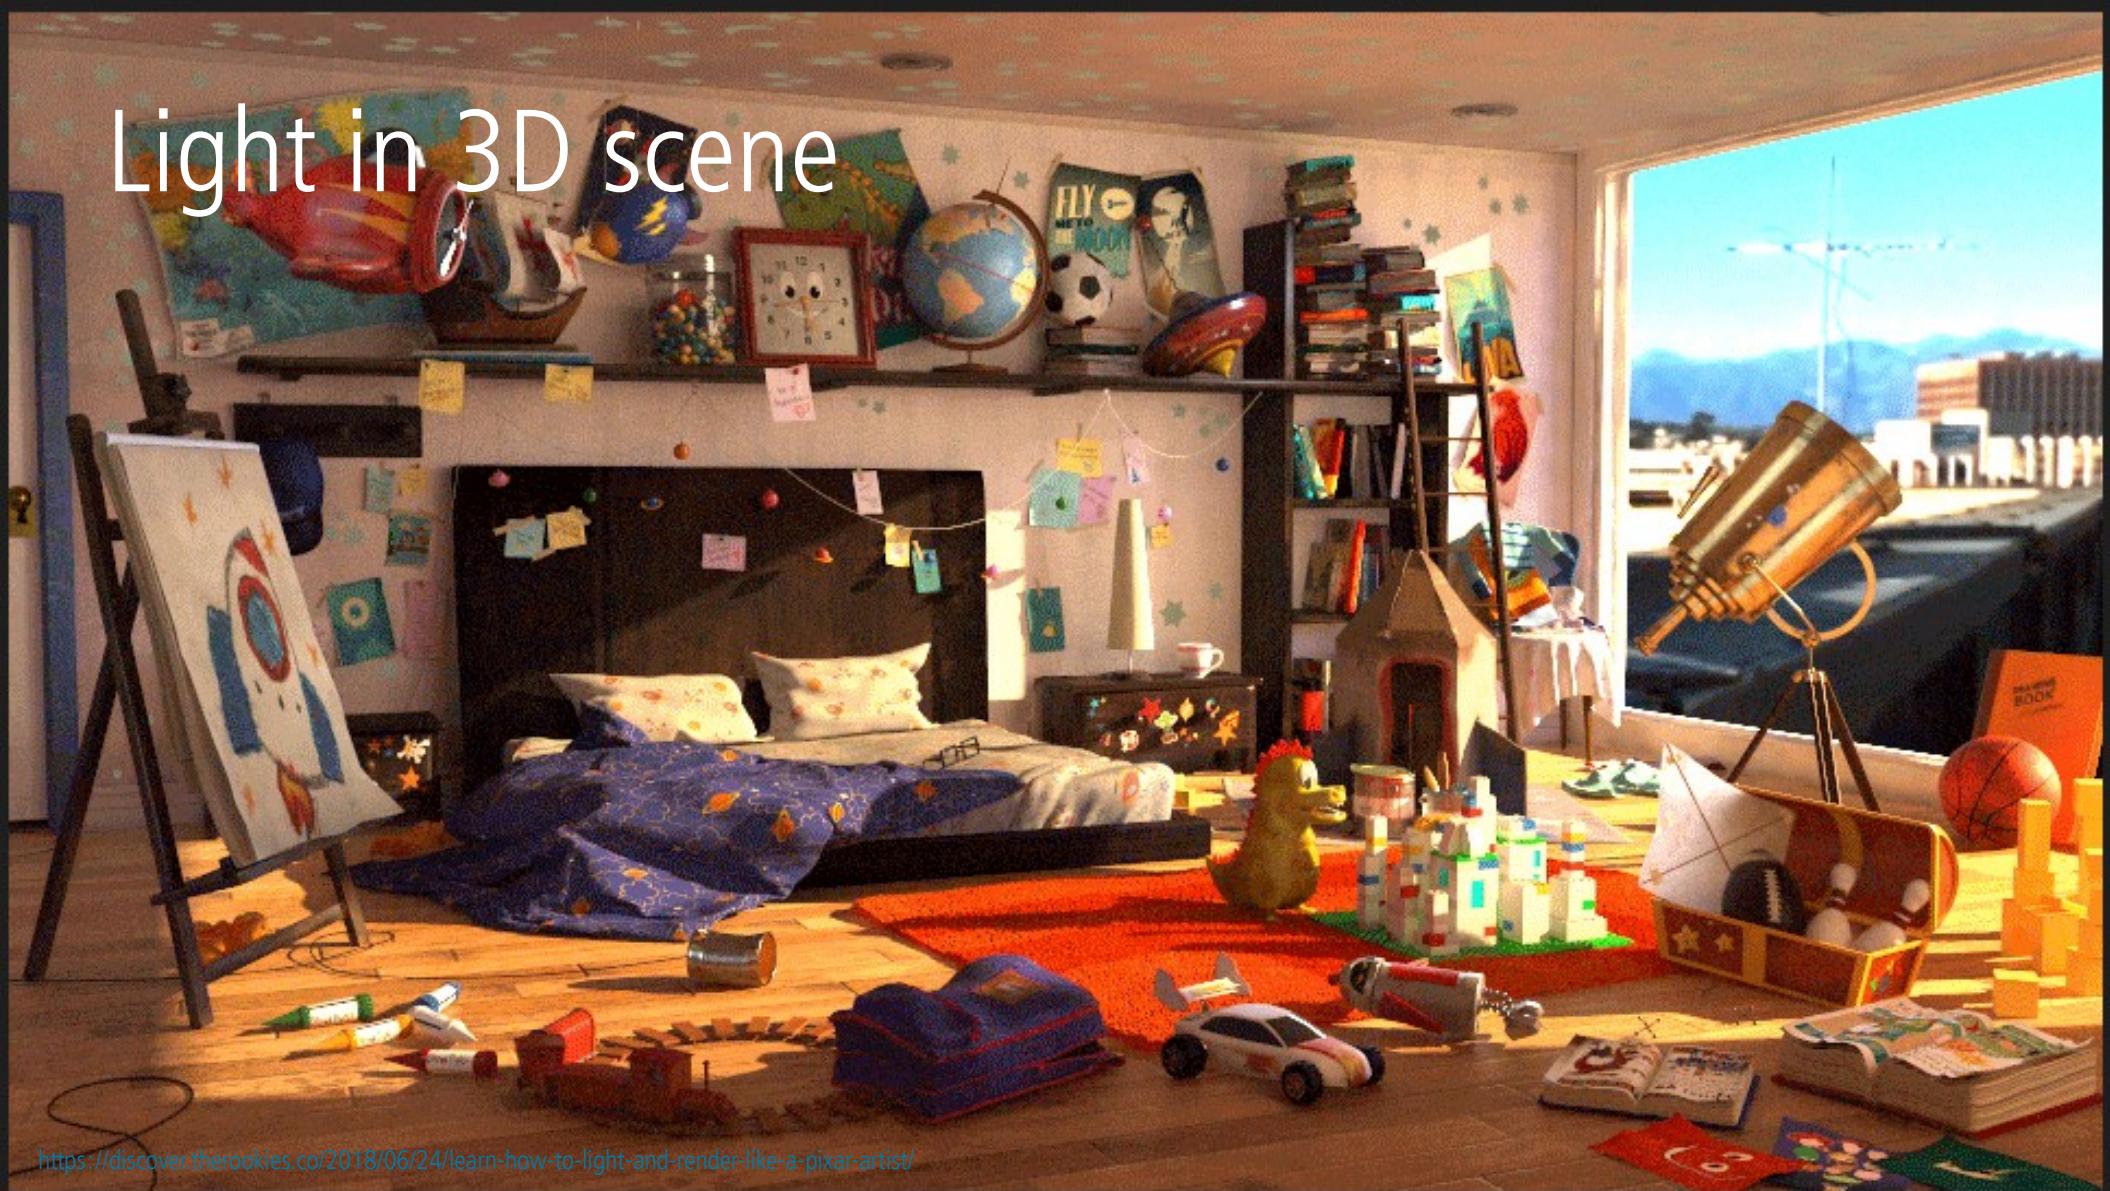



Lights

- Light sources define:
 - Position and direction
 - Color and intensity




Lights

- Light sources can further have:
 - Size
 - Shape







Physical lights have size and shape

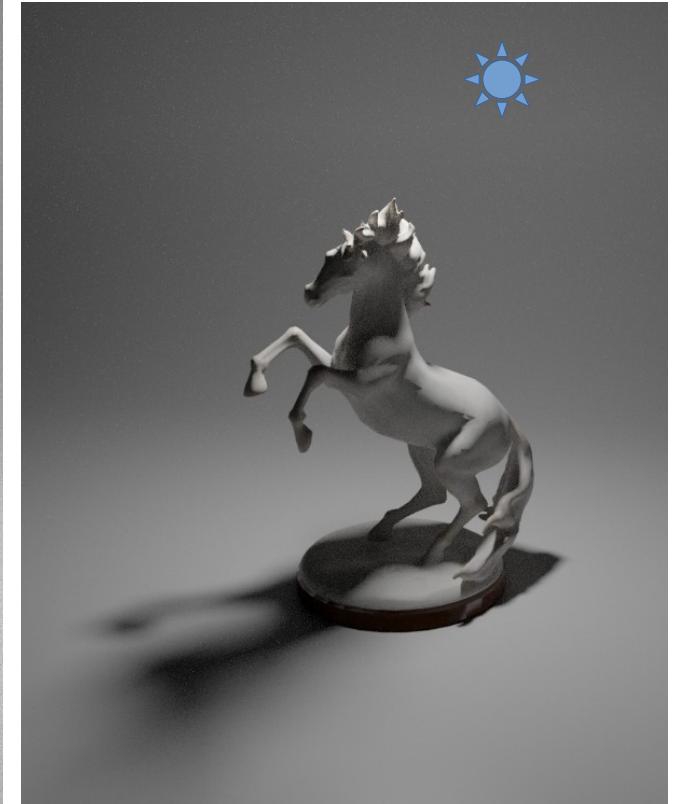

Non-physical lights only determine position/direction and intensity

Non-physical Lights

- Fundamental light sources are:
 - Point lights
 - Directional lights

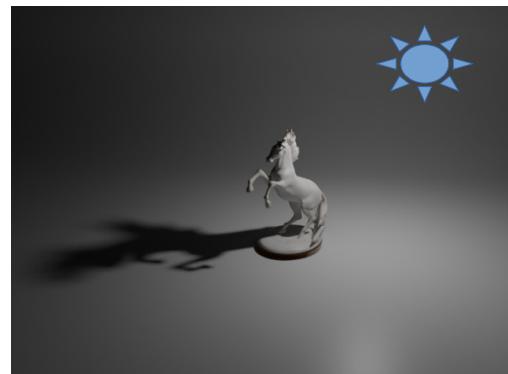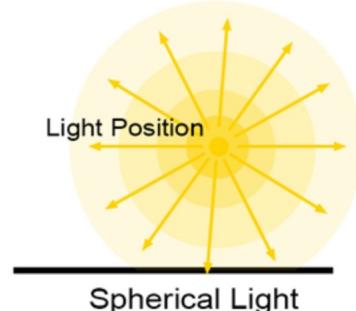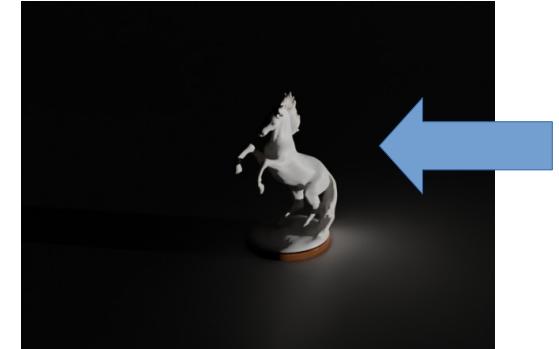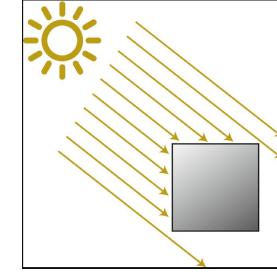

Non-physical lights: no shape or size!


Camera

- Camera defines point of view and it is used to simulate effects of real-world cameras.






Camera

- Fundamental camera model in computer graphics: pinhole camera:
 - Eye (aperture)
 - Focal length
 - Film size
 - (Lens)

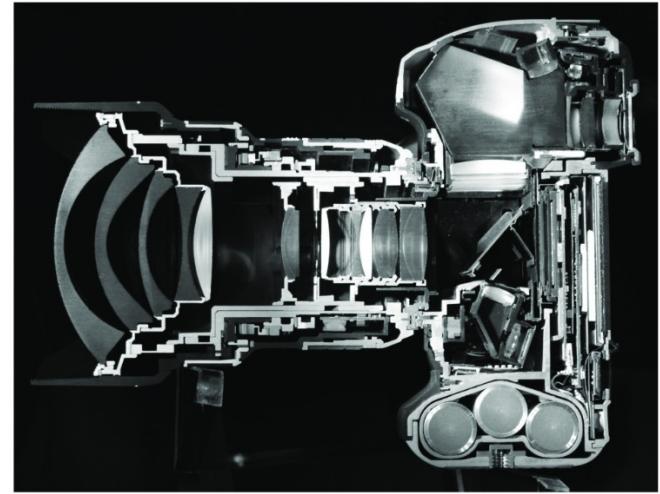





Cross-section of Nikon D3, 14-24mm F2.8 lens

Pinhole camera simplification

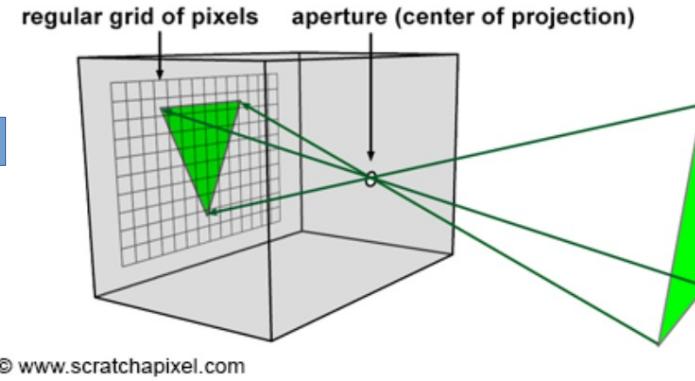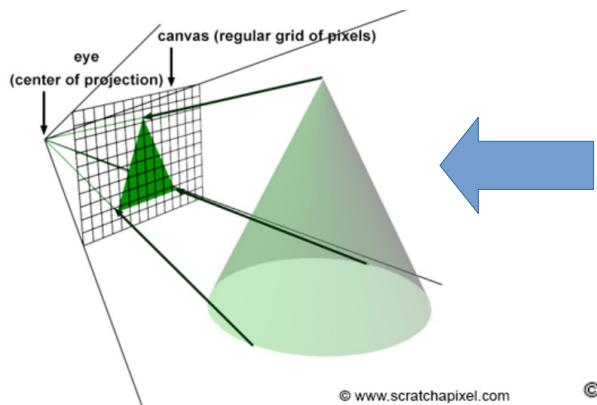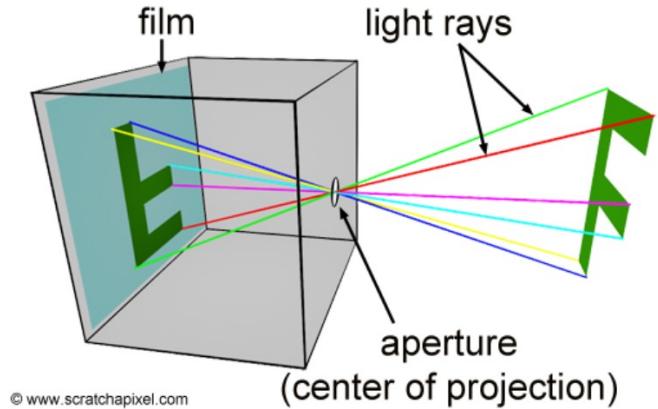

Camera

- Camera defines portion of visible scene → **viewing frustum**
- Amount of visible scene depends on:
 - Film size
 - Focal length

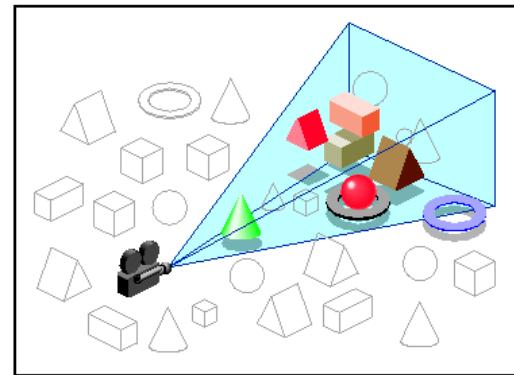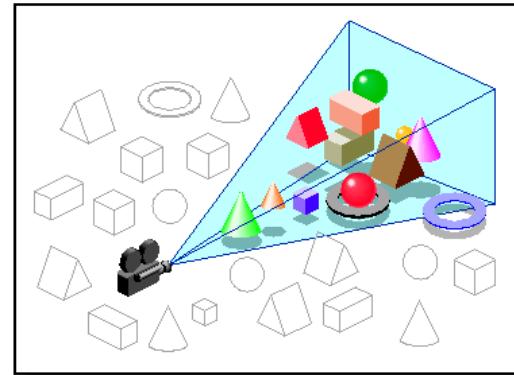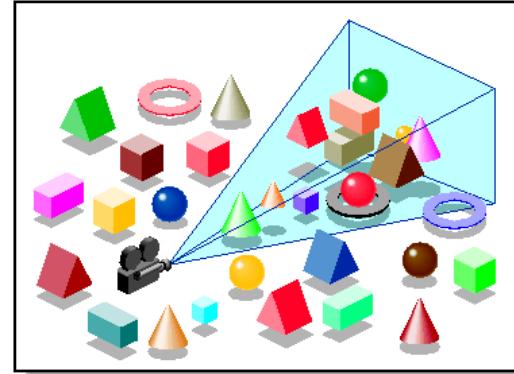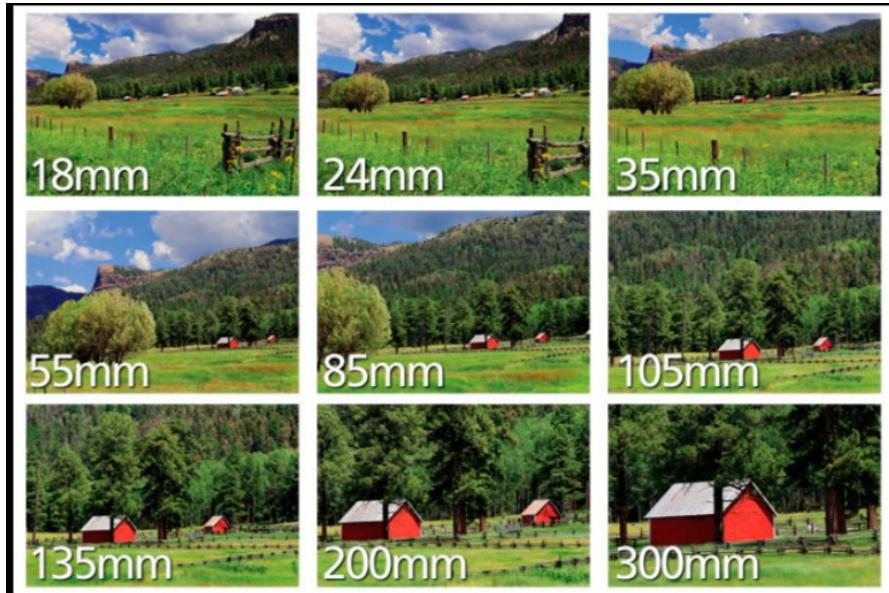

Animated objects

- So far we have discussed static objects → single image
- To introduce **movement – animation** we need **time component**
- Animation:
 - Movement of objects or their parts: **scaling, translating, rotating**
- Rendering image after each movement in 3D scene → **sequence of images → animation**



Animation

- Animation describes change of a shape, material, position, illumination, viewing over time, etc.
- Animation can be created:
 - Interactive modeling: rigging, skinning, keyframing, etc.
 - Procedurally: e.g., physical simulation
- Animation can be:
 - Pregenerated
 - Generated at render-time



<https://www.fudgeanimation.com/experiments/top-5-rigging-tips/>



<https://dreamfarmstudios.com/blog/what-you-might-not-know-about-the-vfx-component-of-the-3d-animation-pipeline/>

Material: animation vs appearance

- In context of **appearance modeling**, material defines how light interacts with surface
- In context of **animation**, especially physically-based animation, material defines shape deformation, e.g., viscosity for liquids or stiffness for deformable objects




Houdini liquid simulation: <https://mathildeb.artstation.com/projects/rZWz5>



Houdini liquid simulation:
<https://martinfatnes.artstation.com/projects/8eRzEx>

Material: animation vs appearance

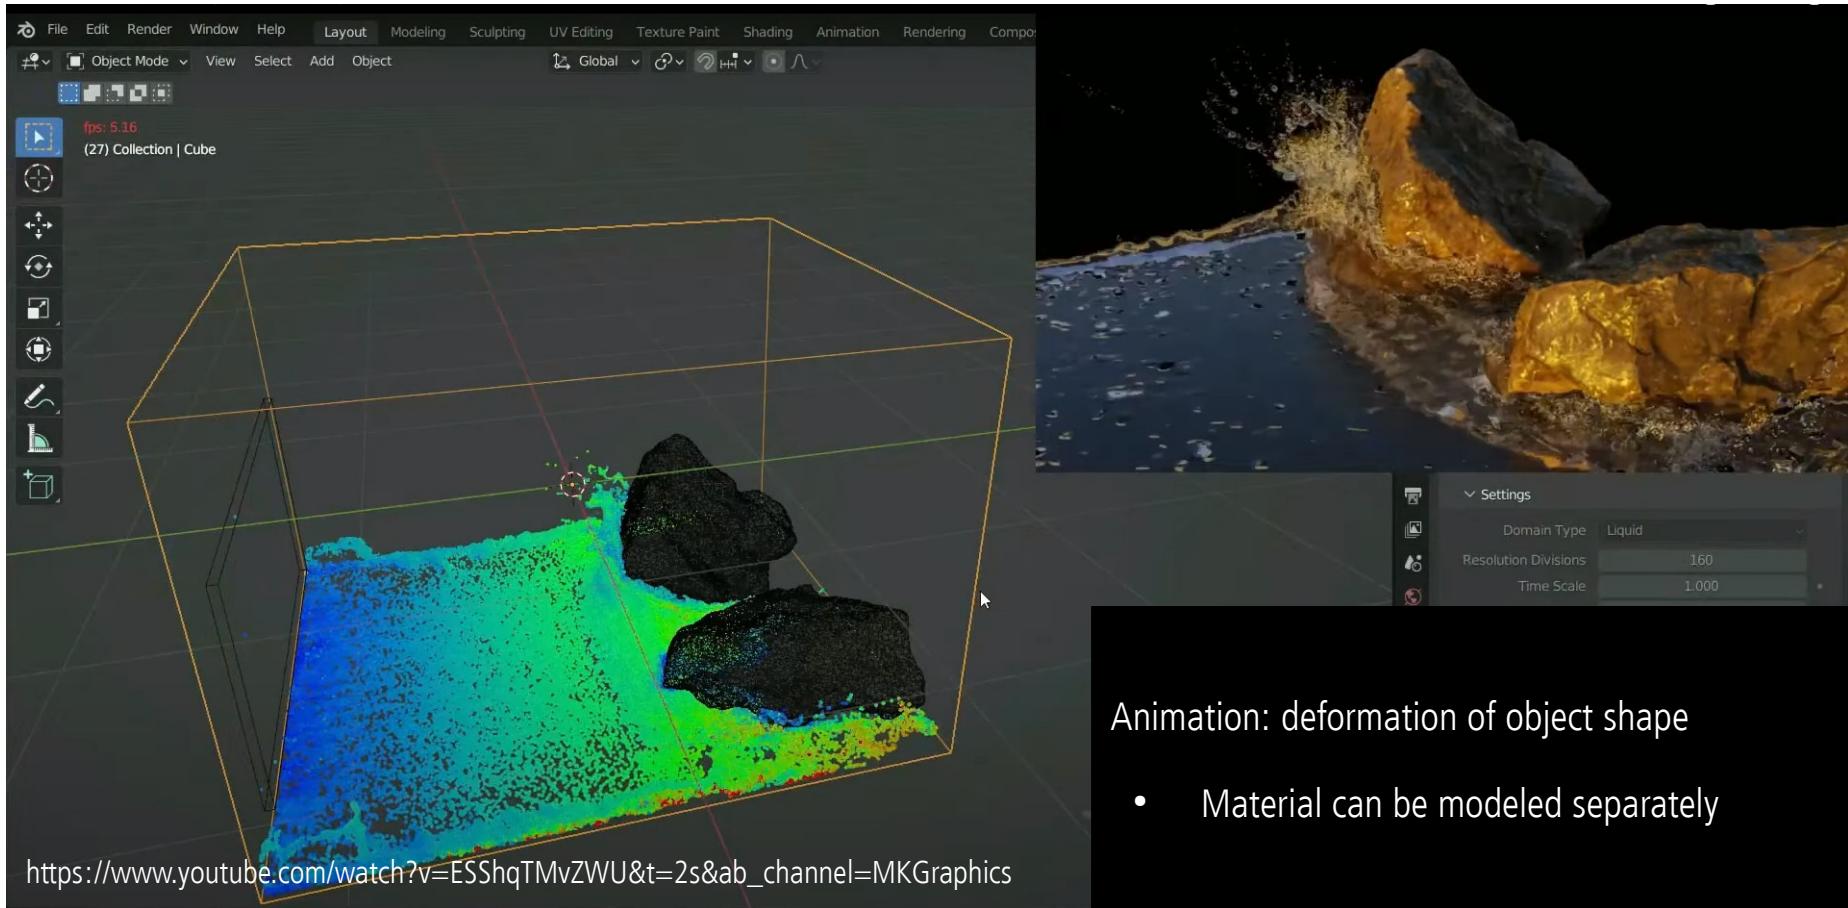

Animation: deformation of object shape

- Material can be modeled separately

Interaction with 3D scene

- Use user input to modify 3D scene
 - Game engines: Godot, Unity, Unreal



<https://www.orithegame.com/>



<https://unity.com/solutions/digital-twins>

3D scene: recap

- **3D scene**
 - 3D objects
 - Lights
 - Cameras
- **Rendering** takes 3D scene information for generating image.

Rendering

A process of generating image from a 3D scene

Rendering:
generating images
from a 3D scene.

3. Image




1. Scene modeling



2. Rendering

Material
modeling





<https://www.artstation.com/lovro>








Rendering: photo-realistic images

- Photo-realistic images – images that look like a photograph* of a real world.
 - To make objects appear as they do in real world, we need to simulate laws of physics: optics – light-matter interaction



Juan Carlos Gutiérrez:
<https://appleseedhq.net/gallery.html>

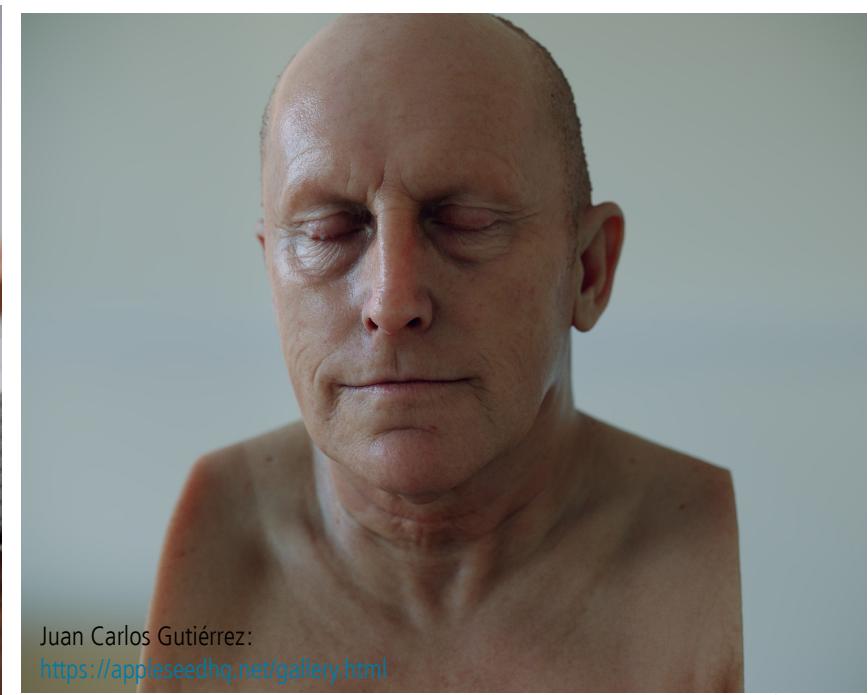

Juan Carlos Gutiérrez:
<https://appleseedhq.net/gallery.html>

* Note that there is also distinction between images that look like a real photo and that are "correct" like a real photo. In graphics, almost always it enough to create images that look like a real photo but the way they are produced doesn't necessarily be correct in terms of how real world works. Again, this is trade-off between quality and speed and decision depends on application.

Rendering: non-photorealistic images


- Non-photo-realistic (NPR) images* – images that contain wide range of expressive styles.



* Specific look of NPR images often comes from exaggerating some characteristics of 3D scene or rendering algorithm. Therefore, it is better to start with photo-realistic rendering and then altering this method to obtain required style in NPR.

Rendering

- In both cases, image is generated using certain **rendering** method.
- Rendering process takes 3D scene information and creates 2D image.

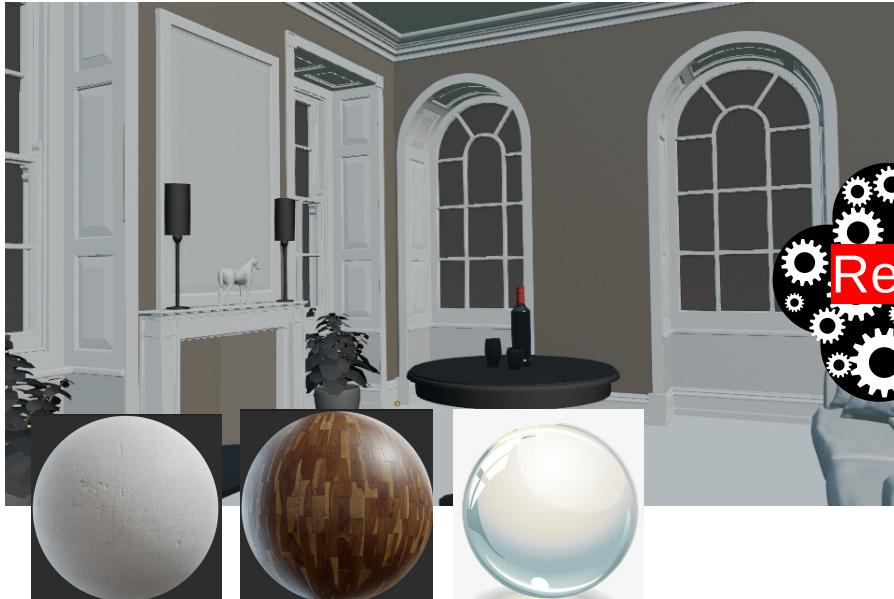


Rendering: simulating visual system

- **Foreshortening effect:** objects that are further appear smaller than those which are closer
- Important for photo-realistic rendering since it simulates how our visual system works
 - It defines shape and size with respect to the distance to the eye.




Foreshortening effect: trace rays from corners of objects to eye and intersecting them with imaginary canvas that lies in between → **perspective projection**.

Direct result of such method is called **wireframe rendering**.

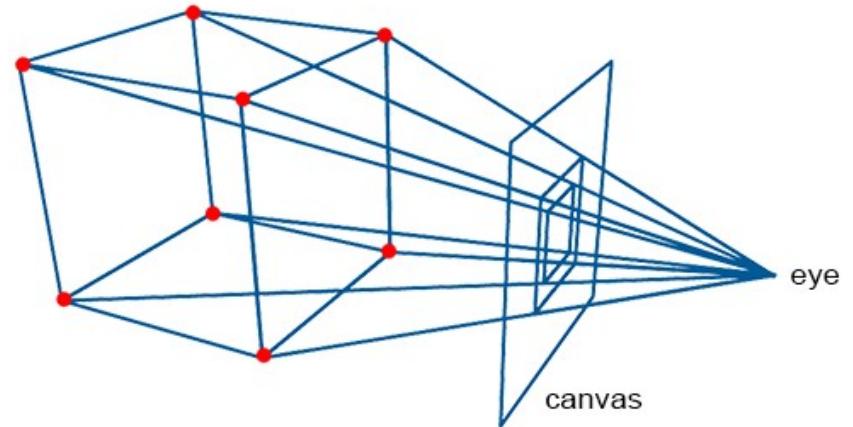

Rendering: visibility problem

- Camera placed at certain point of view covers only small portion of 3D scene
- **Visibility problem***: determine if two points in 3D scene are visible (not obstructed)
 - Determine which objects are visible from camera
 - Determine which surfaces are visible to each other in 3D scene
- Solving the visibility relies in object **shape information**
- Solution to visibility problem in computer graphics can be solved using two main methods:
 - Rasterization**
 - Ray-tracing

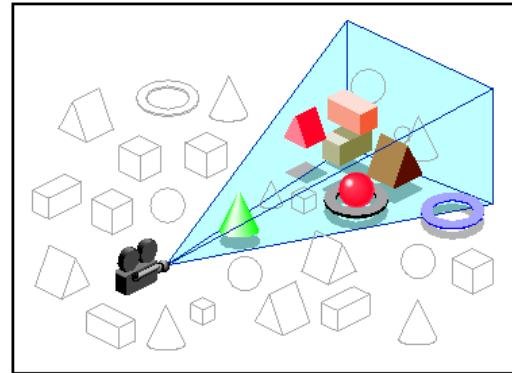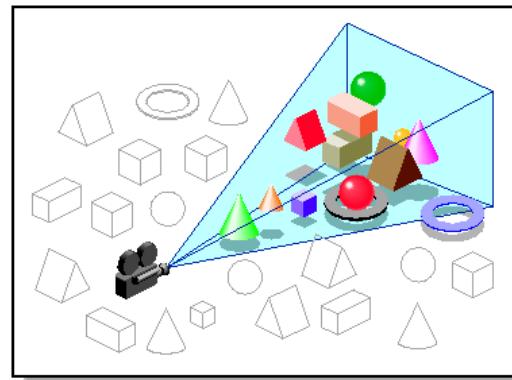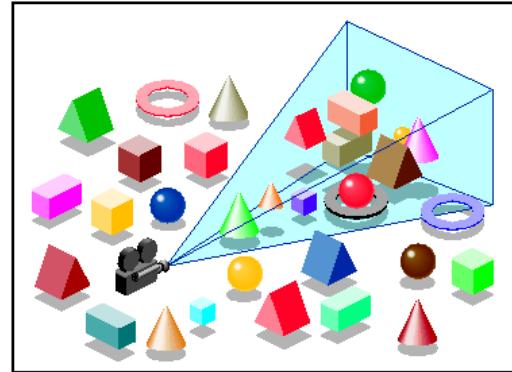


https://techpubs.jurassic.nl/manuals/nt/developer/Optimizer_PG/gi_html/ch05.html

* Also known as: hidden surface elimination, hidden surface determination, hidden surface removal, occlusion culling and visible surface determination

** This is umbrella term and some popular methods are painter's algorithm and z-buffer. Almost all GPUs use an algorithm from this category.

Rendering: visibility problem

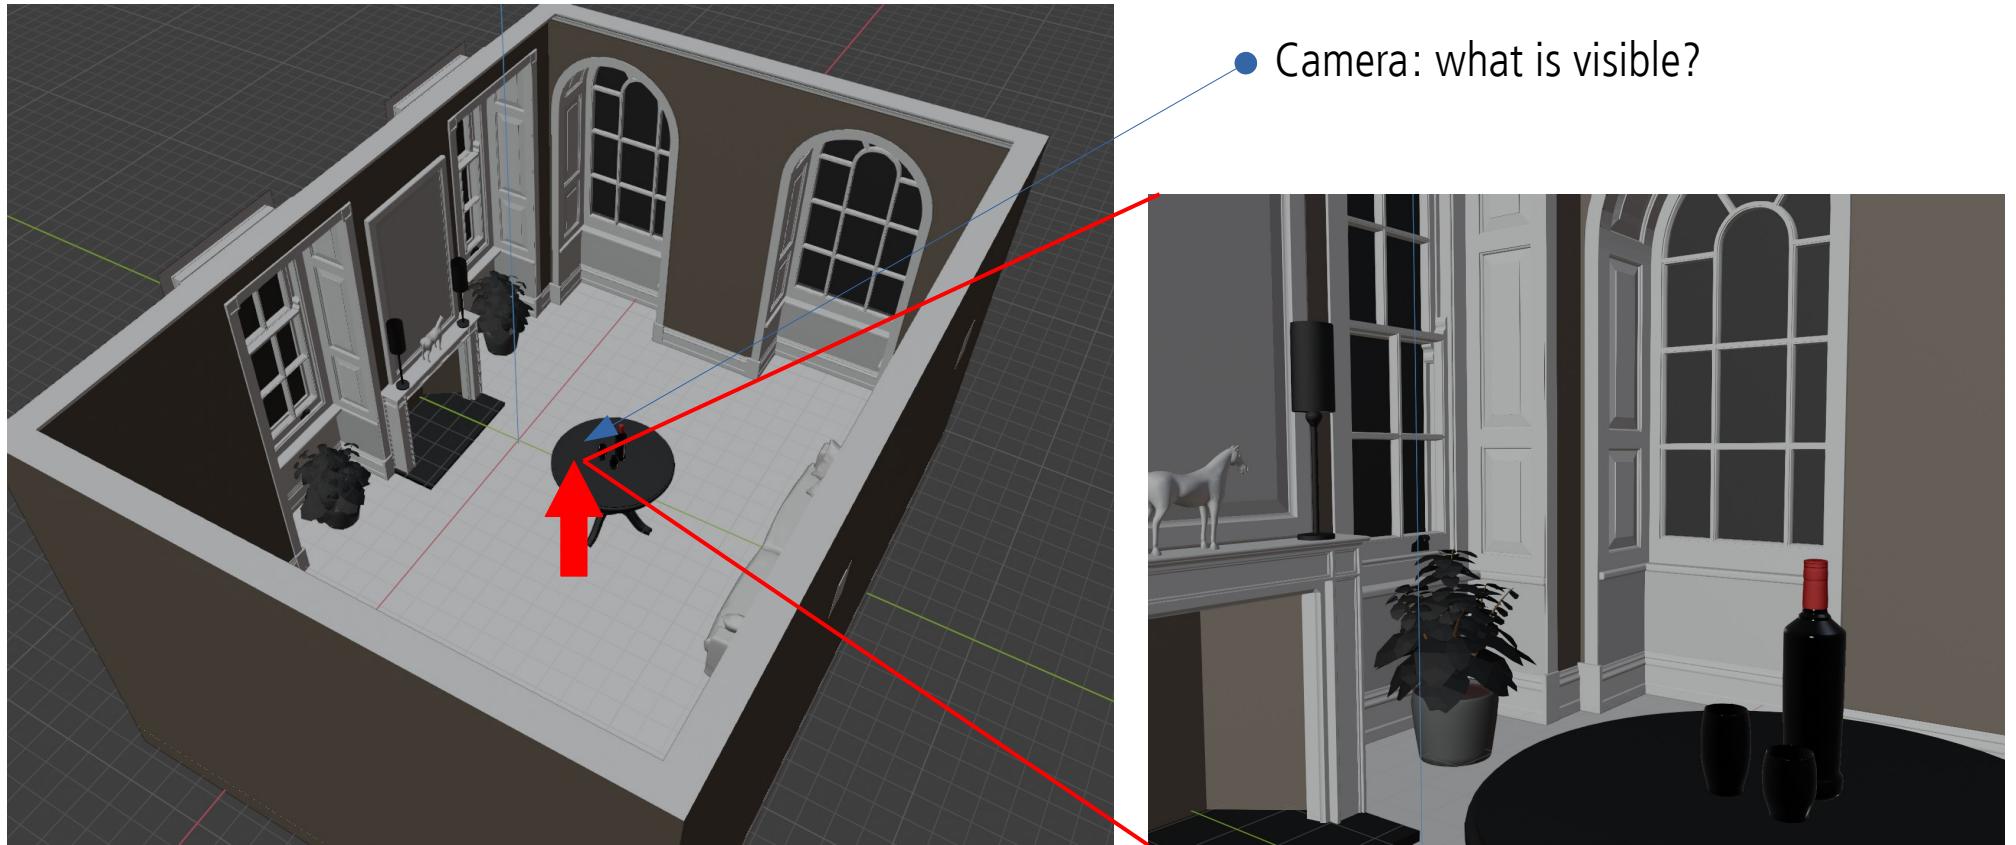

Rendering: appearance

- Once visibility problem is solved; which geometry is visible from certain viewpoint, **appearance of object** is calculated
 - Appearance: The look of objects in terms of color, texture and brightness.
- Object appearance depends on:
 - Object shape and material
 - Illumination
 - Camera viewpoint
- Appearance of object is simulated using **shading**





Rendering: shading

- **Shading** defines interaction of light with object material
 - Gathering light falling on surface → **light transport**
- Implementation of mathematical model which simulates light interaction with surface is called a **shader**.
- Real-world light-matter interaction is complex topic.
 - In CG there is always trade-off between quality of image and rendering speed.



Rendering: shading


- Light falling on an object can be: absorbed or reflected
- **Absorption** gives objects their unique color. If white light (containing all colors) falls onto object which absorbs all colors except red – which is reflected, we perceive this object as red.
 - Color of object is one foundational material information of an object.
- **Scattering**. Light which is not absorbed is scattered. Direction of scattering depends on:
 - Surface orientation → **surface normal** vector.
 - **Scattering model** – a model which describes what happens with light as small scale. This model can have uniform parameters or varying parameters – giving textured look

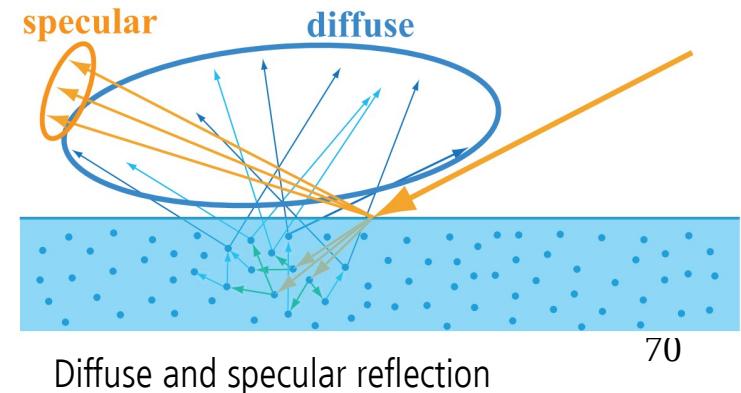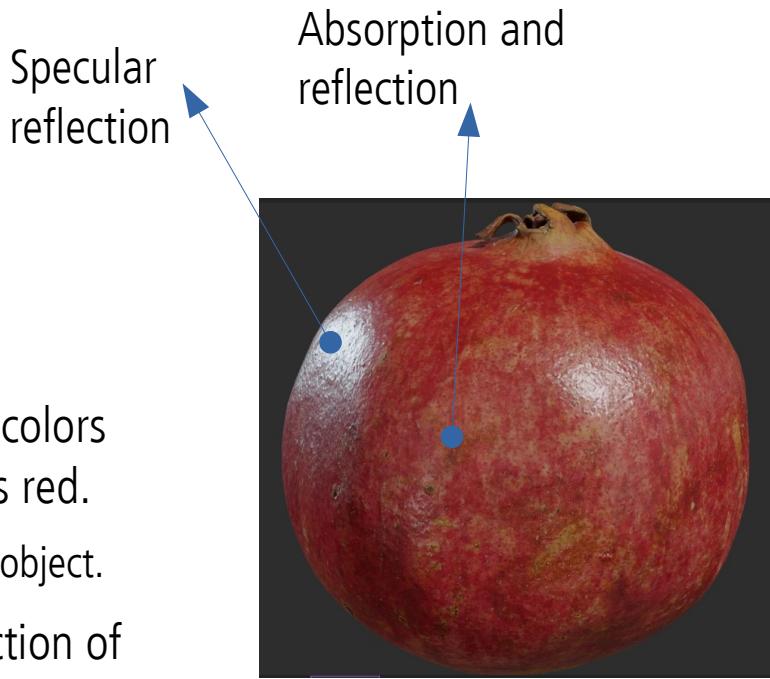

Diffuse and specular reflection

Rendering: light transport


- Crucial information for shading is amount of light falling on surface → **light transport**
- Light is emitted from light sources, reflects from objects and eventually might fall into camera → **forward tracing**
 - Extremely expensive to calculate complete light behavior in whole scene.
- **Backward tracing:** starting from camera, find visible objects and incoming light from there

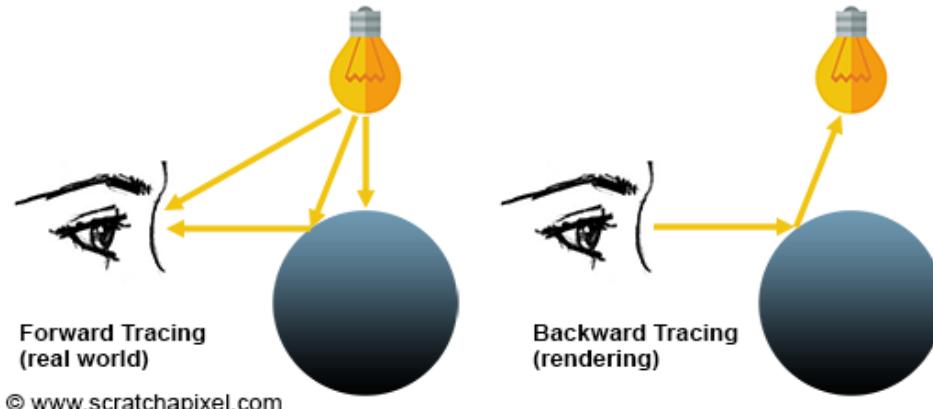


Forward tracing



Backward tracing

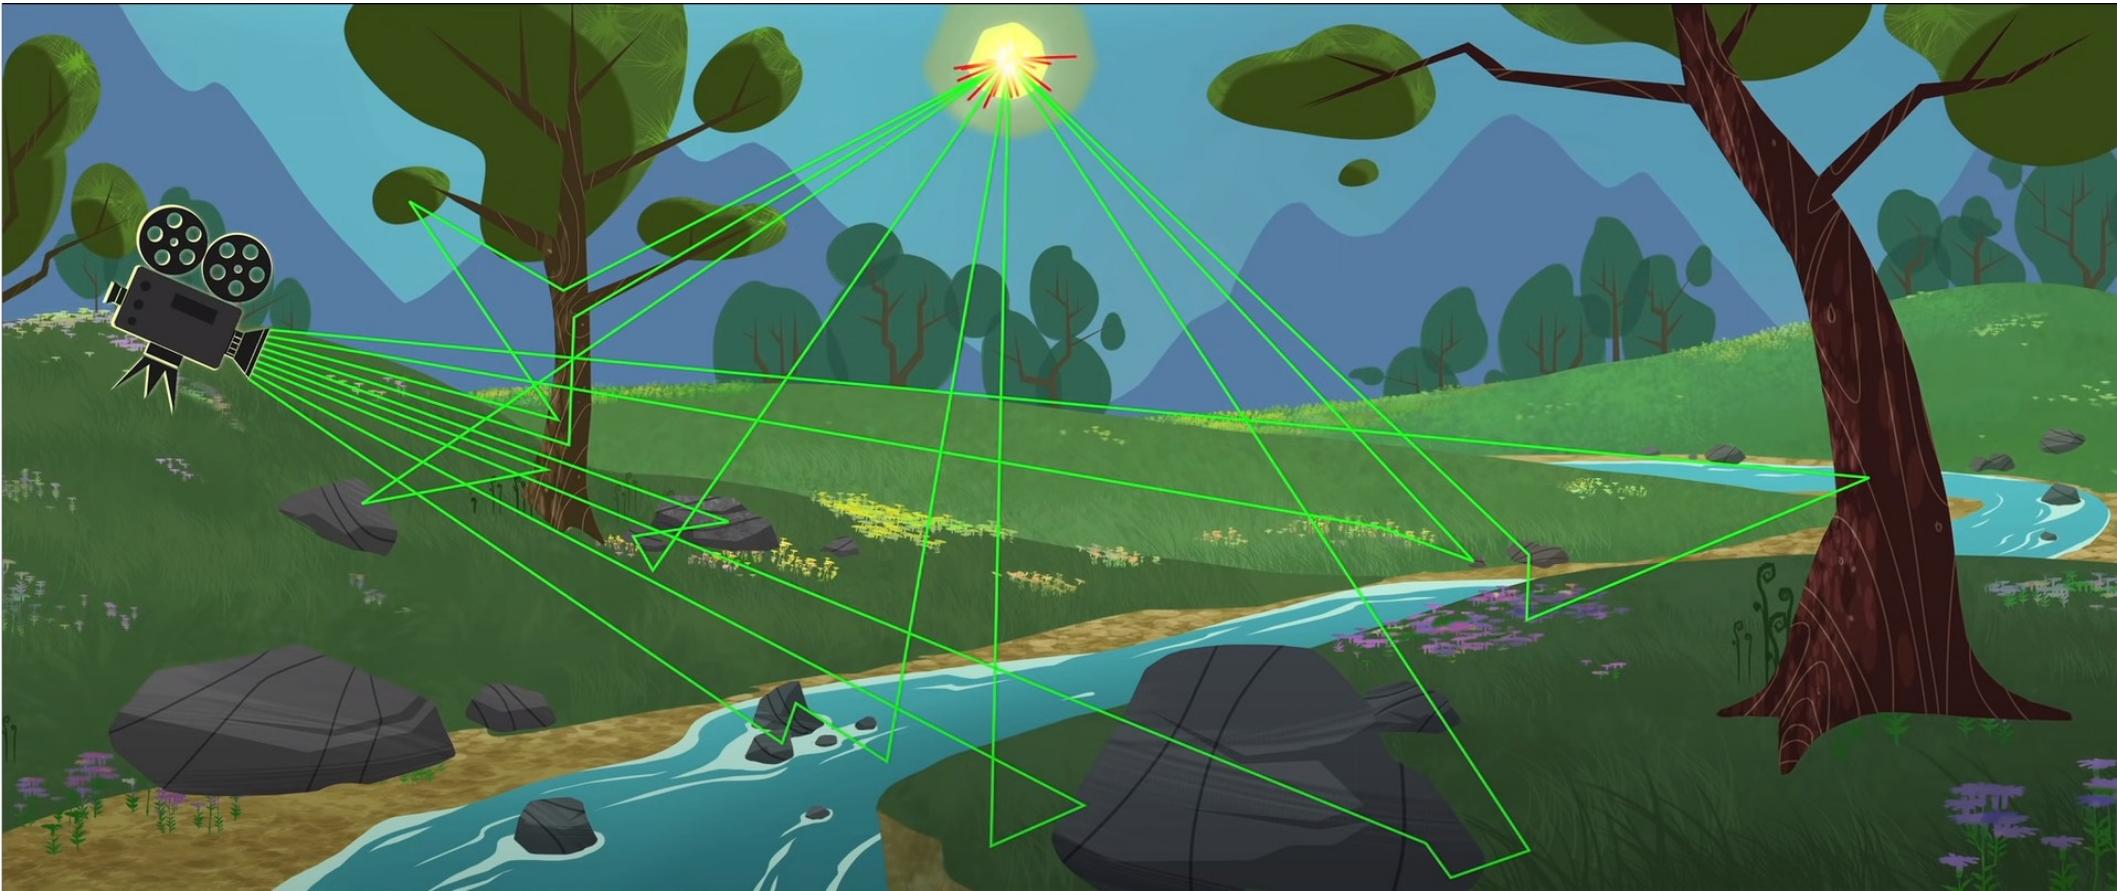


Forward tracing is expensive!

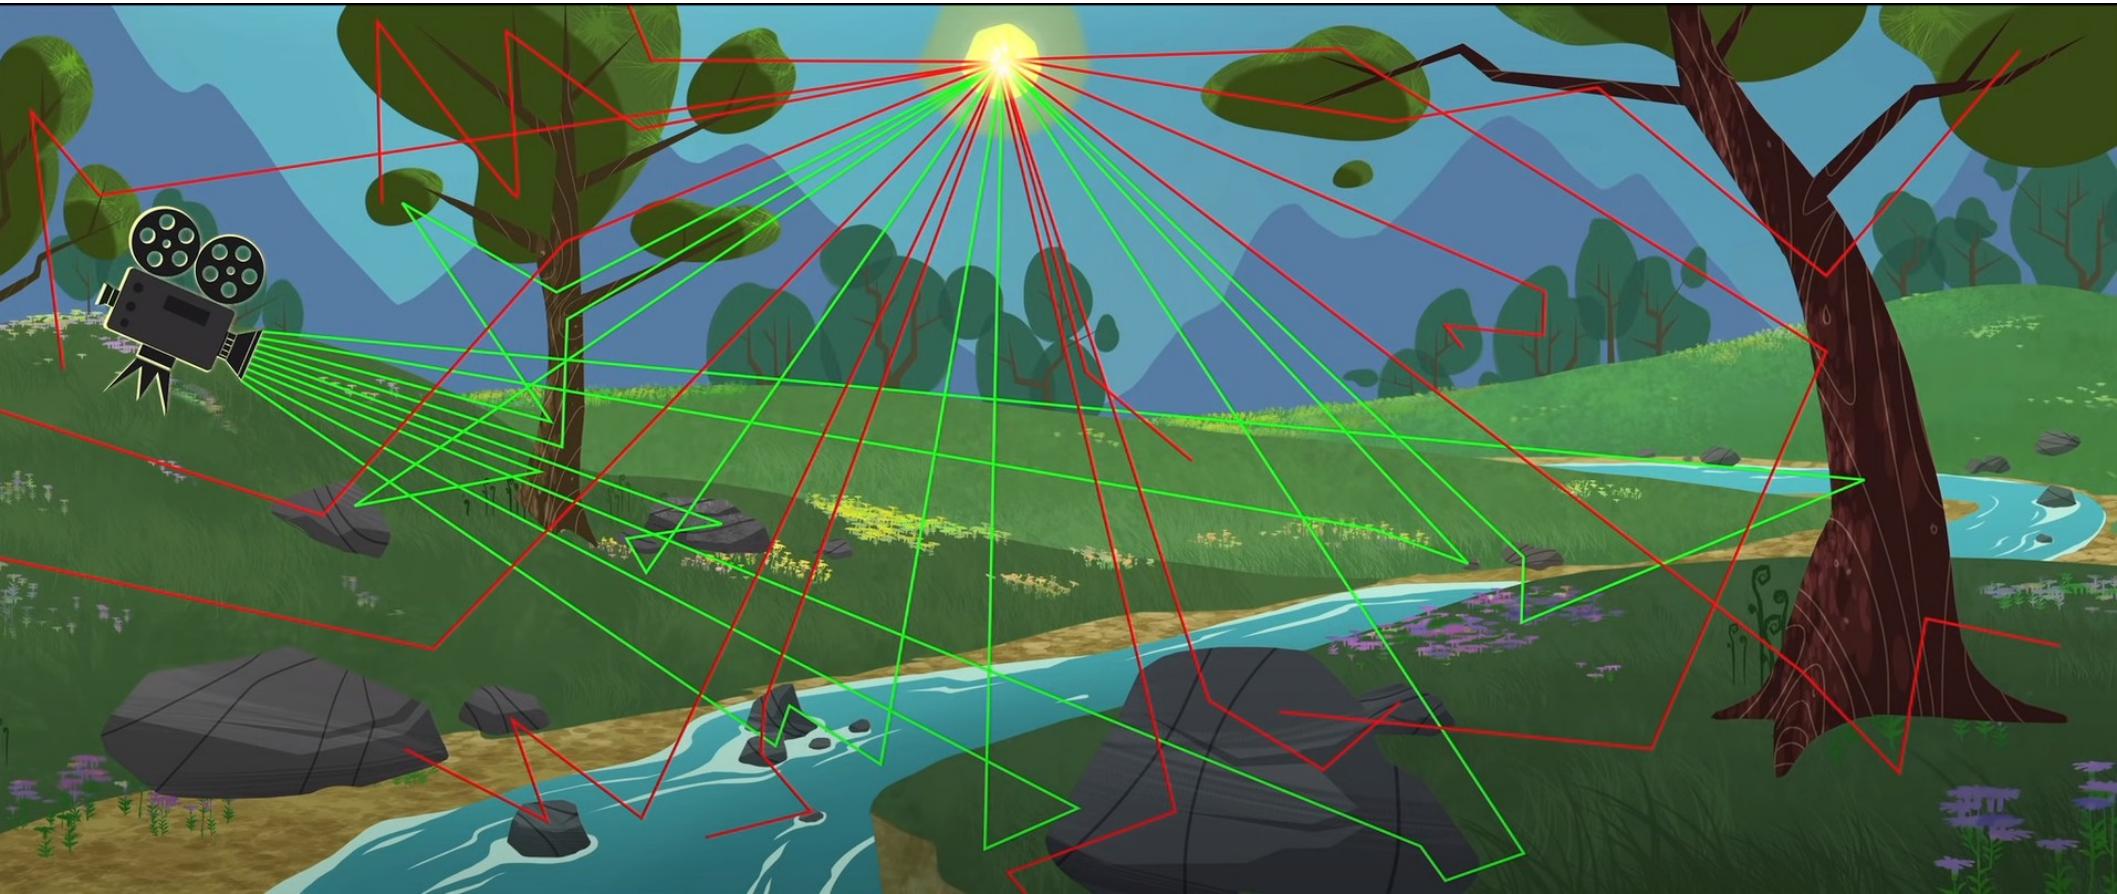



Forward tracing

- Object surface which is visible from camera might receive light from any light source or surface which is facing.
- Amount of light which falls into camera is extremely small. Thus rendering employs light transport only for visible surfaces starting from the camera and only for relevant light paths.

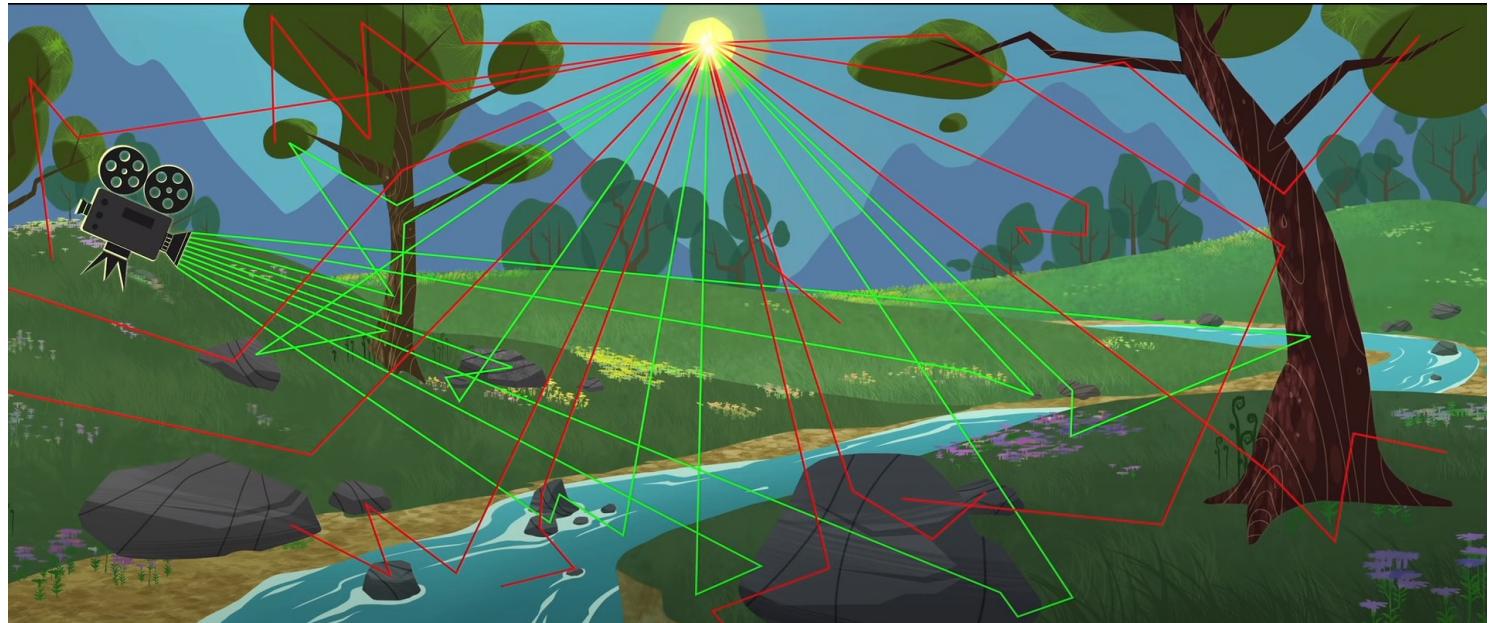


Local and global illumination

- Taking in account only light from light sources → **direct (local) illumination**
- Taking in account light reflected from other objects → **indirect illumination**
- Simulating direct and indirect illumination → **global illumination**
 - Often solved with ray-tracing based methods: path tracing
 - Another approach: radiosity

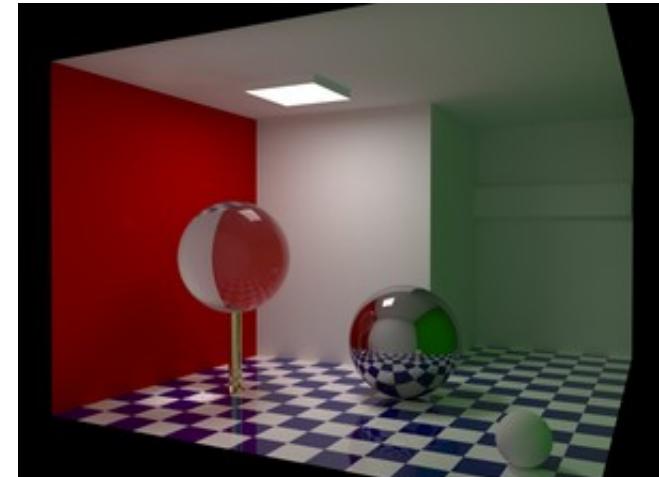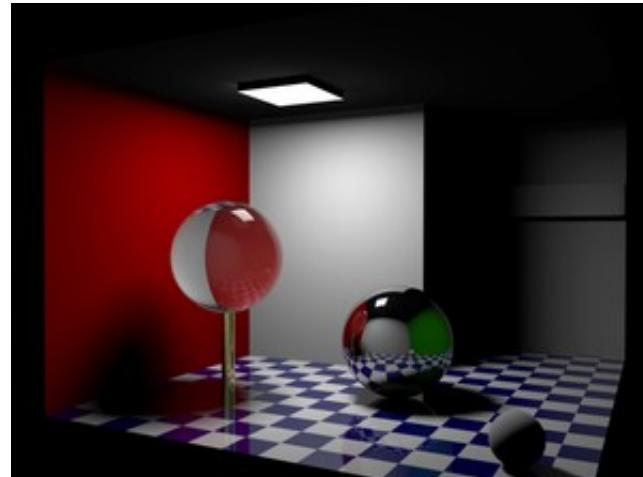

Rendering: recap

- Rendering:
 - Solving **visibility problem**: what is visible from camera point of view
 - Perspective projection
 - Object shape
 - **Shading**: calculating appearance of visible objects
 - Material and shape of object
 - Viewing direction
 - Light falling on the object: **light-transport** (again, visibility problem)

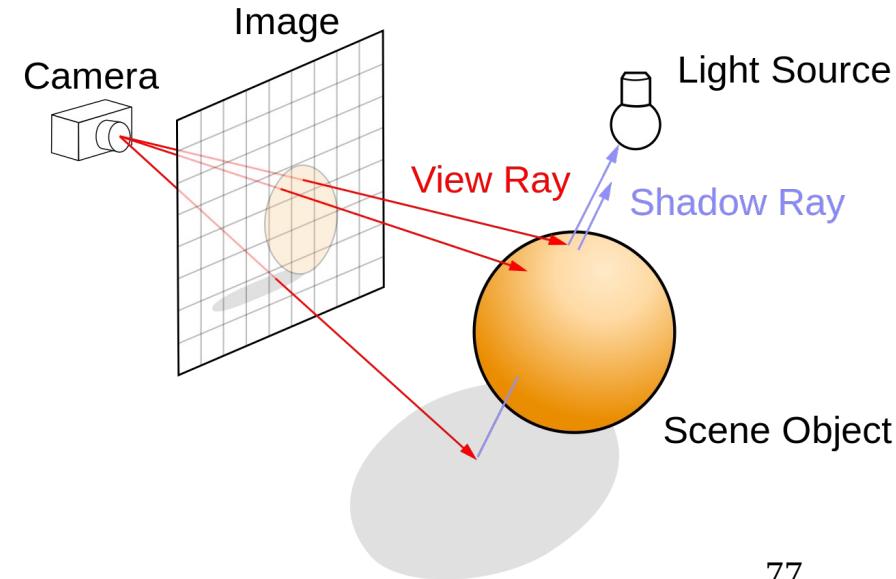


Practical rendering

- In practice, rendering is implemented using
 - Rasterization
 - Ray-tracing
- These two methods are essentially solving visibility problem
- Shading is influenced by this choice since it depends on visibility problem

Rasterization

- Visibility problem is solved by projecting object on surface of canvas from given point of view
 - Project point P onto screen to compute P'
 - Perspective projection matrix
- Object-centric approach

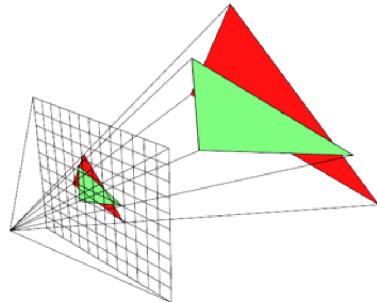


© www.scratchapixel.com

```
for T do in triangles  
  for P do in pixels  
    determine if P inside T  
  end for  
end for
```

Ray-tracing

- Trace rays from camera for each pixel on canvas and intersect objects in the scene → closest objects are visible ones
 - Perspective camera
- Image-centric approach

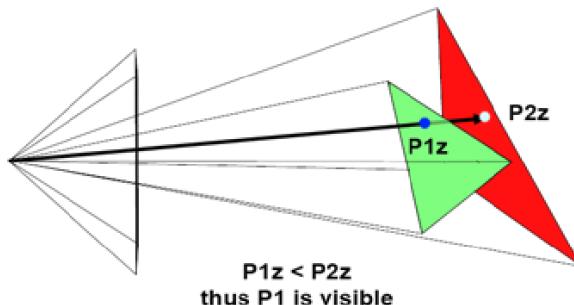

© www.scratchapixel.com

```
for P do in pixels
  for T do in triangles
    determine if ray through P hits T
  end for
end for
```

Scene

Blender, WorkBench

Scene: Crytek Spinoza (Sponza Palace in Dubrovnik)

<https://casual-effects.com/data/index.html>

Rasterization-based render



Blender, EEVEE

Scene: Crytek Spinoza (Sponza Palace in Dubrovnik)

<https://casual-effects.com/data/index.html>

Ray-tracing-based render



Blender, Cycles

Scene: Crytek Spinoza (Sponza Palace in Dubrovnik)

<https://casual-effects.com/data/index.html>

Rasterization vs ray-tracing

- **Rasterization** can quickly determine visibility but has limited shading capabilities when it comes to light transport
 - Geometry (object shape) is projected onto canvas and large amount of information is lost
 - Mainstream method for used by graphic cards and in real-time rendering
- **Ray-tracing** has advanced shading possibilities when it comes to light-transport but it is slow
 - Shadows, soft shadows, reflections, refractions, volumetric scattering, etc.
 - Easier to create photo-realistic images
 - Often requires acceleration-structure for solving visibility problem

Practical rendering

- Blender EEVEE: rasterization-based rendering engine
- Blender Cycles: ray-tracing based rendering engine

Blender 3.4 Manual

blender

Search docs

GETTING STARTED

- About Blender
- Installing Blender
- Configuring Blender
- Help System

SECTIONS

- User Interface
- Editors
- Scenes & Objects
- Modeling
- Sculpting & Painting
- Grease Pencil
- Animation & Rigging
- Physics

Rendering

Introduction

Blender 3.4 Manual

blender

Search docs

Rendering / Eevee / Introduction

Introduction

Eevee is Blender's realtime render engine built using [OpenGL](#) focused on speed and interactivity while achieving the goal of rendering [PBR](#) materials. Eevee can be used interactively in the 3D Viewport but also produce high quality final renders.



Eevee in the 3D Viewport – "Tiger" by Daniel Bystedt.

Blender 3.4 Manual

blender

Search docs

GETTING STARTED

- About Blender
- Installing Blender
- Configuring Blender
- Help System

SECTIONS

- User Interface
- Editors
- Scenes & Objects
- Modeling
- Sculpting & Painting
- Grease Pencil

Blender 3.4 Manual

blender

Search docs

Rendering / Cycles / Introduction

Introduction




Cycles is Blender's physically-based path tracer for production rendering. It is designed to provide physically based results out-of-the-box, with artistic control and flexible shading nodes for production needs.

Image
A result of 3D scene rendering

Image and display

- Rendered image is displayed on **raster devices** → **raster images**
 - Raster: array of pixels → **discretization**
- Raster images: collection of pixels with **color values** (R,G,B)



157	152	174	184	180	152	126	151	172	183	155	164	150	142	126	151	172	183	155	164
150	145	160	170	175	150	125	151	172	183	155	164	145	130	125	151	172	183	155	164
145	140	155	165	170	145	120	146	167	178	148	157	140	135	120	146	167	178	148	157
140	135	150	160	165	140	115	136	157	168	148	157	135	130	115	136	157	168	148	157
135	130	145	155	160	135	110	131	152	163	143	152	130	125	110	131	152	163	143	152
130	125	140	150	155	130	105	126	147	158	138	147	125	120	105	126	147	158	138	147
125	120	135	145	150	125	100	121	142	153	133	142	120	115	100	121	142	153	133	142
120	115	130	140	145	120	95	116	137	148	128	137	115	110	95	116	137	148	128	137
115	110	125	135	140	115	90	111	132	143	123	132	110	105	90	111	132	143	123	132
110	105	120	130	135	110	85	106	127	138	118	127	105	100	85	106	127	138	118	127
105	100	115	125	130	105	80	101	122	133	113	122	100	95	80	101	122	133	113	122
100	95	110	120	125	100	75	96	117	128	108	117	95	90	75	96	117	128	108	117
95	90	105	115	120	95	70	91	112	123	103	112	90	85	70	91	112	123	103	112
90	85	100	110	115	90	65	86	107	118	98	107	85	80	65	86	107	118	98	107
85	80	95	105	110	85	60	81	102	113	93	102	80	75	60	81	102	113	93	102
80	75	90	100	105	80	55	76	97	108	88	97	75	70	55	76	97	108	88	97
75	70	85	95	100	75	50	71	92	103	83	92	70	65	50	71	92	103	83	92
70	65	80	90	95	70	45	66	87	98	88	97	65	60	45	66	87	98	88	97
65	60	75	85	90	65	40	61	82	93	83	92	60	55	40	61	82	93	83	92
60	55	70	80	85	60	35	56	77	88	78	87	55	50	35	56	77	88	78	87
55	50	65	75	80	55	30	51	72	83	73	82	50	45	30	51	72	83	73	82
50	45	60	70	75	50	25	46	67	78	68	77	45	40	25	46	67	78	68	77
45	40	55	65	70	45	20	41	62	73	63	72	40	35	20	41	62	73	63	72
40	35	50	60	65	40	15	36	57	68	58	67	35	30	15	36	57	68	58	67
35	30	45	55	60	35	10	31	52	63	53	62	30	25	10	31	52	63	53	62
30	25	40	50	55	30	5	21	42	53	43	52	20	15	5	21	42	53	43	52
25	20	35	45	50	25	0	16	37	48	38	47	20	15	0	16	37	48	38	47
20	15	30	40	45	20	0	11	32	43	33	42	15	10	0	11	32	43	33	42
15	10	25	35	40	15	0	6	27	38	28	37	10	5	0	6	27	38	28	37
10	5	20	30	35	10	0	1	21	32	22	31	5	4	0	1	21	32	22	31
5	0	15	25	30	5	0	0	12	23	13	22	0	1	0	0	12	23	13	22
0	0	10	20	25	0	0	0	11	22	12	21	0	1	0	0	11	22	12	21

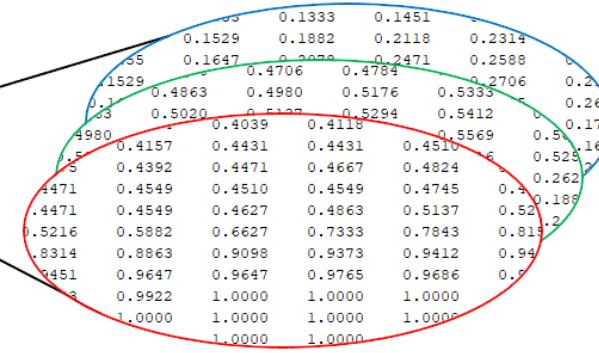
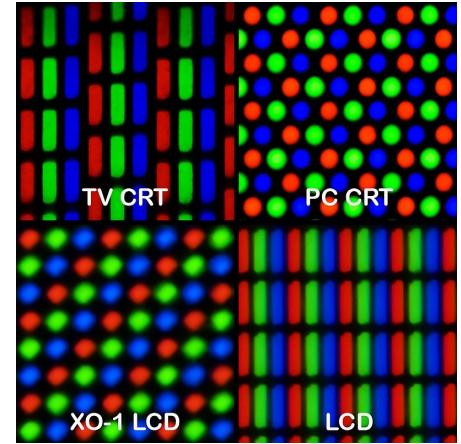


Image and display

- Limitations of display device and raster discretization cause problems:
 - Aliasing
 - Display gamut

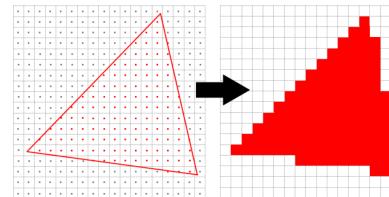


Image post-processing

- Example: color-grading for achieving desired look on rendered image



Merging all together
3D scene, rendering and Image

Image synthesis: big picture

- **3D scene, rendering** and resulting **image** are highly intertwined elements of image synthesis process

