LABORATORIO DI REALTÀ AUMENTATA
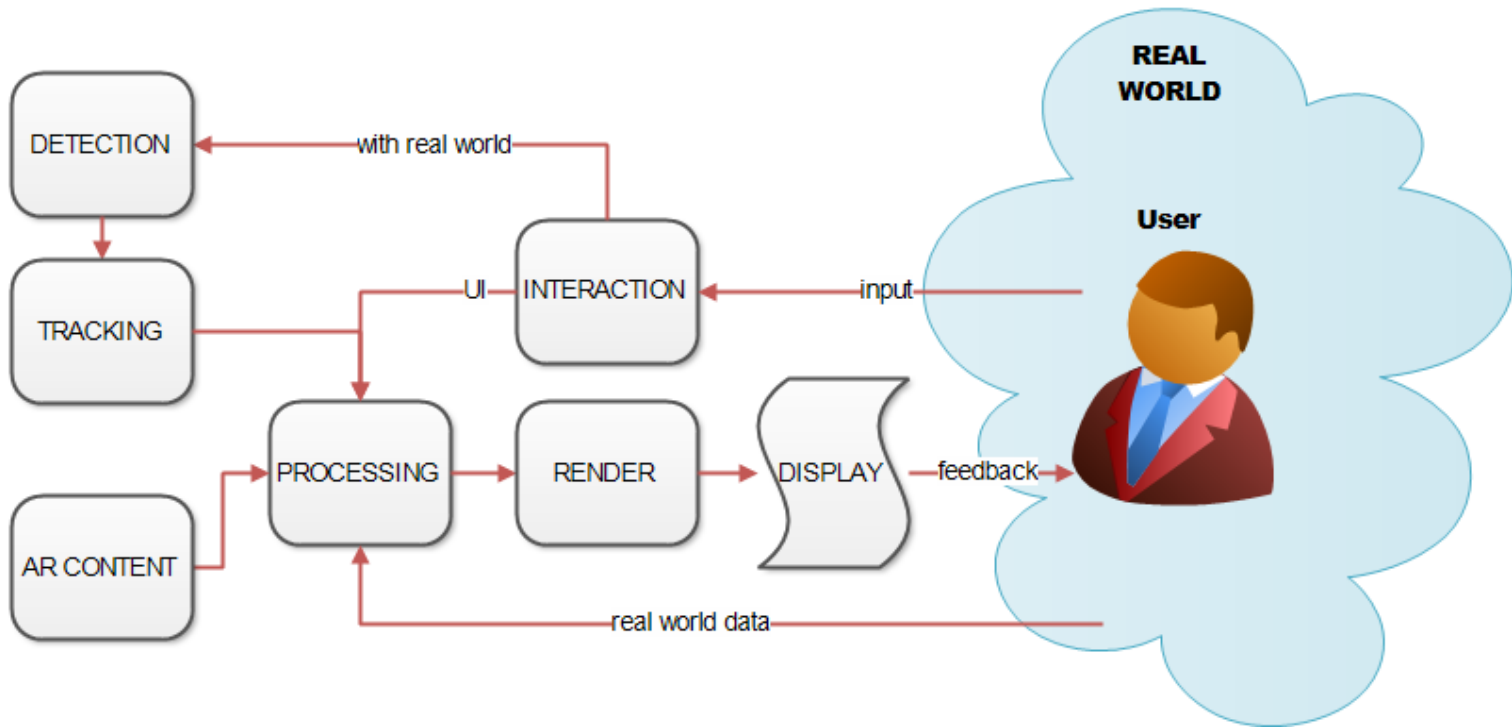
Claudio Piciarelli

Università degli Studi di Udine
Corso di Laurea in Scienze e Tecnologie Multimediali
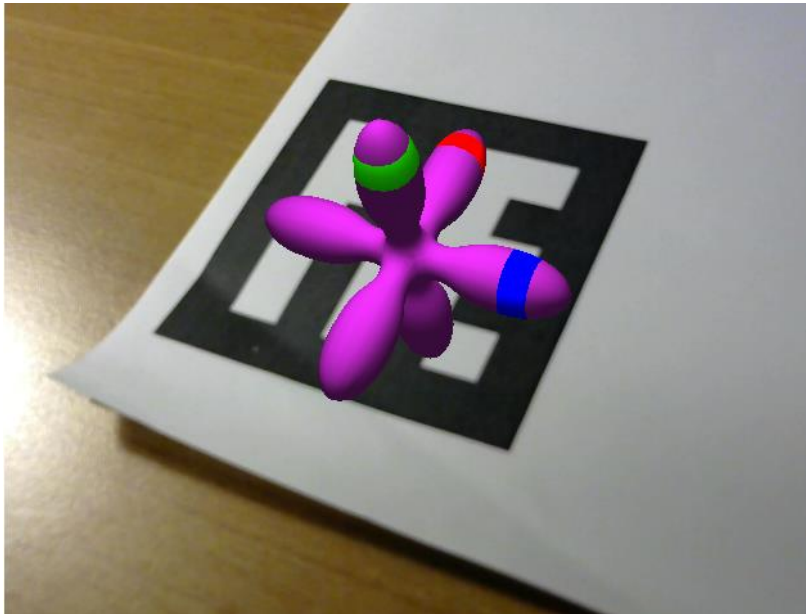
Project introduction

Architecture of an AR system

A simple AR project

□ In the next lessons, we will develop a simple AR system based on visual tracking of fiducial markers
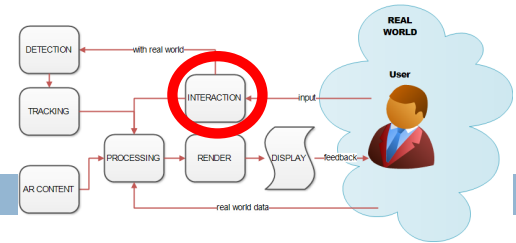
AR tools

- There is a plethora of AR SDK…
  - Vuforia
  - Metaio
  - Wikitude
  - D'Fusion
  - DroidAR
  - ARLab
  - …

- Our aim is to be the most independent possible from a specific development tool / environment

- Web-based augmented reality (*augmented web*)

Web-based AR

- In Web-based AR, we use standard web development techniques
  - HTML 5
  - Javascript
  - …
- Major advantage: you just need a web browser to run the AR application!
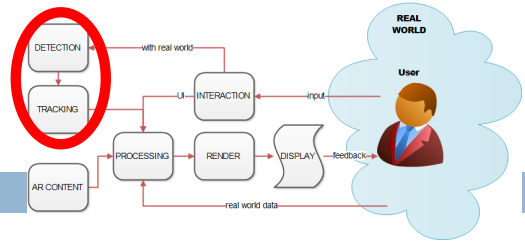- Easily portable to mobile apps too (e.g. through Android's webview…)

Input

- □ Video input will be acquired from a webcam, or simulated with a video

- □ Videos in web pages: HTML 5 `<video>` tag
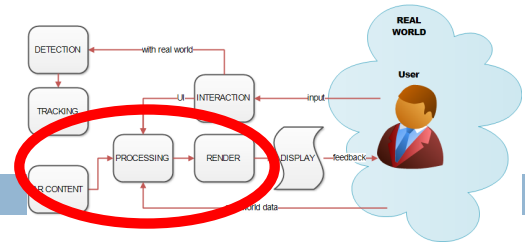
- □ Access to webcams: WebRTC API

Detection & tracking

- ☐ Our system will be based on fiducial markers
- ☐ We will use jsartoolkit.js, a simple javascript library for fiducial marker tracking in video sequences
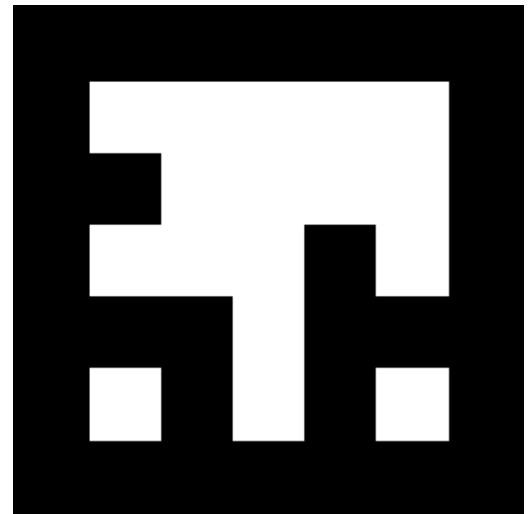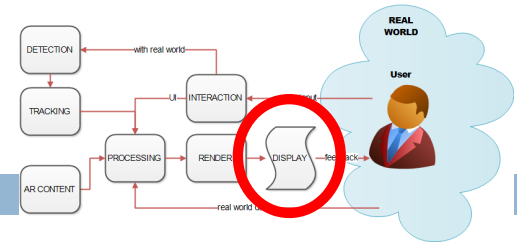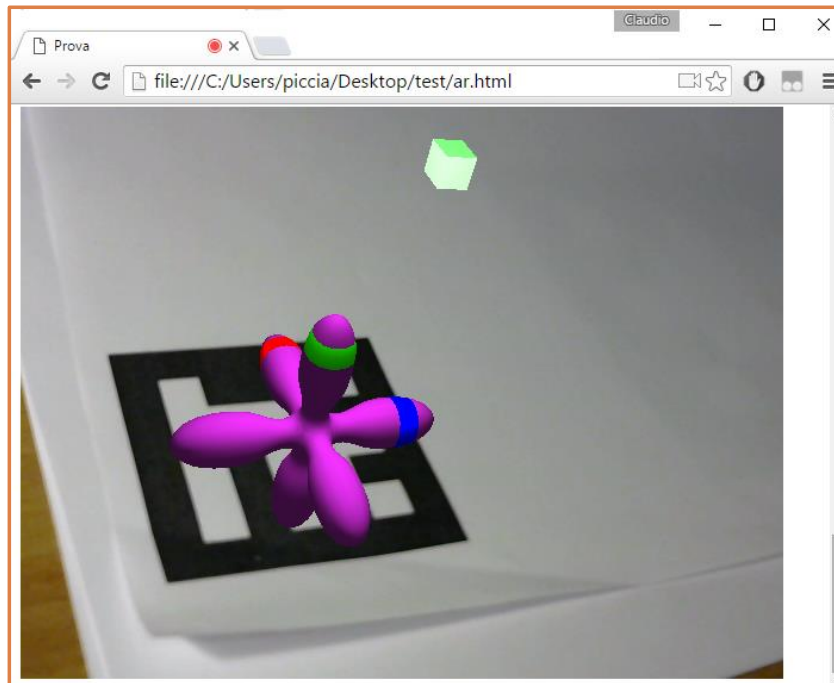
Processing

- 3D content can be either created "online" from the javascript code or loaded from external files

- The three.js library will be used to handle all the 3D content, aligning it with the markers detected by jsartoolkit and rendering the final scene

Display

- Of course the display will be a browser window!
- We will use Firefox as the default browser

Rationale

- There are several augmented web development tools, maybe easier to use than our approach

- But our goal is to learn what happens "behind the curtain"

- At the end of the course, you will have gained a comprehensive understanding of the computational steps involved in reality augmentation

Prerequisites

- Prior knowledge needed:
  - Javascript programming (basic)
  - HTML 5 (very basic)