
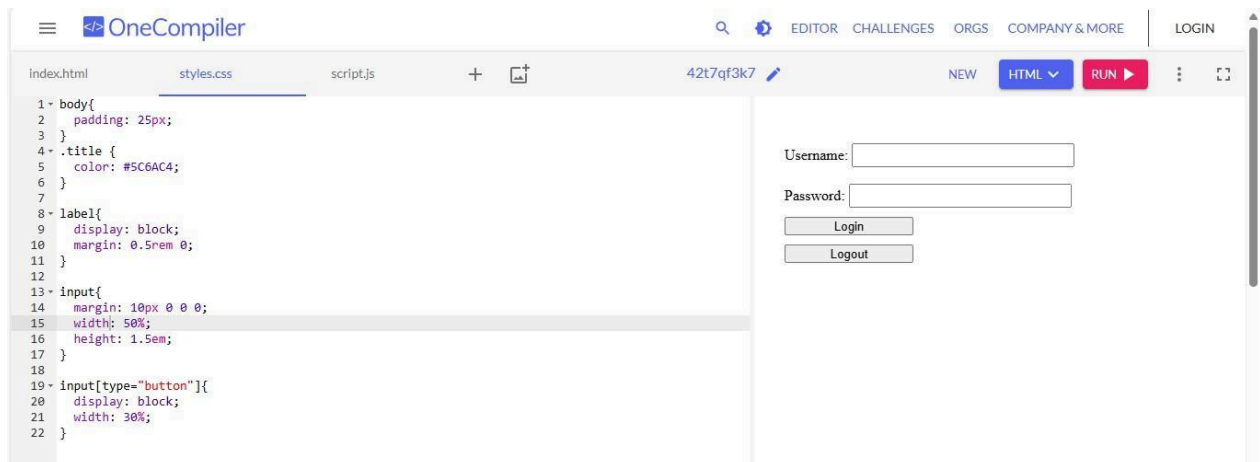


Lorah Jyn I. Hernandez

UCOS 3-2

## ACTIVITY 1

### Number #1

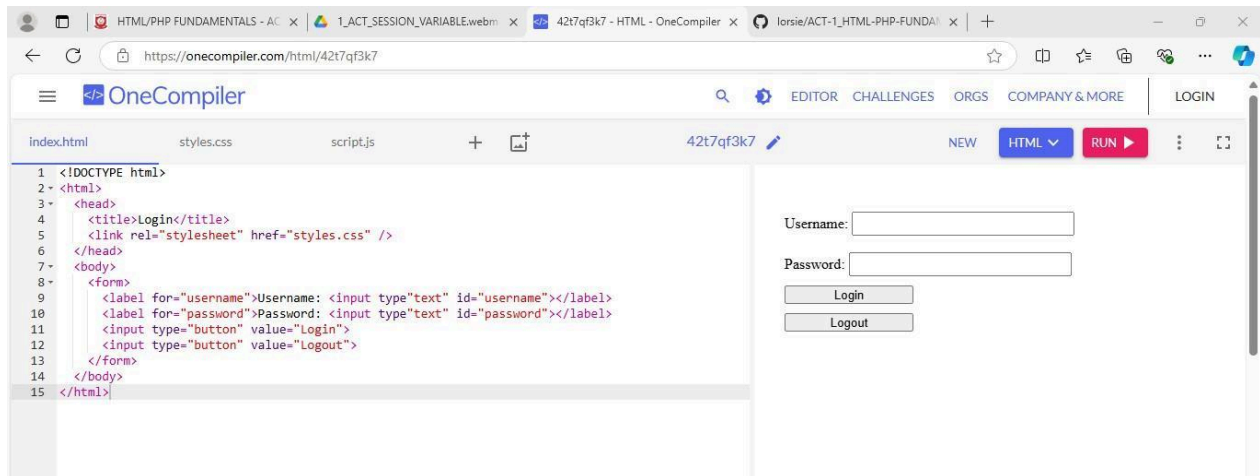

### CODES:

<!DOCTYPE html>

<html>

<head>

<title>Login</title>

<link rel="stylesheet" href="styles.css" />

</head>

```

<body>

<form>

  <label for="username">Username: <input type="text" id="username"></label>

  <label for="password">Password: <input type="text" id="password"></label>

  <input type="button" value="Login">

  <input type="button" value="Logout">

</form>

</body>

</html>

```

Number #2:

The screenshot shows the OneCompiler web interface. On the left, the code editor displays HTML code for a menu. On the right, the rendered output is shown, featuring a table titled 'Menu' with columns 'Order' and 'Amount'. Below the table is a form with a dropdown menu for 'Select an Order', a 'Quantity' input field, a 'Cash' input field, and a 'Submit' button.

**Code Editor (index.html):**

```

1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>Order System</title>
7 </head>
8 <body>
9 <h1>Menu</h1>
10 <table border="1" style="width: 30%;>
11 <tr>
12 <th>Order</th>
13 <th>Amount</th>
14 </tr>
15 <tr>
16 <td>Burger</td>
17 <td>50</td>
18 </tr>
19 <tr>
20 <td>Fries</td>
21 <td>75</td>
22 </tr>
23 <tr>
24 <td>Steak</td>
25 <td>150</td>
26 </tr>
27 </table>
28 <p>
29 <form action="" method="post">
30 <label for="order">Select an Order: </label>
31 <select name="order" id="order">
32 <option value="burger">Burger</option>

```

**Rendered Output:**

### Menu

Order	Amount
Burger	50
Fries	75
Steak	150

Select an Order: Burger ▼

Quantity:

Cash:

OneCompiler

EDITORCHALLENGESORGS COMPANY & MORE

LOGIN

index.htmlstyles.cssscript.js42t7t4v8yNEWHTMLRUN

```
15- <tr>
16-   <td>Burger</td>
17-   <td>50</td>
18- </tr>
19- <tr>
20-   <td>Fries</td>
21-   <td>75</td>
22- </tr>
23- <tr>
24-   <td>Steak</td>
25-   <td>150</td>
26- </tr>
27- </table>
28- <p>
29-   <form action="" method="post">
30-     <label for="order">Select an Order: </label>
31-     <select name="order" id="order">
32-       <option value="burger">Burger</option>
33-       <option value="fries">Fries</option>
34-       <option value="steak">Steak</option>
35-     </select>
36-   </p>
37-   <label for="quantity">Quantity: </label>
38-   <input type="number" id="quantity" name="quantity">
39-   <br><br>
40-   <label for="cash">Cash: </label>
41-   <input type="number" id="cash" name="cash">
42-   <br><br>
43-   <input type="submit" value="Submit">
44- </form>
45- </body>
46- </html>
```

## Menu

Order	Amount
Burger	50
Fries	75
Steak	150

Select an Order: Burger

Quantity:

Cash:

OneCompiler

EDITORCHALLENGESORGS COMPANY & MORE

LOGIN

index.htmlstyles.cssscript.js42t7t4v8yNEWHTMLRUN

```
1- body{
2-   font-family: Arial, sans-serif;
3-   margin: 20px;
4-   background-color: #f4f4f9;
5- }
6-
7- table{
8-   table-layout: auto;
9-   width: 200%;
10-  margin: 0.5rem 0;
11- }
12-
13- th, td{
14-   padding: 10px;
15-   text-align: left;
16- }
17-
18- form{
19-   background-color: #fff;
20-   padding: 20px;
21-   border: 1px solid #ddd;
22-   width: 300px;
23-   box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
24- }
25-
26- label{
27-   display: block;
28-   margin: 0.5rem 0;
29-   font-weight: bold;
30- }
31-
32- input[type="submit"]{
```


## Menu

Order	Amount
Burger	50
Fries	75
Steak	150

Select an Order: Burger

Quantity:

Cash:

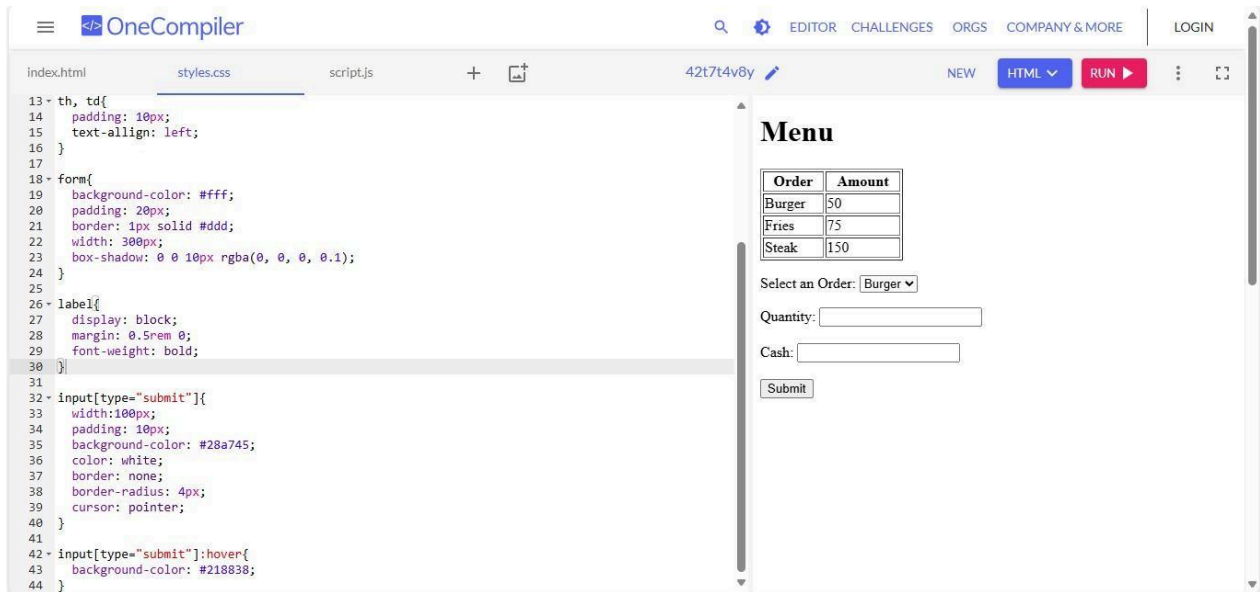

### **CODES:**

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Order System</title>
```

```
</head>
```

```
<body>
```

```
<h1>Menu</h1>
```

```
<table border="1" style="width: 30%">
```

```
<tr>
```

```
<th>Order</th>
```

```
<th>Amount</th>
```

```
</tr>
```

```
<tr>
```

```
<td>Burger</td>
```

```
<td>50</td>
```

```
</tr>

<tr>

  <td>Fries</td>

  <td>75</td>

</tr>

<tr>

  <td>Steak</td>

  <td>150</td>

</tr>

</table>

<p>

<form action="" method="post">

  <label for="order">Select an Order: </label>

  <select name="order" id="order">

    <option value="burger">Burger</option>

    <option value="fries">Fries</option>

    <option value="steak">Steak</option>

  </select>

</p>

<label for="quantity">Quantity: </label>

<input type="number" id="quantity" name="quantity">

<br><br>

<label for="cash">Cash: </label>

<input type="number" id="cash" name="cash">

<br><br>

<input type="submit" value="Submit">

</form>

</body>

</html>
```