



PREVIOUSLY ON

LOVE IS BLIND

An autonomous, spoiler-bounded recap agent

Louise · Ironhack AI Consulting & Integration Bootcamp



THE PROBLEM

No quick refresh on the drama. No fan reaction in one place.



- ❖ **Recap are too long, too generic**

YouTube recaps and articles aren't built for a quick catch-up before the next episode.

- ❖ **Nobody pairs plot with reaction**

Netflix's own in-show "Previously On" segment is plot-only —no fans reactions.

- ❖ **Inconsistent across editions**

Coverage and tone vary wildly between US, UK, Poland and other franchise editions.

- ❖ **Not bounded to your progress**

Spoilers can happen if you read unfiltered content or fan reactions.

Target audience: Love Is Blind viewers, 73% female, 60% aged 35–64, watching for drama and emotional payoff, not just plot recall.

THE SOLUTION

Your recap bestie, spoiler-free




Tell it an edition, season, and the last episode you watched — it autonomously researches, retrieves, and writes a narrator-voiced recap with zero human steps in between.



Structurally spoiler-bounded

RAG retrieval is hard-filtered to episode
≤ your cutoff, not just a prompt
instruction — plus a dedicated audit
node.



Truly autonomous

A ReAct agent plans its own web
searches; 10 LangGraph nodes run
end-to-end with no manual step.




Fan voice, not a data dump

YouTube comments are synthesized
into audience reaction — liked,
criticized, themes, quotes — in comic
narrator prose.

Output: intro · main drama · ranked highlights · audience reaction · participant bios · sources · conclusion

SOLUTION — ARCHITECTURE

10 LangGraph nodes, one real branch

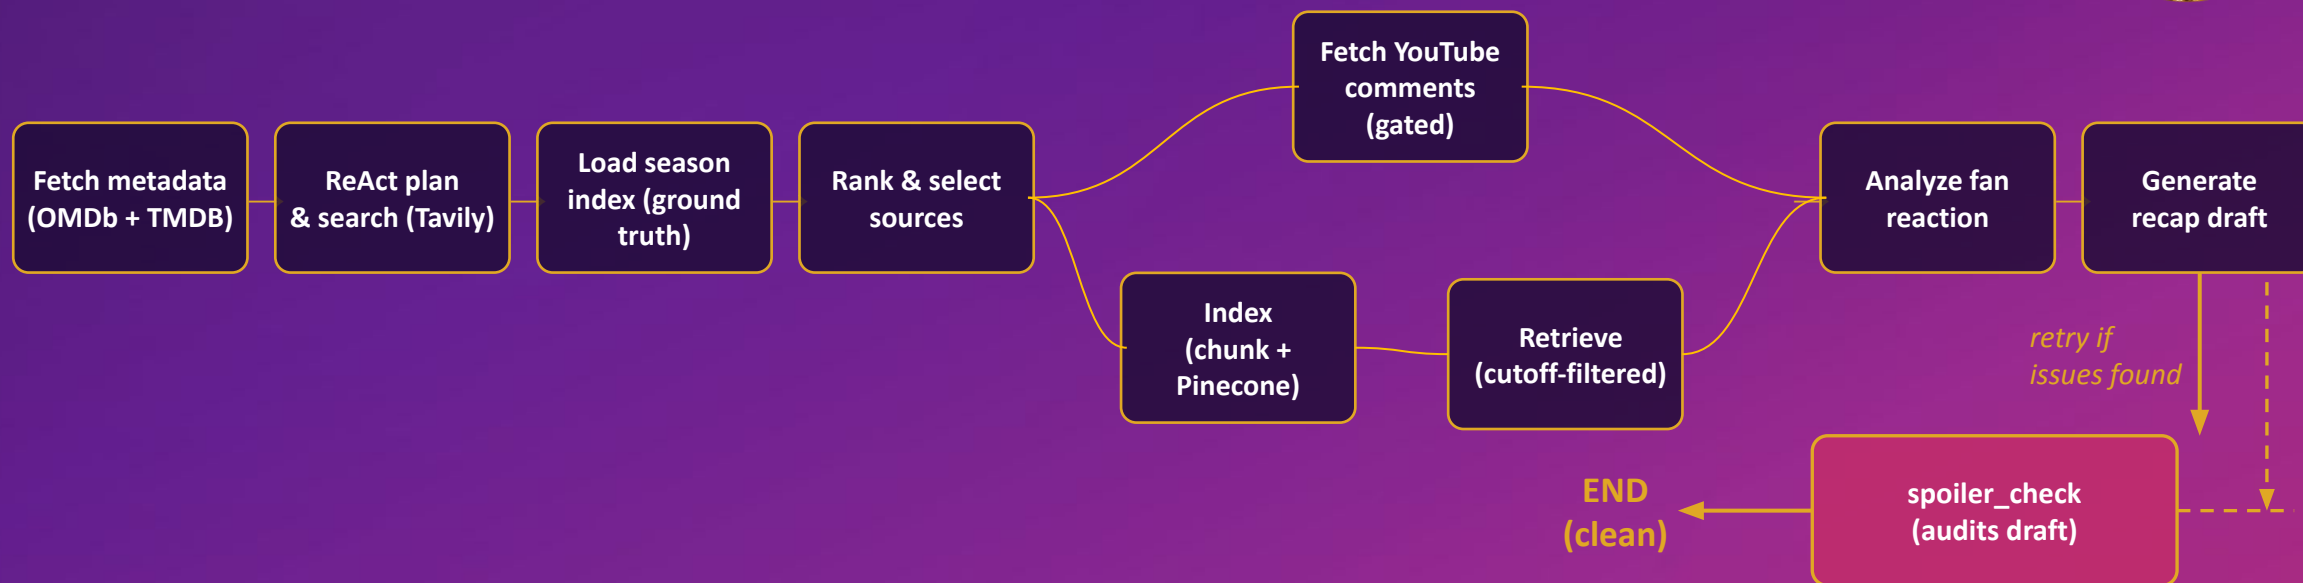

Grounding: Pinecone chunks tagged {edition, season, episode_number, phase}, queried with a hard filter $\text{episode_number} \leq \text{cutoff}$. It structurally enforces the spoiler boundary, not just the prompt. Some process are parallelized. The spoiler_check node is a second, independent audit layer on top of it.



Tavily

Live web search



TMDb

Cast metadata



OMDb

Episode titles



YouTube API

Fan comments

LIVE DEMO

Let's watch it run



1

Pick edition, season & last episode watched

2

Agent researches, retrieves & ranks — autonomously

3

Spoiler-checked recap streams back

SAMPLE OUTPUT — Love Is Blind Poland, Season 1, Episode 3

Main drama so far

Singles enter the pods chasing a connection without ever seeing each other — tension builds as pod bonds face their first real-world test.

Highlights — Episode 3

Damian and Marta's reveal: he's blown away, calling her beautiful despite her own nerves about his reaction.

Participants (10 listed)

Name, age & occupation for every cast member — e.g. Damian Gawron (35, Analyst), Marta Frymer (30, Nails).

Audience reaction

“Filip is sweet and authentic” — fans are here for him; the editing pace is the top complaint this episode.

Sources (4 linked)

IMDb full cast & crew, a YouTube recap/review, a recap podcast, and a Primetimer episode write-up.

Run cost: \$0.0787 · Spoiler check: passed on first attempt · ~30–60 end to end

BUSINESS MODEL

Freemium: free core, paid extras



FREE

Core product, unchanged

On-demand, spoiler-bounded recap generation for any edition, season, and episode — the thing that gets people in the door.



PAID

Additive, not a paywall



Share with a friend

Send a generated recap straight to whoever you're watching with



Email this to yourself

Scheduled delivery — waiting in your inbox the morning after



Predict who gets married

Lightweight per-season prediction game, revealed at the Wedding phase

FUTURE ENHANCEMENTS & GO-TO-MARKET

Community-led, not paid acquisition



Sprint 1 — Reddit seeding

Organic participation in r/LoveIsBlindOnNetflix; success = return usage without re-prompting.



Sprint 2 — Creator partnerships

Pitch recap YouTubers a drafting aid, turning competitors into distribution.



Sprint 3 — Freemium launch

Introduce paid tier once Sprints 1–2 prove organic demand.

NEXT BIG FEATURE — "Where are they now"

Current relationship status per couple, sourced from dated interviews and social media. Different schema, different sourcing, different trigger model than the episode-anchored recap.

Known risk: Netflix/Love Is Blind unfair usage. Position: treat a cease-and-desist as a validation signal, not a pure downside; Prime's own X-Ray recaps are precedent this content category is viable.

REFLECTION

What I Learned

- Couldn't have built this a months ago
- UI early on. It anchors the vision before the deep tech calls
- RAG finally clicked
- Structure beats prompts
- More breaks, not fewer, when it's exciting
- Designer + PM + developer = one person 💙





Thank you

QUESTIONS?

github.com/lou-PL-dev/project3_autonomous_research_-and_report_generation_agent

SOLUTION — STACK DECISION

LangGraph, not n8n



The brief allows n8n as a thin trigger layer in front of a LangGraph brain. It was evaluated — and dropped entirely, not deferred.

✓ **LangGraph — chosen**

- A genuine conditional edge — spoiler_check routes back to generate on failure, not fixed-pipeline retries
- Rich typed state (RecapState) threaded through all 10 nodes, type-checked in code
- Native ReAct loop — the agent decides its own search queries
- Fine-grained control over concurrency, retries, and budget

✗ **n8n — out of scope**

- No second trigger surface needed — CLI + Flask API already cover it
- The "integrate many SaaS connectors" use case n8n excels at doesn't exist yet here
- Would split orchestration across two systems for a solo build — an operational seam that buys nothing yet
- Reconsidered later for delivery/distribution (email, social) — see GTM sprints

Core LLM: OpenAI gpt-4o (generation, fan-reaction) · gpt-4o-mini (planning, tagging, spoiler audit) — split by task cost-sensitivity