

2P11

Generated by Doxygen 1.9.1

1 2PII 2	1
1.1 Compilation	1
1.2 Doxygen	1
2 resources	1
3 Data Structure Index	2
3.1 Data Structures	2
4 File Index	3
4.1 File List	3
5 Data Structure Documentation	4
5.1 Background Struct Reference	4
5.1.1 Detailed Description	4
5.2 Camera Struct Reference	4
5.2.1 Detailed Description	5
5.2.2 Field Documentation	5
5.3 Clickable Struct Reference	5
5.3.1 Detailed Description	6
5.4 ComponentWrapper Struct Reference	6
5.4.1 Detailed Description	6
5.5 Entity Struct Reference	6
5.5.1 Detailed Description	7
5.6 Entry Struct Reference	7
5.7 HashMap Struct Reference	7
5.7.1 Detailed Description	7
5.8 HashMapEntry Struct Reference	8
5.8.1 Detailed Description	8
5.9 Hoverable Struct Reference	8
5.9.1 Detailed Description	8
5.10 Inputs Struct Reference	8
5.10.1 Detailed Description	9
5.11 LinkedList Struct Reference	9
5.11.1 Detailed Description	9
5.12 LinkedListLink Struct Reference	10
5.12.1 Detailed Description	10
5.12.2 Field Documentation	10
5.13 MapComponent Struct Reference	10
5.13.1 Detailed Description	10
5.14 Minimap Struct Reference	11
5.14.1 Detailed Description	11
5.15 Position Struct Reference	11
5.15.1 Detailed Description	11

5.16 PQueueEntry Struct Reference	11
5.16.1 Detailed Description	12
5.17 Rc Struct Reference	12
5.18 Sprite Struct Reference	12
5.19 Text Struct Reference	12
5.20 TilePosition Struct Reference	13
5.20.1 Detailed Description	13
5.21 World Struct Reference	13
5.21.1 Detailed Description	14
5.21.2 Member Function Documentation	14
5.21.3 Field Documentation	14
6 File Documentation	15
6.1 asset_manager.h File Reference	15
6.1.1 Function Documentation	16
6.2 bitflag.h File Reference	17
6.3 camera.h File Reference	18
6.3.1 Function Documentation	19
6.4 ecs.h File Reference	19
6.4.1 Macro Definition Documentation	21
6.4.2 Typedef Documentation	22
6.4.3 Function Documentation	22
6.5 hash_map.h File Reference	24
6.5.1 Function Documentation	26
6.6 input.h File Reference	27
6.6.1 Macro Definition Documentation	28
6.6.2 Typedef Documentation	29
6.6.3 Function Documentation	29
6.7 linked_list.h File Reference	30
6.7.1 Function Documentation	31
6.8 map.h File Reference	32
6.8.1 Typedef Documentation	33
6.8.2 Function Documentation	33
6.9 parser.h File Reference	34
6.10 pathfinding.h File Reference	34
6.10.1 Function Documentation	35
6.11 pqueue.h File Reference	35
6.12 ui.h File Reference	37
6.12.1 Function Documentation	38
6.13 ui_components.h File Reference	39
6.14 util.h File Reference	39
6.14.1 Macro Definition Documentation	41

6.15 vec.h File Reference	42
6.15.1 Detailed Description	44
6.15.2 Macro Definition Documentation	44
6.15.3 Function Documentation	45
Index	47

1 2P11 2

1.1 Compilation

Some dependencies are required to compile, they can be installed with `sudo apt-get install libSDL2-dev libomp-dev libSDL2-ttf-dev libSDL2-mixer-dev` on Debian based distributions.

1.2 Doxygen

The use of `make doc` requires doxygen, LaTeX and graphviz.

The use of the command `make htmldoc` requires firefox

The html documentation is also available at <https://uwu-segfault.eu/2p2doc/>

2 resources

Here is a list of documents used during the making of this project

Websites and pages :

- <https://web.archive.org/web/19990903133921/http://www.concentric.net/~Ttwang/tech/primehash.htm>
- <https://courses.csail.mit.edu/6.006/spring11/rec/rec07.pdf>
- <https://wiki.libsdl.org/SDL2>
- <https://en.cppreference.com>
- <https://ianjk.com/ecs-in-rust/>
- https://austinmorlan.com/posts/entity_component_system/
- <https://www.david-colson.com/2020/02/09/making-a-simple-ecs.html>
- https://en.wikipedia.org/wiki/Fowler%E2%80%93Noll%E2%80%93Vo_hash_function
- <https://www.libsdl.org/release/SDL-1.2.15/docs/html/>
- <https://www.openmp.org/wp-content/uploads/OpenMP-API-Specification-5-2.pdf>

- <https://curc.readthedocs.io/en/latest/programming/OpenMP-C.html#work-sharing-direct>
- <http://www.gameaipro.com/>
- <https://valgrind.org/docs/manual/index.html>
- https://lazyfoo.net/tutorials/SDL/21_sound_effects_and_music/index.php

Books and articles :

- Game AI Pro 360: Guide to Movement and Pathfinding - Steve Rabin - 2019
- Steering Behaviors For Autonomous Characters - Craig W. Reynolds - 1999
- Game Engine Architecture, 3rd edition - Jason Gregory - 2018

3 Data Structure Index

3.1 Data Structures

Here are the data structures with brief descriptions:

Background	
Entities with this component are the background of the user interface	4
Camera	4
Clickable	
Entities with this component start an action when clicked on	5
ComponentWrapper	
Used to store the component, its type and its id	6
Entity	
The entity structure for the ECS	6
Entry	7
HashMap	
A hash map	7
HashMapEntry	
An entry in a HashMap , i.e. a key-value pair	8
Hoverable	
Entities with this component show text when hovered	8
Inputs	
Stores keys and mouse buttons	8
LinkedList	
A singly linked list	9
LinkedListLink	
A link of LinkedList	10
MapComponent	10

Minimap	
Component that corresponds to the minimap	11
Position	
A component that contains the world space coordinates of an entity	11
PQueueEntry	
Entry within a PQueue	11
Rc	12
Sprite	12
Text	12
TilePosition	
Stores the position of a tile	13
World	
The world structure used to store the different parts of the ECS	13

4 File Index

4.1 File List

Here is a list of all documented files with brief descriptions:

asset_manager.h	15
bitflag.h	17
camera.h	18
ecs.h	19
hash_map.h	24
input.h	27
linked_list.h	30
map.h	32
parser.h	34
pathfinding.h	34
pqueue.h	35
ui.h	37
ui_components.h	39
util.h	39
vec.h	42


5 Data Structure Documentation

5.1 Background Struct Reference

Entities with this component are the background of the user interface.

```
#include <ui.h>
```

Collaboration diagram for Background:



Data Fields

- [Sprite](#) * **sprite**
- SDL_Rect * **rect**

5.1.1 Detailed Description

Entities with this component are the background of the user interface.

The documentation for this struct was generated from the following file:

- [ui.h](#)

5.2 Camera Struct Reference

```
#include <camera.h>
```

Data Fields

- float **x**
- float **y**
- float [zoom](#)

5.2.1 Detailed Description

The `Camera` struct is not a component, it is meant to have exactly one instance and serves as the base for screenspace<->worldspace calculations

5.2.2 Field Documentation

5.2.2.1 `zoom` `float Camera::zoom`

`zoom` is such that if `zoom==1`, one pixel in screenspace is one pixel in worldspace, while if `zoom==2`, one pixel in screenspace is two pixels in worldspace

The documentation for this struct was generated from the following file:


- [camera.h](#)

5.3 Clickable Struct Reference

Entities with this component start an action when clicked on.

```
#include <ui.h>
```

Collaboration diagram for Clickable:



Data Fields

- `Sprite * sprite`
- `SDL_Rect * rect`
- `Text * text`
- `Uint8 is_clicked`
- `void(* click_event)()`

5.3.1 Detailed Description

Entities with this component start an action when clicked on.

The documentation for this struct was generated from the following file:

- [ui.h](#)

5.4 ComponentWrapper Struct Reference

Used to store the component, its type and its id.

```
#include <ecs.h>
```

Data Fields

- `uint64_t id`
The component id.
- `int type_id`
The id referring to the component type.
- `void * component`
A pointer to the component itself.

5.4.1 Detailed Description

Used to store the component, its type and its id.

The documentation for this struct was generated from the following file:

- [ecs.h](#)

5.5 Entity Struct Reference

The entity structure for the ECS.

```
#include <ecs.h>
```

Public Member Functions

- [VEC](#) (`uint64_t`) components
A vector of [ComponentWrapper](#) containing the entity's components.

Data Fields

- `uint64_t id`
The entity's id.

5.5.1 Detailed Description

The entity structure for the ECS.

The documentation for this struct was generated from the following file:

- [ecs.h](#)

5.6 Entry Struct Reference

Data Fields

- int **ind**
- int **from**

The documentation for this struct was generated from the following file:

- [pathfinding.c](#)

5.7 HashMap Struct Reference

A hash map.

```
#include <hash_map.h>
```

Public Member Functions

- [VEC \(LinkedList\)](#) bucket
The vector that stores the entries.

Data Fields

- uint64_t(* [hash_function](#))(void *)
The function used for hashing the values stored in the [HashMap](#)
- char(* [comp_function](#))(void *, void *)
The function used to compare values in the [HashMap](#)
- uint [length](#)
Length of the bucket.
- uint [size](#)
Numberb of elements in the hashmap.

5.7.1 Detailed Description

A hash map.

The documentation for this struct was generated from the following file:

- [hash_map.h](#)

5.8 HashMapEntry Struct Reference

An entry in a [HashMap](#), i.e. a key-value pair.

```
#include <hash_map.h>
```

Data Fields

- void * **key**
- void * **value**
- uint64_t [hash](#)
The hash of value

5.8.1 Detailed Description

An entry in a [HashMap](#), i.e. a key-value pair.

The documentation for this struct was generated from the following file:

- [hash_map.h](#)

5.9 Hoverable Struct Reference

Entities with this component show text when hovered.

```
#include <ui.h>
```

Data Fields

- SDL_Rect * **rect**
- char * **text**

5.9.1 Detailed Description

Entities with this component show text when hovered.

The documentation for this struct was generated from the following file:

- [ui.h](#)

5.10 Inputs Struct Reference

stores keys and mouse buttons

```
#include <input.h>
```

Data Fields

- `int * keys`
uses SDL Scancodes as indices
- `Uint64 key_nb`
number of keys currently in
- `char mouse`
1st bit = mb_left; 2nd bit = mb_middle; 3rd bit = mb_right

5.10.1 Detailed Description

stores keys and mouse buttons

The documentation for this struct was generated from the following file:


- [input.h](#)

5.11 LinkedList Struct Reference

A singly linked list.

```
#include <linked_list.h>
```

Collaboration diagram for LinkedList:

**Data Fields**

- `LinkedListLink * head`
Pointer to the the first link of the list. NULL if empty.

5.11.1 Detailed Description

A singly linked list.

The documentation for this struct was generated from the following file:

- [linked_list.h](#)

5.12 LinkedListLink Struct Reference

A link of [LinkedList](#)

```
#include <linked_list.h>
```

Data Fields

- void * [data](#)
- struct _Lk * [next](#)
Pointer to the next link in the list. NULL if last.

5.12.1 Detailed Description

A link of [LinkedList](#)

5.12.2 Field Documentation

5.12.2.1 **data** void* LinkedListLink::data

Pointer to this link's data. Figuring out which type it is is up to the user.

The documentation for this struct was generated from the following file:

- [linked_list.h](#)

5.13 MapComponent Struct Reference

```
#include <map.h>
```

Data Fields

- [Map](#) map

5.13.1 Detailed Description

A component that contains a [Map](#), for rendering purposes. Having more than one such component is undefined behavior.

The documentation for this struct was generated from the following file:

- [map.h](#)

5.14 Minimap Struct Reference

Component that corresponds to the minimap.

```
#include <ui.h>
```

Data Fields

- `SDL_Rect * rect`

5.14.1 Detailed Description

Component that corresponds to the minimap.

The documentation for this struct was generated from the following file:

- [ui.h](#)

5.15 Position Struct Reference

A component that contains the world space coordinates of an entity.

```
#include <camera.h>
```

Data Fields

- `float x`
- `float y`

5.15.1 Detailed Description

A component that contains the world space coordinates of an entity.

The documentation for this struct was generated from the following file:

- [camera.h](#)

5.16 PQueueEntry Struct Reference

an entry within a `PQueue`

```
#include <pqueue.h>
```

Data Fields

- void * **value**
- double **weight**

5.16.1 Detailed Description

an entry within a `PQueue`

The documentation for this struct was generated from the following file:

- [pqueue.h](#)

5.17 Rc Struct Reference

Data Fields

- `uintptr_t` **counter**
- void * **ref**
- `AssetKind` **kd**
- char **locked**

The documentation for this struct was generated from the following file:

- `asset_manager.c`

5.18 Sprite Struct Reference

Data Fields

- `SDL_Texture` * **texture**
- `SDL_Rect` * **rect**

The documentation for this struct was generated from the following file:

- `sprite.h`

5.19 Text Struct Reference

Data Fields

- char * **str**
- `SDL_Color` * **color**

The documentation for this struct was generated from the following file:

- [ui.h](#)

5.20 TilePosition Struct Reference

stores the position of a tile

```
#include <pathfinding.h>
```

Data Fields

- int **x**
- int **y**

5.20.1 Detailed Description

stores the position of a tile

The documentation for this struct was generated from the following file:


- [pathfinding.h](#)

5.21 World Struct Reference

The world structure used to store the different parts of the ECS.

```
#include <ecs.h>
```

Collaboration diagram for World:



Public Member Functions

- [VEC](#) (uint) component_sizes
- [void](#) ([VEC](#)() *component_free)(void *)
- [VEC](#) ([ComponentWrapper](#)) components
A vector of [ComponentWrapper](#) containing all the components.
- [VEC](#) ([Entity](#)) entities
A vector of [Entity](#) containing all the entities.
- [VEC](#) (uint) component_sparsity
Stores the available spaces in *components* that entity deletion created.
- [VEC](#) (uint) entity_sparsity
Stores the available spaces in *entities* that entity deletion created.

Data Fields

- [HashMap](#) `entity_map`
- [HashMap](#) `component2entity`
- `uint` `last_component`

Indicates the id the next component to be added should take.

5.21.1 Detailed Description

The world structure used to store the different parts of the ECS.

5.21.2 Member Function Documentation

5.21.2.1 `VEC()` `World::VEC (` `uint)`

A vector containing all the sizes corresponding to each of the components' types

5.21.2.2 `void()` `World::void (` `VEC() * component_free)`

A vector of functions used to free each of the components (one function per type)

5.21.3 Field Documentation

5.21.3.1 `component2entity` `HashMap` `World::component2entity`

A [HashMap](#) with `uint64_t` as keys and `uint64_t` as values, the keys are components'ids and the values are entities'ids. It establishes for each component the list of the entities currently linked to it

5.21.3.2 `entity_map` `HashMap` `World::entity_map`

A [HashMap](#) with `Bitflag` as keys and `VEC(uint64_t)` as values, the map is used to easily access the list of entities corresponding to the system represented by the `Bitflag` key

The documentation for this struct was generated from the following file:

- [ecs.h](#)


6 File Documentation

6.1 asset_manager.h File Reference

```
#include <SDL2/SDL.h>
```

```
#include "hash_map.h"
```

Include dependency graph for asset_manager.h:

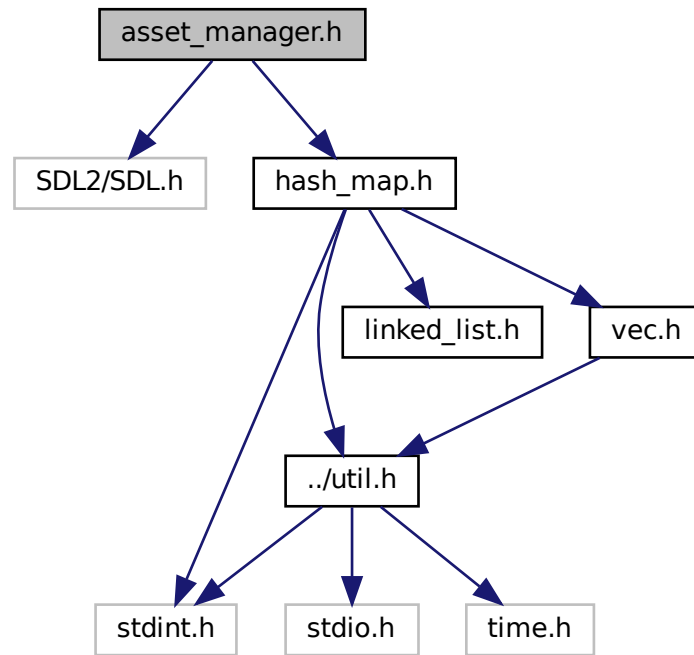

Functions

- void `init_asset_manager` ()
- Error `lock_asset` (char *t, char locked)
- char `is_asset_locked` (char *t)
- void * `get_texture` (char *t, SDL_Renderer *renderer, SDL_Window *window)
- void * `load_texture` (char *t, SDL_Renderer *renderer, SDL_Window *window)
- int `drop_texture` (char *t)
- void * `get_audio` (char *t, char is_mus)
- void * `load_audio` (char *t, char is_mus)
- int `drop_audio` (char *t)
- void * `load_font` (char *t, Uint8 size)
- void * `get_font` (char *t, Uint8 size)
- int `drop_font` (char *font, Uint8 size)
- void `free_asset_store` ()

Variables

- [HashMap ASSET_STORE](#)

Stores and manages the textures used in the game.

6.1.1 Function Documentation

6.1.1.1 drop_texture() `int drop_texture (`
 `char * t)`

Returns a pointer to the audio from file `t`. Will had it to the `ASSET_STORE` if it is not in it yet

6.1.1.2 get_font() `void* get_font (`
 `char * t,`
 `Uint8 size)`

Returns a pointer to the font from file `t`. Will add it to the `ASSET_STORE` if it is not in it yet.

6.1.1.3 get_texture() `void* get_texture (`
 `char * t,`
 `SDL_Renderer * renderer,`
 `SDL_Window * window)`

Returns a pointer to the texture from file `t`. Will had it to the `ASSET_STORE` if it is not in it yet

6.1.1.4 init_asset_manager() `void init_asset_manager ()`

Initializes the `ASSET_STORE`; must be called before any call to `get_texture` or `load_texture`

6.1.1.5 load_audio() `void* load_audio (`
 `char * t,`
 `char is_mus)`

Loads the audio from file `t` in the `ASSET_STORE` While calling it multiple times with the same `t` shouldn't fail, it is unadvisable as slow. Crashes on invalid file path or audio creation.


6.1.1.6 load_texture() `void* load_texture (`
 `char * t,`
 `SDL_Renderer * renderer,`
 `SDL_Window * window)`

Loads the texture from file `t` in the `ASSET_STORE` While calling it multiple times with the same `t` shouldn't fail, it is unadvisable as slow. Crashes on invalid file path or texture creation.


6.2 bitflag.h File Reference

```
#include <stdint.h>
```

Include dependency graph for bitflag.h:



This graph shows which files directly or indirectly include this file:

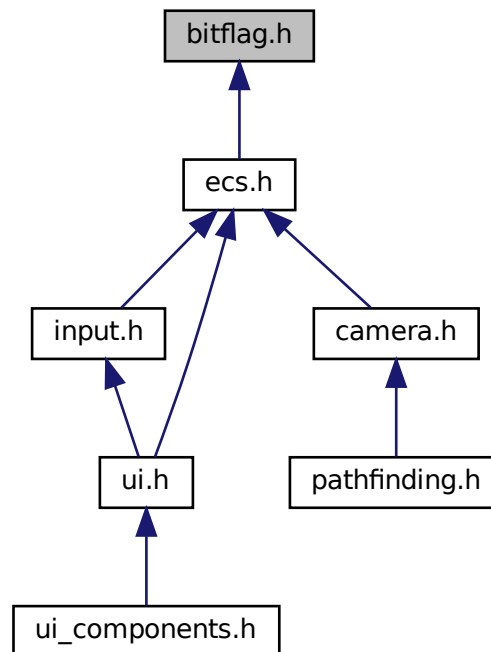

Macros

- `#define bitflag_get(b, r) (((b) >> (r)) & 1)`
expands to the r th least significant bit of b
- `#define bitflag_set(b, r, v) ((v) ? (1 << (r)) | (b) : (~(1 << (r))) & (b))`
expands to the value of b with its r th least significant bit set to v

Typedefs


- typedef uint64_t **Bitflag**

6.3 camera.h File Reference


```
#include "../data_structures/ecs.h"
```

```
#include <SDL2/SDL_render.h>
```

Include dependency graph for camera.h:

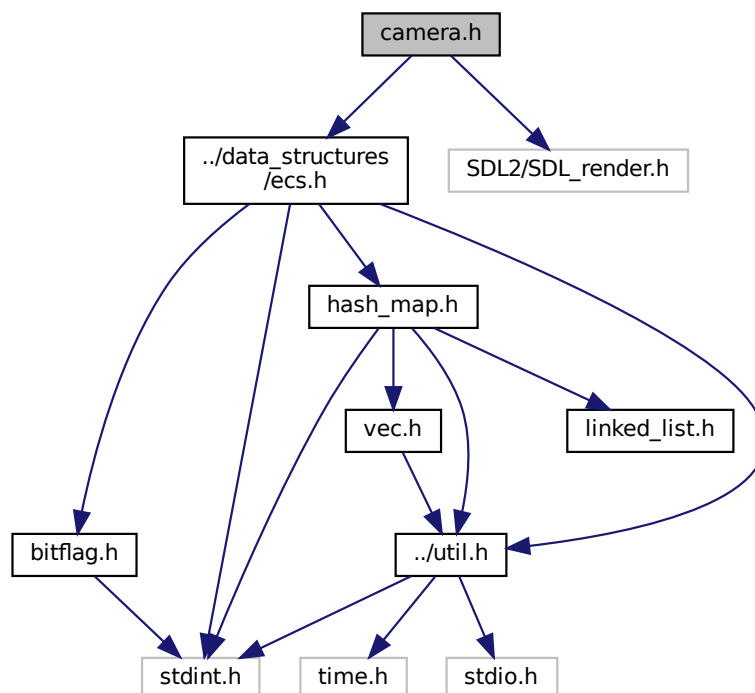

This graph shows which files directly or indirectly include this file:



Data Structures

- struct [Camera](#)
- struct [Position](#)

A component that contains the world space coordinates of an entity.

Functions

- [Position world2screenspace](#) ([Position](#) *p, [Camera](#) *cam)
Transfers p to screenspace, according to cam
- [Position screen2worldspace](#) ([Position](#) *p, [Camera](#) *cam)
Transfers p to worldspace, according to cam
- void [render](#) ([World](#) *w, [SDL_Renderer](#) *rdr, [Camera](#) *cam, [SDL_Window](#) *window)

6.3.1 Function Documentation

6.3.1.1 render() void render (
 [World](#) * w,
 [SDL_Renderer](#) * rdr,
 [Camera](#) * cam,
 [SDL_Window](#) * window)


Renders any entity with a [Position](#) and a [Sprite](#), according to cam. Said position must be in worldspace coordinates. Also renders the map if found.

6.4 ecs.h File Reference


```
#include "../util.h"  
#include "bitflag.h"  
#include "hash_map.h"
```

```
#include <stdint.h>
```

Include dependency graph for ecs.h:

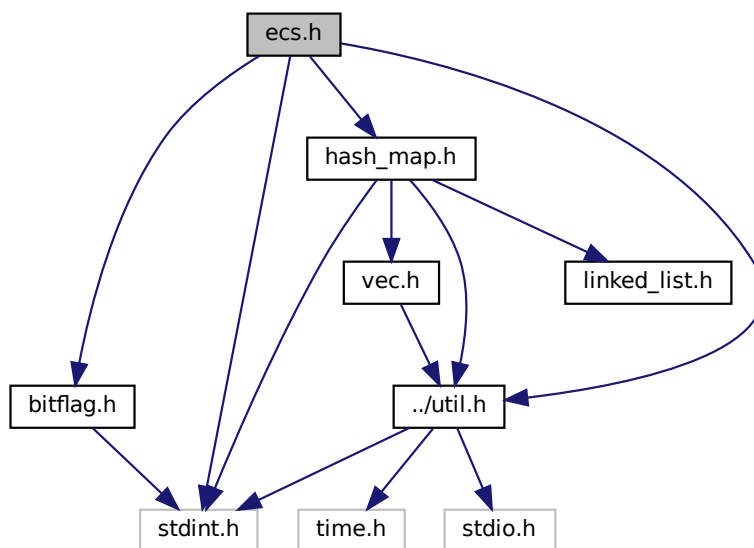

This graph shows which files directly or indirectly include this file:

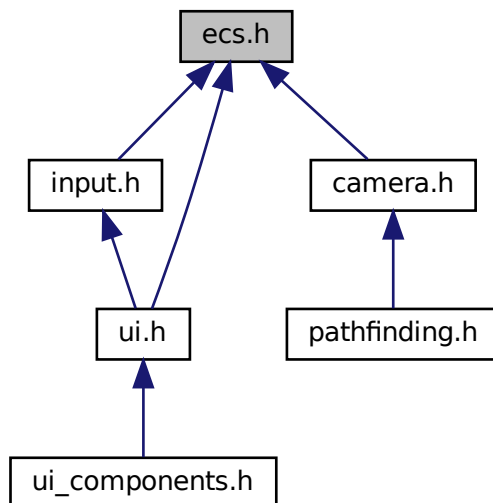

Data Structures

- struct [ComponentWrapper](#)

Used to store the component, its type and its id.

- struct [Entity](#)

The entity structure for the ECS.

- struct [World](#)

The world structure used to store the different parts of the ECS.

Macros

- #define [register_component](#)(w, tp) [register_component_inner_callback](#)((w), sizeof(tp), free)
- #define [register_component_callback](#)(w, tp, callback) [register_component_inner_callback](#)((w), sizeof(tp), (callback))
- #define [parallelize_query](#)(erefs, commands)

Typedefs

- typedef uint64_t [EntityRef](#)

Functions

- char [eq_u64](#) (void *a, void *b)
- [World](#) [world_new](#) ()
Returns a new initialized [World](#) structure.
- void [world_free](#) ([World](#) *)
Frees a [World](#) structure created using [world_new](#)
- int [register_component_inner_callback](#) ([World](#) *w, int size, void(*callback)(void *))
- void [register_system_requirement](#) ([World](#) *w, Bitflag b)
- [Entity](#) * [spawn_entity](#) ([World](#) *w)
Spawns an [Entity](#) into the world and returns a pointer to it.
- void [ecs_add_component](#) ([World](#) *w, [Entity](#) *e, int cid, void *c)
- void [despawn_entity](#) ([World](#) *w, [Entity](#) *e)
Despawns an [Entity](#)
- void [despawn_from_component](#) ([World](#) *w, Bitflag b)
Despawns every [Entity](#) with this Bitflag
- [Entity](#) * [get_entity](#) ([World](#) *w, [EntityRef](#) ref)
Returns an [Entity](#) pointer corresponding to the passed reference.
- [VEC](#) ([EntityRef](#)) [world_query](#)([World](#) *w
- void * [entity_get_component](#) ([World](#) *w, [Entity](#) *e, int type)

Variables

- Bitflag * [b](#)

6.4.1 Macro Definition Documentation

6.4.1.1 parallelize_query `#define parallelize_query(
 erefs,
 commands)`

Value:

```
{
    _Pragma("omp parallel") {
        _Pragma("omp for") {
            for (uint i = 0; i < vec_len(erefs); i++) {
                EntityRef ei = erefs[i];
                commands;
            }
        }
    }
}
```

Expands to a parallel query on the elements of `erefs`. `erefs` is expected to be the return value of `world_query`, and must be a glvalue. Commands are executed with the understanding that they can access the element they work on with `ei`. Note that spawning the threads is a significant overhead. For trivial cases, using the sequential method can be faster. If unsure, use `TIME` to benchmark both usecases. Note that Valgrind will detect some "possibly lost memory". This is intended behavior, see https://gcc.gnu.org/bugzilla/show_bug.cgi?id=36298

6.4.1.2 register_component `#define register_component(
 w,
 tp) register_component_inner_callback((w), sizeof(tp), free)`

`register_component(World*, type)` where `type` is the type of the component. Registers a new component that uses `free` as a way to free it

6.4.1.3 register_component_callback `#define register_component_callback(
 w,
 tp,
 callback) register_component_inner_callback((w), sizeof(tp), (callback))`

`register_component(World*, type, void (*callback)(void *))` where `type` is the type of the component. Registers a new component using a callback function to free it

6.4.2 Typedef Documentation

6.4.2.1 EntityRef `typedef uint64_t EntityRef`

Note that this reference is only valid until the number of entities decreases

6.4.3 Function Documentation

6.4.3.1 ecs_add_component() `void ecs_add_component (`
`World * w,`
`Entity * e,`
`int cid,`
`void * c)`

Links a component to an [Entity](#). The component itself need to live as long as the world does (beware of scopes)

6.4.3.2 entity_get_component() `void* entity_get_component (`
`World * w,`
`Entity * e,`
`int type)`

Returns a pointer to the component of type `type` linked to the [Entity](#), if no component of this type is linked the the [Entity](#) the NULL pointer is returned

6.4.3.3 eq_u64() `char eq_u64 (`
`void * a,`
`void * b)`

Returns a normalized boolean (0 or 1) indicating if the two arguments are equal when both interpreted as `uint64_t`

6.4.3.4 register_component_inner_callback() `int register_component_inner_callback (`
`World * w,`
`int size,`
`void(*) (void *) callback)`

Registers a new component using a callback function to free it, the size of the component's type needs to be passed instead of the type itself

6.4.3.5 register_system_requirement() `void register_system_requirement (`
`World * w,`
`Bitflag b)`

Updates the `entity_map` of the world to take into account the system represented by the `Bitflag` argument. Please not that single-component requirements SHOULD NOT be registered. This is considered undefined behavior, as well as registering the same requirements more than once.


6.4.3.6 VEC() `VEC (`
`EntityRef)`

Returns a vector of `EntityRef` referencing entities corresponding to the system described by the `Bitflag` argument. If you want to modify the `World` based on the return value of this function, use `world_query_mut` instead. The system needs to be registered using `register_system_requirement` before using this function


Returns a pointer to a vector of `EntityRef` referencing entities corresponding to the system described by the `Bitflag` argument. The system needs to be registered using `register_system_requirement` before using this function

6.5 hash_map.h File Reference

```
#include <stdint.h>
#include "../util.h"
#include "linked_list.h"
#include "vec.h"
Include dependency graph for hash_map.h:
```

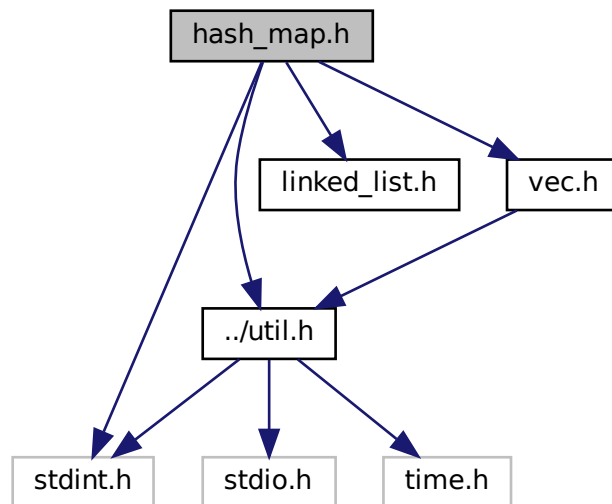

This graph shows which files directly or indirectly include this file:

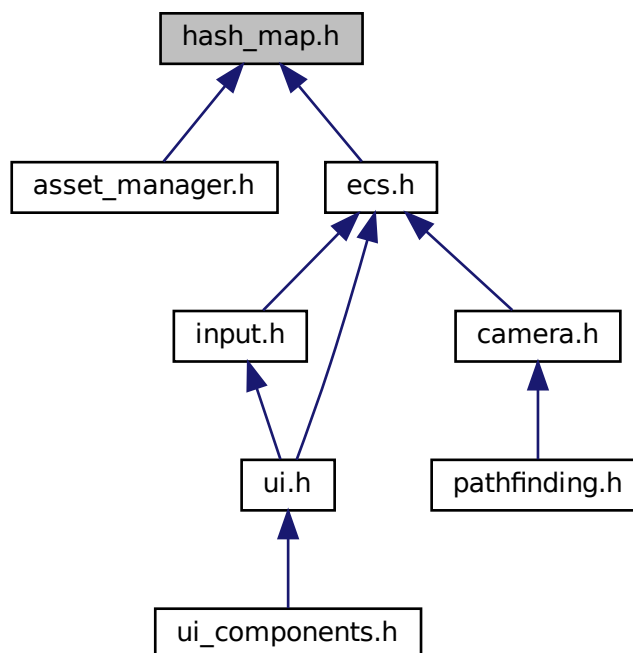

Data Structures

- struct [HashMapEntry](#)
An entry in a [HashMap](#), i.e. a key-value pair.
- struct [HashMap](#)
A hash map.

Macros

- #define [HASHMAP_DEFAULT_LENGTH](#) 32
The initial length of the internal array of a [HashMap](#)
- #define [HASHMAP_OCCUP_MAX](#) 0.7
The occupation ratio of a [HashMap](#) over which it grows.
- #define [HASHMAP_OCCUP_MIN](#) 0.3
The occupation ratio of a [HashMap](#) below which it shrinks.

Functions

- uint64_t [hash_str](#) (void *)
A polynomial rolling hash for strings.
- uint64_t [hash_u64](#) (void *)
A FNV hash function for 64 bit integers.

- `uint64_t hash_u8 (void *)`
A FNV hash function for 8 bit integers.
- `HashMap hash_map_create (uint64_t(*hash)(void *), char(*cmp)(void *, void *))`
- `void hash_map_free_callback (HashMap *h, void(*callback)(void *))`
Frees h, calling callback on each entry to free it.
- `void hash_map_free (HashMap *h)`
Same as hash_map_free_callback but uses hash_map_entry_free as callback.
- `void hash_map_free_void (void *h)`
Same as hash_map_free, deprecated.
- `int hash_map_insert_callback (HashMap *h, void *k, void *v, void(*callback)(void *))`
- `int hash_map_insert (HashMap *h, void *k, void *v)`
- `int hash_map_delete_callback (HashMap *h, void *k, void(*callback)(void *))`
deletes the entry with key k using callback
- `int hash_map_delete (HashMap *h, void *k)`
Same as hash_map_delete_callback but uses hash_map_entry_free as callback.
- `void * hash_map_get (HashMap *h, void *k)`

6.5.1 Function Documentation

6.5.1.1 hash_map_create() `HashMap hash_map_create (`
 `uint64_t(*) (void *) hash,`
 `char(*) (void *, void *) cmp)`

Creates and returns a new `HashMap` that uses `hash` as the hash function and `cmp` as the comparison function

6.5.1.2 hash_map_get() `void* hash_map_get (`
 `HashMap * h,`
 `void * k)`

Returns the value associated with key `k`, or a null pointer if there is no such pair

6.5.1.3 hash_map_insert() `int hash_map_insert (`
 `HashMap * h,`
 `void * k,`
 `void * v)`

Same as `hash_map_insert_callback` but uses `hash_map_entry_free` as callback

6.5.1.4 hash_map_insert_callback() `int hash_map_insert_callback (`
 `HashMap * h,`
 `void * k,`
 `void * v,`
 `void(*) (void *) callback)`

Inserts the key-value pair `k,v` in `h`, deleting any previous entry of key `k` with `callback`


6.6 input.h File Reference

```
#include "data_structures/ecs.h"
```


```
#include <SDL2/SDL.h>
```

```
#include <stdbool.h>
```

Include dependency graph for input.h:

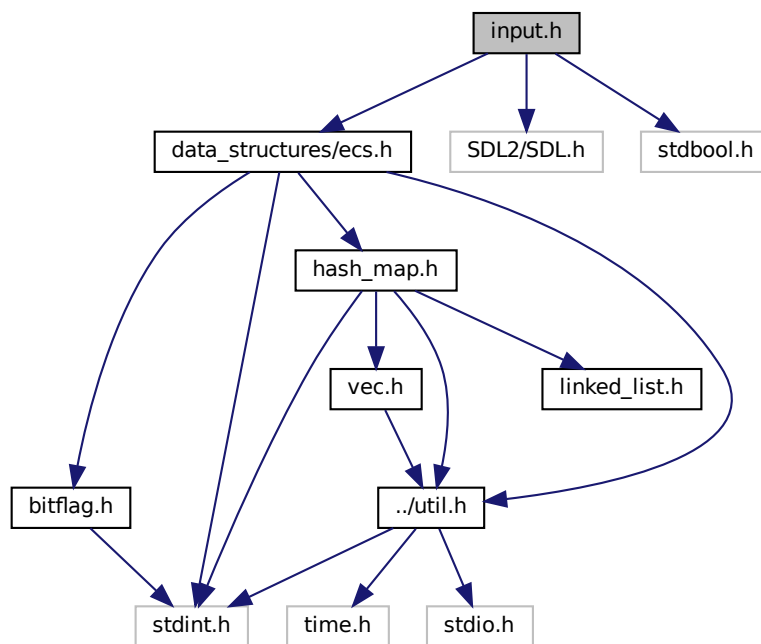

This graph shows which files directly or indirectly include this file:

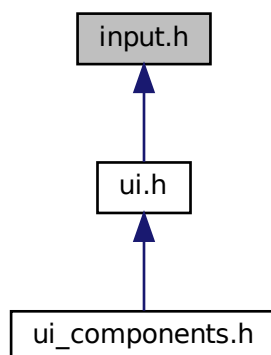

Data Structures

- struct [Inputs](#)
stores keys and mouse buttons

Macros

- #define [KEY_PRESSED](#) 0
the instant the key is pressed
- #define [KEY_RELEASED](#) 1
the instant the key is released
- #define [KEY_DOWN](#) 2
starts on press (included), ends on release (not included)
- #define [inputs_is_key_in_from_scancode](#)(inputs, scancode) ((inputs)->keys[(scancode)])
- #define [inputs_is_key_in](#)(inputs, key) ((inputs)->keys[SDL_GetScancodeFromKey(key)])
- #define [inputs_is_mouse_button_in](#)(inputs, button) (((inputs)->mouse >> ((button)-1)) & 1)
- #define [inputs_update_key_in](#)(inputs, key, new_val)
- #define [inputs_update_mouse_button_in](#)(inputs, button, new_val)

Typedefs

- typedef Uint8 [KeyState](#)
- typedef Uint8 [MouseButton](#)
- typedef void(* [KeyEvent](#)) ([World](#) *, [SDL_Renderer](#) *, [Entity](#) *, [Inputs](#) *, [KeyState](#))
type of callback functions for the key events

Functions

- [Inputs](#) * [inputs_new](#) ()
creates a new [Inputs](#) instance
- void [inputs_free](#) ([Inputs](#) *)
frees the [Inputs](#) instance
- void [inputs_update_key_in_from_scancode](#) ([Inputs](#) *inputs, [SDL_Scancode](#) scancode, bool new_val)
- void [inputs_run_callbacks](#) ([World](#) *, [SDL_Renderer](#) *rdr, [Inputs](#) *, [KeyState](#))
calls all the callbacks for the keyevent
- Uint8 [mouse_in_rect](#) ([SDL_Renderer](#) *rdr, [SDL_Rect](#) *rect)
Checks if the mouse is in the rectangle.

6.6.1 Macro Definition Documentation

6.6.1.1 [inputs_is_key_in](#) #define [inputs_is_key_in](#)(
 [inputs](#),
 [key](#)) ((inputs)->keys[SDL_GetScancodeFromKey(key)])

the state of a key accessed using [SDL_KeyCode](#) bool [inputs_is_key_in](#)([Inputs](#)*, [SDL_KeyCode](#))

6.6.1.2 inputs_is_key_in_from_scancode `#define inputs_is_key_in_from_scancode(
 inputs,
 scancode) ((inputs)->keys[(scancode)])`

the state of a key accessed using SDL_Scancode !!!!!!!! this does not take into account non QWERTY keyboards / remaps !!!!!!!! `bool inputs_is_key_in_from_scancode(Input*,SDL_Scancode)`

6.6.1.3 inputs_is_mouse_button_in `#define inputs_is_mouse_button_in(
 inputs,
 button) (((inputs)->mouse >> ((button)-1)) & 1)`

the state of a mouse button `bool inputs_is_mouse_button_in(Inputs*,MouseButton)`

6.6.1.4 inputs_update_key_in `#define inputs_update_key_in(
 inputs,
 key,
 new_val)`

Value:

`(inputs_update_key_in_from_scancode(inputs, SDL_GetScancodeFromKey(key), \`
`new_val))`

updates the state of a key using SDL_KeyCode `void inputs_update_key_in(Input*,SDL_KeyCode,bool)`

6.6.1.5 inputs_update_mouse_button_in `#define inputs_update_mouse_button_in(
 inputs,
 button,
 new_val)`

Value:

`((inputs)->mouse = (((!(new_val)) << ((button)-1)) | \`
`((inputs)->mouse & ~(1 << ((button)-1))))))`

updates the state of a mouse button MouseButton `inputs_update_mouse_button_in(Input*,MouseButton,bool)`

6.6.2 Typedef Documentation

6.6.2.1 MouseButton `typedef Uint8 MouseButton`

describes any of the following: SDL_BUTTON_LEFT,SDL_BUTTON_MIDDLE, SDL_BUTTON_RIGHT


6.6.3 Function Documentation

6.6.3.1 inputs_update_key_in_from_scancode() `void inputs_update_key_in_from_scancode (`
`Inputs * inputs,`
`SDL_Scancode scancode,`
`bool new_val)`

updates the state of a key using SDL_Scancode !!!!!!!!! this does not take into account non QWERTY keyboards / remaps !!!!!!!!! void inputs_update_key_in_from_scancode(Input*,SDL_Scancode,bool)

6.7 linked_list.h File Reference

This graph shows which files directly or indirectly include this file:

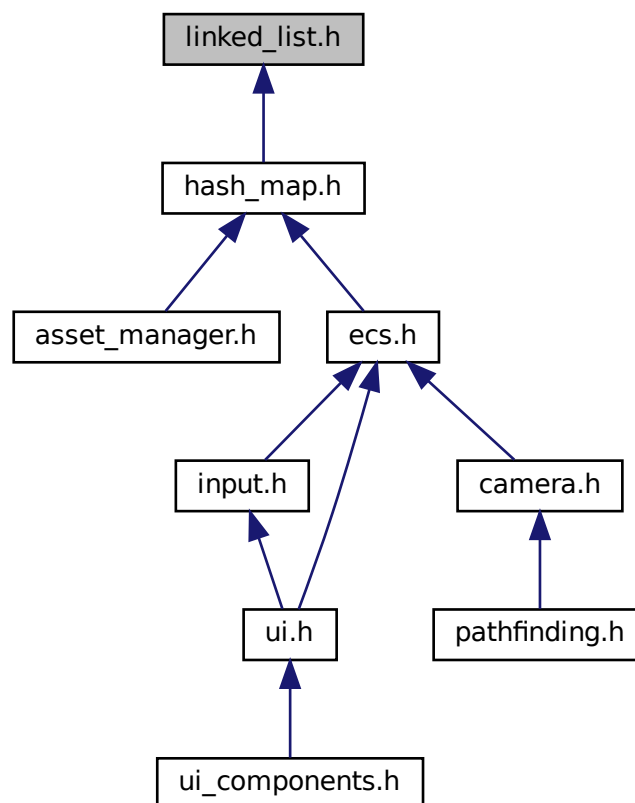

Data Structures

- struct `LinkedListLink`
A link of `LinkedList`
- struct `LinkedList`
A singly linked list.

Functions

- `LinkedList linked_list_create ()`
Creates a `LinkedList`
- `int linked_list_insert (LinkedList *l, void *e, int i)`
- `int linked_list_remove (LinkedList *l, int i)`
Same as `linked_list_remove_callback`, with `free` as the callback
- `int linked_list_remove_callback (LinkedList *l, int i, void(*callback)(void *))`
- `void linked_list_free (LinkedList *)`
Same as `linked_list_free`, with `free` as the callback
- `void linked_list_free_callback (LinkedList *l, void(*callback)(void *))`
- `void * linked_list_get (LinkedList *l, int i)`
*Returns the data field of the *i*th element of *l**

6.7.1 Function Documentation

6.7.1.1 linked_list_free_callback() `void linked_list_free_callback (`
`LinkedList * l,`
`void(*) (void *) callback)`

Frees *l*, calling *callback* on the data fields of each link as a way to free them

6.7.1.2 linked_list_insert() `int linked_list_insert (`
`LinkedList * l,`
`void * e,`
`int i)`

Add *e* as an element of *l* at index *i* Returns 0 on success, -1 on allocation error and -2 if *i* is out of range


6.7.1.3 linked_list_remove_callback() `int linked_list_remove_callback (`
`LinkedList * l,`
`int i,`
`void(*) (void *) callback)`

Removes element at index *i* in *l*, running *callback* on its data as a way to free it


6.8 map.h File Reference

```
#include <stdint.h>
```

Include dependency graph for map.h:



This graph shows which files directly or indirectly include this file:



Data Structures

- struct [MapComponent](#)

Macros

- #define [TILE_SIZE](#) 16
TILE_SIZE is the ingame length of a tile's edge (tiles being squares)
- #define [map_width](#)(m) ((int *) (m))[-2]
returns the width of a Map
- #define [map_height](#)(m) ((int *) (m))[-1]
returns the height of a Map

Typedefs

- typedef [TileTypes](#) ** [Map](#)

Enumerations

- enum `TileTypes` { `TILE_PLAIN` , `TILE_FOREST` , `TILE_NUMBER` }
an enum containing all the tiles for the game

Functions

- void `map_component_free` (void *a)
frees a `MapComponent`, for use in the ecs.
- `Map` `map_create` (int w, int h)
*returns a new `Map` initialized at 0 with size `w*h`*
- void `map_free` (`Map` m)
frees a `Map` created with `map_create`
- `Map` `load_map_from_bmp` (char *path)
- char * `get_tile_file_name` (int8_t id)

6.8.1 Typedef Documentation

6.8.1.1 `Map` typedef `TileTypes** Map`

used to store a map as a matrix of `TileTypes` (each value designates a specific type of tile, ex: water, plain...)

6.8.2 Function Documentation

6.8.2.1 `get_tile_file_name()` char* `get_tile_file_name` (int8_t id)

Returns the file name associated with a certain color. Return value should be freed.


6.8.2.2 `load_map_from_bmp()` `Map` `load_map_from_bmp` (char * path)

Creates a `Map` from the bitmap pointed to by `path`. Said bitmap could be single channel, with 8 bit per color.

6.9 parser.h File Reference

```
#include "units/units.h"
```

Include dependency graph for parser.h:



Functions

- Unit * **parse** (char *path, SDL_Renderer *renderer, SDL_Window *window)


6.10 pathfinding.h File Reference

```
#include "data_structures/map.h"
```

```
#include "renderer/camera.h"
```

```
#include "units/units.h"
```

Include dependency graph for pathfinding.h:

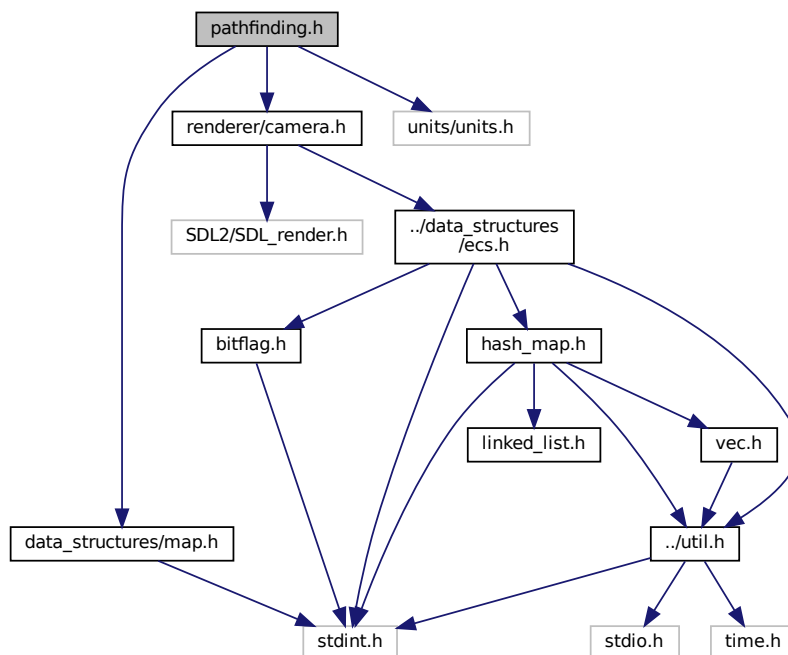

Data Structures

- struct `TilePosition`
stores the position of a tile

Functions

- typedef `VEC` (`TilePosition` *) `Path`
- void `path_free` (`Path` p)
- `Path` `pathfind_astar` (`Map` m, `UnitTypes` u, `TilePosition` *src, `TilePosition` *dest)
returns a minimal Path using the A algorithm*
- double `pathfind_astar_heuristic` (`UnitTypes` u, `TilePosition` *src, `TilePosition` *dest)

6.10.1 Function Documentation

6.10.1.1 pathfind_astar_heuristic() `double pathfind_astar_heuristic (`
 `UnitTypes u,`
 `TilePosition * src,`
 `TilePosition * dest)`

returns the distance between `src` and `dest` times the lowest cost for crossing a tile (cost = 1/speed) (currently using the euclidean distance)


6.10.1.2 VEC() `typedef VEC (`
 `TilePosition *)`

a `Path` on the global map is succession of tile positions, first index being the start of the path

6.11 pqueue.h File Reference

```
#include "vec.h"
```

Include dependency graph for pqueue.h:

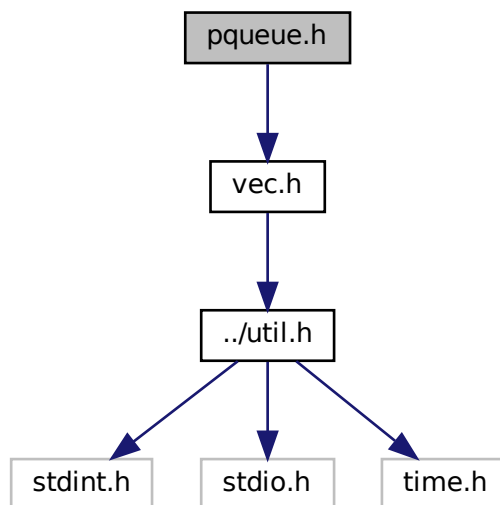

Data Structures

- struct [PQueueEntry](#)
an entry within a PQueue

Macros

- #define [pqueue_new\(\)](#) [vec_new\(PQueueEntry *\)](#)
creates an empty PQueue
- #define [pqueue_len\(p\)](#) [vec_len\(p\)](#)
returns the number of elements currently into the queue
- #define [pqueue_push\(p, val, weight\)](#) (p = [pqueue_push_inner\(p, val, weight\)](#))

Functions

- typedef [VEC](#) ([PQueueEntry *](#)) PQueue
a priority queue
- void [pqueue_free](#) (PQueue p)
frees the queue (does not free the elements still within the queue)
- void [pqueue_free_callback](#) (PQueue p, void(*callback)(void *))
frees the queue and call callback on each element still in the queue
- [PQueueEntry *](#) [pqueue_pop](#) (PQueue p)
removes and returns the element with the smallest weight from the queue
- [PQueueEntry *](#) [pqueue_get](#) (PQueue p)
returns the element with the smallest weight in the queue
- PQueue [pqueue_push_inner](#) (PQueue p, void *val, double weight)
puts an element in the queue


6.12 ui.h File Reference

```
#include "../data_structures/ecs.h"
```


```
#include "../input.h"
```

```
#include "sprite.h"
```

Include dependency graph for ui.h:

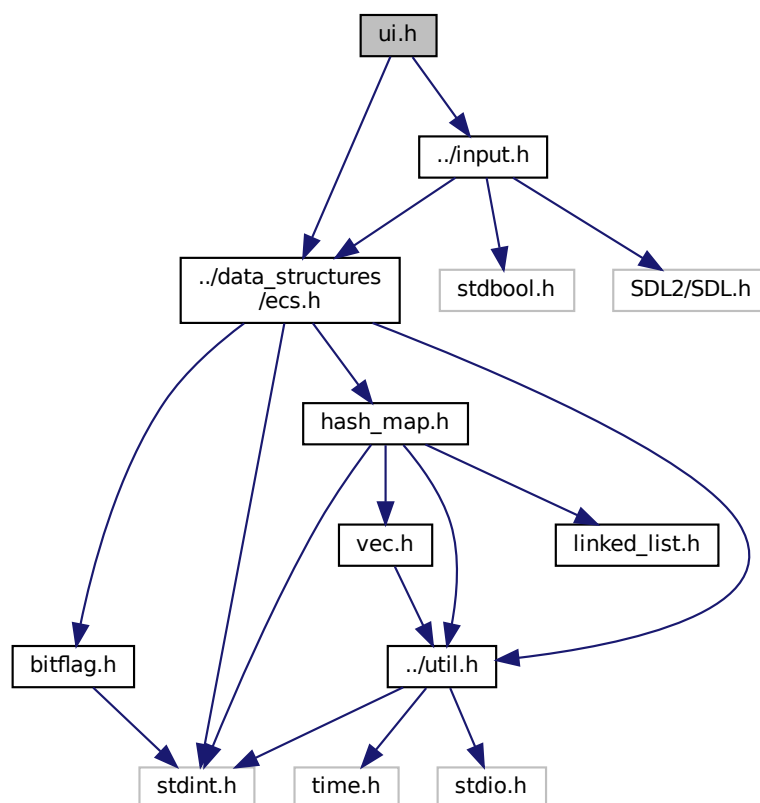

This graph shows which files directly or indirectly include this file:



Data Structures

- struct `Text`
- struct `Background`
Entities with this component are the background of the user interface.
- struct `Clickable`
Entities with this component start an action when clicked on.
- struct `Minimap`
Component that corresponds to the minimap.
- struct `Hoverable`
Entities with this component show text when hovered.

Functions

- void `render_ui` (`World *w`, `SDL_Renderer *rdr`)
Renders any entity that has user interface related component.
- `Entity *` `spawn_clickable` (`World *w`, `Clickable *object`, `KeyEvent *event`)
Adds a clickable to the world.
- void `clickable_event` (`World *w`, `SDL_Renderer *rdr`, `Entity *entity`, `Inputs *in`, `KeyState keystate`)
- void `render_hoverable` (`SDL_Rect *rect`, `char *text`)
- void `hoverable_component_free` (`void *tmp`)
- void `minimap_component_free` (`void *temp`)
- void `background_component_free` (`void *temp`)
- void `clickable_component_free` (`void *temp`)
- void `text_component_free` (`void *temp`)

6.12.1 Function Documentation

6.12.1.1 clickable_event() `void clickable_event (`
 `World * w,`
 `SDL_Renderer * rdr,`
 `Entity * entity,`
 `Inputs * in,`
 `KeyState keystate)`

The `KeyEvent` of the entities associated with a clickable component, there are different cases, if the mouse is out of the sprite, it set `is_clicked` to 0 as for doing nothing, if the left click is pressed on the sprite, it will be set to 1 and if it is set to 1 and the click is released then it will be set to 2. The idea is that if set to 1 there will be a visual change by darkening the sprite and if it set to 2 it will start the action linked to the sprite. It must be noted that if you click on the sprite, move your mouse out and then release the click it will do nothing as a way to correct missclicks.


6.12.1.2 render_hoverable() `void render_hoverable (`
 `SDL_Rect * rect,`
 `char * text)`

This function is used to render the entities associated with a hoverable component

6.13 ui_components.h File Reference

```
#include "ui.h"
```


Include dependency graph for ui_components.h:

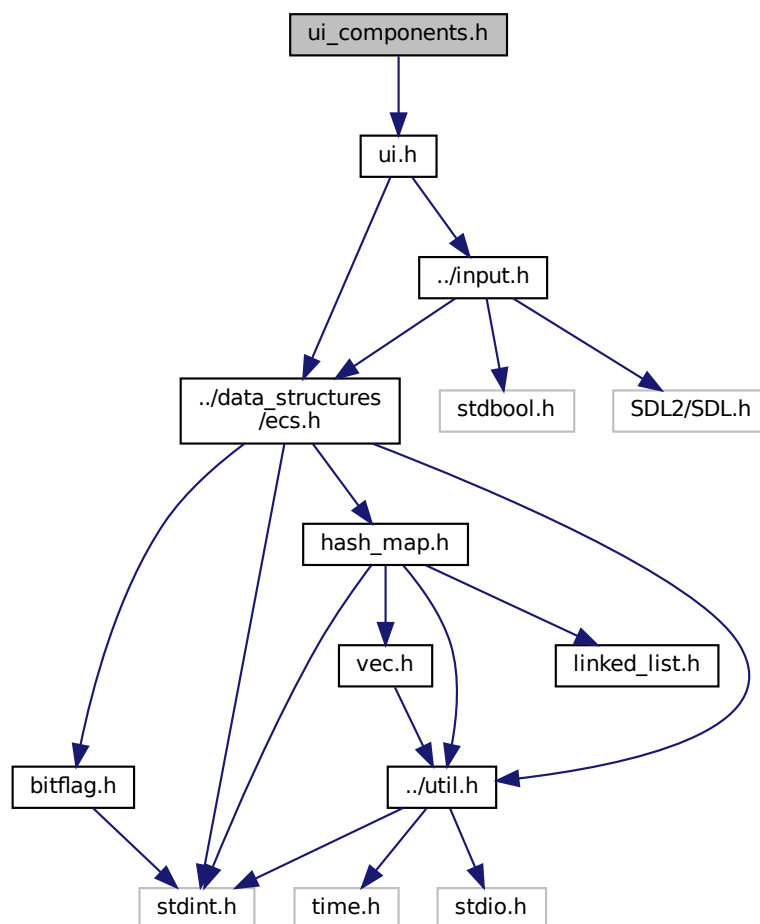


6.14 util.h File Reference

```
#include "errors.h"
#include <stdint.h>
#include <stdio.h>
#include <time.h>
```

Include dependency graph for util.h:

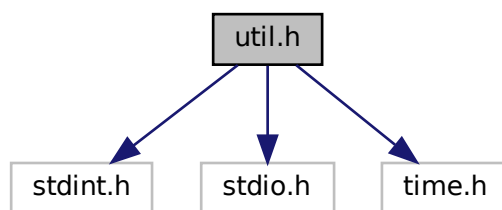

This graph shows which files directly or indirectly include this file:

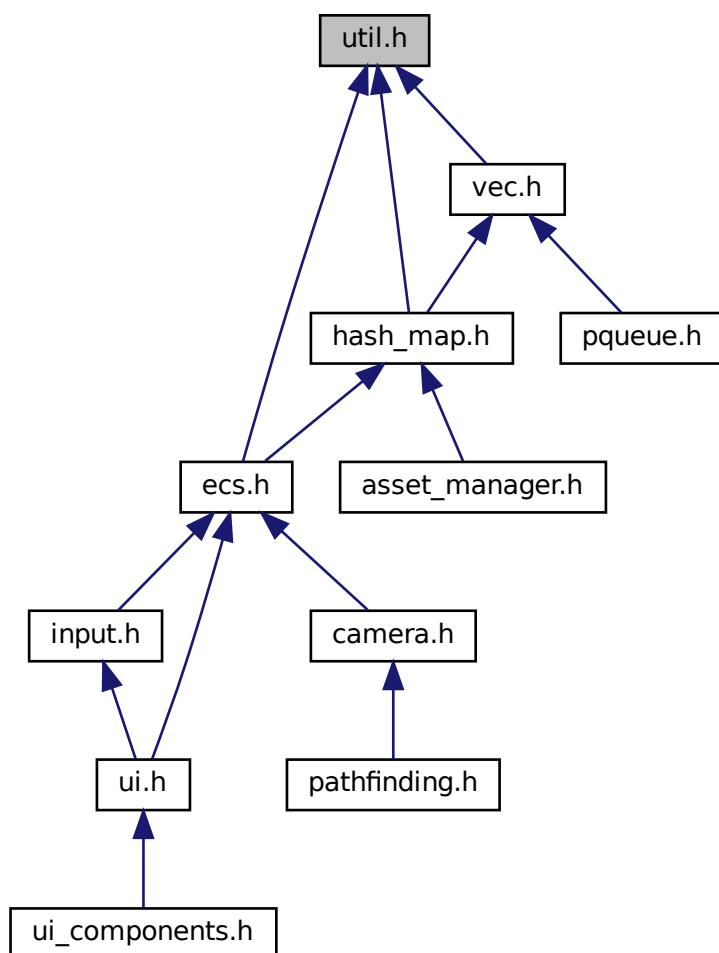

Macros

- `#define WARN(message)`
prints message as a warning
- `#define HANDLE_ERROR(err, message, callback)`
prints message when err != 0, and then runs callback
- `#define TARGET_FRAMETIME (1000 / 60)`
The framerate that the game should try to maintain, in milliseconds.
- `#define WIN_H 360`
The main window's logical height.
- `#define WIN_W 640`
The main window's logical width.
- `#define ASSERT(a)`
- `#define TIME(label, commands)`
Benchmarks commands
- `#define max(a, b) ((a > b) ? (a) : (b))`
- `#define min(a, b) ((a < b) ? (a) : (b))`

Typedefs

- `typedef unsigned int uint`

Functions

- `void free_nothing (void *)`
Does nothing. Used when a callback is necessary but nothing is to be done.
- `char not_strcmp (void *a, void *b)`
Strictly equivalent to !strcmp(a, b). Used as a callback.
- `void sleep_nano (uint64_t n)`
Sleeps the calling thread for n nanoseconds. Uses GNU extensions.

6.14.1 Macro Definition Documentation

6.14.1.1 ASSERT `#define ASSERT(` `a)`

Value:

```
{
    if (!(a)) {
        fprintf(stderr, "[%s:%d] [%x1b[31mE\x1b[0m] assertion '%s' failed\n",
            __FILE__, __LINE__, #a);
        return ASSERTION_FAILED;
    }
}
```

Verify that `a != 0`. Otherwise, prints an error and exits the current function with error `-1`

6.14.1.2 HANDLE_ERROR `#define HANDLE_ERROR(
 err,
 message,
 callback)`

Value:

```
{
    if (err) {
        fprintf(stderr, "[%s:%d] [\x1b[31mE\x1b[0m] %s\n", __FILE__, __LINE__,
            message);
        callback;
    }
}
```

prints message when `err != 0`, and then runs `callback`

6.14.1.3 TIME `#define TIME(
 label,
 commands)`

Value:

```
{
    struct timespec _beg;
    clock_gettime(CLOCK_MONOTONIC, &_beg);
    commands;
    struct timespec _end;
    clock_gettime(CLOCK_MONOTONIC, &_end);
    uint64_t elapsed = (uint64_t)(_end.tv_sec - _beg.tv_sec) * 1000000000 +
        (uint64_t)(_end.tv_nsec - _beg.tv_nsec);
    printf("[\033[38;5;96mBENCHMARKING\033[0m] %s took %fs\n", label,
        (double)elapsed / 1000000000);
}
```

Benchmarks `commands`

6.14.1.4 WARN `#define WARN(
 message)`

Value:


```
fprintf(stderr, "[%s:%d] [\x1b[33mW\x1b[0m] %s\n", __FILE__, __LINE__,
    message);
```

prints message as a warning


6.15 vec.h File Reference

```
#include "../util.h"
```

Include dependency graph for vec.h:

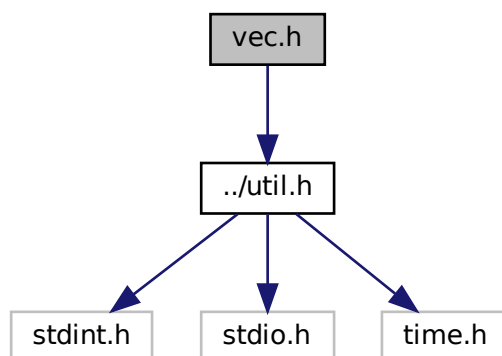

This graph shows which files directly or indirectly include this file:

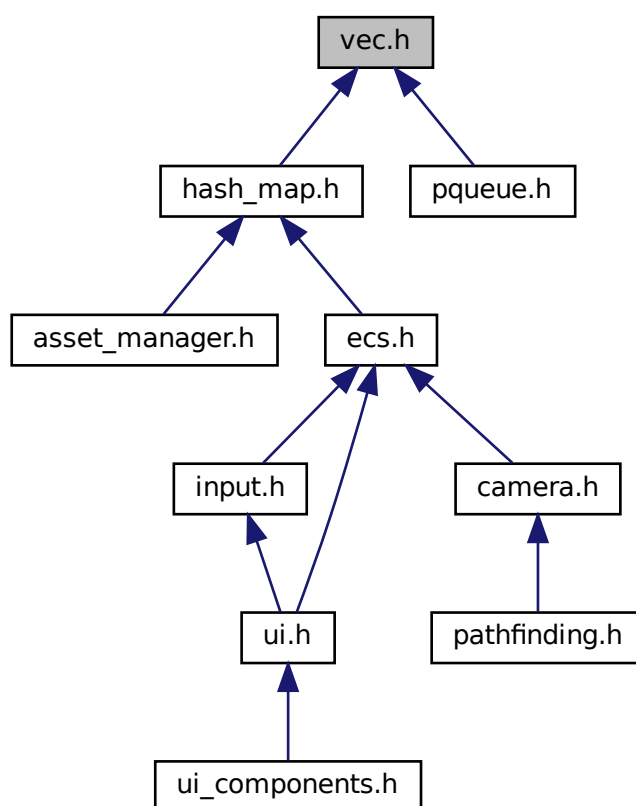

Macros

- `#define VEC(x) x *`
- `#define VEC_INIT_CAPACITY 16`
The length of a `vec` at creation.
- `#define vec_new(type) (vec_new_inner(sizeof(type)))`
Creates a new `vec` for type `type`
- `#define vec_push(vec, obj) vec = (vec_push_inner(((void *) (vec)), (void *)&(obj)))`
adds a copy of `obj` at the end of `vec`
- `#define vec_last(a) (a)[vec_len((a)) - 1]`
expands to the last element of the `vec`

Functions

- `VEC (void) vec_copy(VEC(void) vec)`
copies `vec` and returns the copy
- `void vec_free (VEC(void) vec)`
frees a `vec`. This should always be used instead of `free (vec)`
- `void vec_pop (VEC(void) vec)`
- `uint vec_len (VEC(void) vec)`
returns the length of `vec`. This is a $O(1)$ operation.
- `void vec_sort (VEC(void) vec, char(*gt)(void *a, void *b))`
- `void vec_swap (VEC(void) vec, int a, int b)`
swaps the elements at index `a` and `b` in `vec`
- `char u64_gt (void *a, void *b)`
- `void vec_remove (void *vec, int a)`
removes element at index `a` in `vec`
- `void vec_reverse (void *vec)`

Variables

- `void * obj`

6.15.1 Detailed Description

file This file defines a redimensionnable array, hereafter referred to as `vec`. Relevant informations about the content of the `vec` are stored just before the pointer that the user manipulates

6.15.2 Macro Definition Documentation

6.15.2.1 VEC

```
#define VEC(  
x ) x *
```

A macro that extends to a pointer to `x`, to differentiate vectors from arbitrary pointers

6.15.3 Function Documentation

6.15.3.1 u64_gt() `char u64_gt (`
 `void * a,`
 `void * b)`

`a` and `b` are assumed to be `uint64_t`. returns true iff `&(uint64_t*) a >= &(uint64_t*) b`. Used for `vec←_sort`

6.15.3.2 VEC() `VEC (`
 `void)`

copies `vec` and returns the copy

adds a copy of what `obj` points to at the end of `vec`. returns a potentially new pointer to the `vec`

6.15.3.3 vec_pop() `void vec_pop (`
 `VEC(void) vec)`

removes the last element of the `vec`. Doesn't return it for optimisation purposes

6.15.3.4 vec_reverse() `void vec_reverse (`
 `void * vec)`

reverses `vec` (i.e. `old_vec[i] = new_vec[n-1-i]` where `n` is the length of `vec`)

6.15.3.5 vec_sort() `void vec_sort (`
 `VEC(void) vec,`
 `char(*) (void *a, void *b) gt)`

sorts `vec` in place, using `gt` as a way to compare elements. `gt`'s parameters are pointers to the actually compared data, and `gt` returns true iff `a >= b`. `vec_sort` uses merge sort and is consequentially in $O(n \log(n))$

Index

ASSERT

util.h, [41](#)

asset_manager.h, [15](#)

drop_texture, [16](#)

get_font, [16](#)

get_texture, [16](#)

init_asset_manager, [16](#)

load_audio, [16](#)

load_texture, [16](#)

Background, [4](#)

bitflag.h, [17](#)

Camera, [4](#)

zoom, [5](#)

camera.h, [18](#)

render, [19](#)

Clickable, [5](#)

clickable_event

ui.h, [38](#)

component2entity

World, [14](#)

ComponentWrapper, [6](#)

data

LinkedListLink, [10](#)

drop_texture

asset_manager.h, [16](#)

ecs.h, [19](#)

ecs_add_component, [22](#)

entity_get_component, [23](#)

EntityRef, [22](#)

eq_u64, [23](#)

parallelize_query, [21](#)

register_component, [22](#)

register_component_callback, [22](#)

register_component_inner_callback, [23](#)

register_system_requirement, [23](#)

VEC, [23](#)

ecs_add_component

ecs.h, [22](#)

Entity, [6](#)

entity_get_component

ecs.h, [23](#)

entity_map

World, [14](#)

EntityRef

ecs.h, [22](#)

Entry, [7](#)

eq_u64

ecs.h, [23](#)

get_font

asset_manager.h, [16](#)

get_texture

asset_manager.h, [16](#)

get_tile_file_name

map.h, [33](#)

HANDLE_ERROR

util.h, [41](#)

hash_map.h, [24](#)

hash_map_create, [26](#)

hash_map_get, [26](#)

hash_map_insert, [26](#)

hash_map_insert_callback, [26](#)

hash_map_create

hash_map.h, [26](#)

hash_map_get

hash_map.h, [26](#)

hash_map_insert

hash_map.h, [26](#)

hash_map_insert_callback

hash_map.h, [26](#)

HashMap, [7](#)

HashMapEntry, [8](#)

Hoverable, [8](#)

init_asset_manager

asset_manager.h, [16](#)

input.h, [27](#)

inputs_is_key_in, [28](#)

inputs_is_key_in_from_scancode, [28](#)

inputs_is_mouse_button_in, [29](#)

inputs_update_key_in, [29](#)

inputs_update_key_in_from_scancode, [29](#)

inputs_update_mouse_button_in, [29](#)

MouseButton, [29](#)

Inputs, [8](#)

inputs_is_key_in

input.h, [28](#)

inputs_is_key_in_from_scancode

input.h, [28](#)

inputs_is_mouse_button_in

input.h, [29](#)

inputs_update_key_in

input.h, [29](#)

inputs_update_key_in_from_scancode

input.h, [29](#)

inputs_update_mouse_button_in

input.h, [29](#)

linked_list.h, [30](#)

linked_list_free_callback, [31](#)

linked_list_insert, [31](#)

linked_list_remove_callback, [31](#)

linked_list_free_callback

linked_list.h, [31](#)

linked_list_insert

linked_list.h, [31](#)

linked_list_remove_callback

- linked_list.h, 31
- LinkedList, 9
- LinkedListLink, 10
 - data, 10
- load_audio
 - asset_manager.h, 16
- load_map_from_bmp
 - map.h, 33
- load_texture
 - asset_manager.h, 16
- Map
 - map.h, 33
- map.h, 32
 - get_tile_file_name, 33
 - load_map_from_bmp, 33
 - Map, 33
- MapComponent, 10
- Minimap, 11
- MouseButton
 - input.h, 29
- parallelize_query
 - ecs.h, 21
- parser.h, 34
- pathfind_astar_heuristic
 - pathfinding.h, 35
- pathfinding.h, 34
 - pathfind_astar_heuristic, 35
 - VEC, 35
- Position, 11
- pqueue.h, 35
- PQueueEntry, 11
- Rc, 12
- register_component
 - ecs.h, 22
- register_component_callback
 - ecs.h, 22
- register_component_inner_callback
 - ecs.h, 23
- register_system_requirement
 - ecs.h, 23
- render
 - camera.h, 19
- render_hoverable
 - ui.h, 38
- Sprite, 12
- Text, 12
- TilePosition, 13
- TIME
 - util.h, 42
- u64_gt
 - vec.h, 45
- ui.h, 37
 - clickable_event, 38
 - render_hoverable, 38
- ui_components.h, 39
- util.h, 39
 - ASSERT, 41
 - HANDLE_ERROR, 41
 - TIME, 42
 - WARN, 42
- VEC
 - ecs.h, 23
 - pathfinding.h, 35
 - vec.h, 44, 45
 - World, 14
- vec.h, 42
 - u64_gt, 45
 - VEC, 44, 45
 - vec_pop, 45
 - vec_reverse, 45
 - vec_sort, 45
- vec_pop
 - vec.h, 45
- vec_reverse
 - vec.h, 45
- vec_sort
 - vec.h, 45
- void
 - World, 14
- WARN
 - util.h, 42
- World, 13
 - component2entity, 14
 - entity_map, 14
 - VEC, 14
 - void, 14
- zoom
 - Camera, 5