


HAI H NGUYEN
SID: 844 920 234

SortedIntList
<ul style="list-style-type: none">- elementData : int[]- size : int- unique : boolean+ DEFAULT_CAPACITY : int
<ul style="list-style-type: none">+ SortedIntList ()+ SortedIntList (unique : boolean)+ SortedIntList (size : int)+ SortedIntList (unique : boolean, size : int)+ add (value : int)+ clear ()+ contains (value : int) : boolean+ ensureCapacity (capacity : int)+ get (index : int) : int+ getUnique() : boolean+ indexOf (value : int) : int+ isEmpty () : boolean+ max () : int+ min () : int+ remove (index : int)+ removeDuplicates ()+ setUnique(value : boolean)+ size (size : int) : int+ toString () : String- checkIndex (index : int)- getInsertIndex (value : int) : int- insert (index : int, value : int)

HAI H NGUYEN
SID: 844 920 234

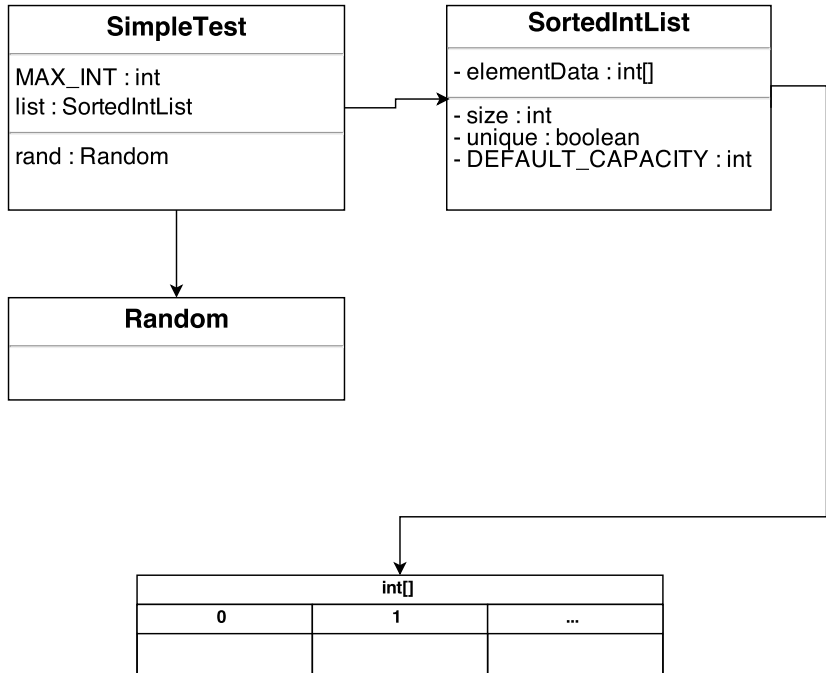

```

1
2 import java.util.*;
3 /**
4  * An Integer Specific data type which sort itself.
5  *
6  * <ul>
7  * <li> Name: SortedIntList.java
8  * <li> Description: Sorted Int List
9  * <li> Class: Java 145
10 * <li> Instructor: Ken Hang
11 * <li> Date: Jan 28 2015
12 * </ul>
13 *
14 * @author Hai H Nguyen (Bill)
15 * @version Winter 2015
16 */
17 public class SortedIntList {
18
19     public static final int DEFAULT_CAPACITY = 99;
20
21     private int[] elementData; // list of integers
22
23     private int size; // current number of elements in the list
24
25     private boolean unique; // indicate whether there should be duplications or not
26
27     /**
28      * Full Constructor, take a capacity and an indicator, then call Main Constructor.
29      * @param unique Indicate whether there should be duplications or not
30      * @param capacity Replacement for the DEFAULT_CAPACITY
31      */
32     public SortedIntList(boolean unique, int capacity){
33         this(capacity);
34
35         this.unique = unique;
36     }
37
38     /**
39      * Main Constructor, take in a capacity and instantiate an array based on it.
40      * @param capacity Replacement for the DEFAULT_CAPACITY
41      */
42     public SortedIntList(int capacity){
43         if (capacity < 0) {
44             throw new IllegalArgumentException("Invalid capacity: " + capacity);
45         }
46
47         elementData = new int[capacity];
48
49         size = 0;
50     }
51
52     /**
53      * Sub Constructor, take an indicator, call Full Constructor with DEFAULT_CAPACITY
54      * @param unique Indicate whether there should be duplicates or not
55      */
56     public SortedIntList(boolean unique) {
57         this(unique, DEFAULT_CAPACITY);
58     }
59
60     /**
61      * Default Constructor, Call the Main Constructor with DEFAULT_CAPACITY
62      */
63     public SortedIntList(){
64         this(DEFAULT_CAPACITY);
65     }
66
67     /**
68      * @return The maximum value from the List

```

```

69     */
70     public int max(){
71         if (size == 0){
72             throw new NoSuchElementException("Size: " + size);
73         }
74
75         return elementData[size-1];
76     }
77
78     /**
79      * @return          The minimum value from the List
80      */
81     public int min(){
82         if (size == 0){
83             throw new NoSuchElementException("Size: " + size);
84         }
85
86         return elementData[0];
87     }
88
89     /**
90      * @return          The value of the Unique Flag
91      */
92     public boolean getUnique(){
93         return unique;
94     }
95
96     /**
97      * Set the Value of the Unique Flag
98      * @param value      The Flag to switch to
99      */
100    public void setUnique (boolean value){
101        if ((unique = value) && size > 1){
102            removeDuplicates();
103        }
104    }
105
106    /**
107     * @param index      Index to get Value
108     * @return           Value at Index
109     */
110    public int get(int index) {
111        checkIndex(index);
112
113        return elementData[index];
114    }
115
116    /**
117     * @return           The Size Field
118     */
119    public int size() {
120        return size;
121    }
122
123    /**
124     * Add the passed value into the elementData.
125     * @param value      Element to be added
126     */
127    public void add(int value){
128        int index = indexOf(value);
129
130        if (!(index >= 0 && unique)){
131            ensureCapacity(size + 1);
132
133            if (index == -1){
134                index = getInsertIndex (value);
135            }
136

```

```

137         insert(index,value);
138     }
139 }
140
141 /**
142  * @param value      Value looking for index
143  * @return           Return the index to Insert the passed Value
144  */
145 private int getInsertIndex(int value){
146     return -(Arrays.binarySearch(elementData, 0, size, value)+1);
147 }
148
149 /**
150  * Insert the value at the index indicated
151  * @param index      Index to insert the value
152  * @param value      Value to be inserted
153  */
154 private void insert(int index, int value){
155     for (int i = size; i > index; --i) {
156         elementData[i] = elementData[i - 1];
157     }
158
159     elementData[index] = value;
160
161     ++size;
162 }
163
164 /**
165  * Remove all Duplicates
166  */
167 public void removeDuplicates(){
168     int previousSize = size + 1;    // Ensure Space
169
170     int [] tempData = new int[previousSize];
171
172     size = 1;
173
174     tempData[0] = elementData[0];
175
176     for (int i = 0 ; i < previousSize-1; ++i){
177         if (tempData[size-1] != elementData[i]){
178             tempData[(++size)-1] = elementData[i];
179         }
180     }
181
182     elementData = tempData;
183 }
184
185 /**
186  * Remove the element at passed index
187  * @param index      Index of Element to be Deleted
188  */
189 public void remove(int index) {
190     checkIndex(index);
191
192     --size;
193
194     for (int i = index; i < size; i++) {
195         elementData[i] = elementData[i + 1];
196     }
197 }
198
199 /**
200  * Set the Size to 0, thus negate the use of other functions.
201  */
202 public void clear() {
203     size = 0;
204 }

```

```

205
206 /**
207  * @param value      The value to check for index
208  * @return           Index of the value given. Else return -1
209  */
210 public int indexOf(int value) {
211     int index = Arrays.binarySearch(elementData, 0, size, value);
212
213     if (index >= 0){
214         return index;
215     } else {
216         return -1;
217     }
218 }
219
220 /**
221  * @param value      The value to check for existence
222  * @return           True if elementData contains it, False otherwise
223  */
224 public boolean contains(int value) {
225     return indexOf(value) >= 0;
226 }
227
228 /**
229  * Check if index is within the size
230  * @param index      Index to be checked
231  */
232 private void checkIndex(int index) {
233     if (index < 0 || index >= size) {
234         throw new IndexOutOfBoundsException("index: " + index);
235     }
236 }
237
238 /**
239  * @return           True if size is 0, False otherwise.
240  */
241 public boolean isEmpty() {
242     return size == 0;
243 }
244
245 /**
246  * Check the capacity of the current list. If needed, double it.
247  * @param capacity    Passed size to check
248  */
249 public void ensureCapacity(int capacity) {
250     if (capacity > elementData.length) {
251         int newCapacity = elementData.length * 2 + 1;
252
253         if (capacity > newCapacity) {
254             newCapacity = capacity;
255         }
256
257         elementData = Arrays.copyOf(elementData, newCapacity);
258     }
259 }
260
261 /**
262  * @return           Comma-separated, bracketed version of the list
263  */
264 public String toString() {
265     if (size == 0) {
266         return "[]";
267     } else {
268         String out = "[" + elementData[0];
269
270         for (int i = 1; i < size; i++) {
271             out += ", " + elementData[i];
272         }

```

```
273
274         out += "];
275
276         return out;
277     }
278 }
279 }
```

```

1
2 import java.util.Random;
3 /**
4  * An Updated simple test for SortedIntList.
5  *
6  * <ul>
7  * <li> Name: SimpleTest.java
8  * <li> Description: Sorted Int List Simple Test
9  * <li> Class: Java 145
10 * <li> Instructor: Ken Hang
11 * <li> Date: Feb 2 2015
12 * </ul>
13 *
14 * @author Hai H Nguyen (Bill)
15 * @version Winter 2015
16 */
17 public class SimpleTest {
18
19     //Random Duplicate Indicator
20     public static final int MAX_INT = 9;
21
22     public static void main(String[] args) {
23         test1();
24
25         test2();
26
27         //ExtraTest.test3(); //These invoke
28
29         //ExtraTest.test4(); //test cases extracted
30
31         //ExtraTest.test5(); //from model tests on canvas
32     }
33
34     //First Test
35     //Test Uniqueness and Sort order
36     public static void test1() {
37         boolean unique = false;
38
39         SortedIntList list = new SortedIntList(unique);
40
41         fill(list, 18);
42
43         list.setUnique(unique = true);
44
45         fill(list, 18);
46
47         boolean failFlag = ((list.getUnique() != unique) || (!isSorted(list)));
48
49         list.clear();
50
51         failFlag = failFlag || (!list.toString().equals("[]"));
52
53         if (failFlag){
54             System.out.println("\nTest 1 Failed!\n");
55         } else{
56             System.out.println("\nTest 1 Passed!\n");
57         }
58     }
59
60     //Second Test
61     //Test toString, min, max and size
62     public static void test2() {
63         if (checkToString() && checkMinMax() && checkSize()) {
64             System.out.println("\nTest 2 Passed!");
65         } else {
66             System.out.println("\nTest 2 Failed!");
67         }
68     }

```



```

69
70 // returns true if list is sorted, false otherwise
71 public static boolean isSorted(SortedIntList list) {
72     for (int i = 0; i < list.size() - 1; i++) {
73         if (list.get(i) > list.get(i + 1)) {
74             return false;
75         }
76     }
77     return true;
78 }
79
80
81 // Test the toString Method.
82 public static boolean checkToString() {
83     SortedIntList list1 = new SortedIntList(10);
84
85     fillNine(list1);
86
87     list1.add(0);
88
89     String test1 =
90         "[-9, -8, -7, -6, -5, -4, -3, -2, -1, " +
91         "0, 1, 2, 3, 4, 5, 6, 7, 8, 9]";
92
93     SortedIntList list2 = new SortedIntList(true);
94
95     for (int i = 9; i > 0; --i) {
96         for (int j = 0; j < 9; ++j) {
97             list2.add(i * 9);
98         }
99     }
100
101     String test2 = "[9, 18, 27, 36, 45, 54, 63, 72, 81]";
102
103     boolean failFlag = !( test1.equals(list1.toString()) &&
104         test2.equals(list2.toString()));
105
106     System.out.println(failFlag ?
107         "toString Failed!" : "toString Ok!");
108
109     return (!failFlag);
110 }
111
112 // Test the min/max methods.
113 public static boolean checkMinMax() {
114     //Should be -9 and 9
115
116     SortedIntList list = new SortedIntList();
117
118     fillNine(list);
119
120     boolean failFlag = list.min() != -9 && list.max() != 9;
121
122     System.out.println(failFlag ?
123         "min and max Failed!" : "min and max Ok!");
124
125     return (!failFlag);
126 }
127
128 // Checks to see if the list has the appropriate size.
129 public static boolean checkSize() {
130     SortedIntList list = new SortedIntList();
131
132     fillNine(list);
133
134     boolean failFlag = list.size() != 18;
135
136     System.out.println(failFlag ?

```

```
137         "size Failed!" : "size Ok!");
138
139     return (!failFlag);
140 }
141
142 //pre: list is a SortedIntList, size will not exceed l's capacity
143 //post: list is filled with TEST_SIZE random values
144 public static void fill(SortedIntList list, int size) {
145     Random rand = new Random();
146
147     list.clear();
148
149     for (int i = 0; i < size; i++) {
150         list.add(rand.nextInt(MAX_INT));
151     }
152 }
153
154 // Add integers from -9 to 9 into the list
155 public static void fillNine(SortedIntList list){
156     for(int i = 9; i > 0; --i){
157         list.add(i);
158
159         list.add(-i);
160     }
161 }
162 }
```