

The Petri-Nets to Statecharts Transformation Case

Pieter Van Gorp

Eindhoven University of Technology, PO Box 513, 5600 MB Eindhoven, The Netherlands.

`p.m.e.v.gorp@tue.nl`

Louis M. Rose

Department of Computer Science, University of York, UK.

`louis.rose@york.ac.uk`

TODO:

- Abstract
- Mention performance for Epsilon (can be brief)
- Create ZIP attachment with testsuite models

1 Introduction

Although transformations are already developed for decades in various communities (such as the compiler community [1], the program transformation community [5] and the business process management (BPM) community [8]), it is relatively new to study the strengths and weaknesses from transformation approaches across community boundaries. The aim of the Transformation Tool Contest (TTC) is to compare the expressiveness, the usability and the performance of graph and model transformation tools along a number of selected case studies. A deeper understanding of the relative merits of different tool features will help to further improve graph and model transformation tools and to indicate open problems [6]. This paper proposes a case for the sixth edition of TTC (i.e., to TTC'13).

1.1 Context of the Case

In BPM research and practice, transformations are usually programmed using general purpose programming languages. Mapping rules in BPM literature tend to be formalized using mathematical set constructs whereas they tend to be documented using informal visual rules and implemented in Java or another general purpose programming language. In the graph and model transformation communities, special purpose languages and tools are being developed to support the direct execution of such mapping rules. Finally, various comparative studies have been contributed to the emerging field of transformation engineering (cfr., [12, 17, 9, 7, 11, 10, 14, 13]) but too little transformation problems have been considered that are considered challenging by the BPM community. This paper proposes the so-called PN2SC case, related to the transformation of Petri-Nets to statecharts. The case relates to an active research line at Eindhoven University of Technology. Interestingly, much of the associated research efforts have been spent on an optimization algorithm which turns out to be irrelevant when using a rule-based transformation approach instead of an imperative programming approach [16]. Therefore, the case can be considered a nice showcase for demonstrating to the BPM community the potential impact of results from the transformation community.

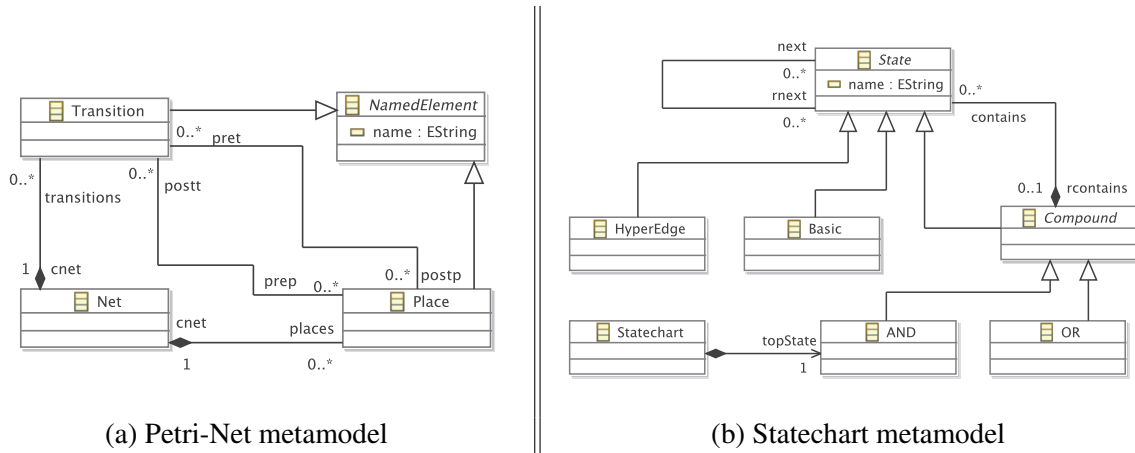


Figure 1: The metamodels used in the PN2SC transformation.

1.2 Relevance for TTC'13

Besides providing input to BPM industry and its research community, this study also covers a previously unstudied type of transformation. More specifically, the transformation problem under study is a process model translation that raises the abstraction level. Regardless of concrete language and metamodel details, this type of problem has not yet been considered for the evaluation of transformation approaches.

In the following, we briefly survey existing comparative studies related to process models. Varró et al. studied various approaches to mapping conceptual process model in UML to more technical CSP models [17]. Also, in a special issue edited by Rensink et al., various experts present their solutions to a case study concerning the mapping of conceptual process models in BPMN to more technical BPEL models [9]. Grønmo et al. discuss various approaches to transforming conceptual UML models into strictly structured counter-parts [7]. Again, the target models are more low-level than the input models. Rose et al. discuss different approaches to migrating Petri-Net models [10]. In that case, input models are at the same level of abstraction as output models.

Van Gorp et al. have already considered the case proposed by this paper for comparing a graph transformation approach to the Java-based programming approach that is mainstream in the BPM domain. The authors make the interesting observation that the rule-based approach required less specification effort yet delivered superior performance. By submitting this case to TTC'13, we aim at analyzing the generalizability of that observation.

1.3 Input and Output Languages

TODO: copy/paste some background about petri-nets and statecharts, also cite some papers about safe nets, workflow nets.

2 The Transformation

This section details the Petri-Net to statechart transformation algorithm, originally described by Es-huis [2]. The transformation described below is *input-destructive* (elements of the Petri-Net model are removed as the transformation proceeds), and uses the metamodels shown in figure 1.

2.1 Preconditions

The following assumptions can be made regarding the context in which the PN2SC transformation is started:

- there is only one instance of `Net`,
- there are no `Statechart` nor `State` instances.

2.2 Initialisation

The first step in the PN2SC transformation involves creating an initial structure for the statechart model. In particular, the following statechart model elements are created:

- For every `Place` p in the Petri-Net:
 an instance of `Basic`, b (with $b.name = p.name$),
 an instance of `OR`, o such that $o.contains = \{b\}$,
- For every `Transition` t in the Petri-Net:
 an instance of `HyperEdge` e (with $e.name = t.name$),
- All `pret/postp` and `postt/prep` arcs should be mapped to `next/rnext` links between the `States` equivalent with the input `NamedElements` that are connected by these arcs.

Equivalence. Initialisation should also provide a mechanism for identifying the `OR` node created for a particular `Place` and the `HyperEdge` created for a particular `Transition`. The precise mechanism can vary over implementations. One approach is to use a name-based identification (e.g., assign all `Places` a uniquely identifying name and copy each `Place`'s name to its `OR` node during initialisation.) Another approach is to create traceability links between corresponding source and target elements. In the remainder of this section we assume that the initialisation of the transformation will construct an injective function $equiv : Place \rightarrow OR$.

2.3 Reduction rules

Following initialisation, the transformation continues by applying one of two types of reduction rules: `AND` and `OR`.

2.3.1 AND rules

The first type of reduction rule, `AND` (informally documented by Figure 2.a), constructs an `AND` state for a set of `Places` that are connected to the same incoming and outgoing `Transitions`.

Pre-conditions. The `AND` rule can be applied to a `Transition`, t , iff $|t.prep| > 1$ and every `Place` in $t.prep$ is connected to the same set of outgoing transitions and the same set of incoming transitions. Alternatively, the `AND` rule can be applied to a `Transition`, t iff $|t.postp| > 1$ and every `Place` in $t.postp$ is connected to the same set of outgoing transitions and the same set of incoming transitions. Given these two alternative situations, we refer to two `AND` rules. However, in some languages one can implement these variants in one rule.

Figure 2.a illustrates when the `AND` rule for the situation $|t.prep| > 1$ would be applicable: q_1 to q_n all have $\{t\}$ as the set of outgoing transitions while they share $\{t_1, t_2\}$ as the set of incoming transitions.

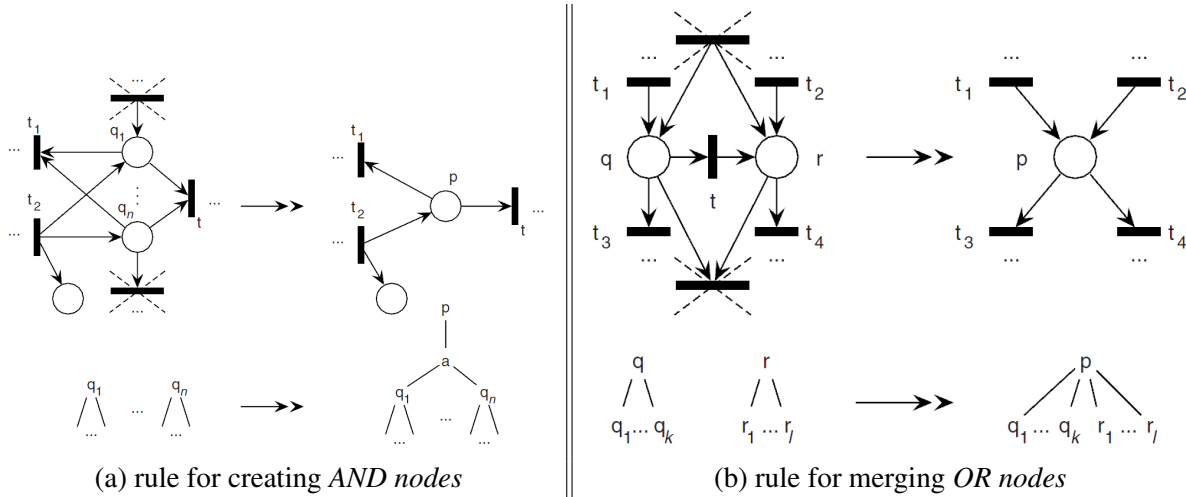


Figure 2: Visual documentation for mapping rules.

q_n should not have an outgoing arc to a transition for which there is no corresponding arc between q_1 and that transition. Conversely, q_1 should not have an incoming arc from a transition for which there is no corresponding arc between that transition and q_n . To illustrate the situation when the AND rule for the situation $|t.postp| > 1$ would be applicable, one can simply reverse all arcs in Figure 2.a.

Effect on statechart. Applying the AND rule results in the creation of a new AND state (a) and a new OR state (p) such that $p.contains = a$ and $a.contains$ is the set of OR states $\{q \in t.prep : equiv(q)\}$; or $\{q \in t.postp : equiv(q)\}$ if the rule has been applied to the transition's postset, $t.postp$.

Effect on Petri-Net. Applying the AND rule removes from the Petri-Net all but one of the Places in the set $t.prep$ ($t.postp$).

EOL Implementation. Figure 3 shows an implementation of the AND rule in EOL. Note that the AND rule can be applied in “both directions” on line 2.

2.3.2 OR rules

The second type of reduction rule, OR (informally documented by Figure 2.b), constructs an OR state for a Transition that has a single preceding Place and single succeeding Place.

Pre-conditions. The OR rule can be applied to a Transition, t , iff $(|t.prep| = 1) \wedge (|t.postp| = 1)$ and there is no transition, t' , such that $(q \in t'.prep) \wedge (r \in t'.prep)$ or $(q \in t'.postp) \wedge (r \in t'.postp)$ where q is the single place contained in $t.prep$ and r is the single place contained in $t.postp$.

Effect on statechart. Applying the OR rule results in the creation of a new OR state (p) such that $p.contains$ is the set of OR states $equiv(q).contains \cup equiv(r).contains$.

```

1 operation PN!Transition apply_and_rule() : Boolean {
2   return self.apply_and_rule(self.prep) or self.apply_and_rule(self.postp);
3 }
4
5 operation PN!Transition apply_and_rule(places : Collection(PN!Place)) : Boolean {
6   var result = false;
7
8   // Check pre-conditions
9   if (places.size() > 1 and places.forAll(p|p.has_same_transitions_as?(places.first))) {
10
11     // Alter statechart
12     var parent = new SC!AND;
13     parent.contains.addAll(places.equivalent());
14
15     var root = new SC!OR;
16     get_top_state().contains.add(root);
17     root.contains.add(parent);
18
19     // Alter Petri net
20     delete places.tail();
21
22     result = true;
23   }
24
25   return result;
26 }
27
28 operation PN!Place has_same_transitions_as?(other : PN!Place) : Boolean {
29   return self.pret.size() == other.pret.size() and
30         self.postt.size() == other.postt.size() and
31         self.pret.forAll(e|other.pret.includes(e)) and
32         self.postt.forAll(e|other.postt.includes(e));
33 }
34
35 operation Collection tail() : Collection {
36   var tailed = self.clone();
37   tailed.removeAt(0);
38   return tailed;
39 }
40
41 operation PN!Place equivalent() : SC!OR {
42   // This operation is implementation-specific.
43   // In our solution, we use the names of Places and OR
44   // nodes to implement equivalence, but other approaches
45   // are equally valid and correct.
46 }

```

Figure 3: EOL code for performing AND merges (Figure 2a).

```

1 operation Transition apply_or_rule() : Boolean {
2   var result = false;
3
4   if (self.prep.size() == 1 and self.postp.size() == 1) {
5     var q = self.prep.first;
6     var r = self.postp.first;
7
8     if ((q == r) or not q.shares_a_transition_with?(r)) {
9       if (q <> r) {
10        var merger = q.equivalent();
11        var mergee = r.equivalent();
12
13        // Update statechart, re-using the q state as p
14        merger.contains.addAll(mergee.contains);
15        delete mergee;
16
17        // Update Petri net, re-using the q place as p
18        q.pret.addAll(r.pret);
19        q.postt.addAll(r.postt);
20        delete r;
21        delete self; //// TODO (PVG): move to after this conditional ?
22
23        result = true;
24      }
25    }
26  }
27
28  return result;
29 }
30
31 operation Place shares_a_transition_with?(other : Place) : Boolean {
32   return self.pret.exists(e|e.postp.includes(other)) or
33     self.postt.exists(e|e.prep.includes(other));
34 }

```

Figure 4: EOL code for performing OR merges (Figure 2b).

Effect on Petri-Net. Applying the OR rule removes from the Petri-Net the Transition t and the Places q and r ; and adds a new Place p such that $p.pret = (q.pret \cup r.pret)$ and $p.postt = (q.postt \cup r.postt)$.

EOL Implementation. Figure 4 shows an implementation of the OR rule in EOL. Note that this implementation re-uses q to form p , rather than instantiate a new Place or OR state.

2.4 Termination

The output model should contain a single instance of Statechart sc . The transformation should apply the reduction rules as long as possible to the input elements. For input Petri-Nets in the class of nets defined by [3], the reduction process should terminate with exactly one Place left. The equivalent AND state st should not have any parent Compound state. Moreover, $sc.topState = st$ should hold for sc . For input nets outside that class, the reduction rules typically cannot produce a unique top-level AND state so it is impossible to produce a model that conforms strictly to the output model. However, in that case the transformation should terminate in a state that can only be reached after sequentially applying the reduction rules as long as possible. It should be possible to inspect the resulting state of the input Petri-Net for further analysis purposes.

3 Example Transformation Execution Trace

This section demonstrates the intended behavior of the reduction rules from the previous section. Figure 5 visualizes an execution trace for an input model with 11 places and 10 transitions. The input Petri-Net model is shown on the left of the figure while its corresponding statechart is shown at the right of the

figure. Places are represented as white circles and transitions as black bars. Basic states are represented as yellow ovals while hyperedges are represented as black bars too. OR states are represented as white boxes while AND states are represented as gray boxes. The top of the figure shows an execution snapshot after initialization. Each Place and Transition element has respectively its corresponding Basic state and HyperEdge.

The figure shows downwards subsequent applications of reduction rules. The second to fifth snapshots are the result of applying in sequence once the AND rule and three times the OR rule. From the figure it cannot be determined which variant of the AND rule has been applied in the first step since they would both lead to the second snapshot in Figure 5. The bottom of the figure shows a final application of the OR rule. Since the final snapshot contains exactly one input place, the output statechart can be considered valid. The details of embedding the final structure in a StateChart container element are straightforward and not shown in Figure 5.

4 Testsuite and Additional Artifacts

In this section, we present some testcases that should be used both for some basic correctness verification as well as for performance testing. The complete testsuite is available in an online repository¹. Moreover, we provide online access to additional test materials, three existing solutions to the case (a Java solution, a GrGen.NET solution and an Epsilon solution²) and GMF-based editors with automatic layouting features. We will also participate in online discussions related to these materials and may submit also improved versions of the existing solutions.

4.1 Testcase 1: Artificial Example

This testcase is based on the running example from a Formal Methods 2009 conference paper by Es-huis [3]. Some intermediate snapshots of a valid application sequence of the reduction rules are described in that paper but the distinction between input and output model is not as clear as in Figure 5.

Figure 6 shows the input Petri-Net while Figure 7 shows the expected output. The names of the AND and OR states are arbitrary. Both figures are based on GMF-based editors so the details of the concrete Petri-Net and statechart syntax can be adapted. In the following, AND states are represented as rectangles with solid lines while OR states are represented as rectangles with dashed lines.

Listings 1 and 2 show the XMI representations of the input and expected output model for this testcase. Listing 3 shows the XMI representation of the Petri-Net after application of the transformation.

```
<?xml version="1.0" encoding="UTF-8"?>
<pnet:Net xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:pnet="http://uam.es/PetriNets" xmi:id="$29">
  <places xmi:id="$27" name="E10" pret="$6"/>
  <places xmi:id="$25" name="E0" pret="$23"/>
  <places xmi:id="$21" name="E1" postt="$23" pret="$1E"/>
  <places xmi:id="$1C" name="E2" postt="$1E" pret="$1A"/>
  <places xmi:id="$18" name="E3" postt="$1A" pret="$16"/>
  <places xmi:id="$14" name="E4" postt="$16" pret="$6"/>
  <places xmi:id="$11" name="E5" postt="$E" pret="$6"/>
  <places xmi:id="$D" name="E6" postt="$1E" pret="$E"/>
  <places xmi:id="$9" name="E7" postt="$E" pret="$A"/>
  <places xmi:id="$5" name="E8" postt="$A" pret="$6"/>
  <places xmi:id="$0" name="E9" postt="$6"/>
  <transitions xmi:id="$23" name="E11" prep="$21" postp="$25"/>
  <transitions xmi:id="$1E" name="E12" prep="$1C_$D" postp="$21"/>
  <transitions xmi:id="$1A" name="E13" prep="$18" postp="$1C"/>
  <transitions xmi:id="$16" name="E14" prep="$14" postp="$18"/>
</pnet:Net>
```

¹See https://github.com/louismrose/ttc_pn2sc/

²See <http://is.ieis.tue.nl/staff/pvgorp/share/?page=LookupImage&bNameSearch=pn2sc+benchmark>.

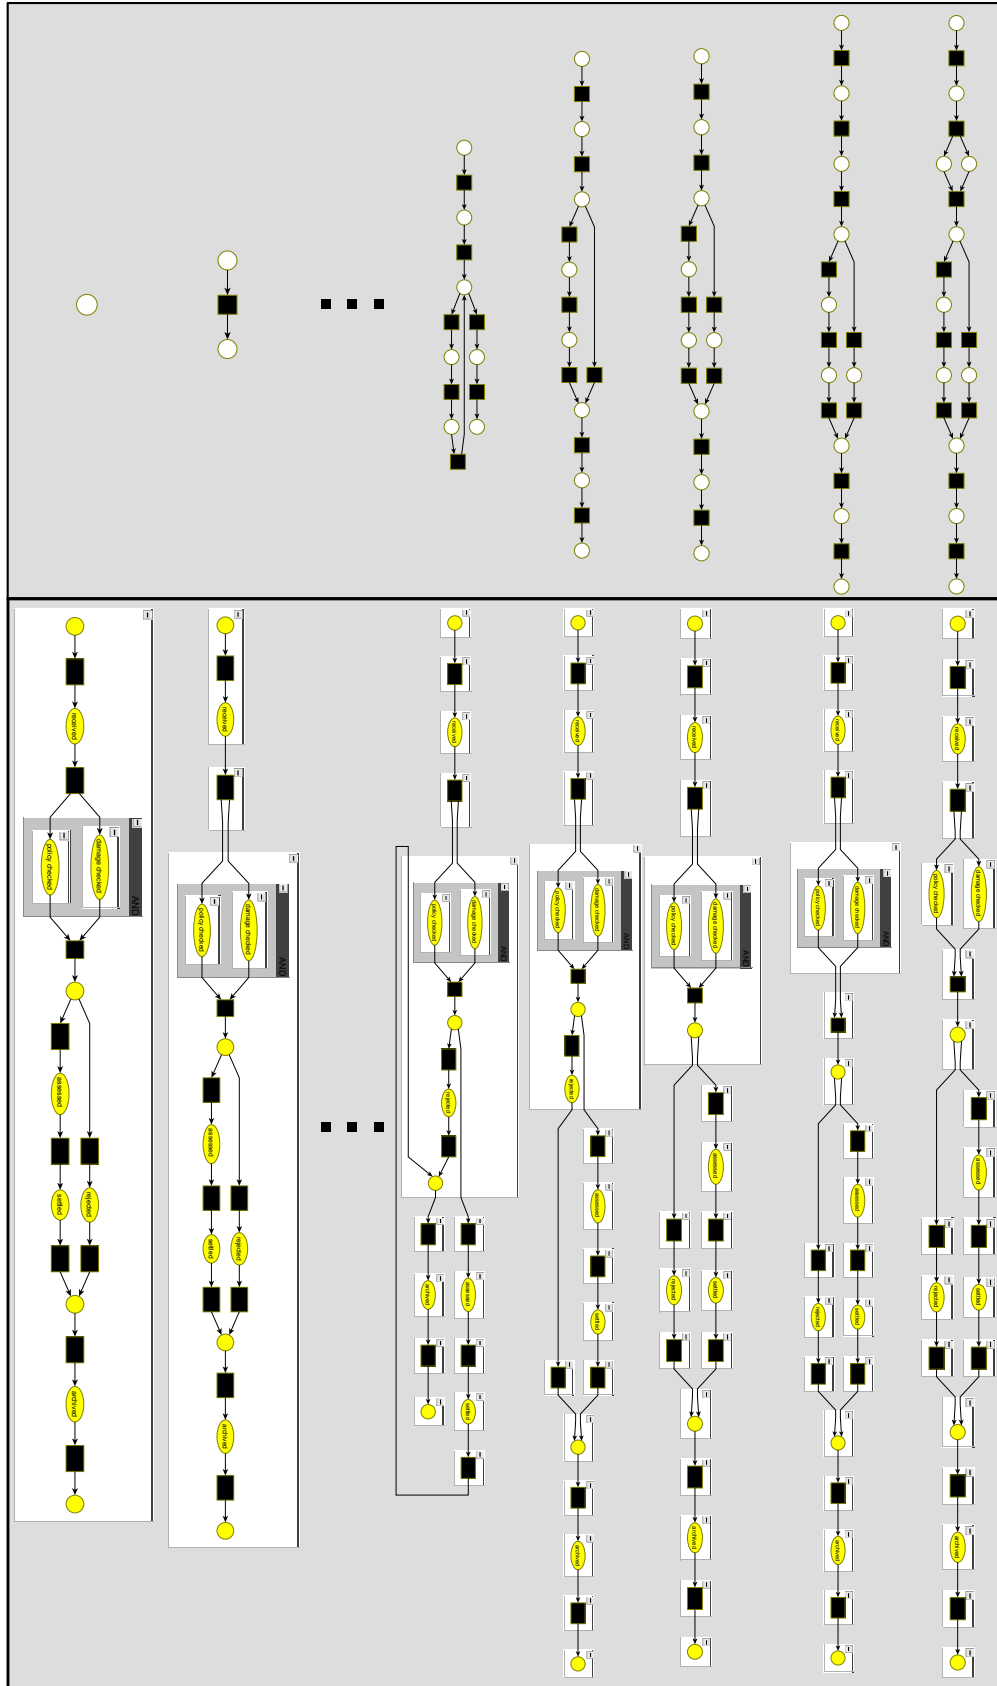


Figure 5: Visualization of an execution trace of the AND and OR reduction rules.

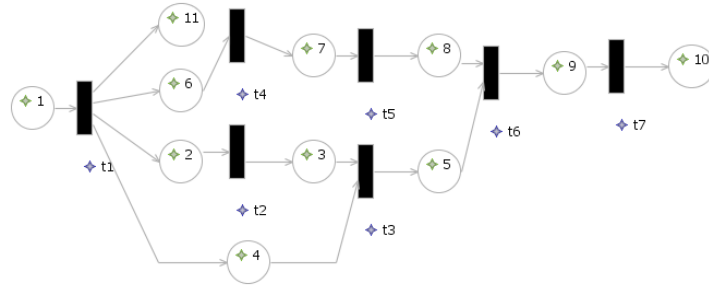


Figure 6: Testcase 1 input, diagram exported from a GMF-based Petri-Net editor.

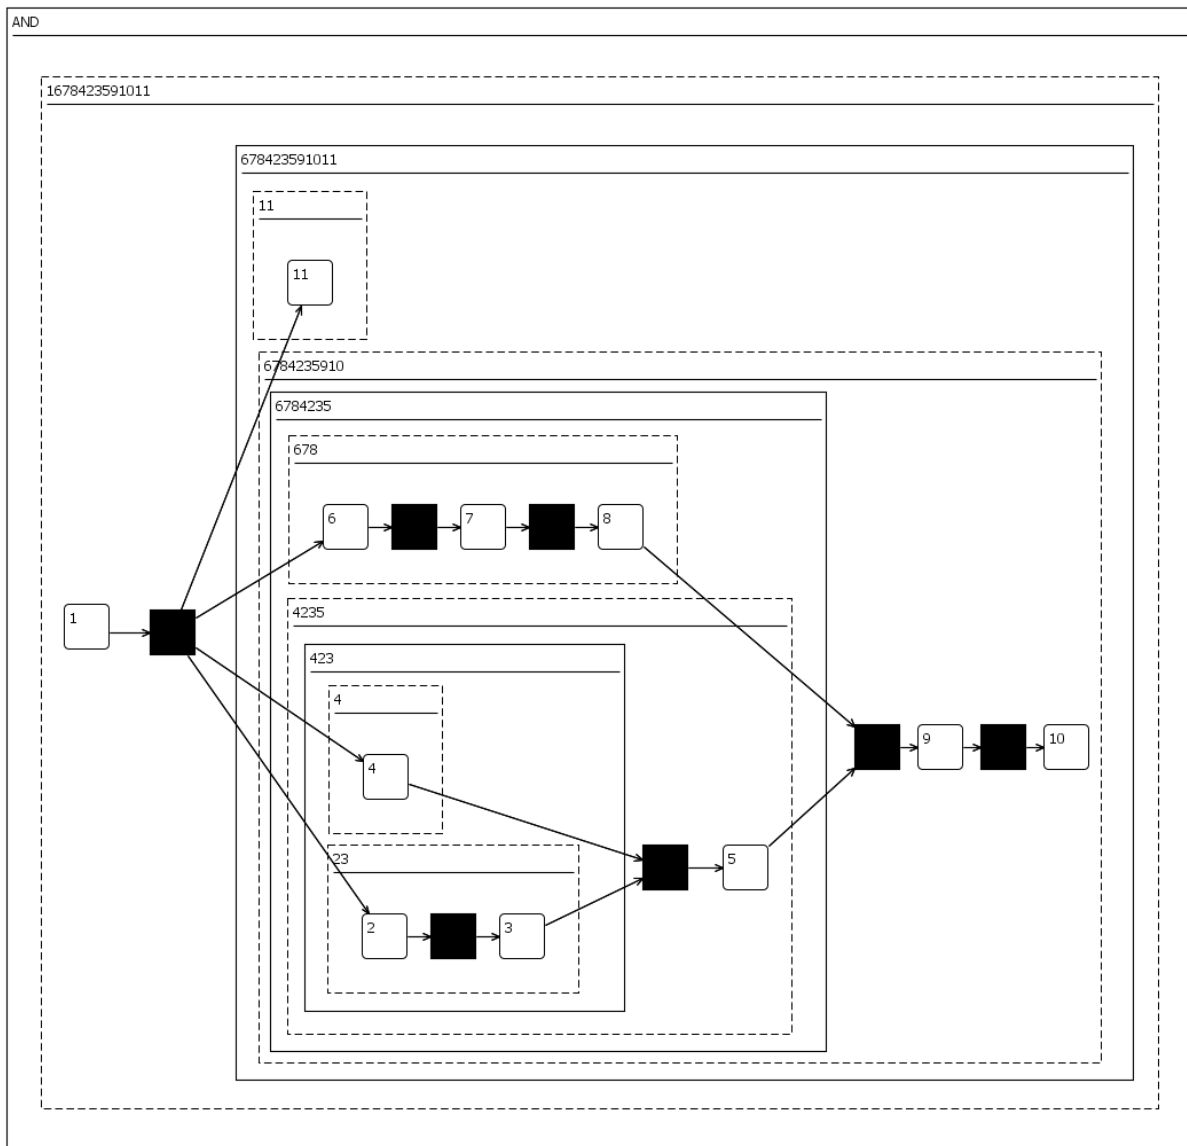


Figure 7: Testcase 1 output, diagram exported from a GMF-based Statechart editor.

```

<transitions xmi:id="$E" name="E15" prep="$9_$11" postp="$D"/>
<transitions xmi:id="$A" name="E16" prep="$5" postp="$9"/>
<transitions xmi:id="$6" name="E17" prep="$0" postp="$5_$11_$14_$27"/>
</pnet:Net>

```

Listing 1: XMI representation of the Petri-Net input model

```

<?xml version="1.0" encoding="UTF-8"?>
<schart:Statechart xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:schart="http://uam.es/StateCharts" xmi:id="$29">
  <topState>
    <contains xsi:type="schart:OR" name="1678423591011">
      <contains xsi:type="schart:Basic" xmi:id="$0" name="1" next="$6"/>
      <contains xsi:type="schart:HyperEdge" xmi:id="$6" name="t1" next="$5_$11_$14_$27" rnext="$0"/>
      <contains xsi:type="schart:AND" name="678423591011">
        <contains xsi:type="schart:OR" name="6784235910">
          <contains xsi:type="schart:AND" name="6784235">
            <contains xsi:type="schart:OR" name="678">
              <contains xsi:type="schart:Basic" xmi:id="$14" name="6" next="$16" rnext="$6"/>
              <contains xsi:type="schart:HyperEdge" xmi:id="$16" name="t4" next="$18" rnext="$14"/>
              <contains xsi:type="schart:Basic" xmi:id="$18" name="7" next="$1A" rnext="$16"/>
              <contains xsi:type="schart:HyperEdge" xmi:id="$1A" name="t5" next="$1C" rnext="$18"/>
              <contains xsi:type="schart:Basic" xmi:id="$1C" name="8" next="$1E" rnext="$1A"/>
            </contains>
          <contains xsi:type="schart:OR" name="4235">
            <contains xsi:type="schart:AND" name="423">
              <contains xsi:type="schart:OR" name="4">
                <contains xsi:type="schart:Basic" xmi:id="$11" name="4" next="$E" rnext="$6"/>
              </contains>
              <contains xsi:type="schart:OR" name="23">
                <contains xsi:type="schart:Basic" xmi:id="$5" name="2" next="$A" rnext="$6"/>
                <contains xsi:type="schart:HyperEdge" xmi:id="$A" name="t2" next="$9" rnext="$5"/>
                <contains xsi:type="schart:Basic" xmi:id="$9" name="3" next="$E" rnext="$A"/>
              </contains>
            </contains>
            <contains xsi:type="schart:HyperEdge" xmi:id="$E" name="t3" next="$D" rnext="$9_$11"/>
            <contains xsi:type="schart:Basic" xmi:id="$D" name="5" next="$1E" rnext="$E"/>
          </contains>
        </contains>
        <contains xsi:type="schart:HyperEdge" xmi:id="$1E" name="t6" next="$21" rnext="$D_$1C"/>
        <contains xsi:type="schart:Basic" xmi:id="$21" name="9" next="$23" rnext="$1E"/>
        <contains xsi:type="schart:HyperEdge" xmi:id="$23" name="t7" next="$25" rnext="$21"/>
        <contains xsi:type="schart:Basic" xmi:id="$25" name="10" rnext="$23"/>
      </contains>
      <contains xsi:type="schart:OR" name="11">
        <contains xsi:type="schart:Basic" xmi:id="$27" name="11" rnext="$6"/>
      </contains>
    </contains>
  </topState>
</schart:Statechart>

```

Listing 2: XMI representation of the output statechart model

```

<?xml version="1.0" encoding="UTF-8"?>
<pnet:Net xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:pnet="http://uam.es/PetriNets" xmi:id="$29">
  <places xmi:id="$0" name="1678423591011"/>
</pnet:Net>

```

Listing 3: XMI representation of the Petri-Net input model at transformatoin termination time

4.2 Testcase 2: Insurance Claim Example

This testcase is based on an insurance claim example from a paper at the ER 2012 conference [4]. For that paper, PN2SC is supplemented with pre-processing rules for activity diagrams with object flows. Also, there are post-processing rules for removing hyper-edges and for introducing initial, decision and final nodes in the statecharts. These extensions are not part of the proposed TTC'13 case but we mention them here for clarifying the bigger picture.

Figure 8 shows the input Petri-Net for Testcase 2 while Figure 9 shows the expected output. Listings 4 and 5 show the XMI representations of the input and expected output model for this testcase. Similar to Testcase 1, the input Petri-Net should be completely reduced to one place upon transformation termination.

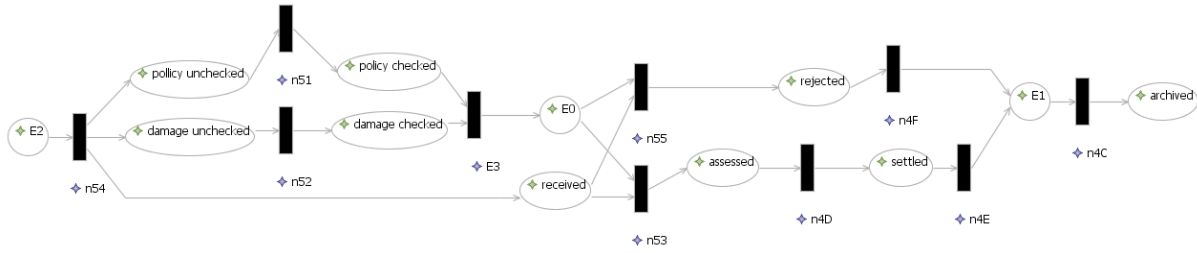


Figure 8: Testcase 2 input, diagram exported from a GMF-based Petri-Net editor.

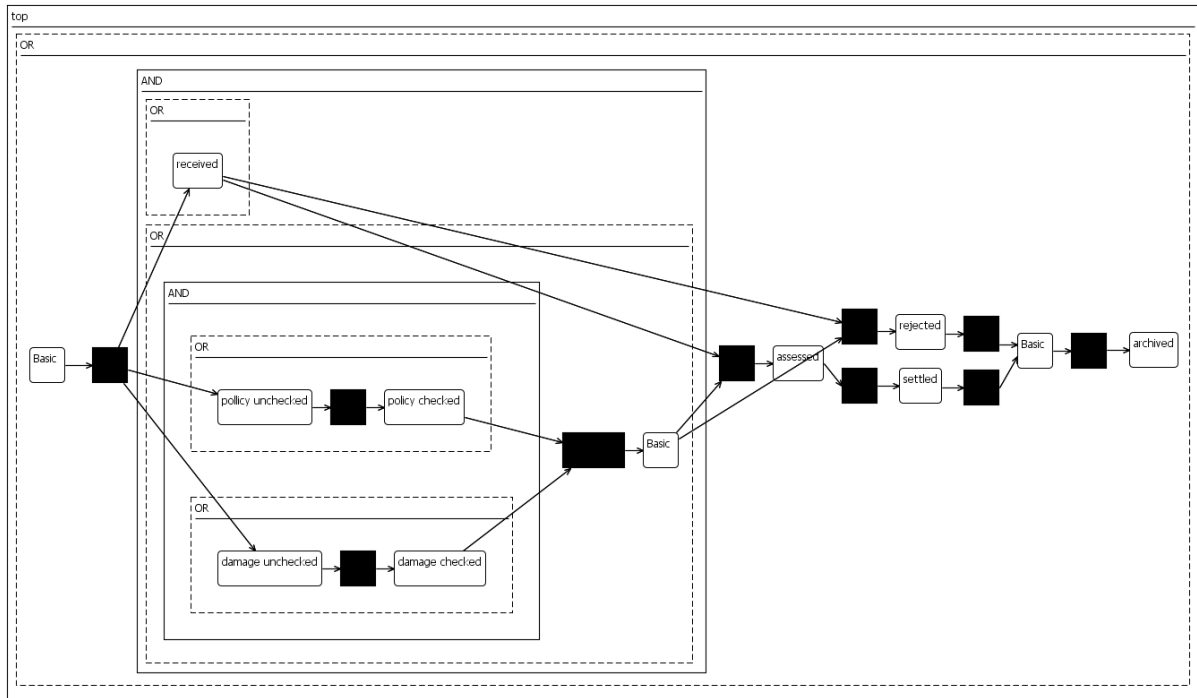


Figure 9: Testcase 2 output, diagram exported from a GMF-based Statechart editor.

```

<?xml version="1.0" encoding="UTF-8"?>
<pnet:Net xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:pnet="http://uam.es/PetriNets" xsi:schemaLocation="http://uam.es/PetriNets ../metamodels/PetriNets.ecore" xmi:id="
  $2F">
  <places xmi:id="$B" name="received" postt="_$22_$2B" pret="_$26"/>
  <places xmi:id="$A" name="assessed" postt="_$F" pret="_$22"/>
  <places xmi:id="$9" name="settled" postt="_$12" pret="_$F"/>
  <places xmi:id="$8" name="rejected" postt="_$15" pret="_$2B"/>
  <places xmi:id="$7" name="archived" postt="" pret="_$C"/>
  <places xmi:id="$6" name="policy_checked" postt="_$1E" pret="_$18"/>
  <places xmi:id="$5" name="damage_checked" postt="_$1E" pret="_$1B"/>
  <places xmi:id="$4" name="policy_unchecked" postt="_$18" pret="_$26"/>
  <places xmi:id="$3" name="damage_unchecked" postt="_$1B" pret="_$26"/>
  <places xmi:id="$2" name="E0" postt="_$22_$2B" pret="_$1E"/>
  <places xmi:id="$1" name="E1" postt="_$C" pret="_$12_$15"/>
  <places xmi:id="$0" name="E2" postt="_$26" pret="" />
  <transitions xmi:id="$2B" name="n55" postp="_$8" prep="_$2_$2B"/>
  <transitions xmi:id="$26" name="n54" postp="_$3_$4_$B" prep="_$0"/>
  <transitions xmi:id="$22" name="n53" postp="_$A" prep="_$2_$2B"/>
  <transitions xmi:id="$1E" name="E3" postp="_$2" prep="_$5_$6"/>
  <transitions xmi:id="$1B" name="n52" postp="_$5" prep="_$3"/>
  <transitions xmi:id="$18" name="n51" postp="_$6" prep="_$4"/>
  <transitions xmi:id="$15" name="n4F" postp="_$1" prep="_$8"/>
  <transitions xmi:id="$12" name="n4E" postp="_$1" prep="_$9"/>
  <transitions xmi:id="$F" name="n4D" postp="_$9" prep="_$A"/>
  <transitions xmi:id="$C" name="n4C" postp="_$7" prep="_$1"/>
</pnet:Net>

```

Listing 4: XMI representation of the Petri-Net input model for Testcase 2

```

<?xml version="1.0" encoding="UTF-8"?>
<schart:Statechart xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:schart="http://uam.es/StateCharts">
  <topState name="top">
    <contains xsi:type="schart:OR" name="">
      <contains xsi:type="schart:AND" xmi:id="$30" name="" next="" rnext="" >
        <contains xsi:type="schart:OR" xmi:id="$36" name="">
          <contains xmi:type="schart:Basic" xmi:id="$4B" name="received" next="_$3E_$40" rnext="_$3F" />
        </contains>
      <contains xsi:type="schart:OR" xmi:id="$33" name="">
        <contains xsi:type="schart:AND" xmi:id="$31" name="" next="" rnext="" >
          <contains xsi:type="schart:OR" xmi:id="$35" name="">
            <contains xmi:type="schart:HyperEdge" xmi:id="$3B" name="n51" next="_$47" rnext="_$45" />
            <contains xmi:type="schart:Basic" xmi:id="$45" name="policy_unchecked" next="_$3B" rnext="_$3F" />
            <contains xmi:type="schart:Basic" xmi:id="$47" name="policy_checked" next="_$3D" rnext="_$3B" />
          </contains>
          <contains xsi:type="schart:OR" xmi:id="$34" name="">
            <contains xmi:type="schart:HyperEdge" xmi:id="$3C" name="n52" next="_$46" rnext="_$44" />
            <contains xmi:type="schart:Basic" xmi:id="$44" name="damage_unchecked" next="_$3C" rnext="_$3F" />
            <contains xmi:type="schart:Basic" xmi:id="$46" name="damage_checked" next="_$3D" rnext="_$3C" />
          </contains>
        </contains>
      <contains xmi:type="schart:HyperEdge" xmi:id="$3D" name="" next="_$43" rnext="_$46_$47" />
      <contains xmi:type="schart:Basic" xmi:id="$43" name="" next="_$3E_$40" rnext="_$3D" />
    </contains>
  </contains>
  <contains xmi:type="schart:HyperEdge" xmi:id="$38" name="n4D" next="_$49" rnext="_$4A" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$37" name="n4C" next="_$2F" rnext="_$42" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$39" name="n4E" next="_$42" rnext="_$49" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$3A" name="n4F" next="_$42" rnext="_$48" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$40" name="n55" next="_$48" rnext="_$43_$4B" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$3E" name="n53" next="_$4A" rnext="_$43_$4B" />
  <contains xmi:type="schart:HyperEdge" xmi:id="$3F" name="n54" next="_$44_$45_$4B" rnext="_$41" />
  <contains xmi:type="schart:Basic" xmi:id="$41" name="" next="" rnext="" />
  <contains xmi:type="schart:Basic" xmi:id="$48" name="rejected" next="_$3A" rnext="_$40" />
  <contains xmi:type="schart:Basic" xmi:id="$4A" name="assessed" next="_$38" rnext="_$3E" />
  <contains xmi:type="schart:Basic" xmi:id="$49" name="settled" next="_$39" rnext="_$38" />
  <contains xmi:type="schart:Basic" xmi:id="$42" name="" next="_$37" rnext="_$39_$3A" />
  <contains xmi:type="schart:Basic" xmi:id="$2F" name="archived" next="" rnext="_$37" />
</contains>
</topState>
</schart:Statechart>

```

Listing 5: XMI representation of the output statechart model for Testcase 2

4.3 Testcase 3: Patient Logistics Example

This testcase is inspired by the way patients can be routed throughout a hospital in the context of dermatology care. For this testcase, the transformation should terminate in the aforementioned failure state

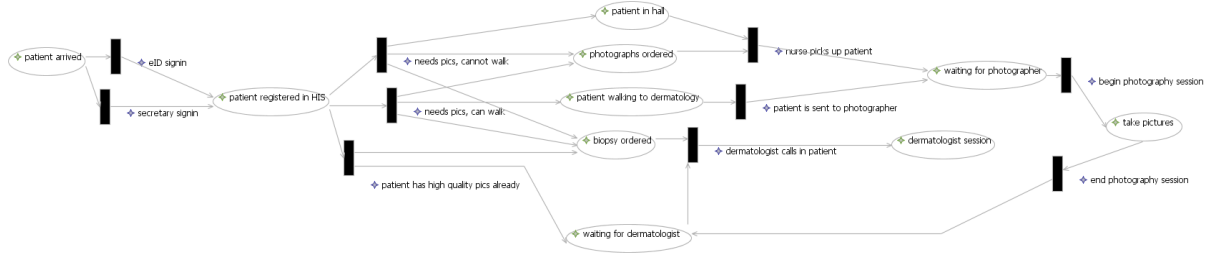


Figure 10: Testcase 3 input, diagram exported from a GMF-based Petri-Net editor.

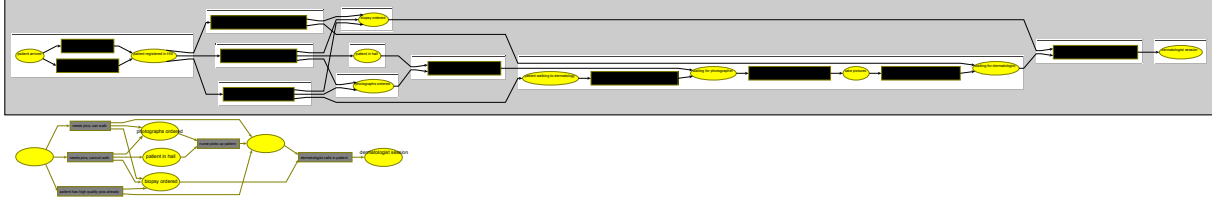


Figure 11: Testcase 3 output, diagram exported from the GrGen.NET graph visualizer.

since the input model is not part of the class of petri-nets for which the reduction rules have been designed.

Figure 10 shows the input Petri-Net for Testcase 3 while Figure 11 shows a possible visualization of the failed execution. The top of the figure shows the statechart model that was generated so far. Again, OR states are represented as white boxes. There are no AND states in the model, but a gray box is shown nonetheless to make the white boxes better visible in print. The bottom of the figure shows the Petri-Net upon transformation failure. The two places (ovals) without labels have been produced by successive applications of the OR reduction rule. The corresponding OR states can be identified at the left and in the middle of the statechart.

Listing 6 shows the XMI representation of the input for this testcase. Since the output is not a valid statechart model, no XMI is provided for the expected output.

```
<?xml version="1.0" encoding="UTF-8"?>
<pnet:Net xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI" xmlns:pnet="http://uam.es/PetriNets">
  <places name="patient_arrived" postt="//@transitions.0_//@transitions.1"/>
  <places name="patient_registered_in_HIS" postt="//@transitions.2_//@transitions.3_//@transitions.7" pret="//@transitions.0_
    //@transitions.1"/>
  <places name="patient_walking_to_dermatology" postt="//@transitions.5" pret="//@transitions.3"/>
  <places name="photographs_ordered" postt="//@transitions.4" pret="//@transitions.3_//@transitions.2"/>
  <places name="biopsy_ordered" postt="//@transitions.9" pret="//@transitions.2_//@transitions.3_//@transitions.7"/>
  <places name="patient_in_hall" postt="//@transitions.4" pret="//@transitions.2"/>
  <places name="take_pictures" postt="//@transitions.8" pret="//@transitions.6"/>
  <places name="waiting_for_photographer" postt="//@transitions.6" pret="//@transitions.5_//@transitions.4"/>
  <places name="waiting_for_dermatologist" postt="//@transitions.9" pret="//@transitions.7_//@transitions.8"/>
  <places name="dermatologist_session" pret="//@transitions.9"/>
  <transitions name="eID_signin" prep="//@places.0" postp="//@places.1"/>
  <transitions name="secretary_signin" prep="//@places.0" postp="//@places.1"/>
  <transitions name="needs_pics_cannot_walk" prep="//@places.1" postp="//@places.4_//@places.5_//@places.3"/>
  <transitions name="needs_pics_can_walk" prep="//@places.1" postp="//@places.2_//@places.3_//@places.4"/>
  <transitions name="nurse_picks_up_patient" prep="//@places.3_//@places.5" postp="//@places.7"/>
  <transitions name="patient_is_sent_to_photographer" prep="//@places.2" postp="//@places.7"/>
  <transitions name="begin_photography_session" prep="//@places.7" postp="//@places.6"/>
  <transitions name="patient_has_high_quality_pics_already" prep="//@places.1" postp="//@places.8_//@places.4"/>
  <transitions name="end_photography_session" prep="//@places.6" postp="//@places.8"/>
  <transitions name="dermatologist_calls_in_patient" prep="//@places.8_//@places.4" postp="//@places.9"/>
</pnet:Net>
```

Listing 6: XMI representation of the Petri-Net input model for Testcase 3

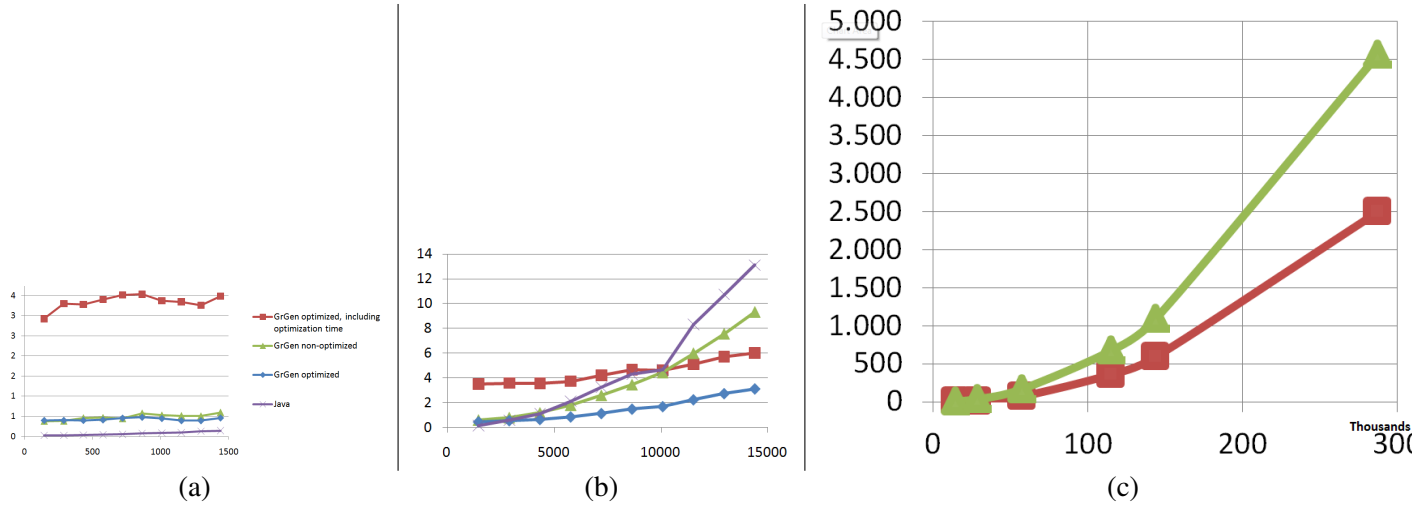


Figure 12: Performance (execution time seconds) of Java and GrGen.NET solutions.

4.4 Performance Testcases

For performance testing, we enclose an EMF representations of the key models that were used to compare the Java and GrGen.NET based solutions of the aforementioned paper by Van Gorp et al. [16]. The models are based on a large Petri-Net that can be transformed successfully by the reduction rules. That Petri-Net has been cloned multiple times to create models of up to 300 thousand elements. All results from [16] can be reproduced via an online virtual machine in SHARE [15]. In general, the performance of both solutions scales linearly for models of normal size (requiring always less than a second.) For models with thousands of elements, the GrGen.NET solution exhibits an $\mathcal{O}(x^2)$ time complexity.

Figure 12 shows the performance results from as a benchmark [16].) The figure shows that for GrGen.NET, two curves are shown. Both curves are based on just one transformation specification. Different results were obtained by changing small engine settings: for one version, the rules are applied directly while for the other version the engine is instructed to first analyze the input model and generate optimized execution code/parameters. The analysis obviously takes time too. It turned out that for models consisting of less than 10.000 elements, the analysis generated too much overhead. The Java solution cannot process more than about 15.000 elements, due to limitations of the address space of the 32 bits Java virtual machine that we have used. For inputs models with more than 10.000 elements, the required processing time increases significantly too. For models of some hundreds of thousands of elements, the engine-provided GrGen optimizations reach a speedup factor of almost two.

We encourage case submitters to demonstrate various strategies to performance tuning but point out that for the GrGen.NET solution, the transformation definition (i.e., the rule specification) was not even optimized for performance. In general, especially solutions that deliver good performance without negatively affecting the specification style will be considered of high quality.

5 Evaluation Criteria

5.1 Basic Criteria

5.1.1 Transformation Correctness

Solutions should at least demonstrate that they have the intended behavior for all testcases.

5.1.2 Transformation Performance

Secondly, runtime performance will be evaluated (using the performance testcases). An online spreadsheet will be shared via the TTC'13 forum for conveniently entering and comparing performance results.

5.1.3 Transformation Understandability

Peer reviews will be used to assess qualitatively the understandability of all solutions. We envision online reviews involving multiple rounds in order to reach consensus among all participants.

5.1.4 Reproducibility

Solution submitters should facilitate the online review by (1) providing an appendix that lists all code, diagrams, scripts, pop-ups that are essential for running the transformation, (2) publishing all artifacts to SHARE. Point (1) ensures that reviewers know where to look while (2) ensures that reviewers can put all artifacts in the proper perspective. For (2), solution submitters are encouraged to provide on the VM desktop one shortcut per testcase. Ideally, clicking that shortcuts automatically demonstrates that the test is passed by the solution. However, this is hard since we do not offer any infrastructure for automatically analyzing whether an output EMF file is the same as the testcase-provided one. Solution submitters who have technology for automating the test procedure are encouraged to share that via the TTC'13 forum. As case proposers, we at least offer the aforementioned GMF editors with an automatic layouting feature for the effective human-based analysis of the generated output models.

5.2 Bonus Criteria

5.2.1 Formalization of the class of supported Input Petri-Nets

Solution submitters who have technologies to formalize the class of Petri-Nets supported by the reduction rules are encouraged to demonstrate how such technologies should be used effectively. Eshuis has already defined the class of supported nets mathematically but a computer-supported, formal, link between the definition of that class and the definition of the reduction rules is missing.

5.2.2 Simulation Support

Solution submitters are also encouraged to demonstrate features related to the execution of the Petri-Nets and their corresponding statecharts. Note however that execution of the models in isolation is not considered relevant to this case. Instead, we are interested in tools that facilitate for example the simulation of statecharts based on a rule-based Petri-Net simulator (or vice versa).

5.2.3 Transformation Language support for Change Propagation

We are interested in typical scenario's of change propagation (automatically creating/updating/deleting output model elements when performing updates on a previously transformed input model). To the best of our knowledge, most graph and transformation languages do not yet offer built-in support for this so experts are encouraged to show their unique features for this use case.

5.2.4 Transformation Language support for Reversing Transformation

Previous editions of the TTC did not yet attract convincing solutions based on languages with support for bidirectional transformations. We consider the PN2SC a particularly challenging case for such languages since the reduction rules are input-destructive. Therefore, we especially encourage experts in such languages to check whether they can solve the case and also report potentially negative results.

6 Format for Presenting Evaluation Results

(TODO: PVG is too tired to finish this today and has to lecture tomorrow...)

Acknowledgements: The authors thank Prof. Juan de Lara for constructing the initial versions of the Petri-Net and statecharts metamodels used in this case.

References

- [1] David F. Bacon, Susan L. Graham, and Oliver J. Sharp. Compiler transformations for high-performance computing. *ACM Comput. Surv.*, 26(4):345–420, 1994.
- [2] Rik Eshuis. Statecharting Petri Nets. Technical Report Beta WP 153, Eindhoven University of Technology, 2005.
- [3] Rik Eshuis. Translating safe petri nets to statecharts in a structure-preserving way. In Ana Cavalcanti and Dennis Dams, editors, *FM*, volume 5850 of *LNCS*, pages 239–255. Springer, 2009. Extended as Beta WP 282 at Eindhoven University of Technology.
- [4] Rik Eshuis and Pieter Van Gorp. Synthesizing object life cycles from business process models. In Paolo Atzeni, David W. Cheung, and Sudha Ram, editors, *ER*, volume 7532 of *Lecture Notes in Computer Science*, pages 307–320. Springer, 2012.
- [5] M. S. Feather. A survey and classification of some program transformation approaches and techniques. In *The IFIP TC2/WG 2.1 Working Conference on Program specification and transformation*, pages 165–195, Amsterdam, The Netherlands, The Netherlands, 1987. North-Holland Publishing Co.
- [6] Pieter Van Gorp, Steffen Mazanek, and Louis Rose, editors. *Proceedings Fifth Transformation Tool Contest*, volume 74 of *EPTCS*, 2011.
- [7] R. Grønmo, B. Møller-Pedersen, and G.K. Olsen. Comparison of three model transformation languages. In *ECMDA-FA'09: European Conference on Model Driven Architecture - Foundations and Applications*, volume 5562 of *LNCS*, pages 2–17. Springer, 2009.
- [8] Niels Lohmann, Eric Verbeek, and Remco Dijkman. Transactions on petri nets and other models of concurrency II. In Kurt Jensen and Wil M. Aalst, editors, *Transactions on Petri Nets and Other Models of Concurrency II*, chapter Petri Net Transformations for Business Processes — A Survey, pages 46–63. Springer-Verlag, Berlin, Heidelberg, 2009.
- [9] Arend Rensink and Pieter Van Gorp. Graph transformation tool contest 2008. *International Journal on Software Tools for Technology Transfer (STTT)*, 12:171–181, 2010.

- [10] L.M. Rose, M. Herrmannsdoerfer, J.R. Williams, D.S. Kolovos, K. Garcés, R.F. Paige, and F.A.C. Polack. A comparison of model migration tools. In D.C. Petriu, N. Rouquette, and Ø Haugen, editors, *MODELS'10: International Conference on Model Driven Engineering Languages and Systems*, volume 6394 of *LNCs*, pages 61–75. Springer, 2010.
- [11] Louis M. Rose, Richard F. Paige, Dimitrios S. Kolovos, and Fiona A.C. Polack. An analysis of approaches to model migration. In *MoDSE-MCCM'09: Joint MoDSE-MCCM Workshop on Models and Evolution*, pages 6–15, 2009.
- [12] Gabriele Taentzer, Karsten Ehrig, Esther Guerra, Juan De Lara, Tihamer Levendovszky, Ulrike Prange, and Daniel Varro. Model transformations by graph transformations: A comparative study. In *Model Transformations in Practice Workshop at MODELS 2005, Montego*, page 05, 2005.
- [13] José Barranquero Tolosa, Oscar Sanjuán-Martínez, Vicente García-Díaz, B. Cristina Pelayo G-Bustelo, and Juan Manuel Cueva Lovelle. Towards the systematic measurement of ATL transformation models. *Softw. Pract. Exper.*, 41:789–815, June 2011.
- [14] Marcel van Amstel, Steven Bosems, Ivan Kurtev, and Luís Ferreira Pires. Performance in model transformations: Experiments with ATL and QVT. In Jordi Cabot and Eelco Visser, editors, *Theory and Practice of Model Transformations*, volume 6707 of *Lecture Notes in Computer Science*, pages 198–212. Springer Berlin / Heidelberg, 2011.
- [15] Pieter Van Gorp. Online demo: PN2SC in Java and GrGen. <http://is.ieis.tue.nl/staff/pvgorp/share/?page=ConfigureNewSession&vdiID=343>, 2010.
- [16] Pieter Van Gorp and Rik Eshuis. Transforming process models: executable rewrite rules versus a formalized java program. In *Proceedings of the 13th international conference on Model driven engineering languages and systems: Part II*, *MODELS'10*, pages 258–272, Berlin, Heidelberg, 2010. Springer-Verlag.
- [17] Dániel Varró, Márk Asztalos, Dénes Bisztray, Artur Boronat, Duc-Hanh Dang, Rubino Geiß, Joel Greenyer, Pieter Van Gorp, Ole Kniemeyer, Anantha Narayanan, Edgars Rencis, and Erhard Weinell. Transformation of UML models to CSP: A case study for graph transformation tools. In *AGTiVE'08: International Symposium on Applications of Graph Transformation with Industrial Relevance*, volume 5088 of *LNCs*, pages 540–565. Springer, 2008.