
barbac Reads or counts → shared barcode lineages

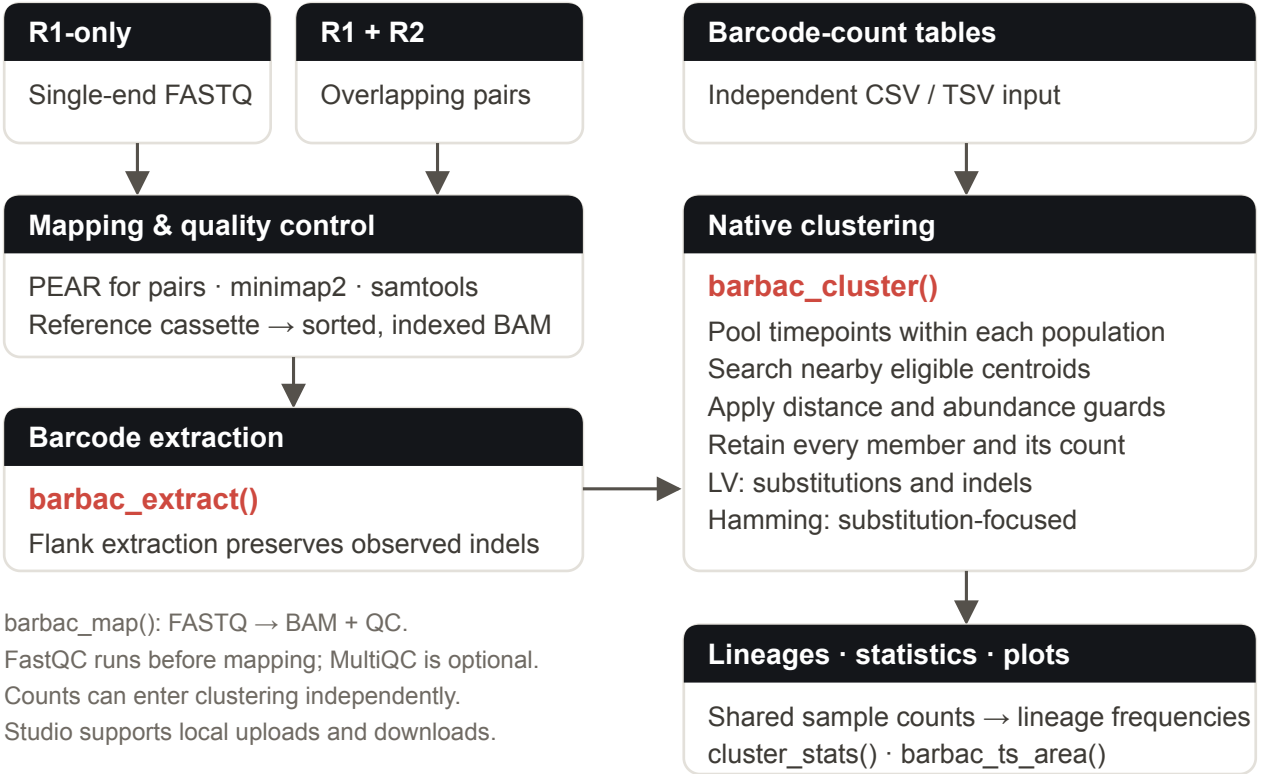

barbac_map(): FASTQ → BAM + QC.
FastQC runs before mapping; MultiQC is optional.
Counts can enter clustering independently.
Studio supports local uploads and downloads.