
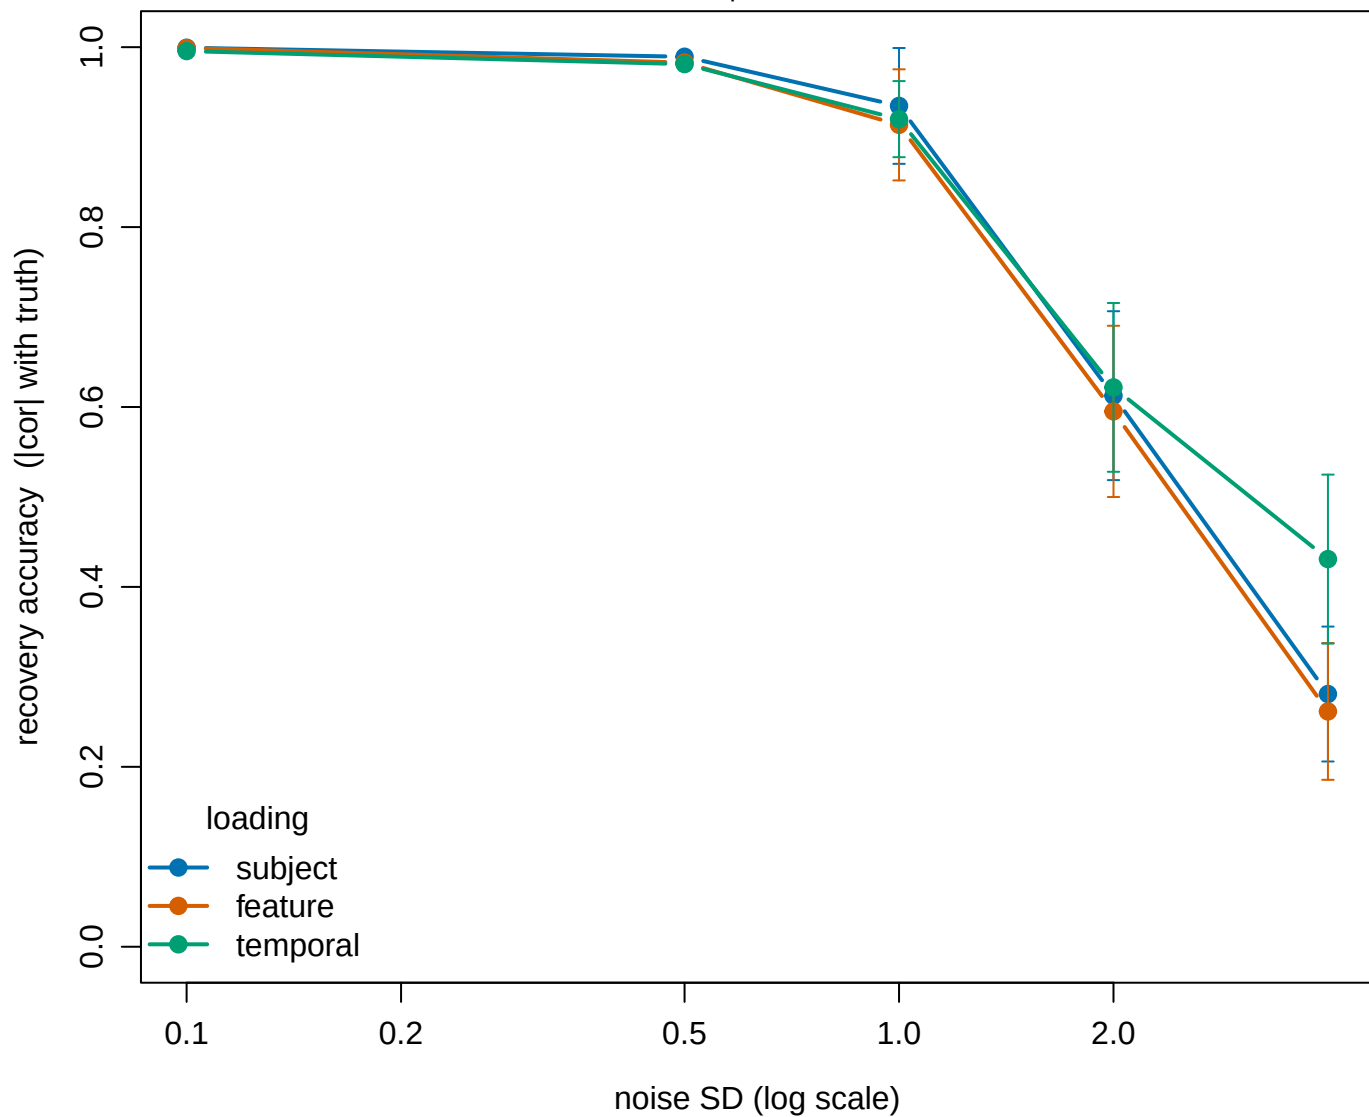
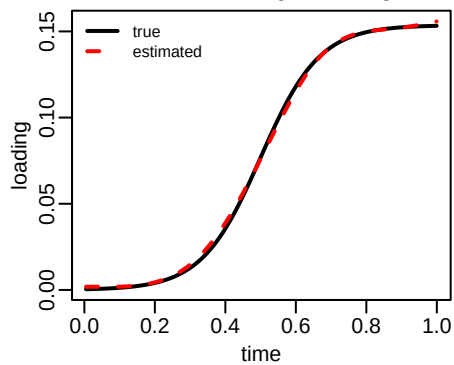
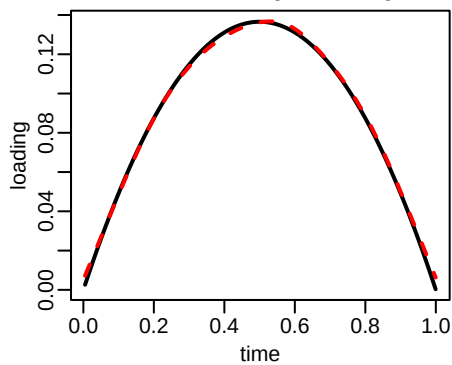
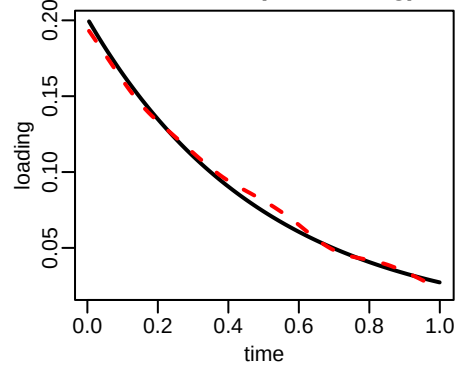
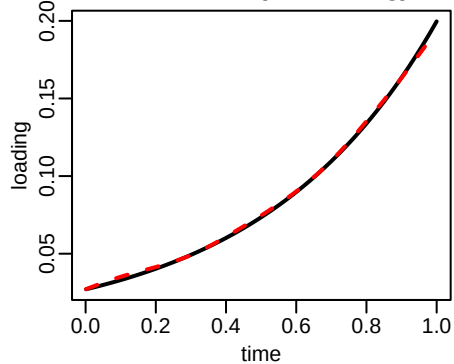
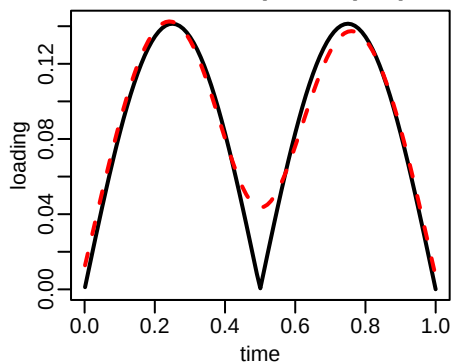
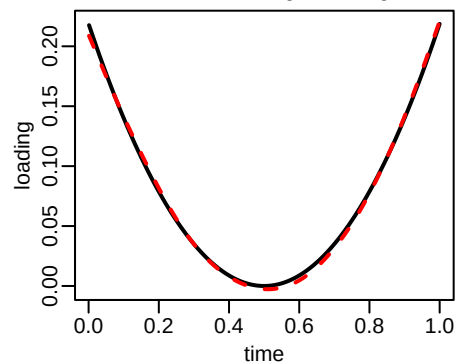
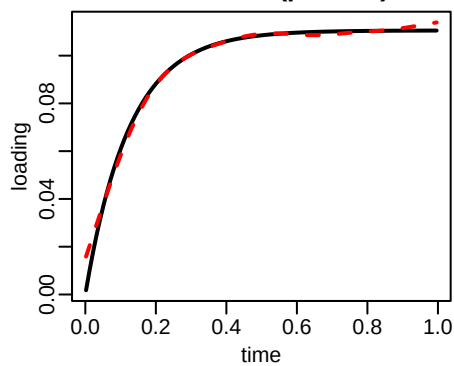
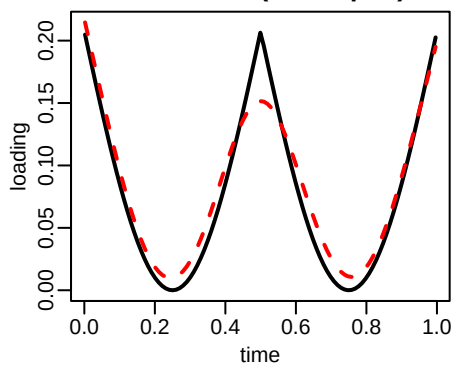


multiTEMPED recovery decreases with noise

20 seeds per noise level

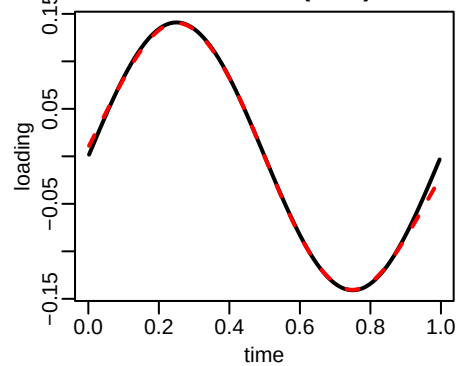

mod1 PC1 (s_curve)**mod1 PC2 (concave)****mod1 PC3 (decreasing)****mod2 PC1 (increasing)****mod2 PC2 (m_shaped)****mod2 PC3 (convex)****mod3 PC1 (plateau)****mod3 PC2 (w_shaped)****mod3 PC3 (sine)**

multiTEMPTED validation (log output)

multiTEMPTED validation: m x f curves, unaligned; 5 noise levels x 20 seeds

Recovery accuracy ($|\text{cor}|$ with truth), mean $\pm$ sd over seeds:

noise_sd	subject		feature		temporal	
0.1	0.999	(± 0.000)	0.999	(± 0.000)	0.996	(± 0.001)
0.5	0.989	(± 0.003)	0.983	(± 0.003)	0.981	(± 0.005)
1.0	0.935	(± 0.064)	0.914	(± 0.062)	0.920	(± 0.042)
2.0	0.613	(± 0.094)	0.595	(± 0.095)	0.622	(± 0.094)
4.0	0.281	(± 0.075)	0.262	(± 0.076)	0.431	(± 0.094)