1. Screenshot Evidence

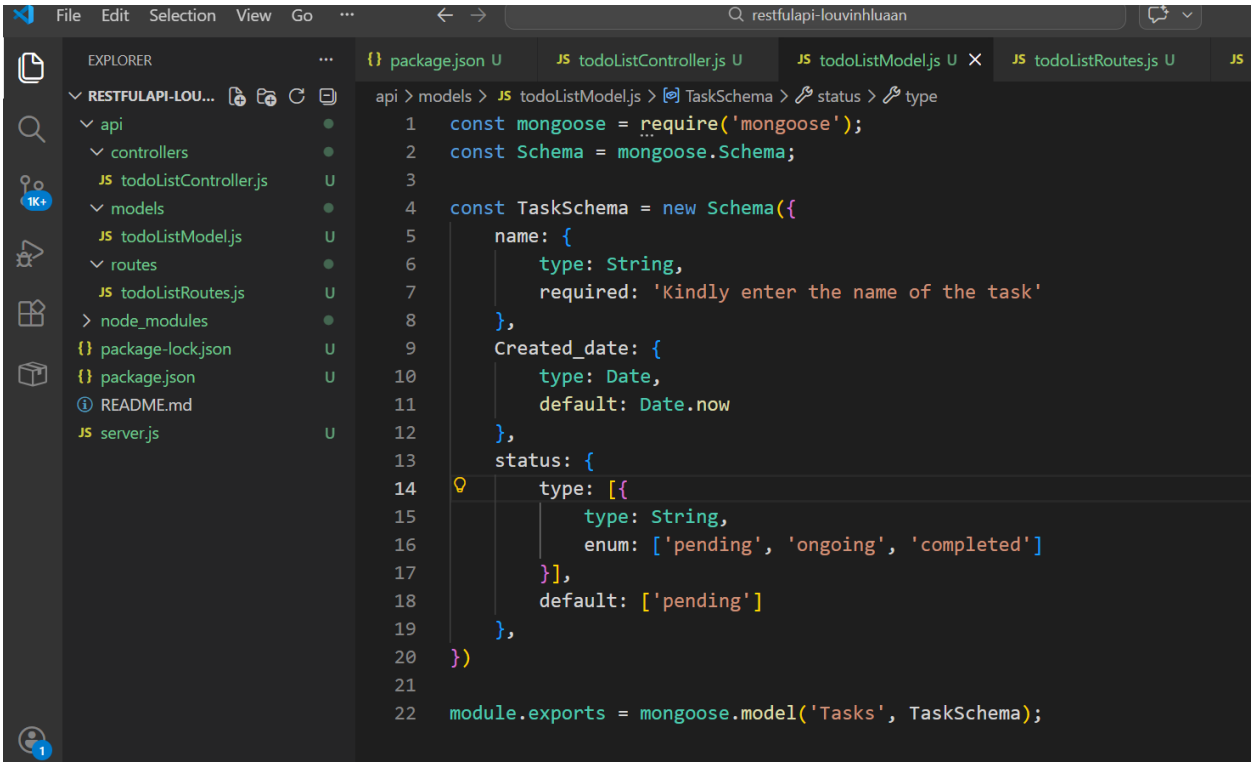

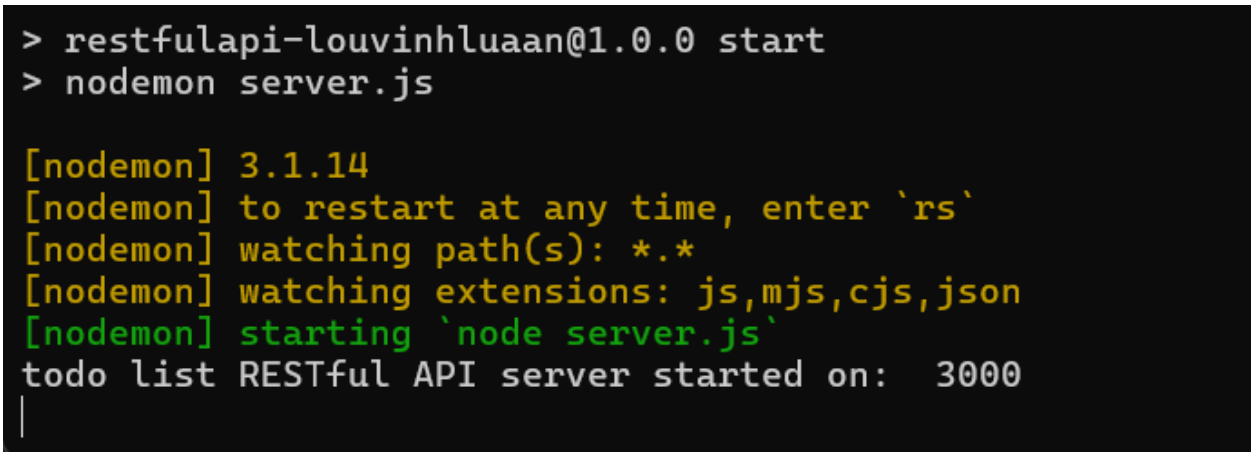

package.json U | todoListController.js U | todoListModel.js U | todoListRoutes.js U | server.js U | Postcode

GET http://localhost:3000/tasks

Sen

Params | Authorization | Headers (4) | Body | Options

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body | Headers | JSON

Status: 200 OK Duration: 57


```
[
    {
        "_id":"69b37bf9b0e4ac5e54407136",
        "name":"Do matt's coursework",
        "status":["pending"],
        "Created_date":"2026-03-13T02:52:41.998Z",
        "__v":0
    }
```


le Edit Database Collection Index Document View Help

Connect | IntelliShell | Export | Import

Open connections

Search open connections (Ctrl+F)

- mongodb [replica set: atlas-2qja7o-shard-0]
  - Replica Set Members
  - admin
  - local
  - louvinhluan
    - Collections (3)
      - british_pubs
      - tasks
      - welsh_pubs
    - System (0)
    - Views (0)
  - pubs
  - sample_mflix
  - test

Quickstart | IntelliShell: mongodb

louvinhluan > ac-dxtrxmg-shard-00-02...b.net:27017 [Primary] > louvinhluan

New | Load file | Save file | Enable Query Assist | Change view

```
db.getCollection("tasks").find({})
```

Raw shell output | Find Query (line 1)

50 | Documents 1 to 1

tasks > name

_id	name	status	Created_date	__v
69b37bf9b0e4ac...	Do matt's cours...	[1 elements]	2026-03-13T02:...	0

2. Understanding Section

Through this lab, I gained a deeper understanding of RESTful APIs, which are essential mechanisms for software components to communicate via specific protocols. I learned that API stands for Application Programming Interface and REST, defined by Roy Fielding, represents a standard architectural style for modern web services. The most significant insight I gained is the concept of "statelessness" where the server does not store client data between requests, ensuring better efficiency.

To apply these concepts, I followed a structured methodology using Node.js and Express to build a To-Do List application. I organized the project into three main parts: models for database schemas, controllers for handling logic and routes for defining endpoints. Using the Mongoose library, I defined a "TaskSchema" to manage data such as task names and status within a MongoDB database.

I have concluded that RESTful APIs are powerful because they use standard HTTP verbs like GET, POST, PUT and DELETE to perform CRUD operations. This makes the interface predictable and easy for different clients to use. Testing the API with the Postcode extension confirmed that the server correctly transfers the state of resources in JSON format. This process taught me how modern applications effectively separate backend data from the frontend display.