All About Pizza!

Title About Content Contact Us

SALES PROJECT

PIZZAHUT

ABOUT

HI ! I am Lovansh Bhatt and in this project i have utilised SQL queries to solve questions that were related to pizzahut sales
Name of the project is “pizzahut sales project”

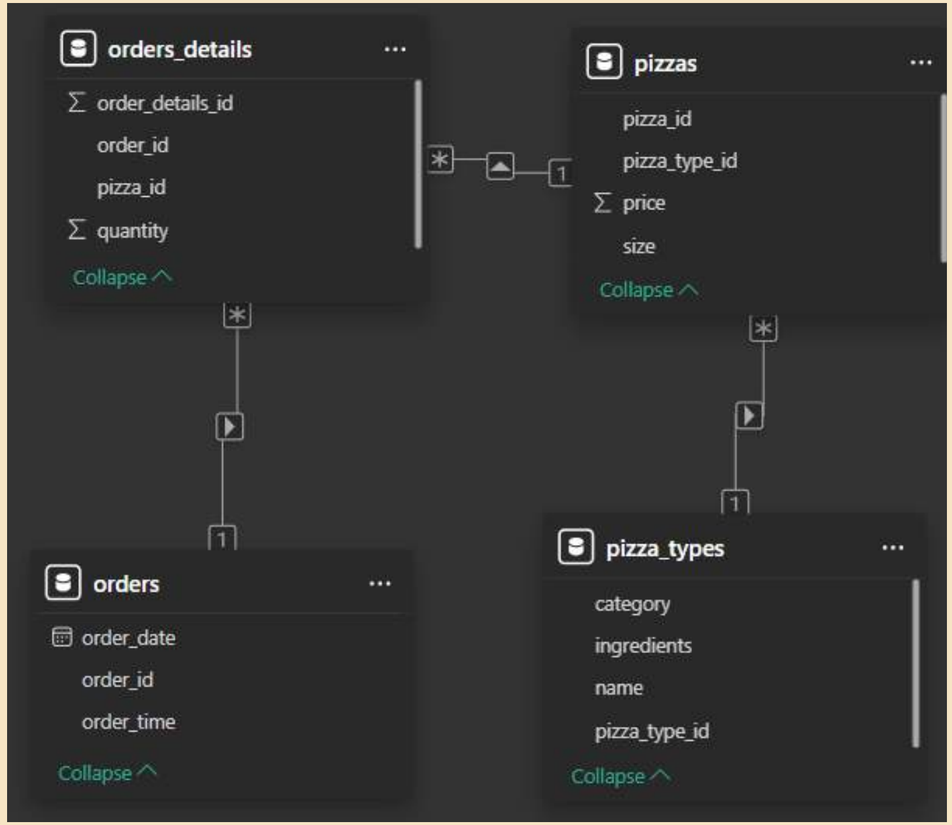

INTERACTIVE DASHBOARD

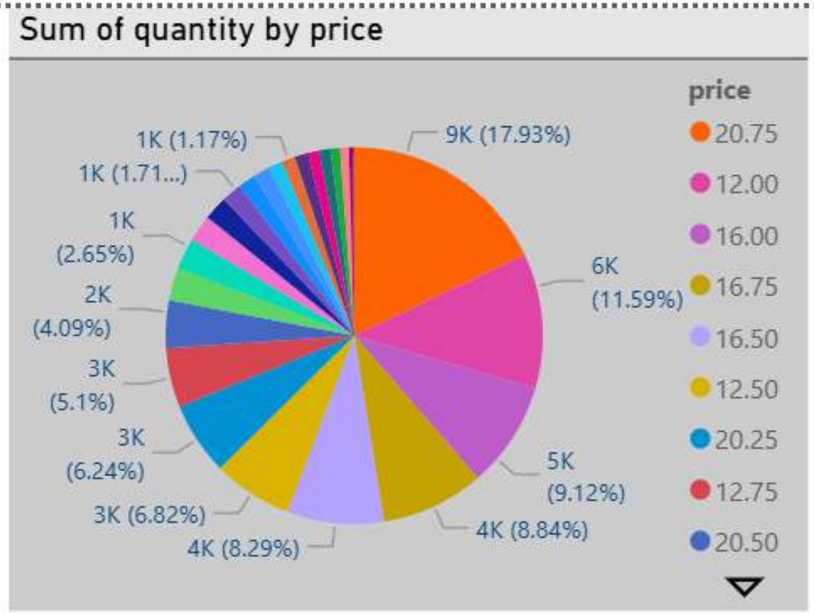

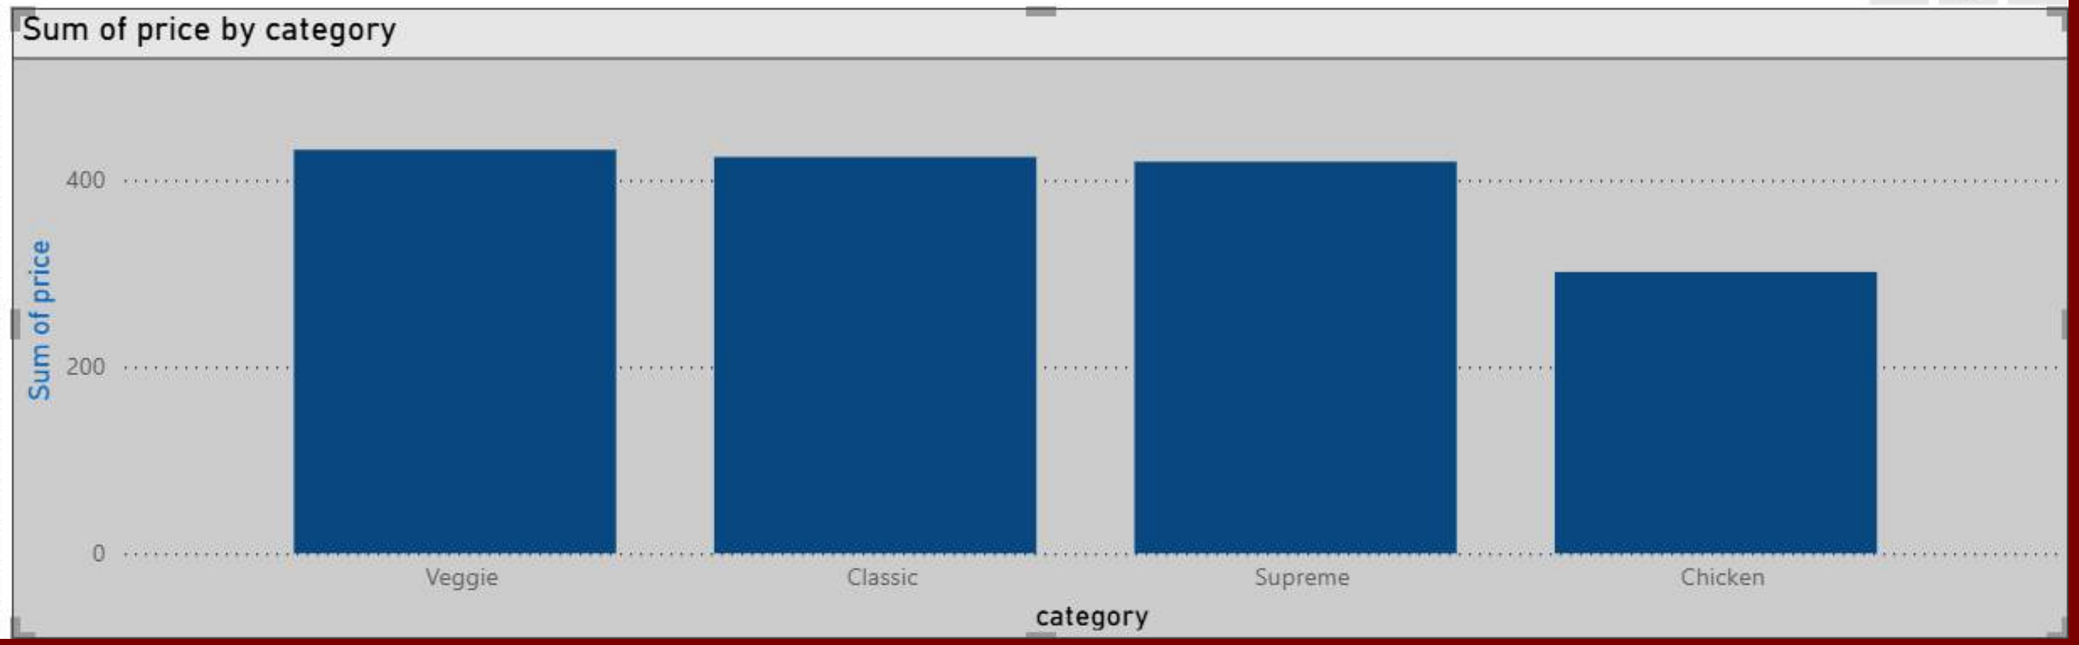

QUESTIONS

1-- Retrieve the total number of orders placed.
2-- Calculate the total revenue generated from pizza sales.
3-- Identify the highest-priced pizza.
4-- Identify the most common pizza size ordered.
5-- List the top 5 most ordered pizza types along with their quantities.
6-- Join the necessary tables to find the total quantity of each pizza category ordered.
7-- Determine the distribution of orders by hour of the day.
8-- Join relevant tables to find the category-wise distribution of pizzas.
9-- Group the orders by date and calculate the average number of pizzas ordered per day.
10-- Determine the top 3 most ordered pizza types based on revenue.
11-- Calculate the percentage contribution of each pizza type to total revenue.
12-- Analyze the cumulative revenue generated over time.
13-- Determine the top 3 most ordered pizza types based on revenue for each pizza category.

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```
SELECT
    COUNT(order_id) AS total_orders
FROM
    orders;
```

Result Grid

	total_orders
▶	21350

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

```sql
SELECT
    ROUND(SUM(orders_details.quantity * pizzas.price),2) AS total_sales
FROM
    orders_details
        JOIN
    pizzas ON pizzas.pizza_id = orders_details.pizza_id;
```

Result Grid

	total_sales
▶	817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid | Filter Rows:

name	price
The Greek Pizza	35.95

IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```sql
SELECT pizzas.size, COUNT(orders_details.order_details_id)
AS order_count
FROM pizzas JOIN orders_details ON
pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size ORDER BY order_count DESC;
```

Result Grid

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS QUANTITY
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY SUM(orders_details.quantity) DESC
LIMIT 5;
```

Result Grid | Filter Rows:

name	QUANTITY
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```sql
SELECT
    pizza_types.category, SUM(orders_details.quantity)
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY SUM(orders_details.quantity) DESC
LIMIT 5;
```

Result Grid | Filter Rows:

category	SUM(orders_details.quantity)
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

Result Grid | Filter

hour	order_count
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336
18	2399
19	2009
20	1642
21	1198
22	663
23	28
10	8
9	1

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT category, COUNT(name) FROM pizza_types
GROUP BY category;
```

Result Grid | Filter Rows:

category	COUNT(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```sql
SELECT
    ROUND(AVG(QUANTITY), 0)
FROM
    (SELECT
        orders.order_date AS date,
            SUM(orders_details.quantity) AS QUANTITY
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid | Filter Rows:

ROUND(AVG(QUANTITY), 0)
138

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```sql
SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name ORDER BY revenue DESC LIMIT 3;
```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
SELECT
    pizza_types.category,
   ROUND(SUM(orders_details.quantity * pizzas.price) / (SELECT
            ROUND(SUM(orders_details.quantity * pizzas.price),
                        2) AS total_sales
        FROM
            orders_details
                JOIN
            pizzas ON pizzas.pizza_id = orders_details.pizza_id),2)* 100 AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

Result Grid | Filte

category	revenue
Classic	27
Supreme	25
Veggie	24
Chicken	24

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```sql
SELECT order_date, SUM(revenue) OVER (ORDER BY order_date) AS  cum_revenue
FROM
(SELECT orders.order_date, SUM(orders_details.quantity * pizzas.price) AS revenue
FROM orders
JOIN
orders_details ON orders.order_id = orders_details.order_id
JOIN
pizzas ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY orders.order_date) AS sales;
```

Result Grid Filter Rows:

order_date	cum_revenue
2015-01-01	2713.8500000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7
2015-01-08	19399.05
2015-01-09	21526.4
2015-01-10	23990.350000000002
2015-01-11	25862.65
2015-01-12	27781.7
2015-01-13	29831.300000000003
2015-01-14	32358.700000000004
2015-01-15	34343.50000000001
2015-01-16	36937.65000000001
2015-01-17	39001.75000000001

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

Result Grid | Filter Rows:

name	category
The Thai Chicken Pizza	Chicken
The Barbecue Chicken Pizza	Chicken
The California Chicken Pizza	Chicken
The Classic Deluxe Pizza	Classic
The Hawaiian Pizza	Classic
The Pepperoni Pizza	Classic
The Spicy Italian Pizza	Supreme
The Italian Supreme Pizza	Supreme
The Sicilian Pizza	Supreme
The Four Cheese Pizza	Veggie
The Mexicana Pizza	Veggie
The Five Cheese Pizza	Veggie

```sql
SELECT name, category FROM
(SELECT category, name, revenue,
RANK() OVER(PARTITION BY category ORDER BY revenue DESC) AS rn
FROM
(SELECT pizza_types.category, pizza_types.name, SUM((orders_details.quantity) * pizzas.price) AS revenue
FROM pizza_types JOIN pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
JOIN orders_details ON orders_details.pizza_id = pizzas.pizza_id GROUP BY pizza_types.category, pizza_types.name) AS a)as b
WHERE rn <= 3;
```

CONTACT

+91-7289068133

lovanshbhatt570@gmail.com

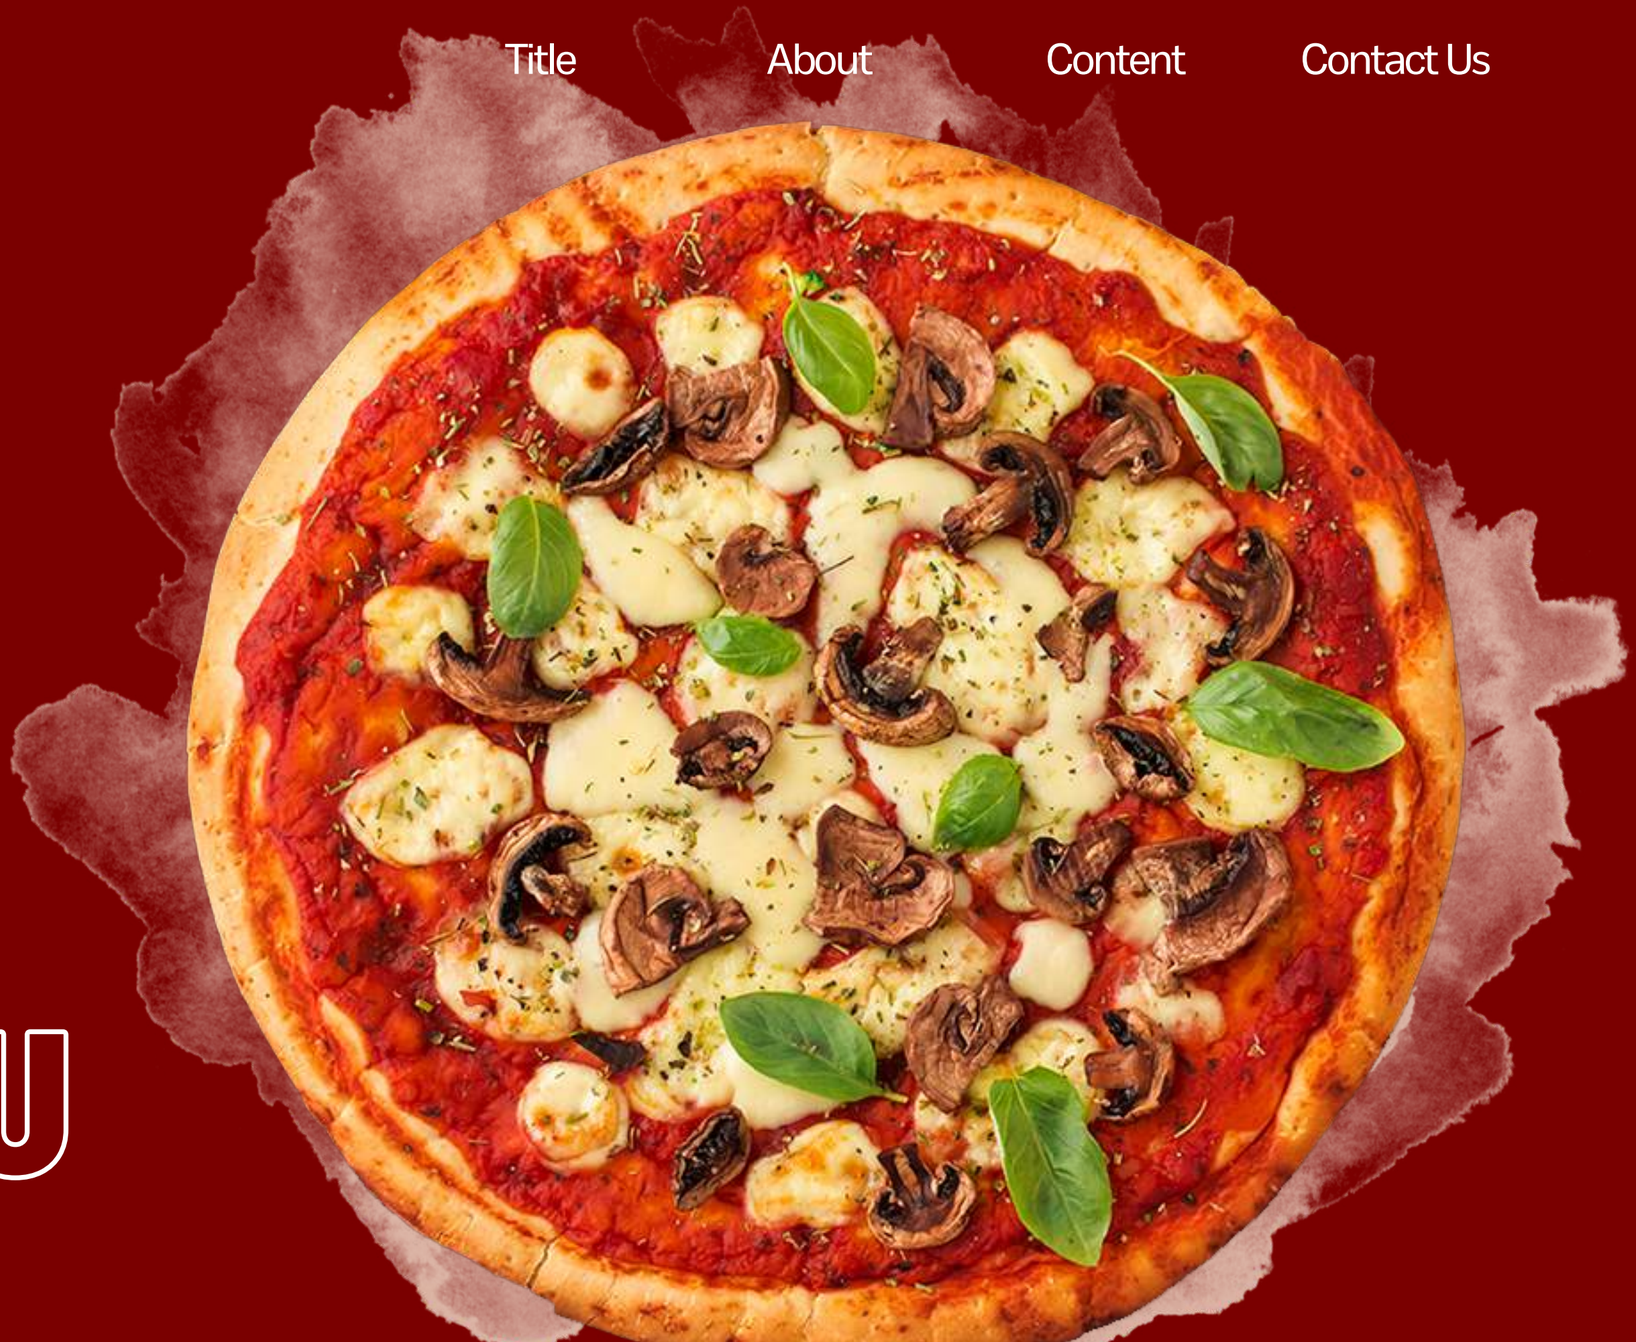

THANK YOU