

HTML/CSS 클론코딩(2)

이재이

Contents


01. 레이아웃

02. 구현결과

03. 소요시간

01. 레이아웃

container

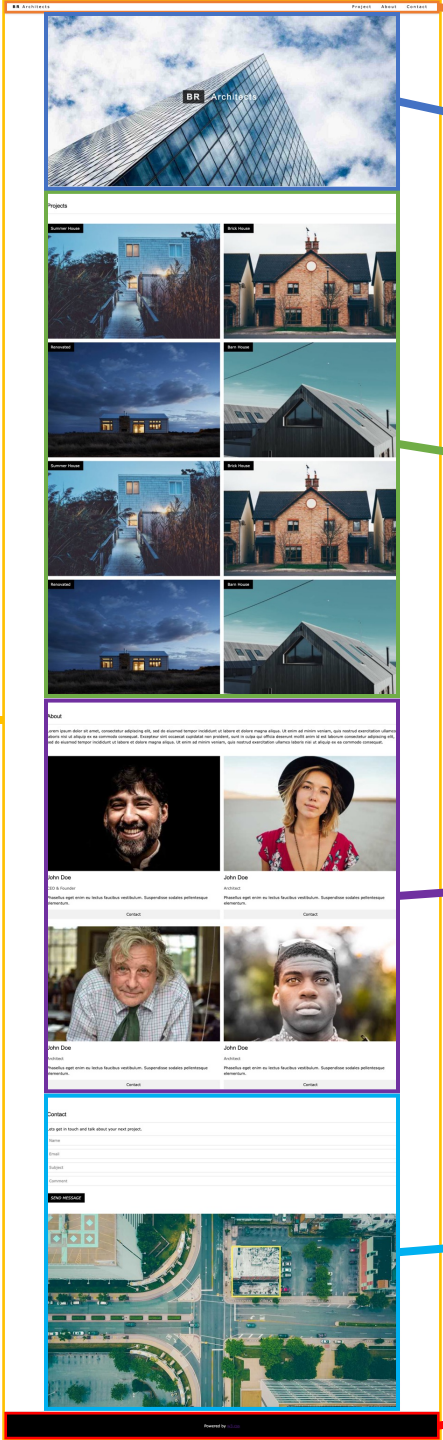

Nav Bar

Header

Content - Project

Content - About

Content - Contact

footer

02. 구현결과 - Nav Bar

BR Architects

Project About Contact

HTML

```
<body>
  <!-- Nav Bar -->
  <div class="top">
    <div class="menu">
      <a href="#home" class="button"><b>BR</b> Architects</a>
      <div class="nav-right">
        <a href="#project" class="button">Project</a>
        <a href="#about" class="button">About</a>
        <a href="#contact" class="button">Contact</a>
      </div>
    </div>
  </div>
</div>
```

CSS

```
/* Nav Bar */
.top {
  position: fixed;
  width: 100%;
  z-index: 1;
  top: 0;
}

.menu {
  width: 100%;
  overflow: hidden;
  color: #000;
  background-color: #fff;
  letter-spacing: 4px;
  padding: 8px 16px;
  box-shadow: 0 2px 5px 0 rgb(0 0 0 / 16%),
    0 2px 10px 0 rgb(0 0 0 / 12%);
}

.button {
  width: auto;
  border: none;
  display: inline-block;
  padding: 8px 16px;
  vertical-align: middle;
  overflow: hidden;
  text-decoration: none;
  color: inherit;
  background-color: inherit;
  text-align: center;
  cursor: pointer;
  white-space: nowrap;
}

.button:hover {
  background-color: #909090;
}

.nav-right {
  float: right;
  padding: 0 16px;
}
```

02. 구현결과 - Header

CSS



HTML

```
<!-- Header -->
<header class="main-container" style="max-width:1500px;" id="home">
  
  <div class="display-middle">
    <h1 class="titlefont">
      <span class="opacity padding8 blackbox"><b>BR</b></span>
      <span class="opacity padding8">Architects</span>
    </h1>
  </div>
</header>
```

```
/* Header */
.main-container {
  position: relative;
  margin-left: auto;
  margin-right: auto;
}

.image {
  max-width: 100%;
  height: auto;
}

img {
  vertical-align: middle;
  border-style: none;
}

.display-middle {
  position: absolute;
  top: 50%;
  left: 50%;
  margin-top: 16px;
  transform: translate(-50%, -50%);
  text-align: center;
  vertical-align: middle;
}

.blackbox {
  text-align: center;
  background-color: #000;
  padding: 8px 16px;
}

.opacity {
  opacity: 0.75;
}

.padding8 {
  padding: 8px 16px;
}

.titlefont {
  color: #fff;
  font-size: 36px;
  letter-spacing: 4px;
}
```

02. 구현결과 - Content - Project

HTML

```
<!-- Content -->
<div class="content">
  <!-- Project -->
  <div class="container" id="project">
    <h3 class="subtitle">Projects</h3>
  </div>
  <div class="container2">
    <div class="box1">
      <div class="display-container">
        <div class="textbox">Summer House</div>
        
      </div>
    </div>
    <div class="box1">
      <div class="display-container">
        <div class="textbox">Brick House</div>
        
      </div>
    </div>
    <div class="box1">
      <div class="display-container">
        <div class="textbox">Renovated</div>
        
      </div>
    </div>
    <div class="box1">
      <div class="display-container">
        <div class="textbox">Barn House</div>
        
      </div>
    </div>
  </div>
</div>
```

CSS

```
/* Page content */
.subtitle {
  color: #000;
  padding-top: 16px;
  padding-bottom: 16px;
  border-bottom: 1px solid #ccc;
}

/* project */
.marginbottom {
  margin-bottom: 16px;
}

@media (max-width: 993px) {
  .box1 {
    width: 24.99999%;
  }
}

@media (min-width: 601px) {
  .box1 {
    width: 49.99999%;
  }
}

.container {
  padding: 0.01em 16px;
  padding-top: 32px;
  padding-bottom: 32px;
}


.container2 {
  padding: 0 8px;
}

.container2:before,
.container2:after {
  content: "";
  display: table;
  clear: both;
}


.display-container {
  position: relative;
  padding: 0 8px;
}

.box1 {
  margin-bottom: 16px;
  float: left;
}

.textbox {
  position: absolute;
  padding: 8px 16px;
  color: #fff;
  background-color: #000;
}
```

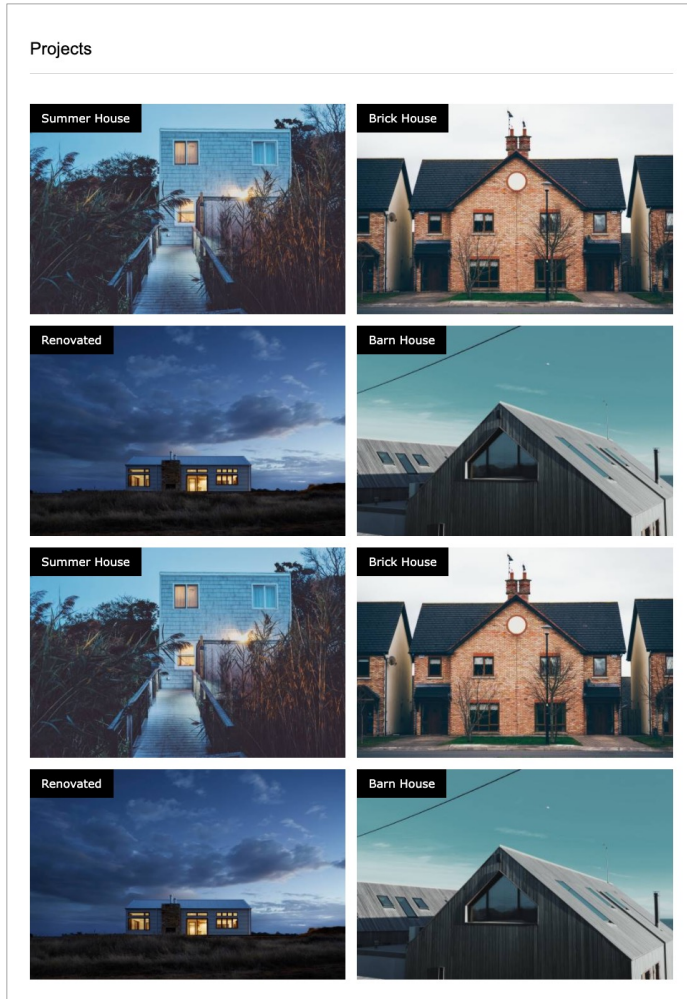

02. 구현결과 – Content – About

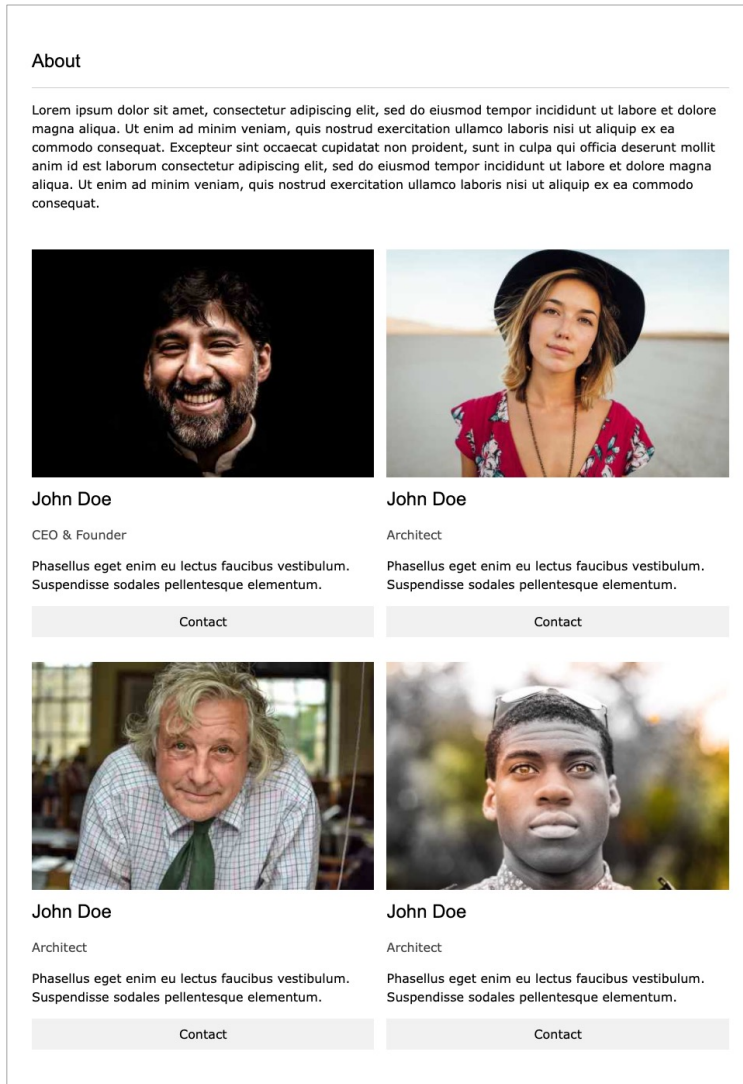

HTML

```
<!-- About -->
<div class="container" id="about">
  <h3 class="subtitle">About</h3>
  <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit, ...
    consequat.</p>
</div>
<div class="container2">
  <div class="box1">
    <div class="display-container">
      
      <h3>John Doe</h3>
      <p class="opacity">CEO & Founder</p>
      <p>Phasellus eget enim eu lectus faucibus vestibulum.
        Suspendisse sodales pellentesque elementum.</p>
      <p><button class="button2 b">Contact</button>
    </p>
    </div>
  </div>
  <div class="box1"> ...
</div>
  <div class="box1"> ...
</div>
  <div class="box1"> ...
</div>
</div>
```

CSS

```
/* About */
.button2 {
  border: none;
  padding: 8px 16px;
  overflow: hidden;
  text-decoration: none;
  text-align: center;
  cursor: pointer;
  white-space: nowrap;
  text-transform: none;
  color: #000;
  background-color: #f1f1f1;
  font: inherit;
  user-select: none;
  -webkit-appearance: button;
}

.b {
  width: 100%;
  display: block;
}


.button2:hover {
  background-color: #909090;
}
```

02. 구현결과 - Content - Contact

Contact

Lets get in touch and talk about your next project.

SEND MESSAGE

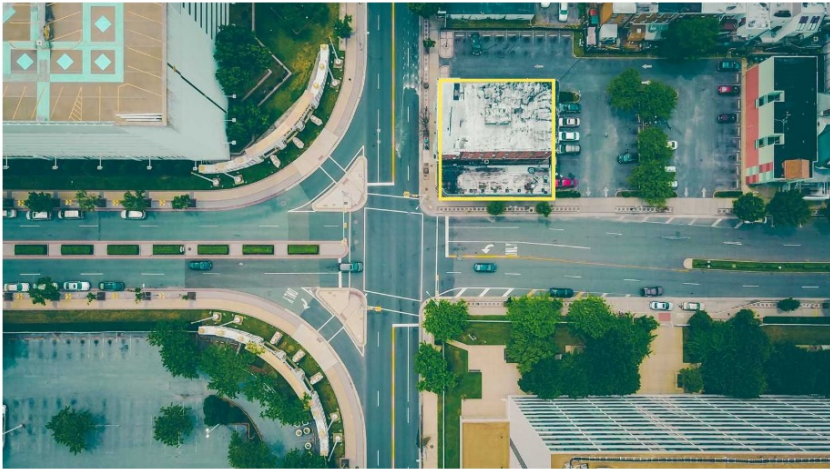

Powered by [w3.css](#)

```
<!-- Contact -->
<div class="container" id="contact">
  <h3 class="subtitle">Contact</h3>
  <p>Lets get in touch and talk about your next project.</p>
  <form action="/action_page.php" target="_blank">
    <input class="input border" type="text" placeholder="Name" required name="Name">
    <input class="input border section" type="text" placeholder="Email" required name="Email">
    <input class="input border section" type="text" placeholder="Subject" required name="Subject">
    <input class="input border section" type="text" placeholder="Comment" required name="Comment">
    <button class="sendbutton" type="submit"><i>SEND MESSAGE</i></button>
  </form>
</div>

<div class="map">
  
</div>

<!-- Footer -->
<footer class="bottom">
  <p>
    Powered by
    <a href="https://www.w3schools.com/w3css/default.asp"
      title="W3.CSS" target="_blank" class="hovertext">w3.css</a>
  </p>
</footer>
```

HTML

```
/* footer */
.bottom {
  color: #fff;
  background-color: #000;
  width: 100%;
  padding-top: 32px;
  padding-bottom: 32px;
  text-align: center;
}

.bottom .hovertext:hover {
  color: green;
}

/* float 마감제 */
.clear:after {
  content: '';
  display: block;
  float: none;
  clear: both;
}
```

CSS

```
/* Contact */
form {
  display: block;
  margin-top: 0em;
}

.input {
  padding: 8px;
  display: block;
  width: 100%;
  overflow: visible;
  font: inherit;
}

.border {
  border: 1px solid #ccc;
}

.section {
  margin-top: 16px;
  margin-bottom: 16px;
}

.sendbutton {
  border: none;
  padding: 8px 16px;
  overflow: hidden;
  text-decoration: none;
  text-align: center;
  cursor: pointer;
  white-space: nowrap;
  text-transform: none;
  font: inherit;
  user-select: none;
  margin-top: 16px!important;
  margin-bottom: 16px!important;
  color: #fff;
  background-color: #000;
}

.map {
  padding: 0.01em 16px;
}
```


03. 소요시간

코딩 소요시간

16:00 – 24:00

느낀점

클론코딩이 실력향상에 도움이 많이 되는 것을 느낄 수 있었습니다.
그동안 배웠던 내용들을 숙지하기까지 시간이 많이 부족했는데,
클론코딩을 하며 복습에 도움이 많이 되었습니다.