

A












B










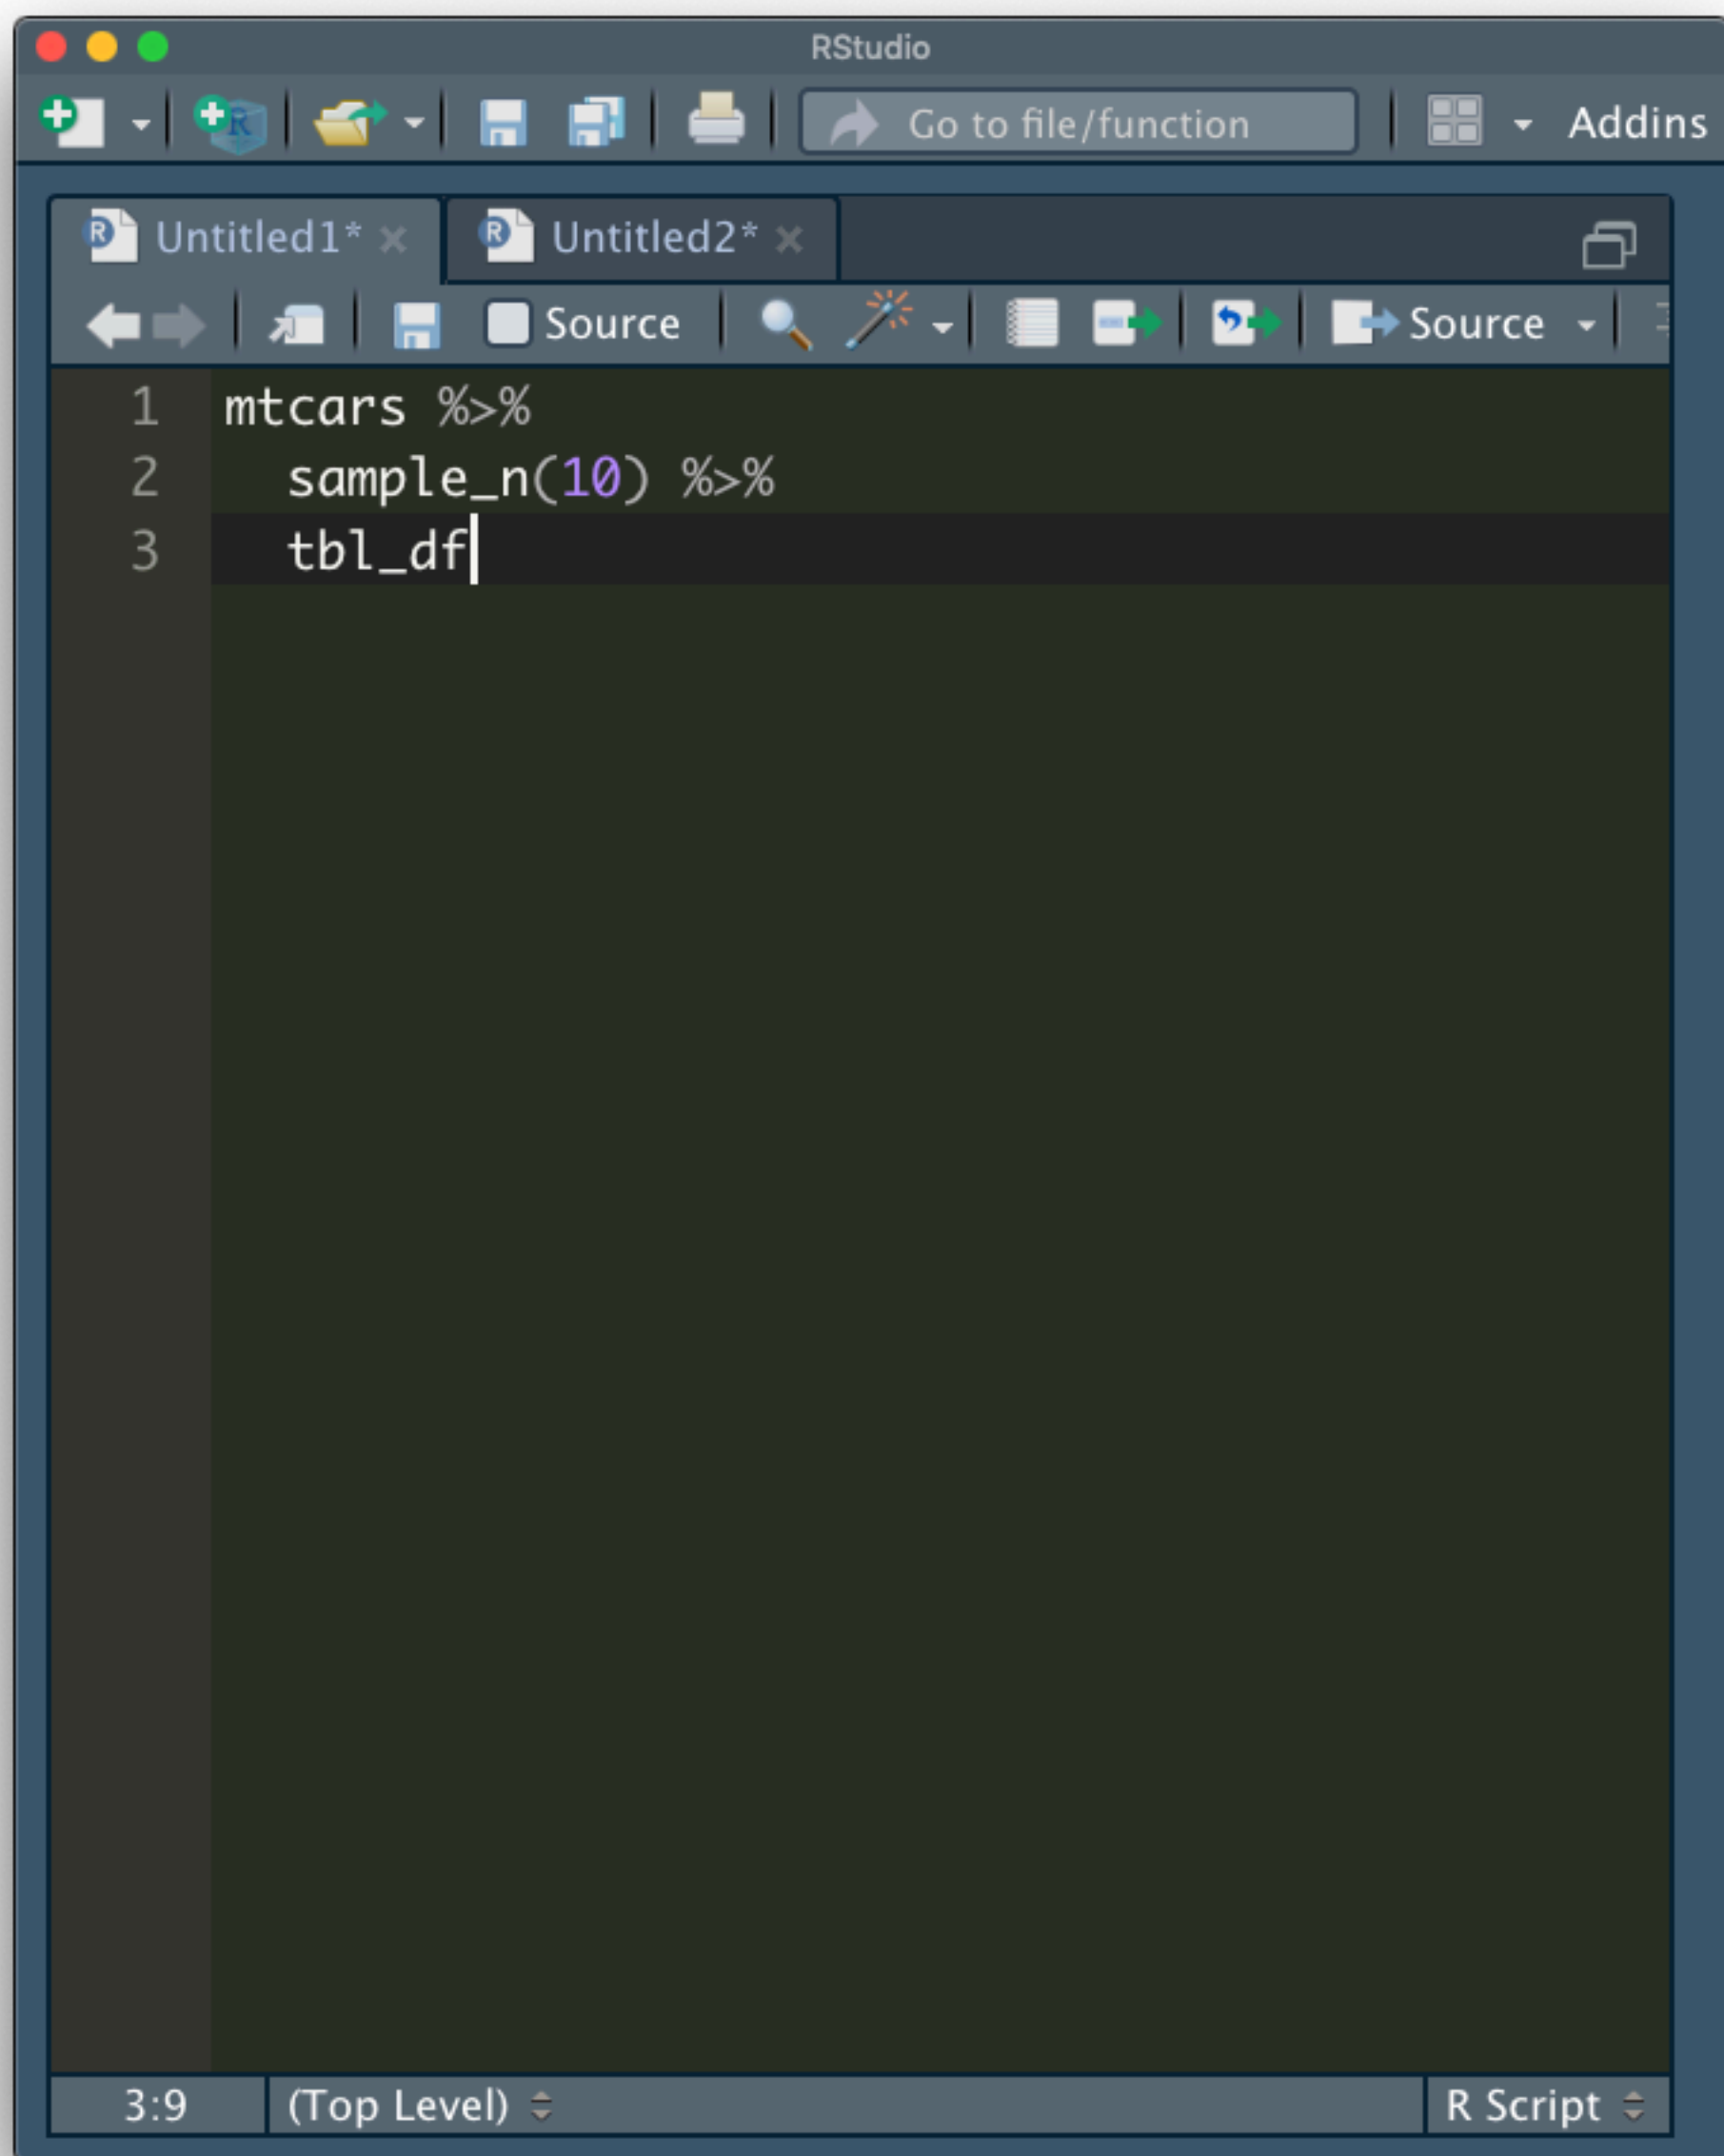

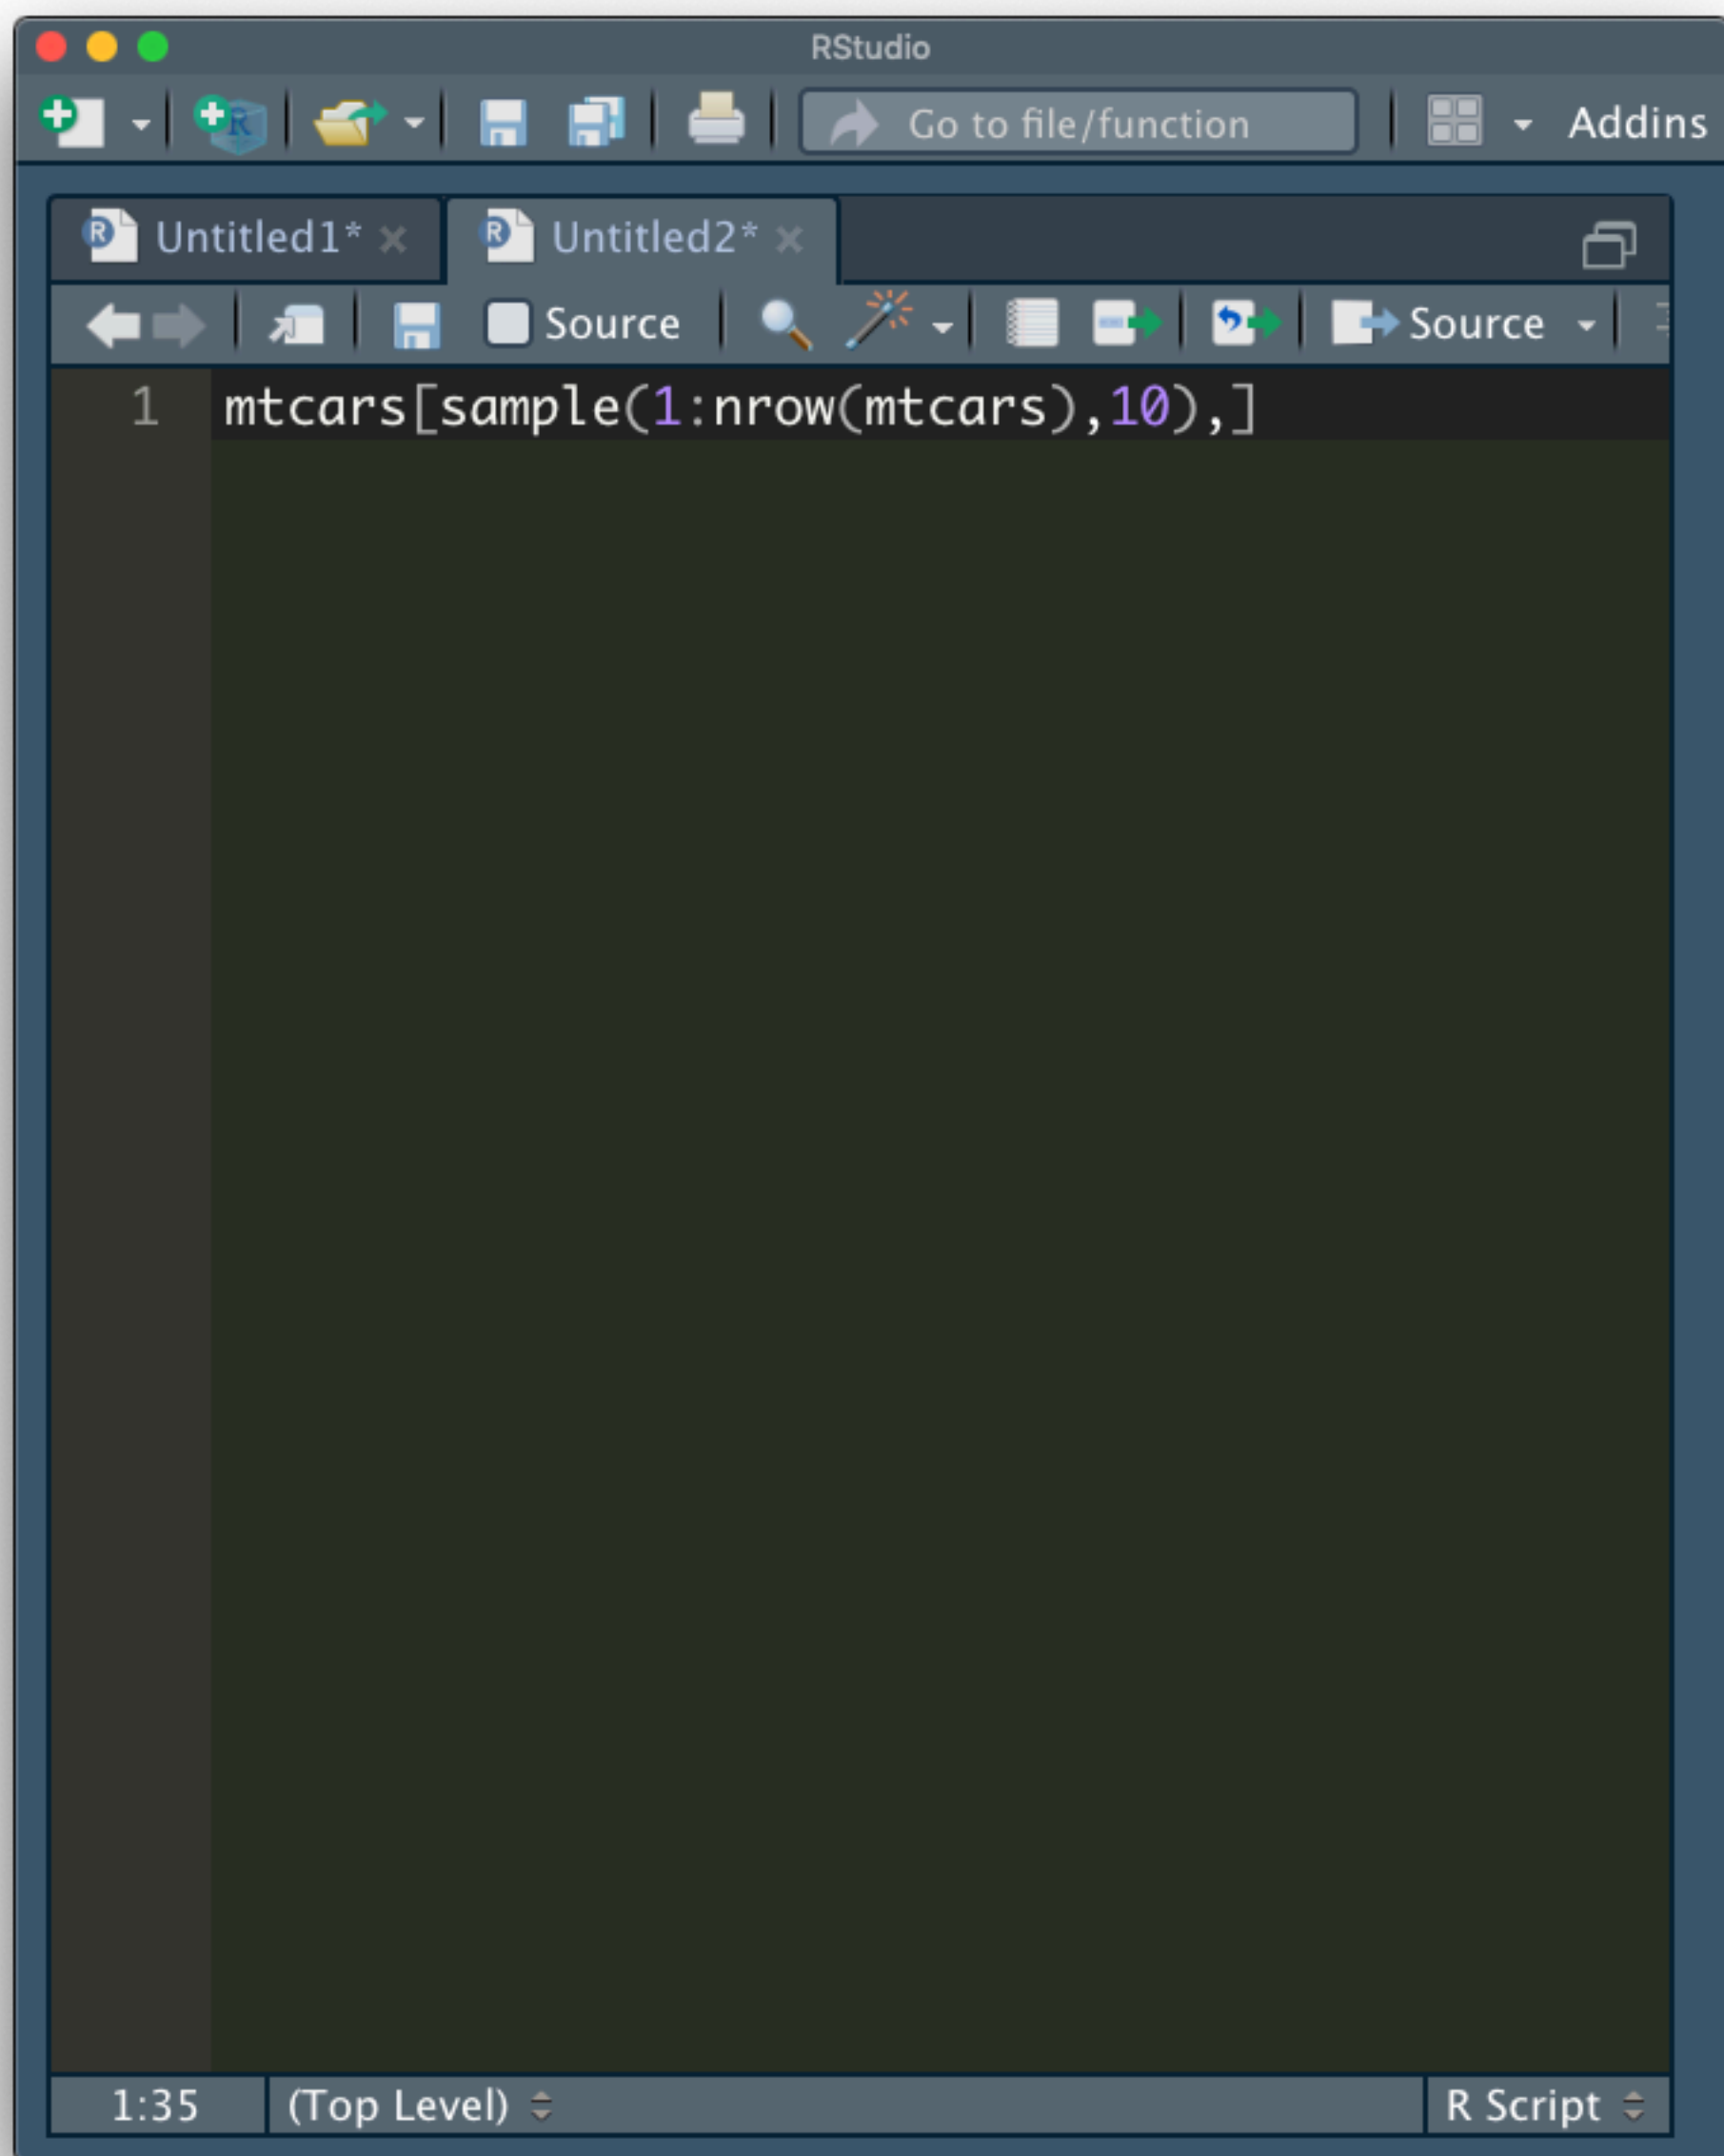











Before

After

RStudio

Go to file/function

Addins


Untitled1* x

Untitled2* x

Source

```
1 mtcars[sample(1:nrow(mtcars),10),]
```

1:35 (Top Level) R Script

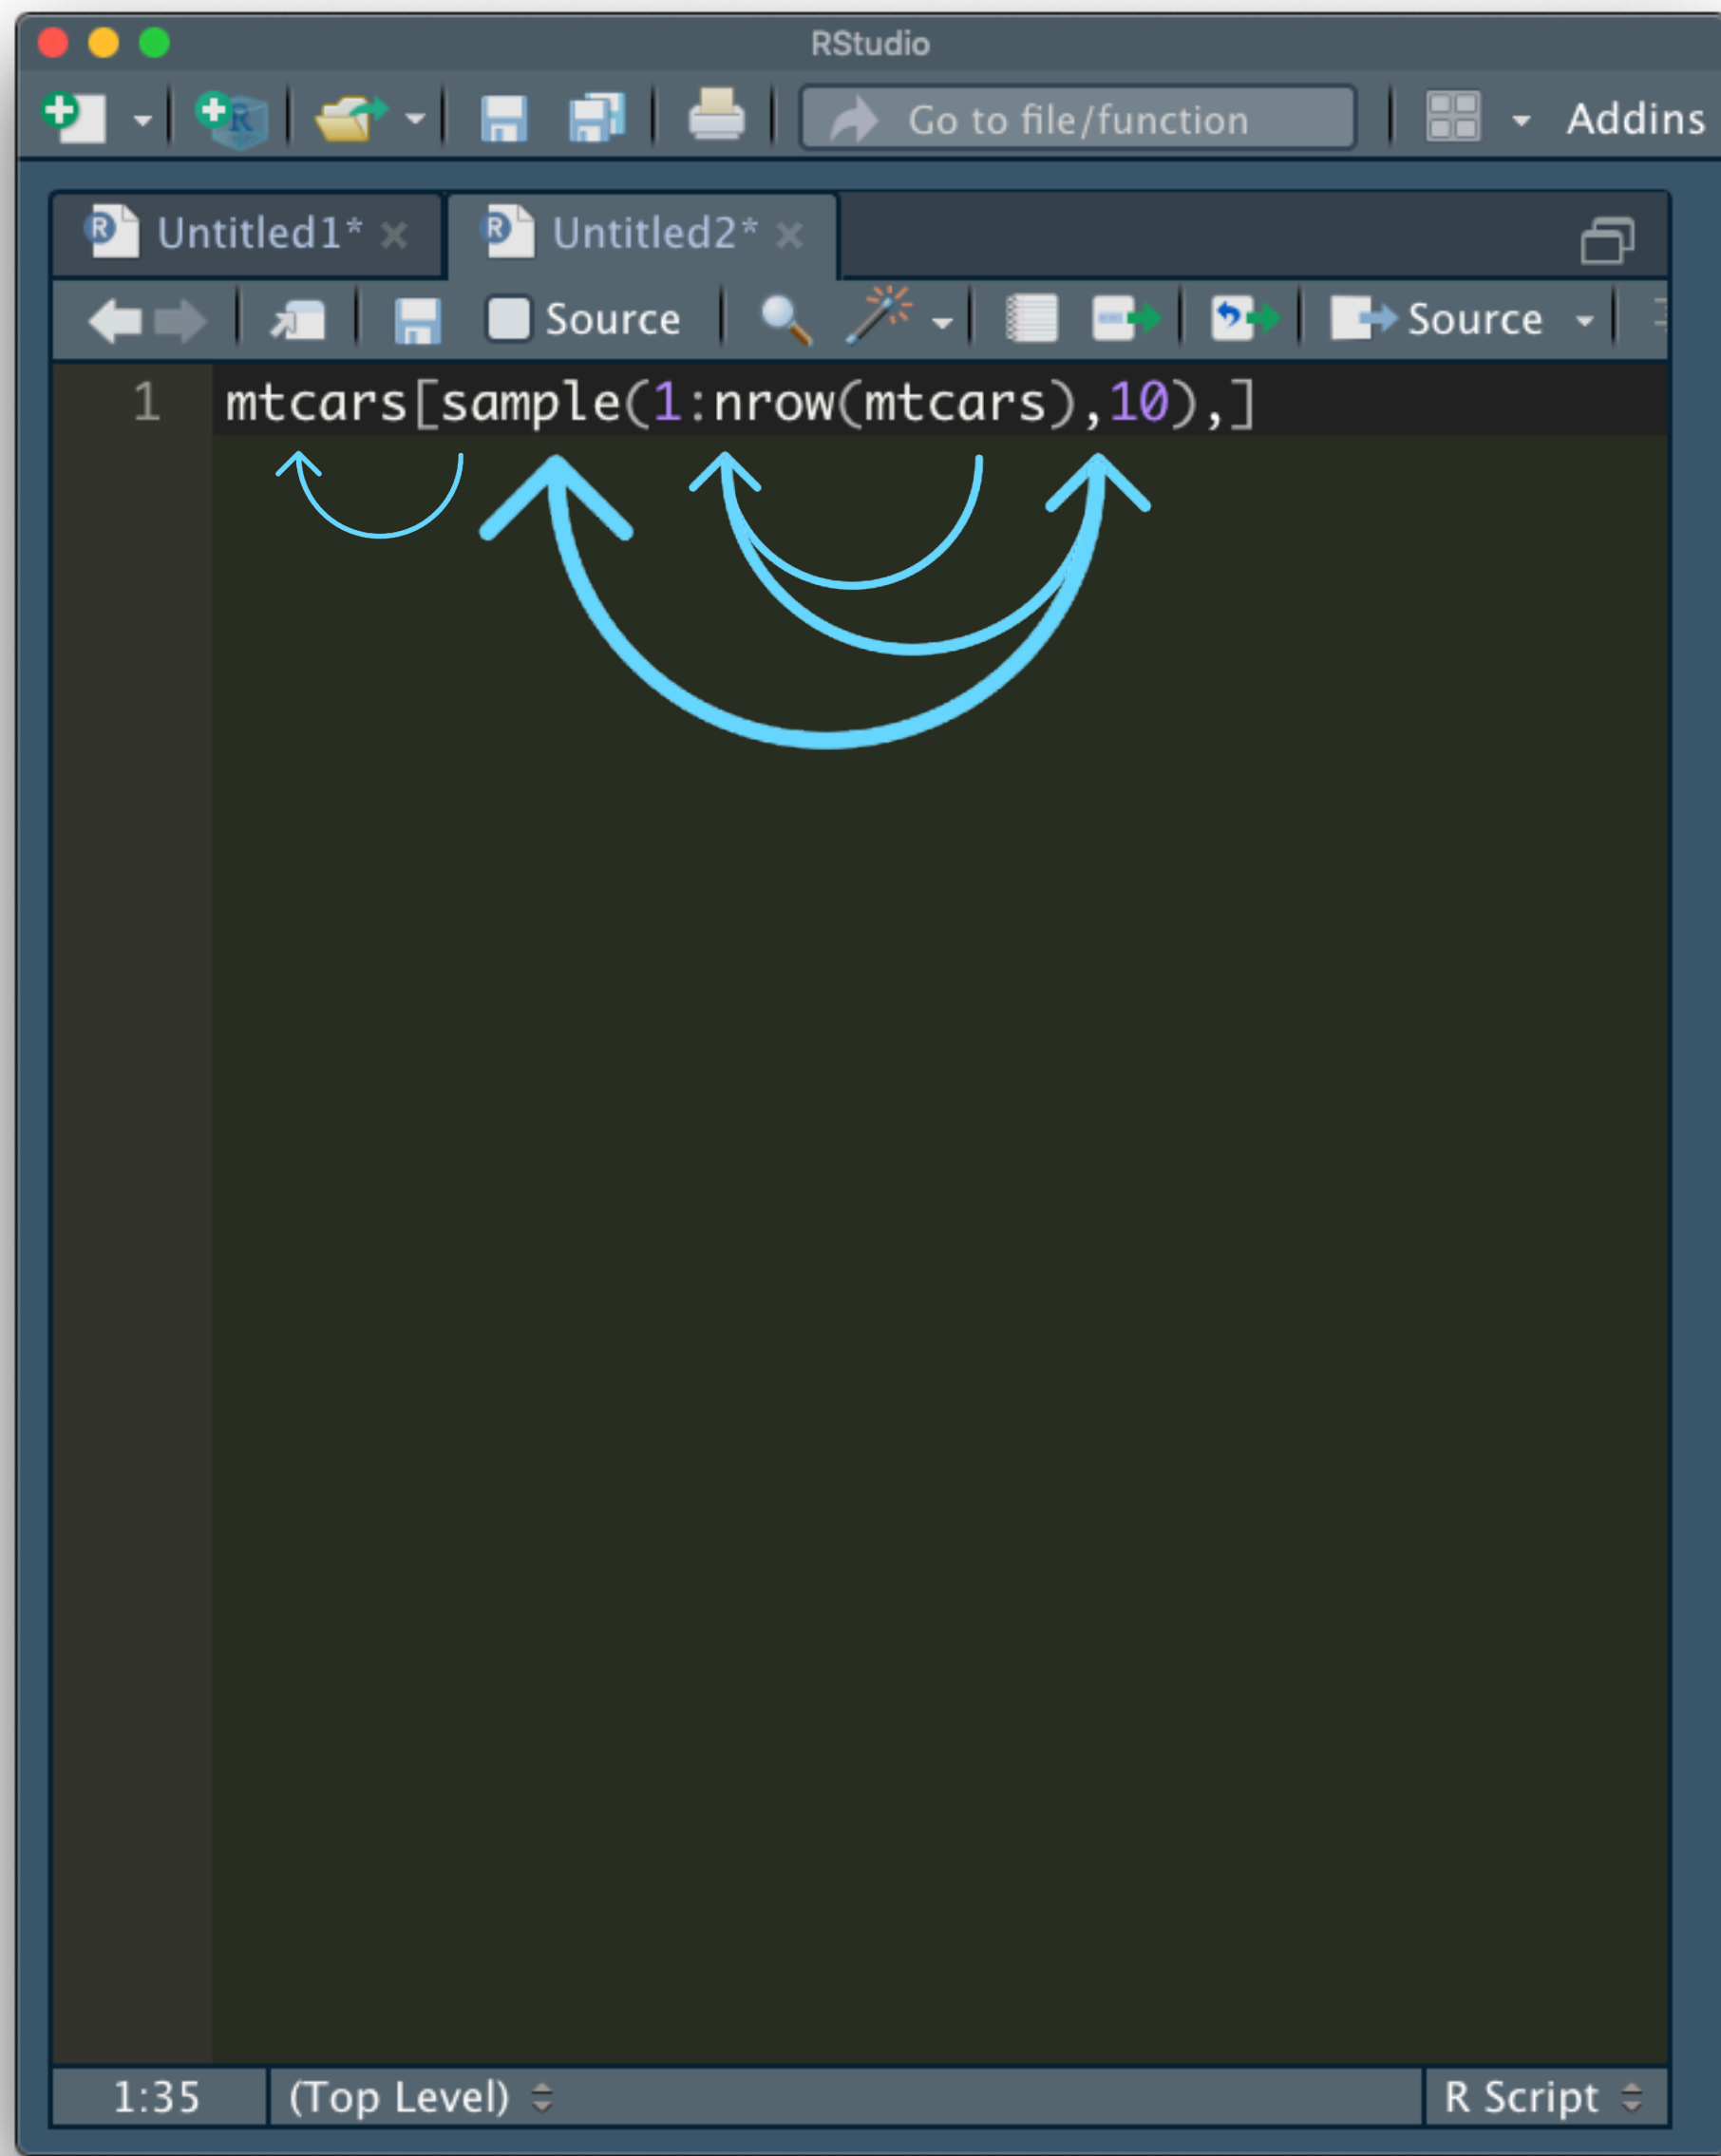

RStudio

Go to file/function

Addins

Untitled1* x

Untitled2* x

Source

```
1 mtcars %>%  
2   sample_n(10) %>%  
3   tbl_df|
```

3:9 (Top Level) R Script

