




B













A









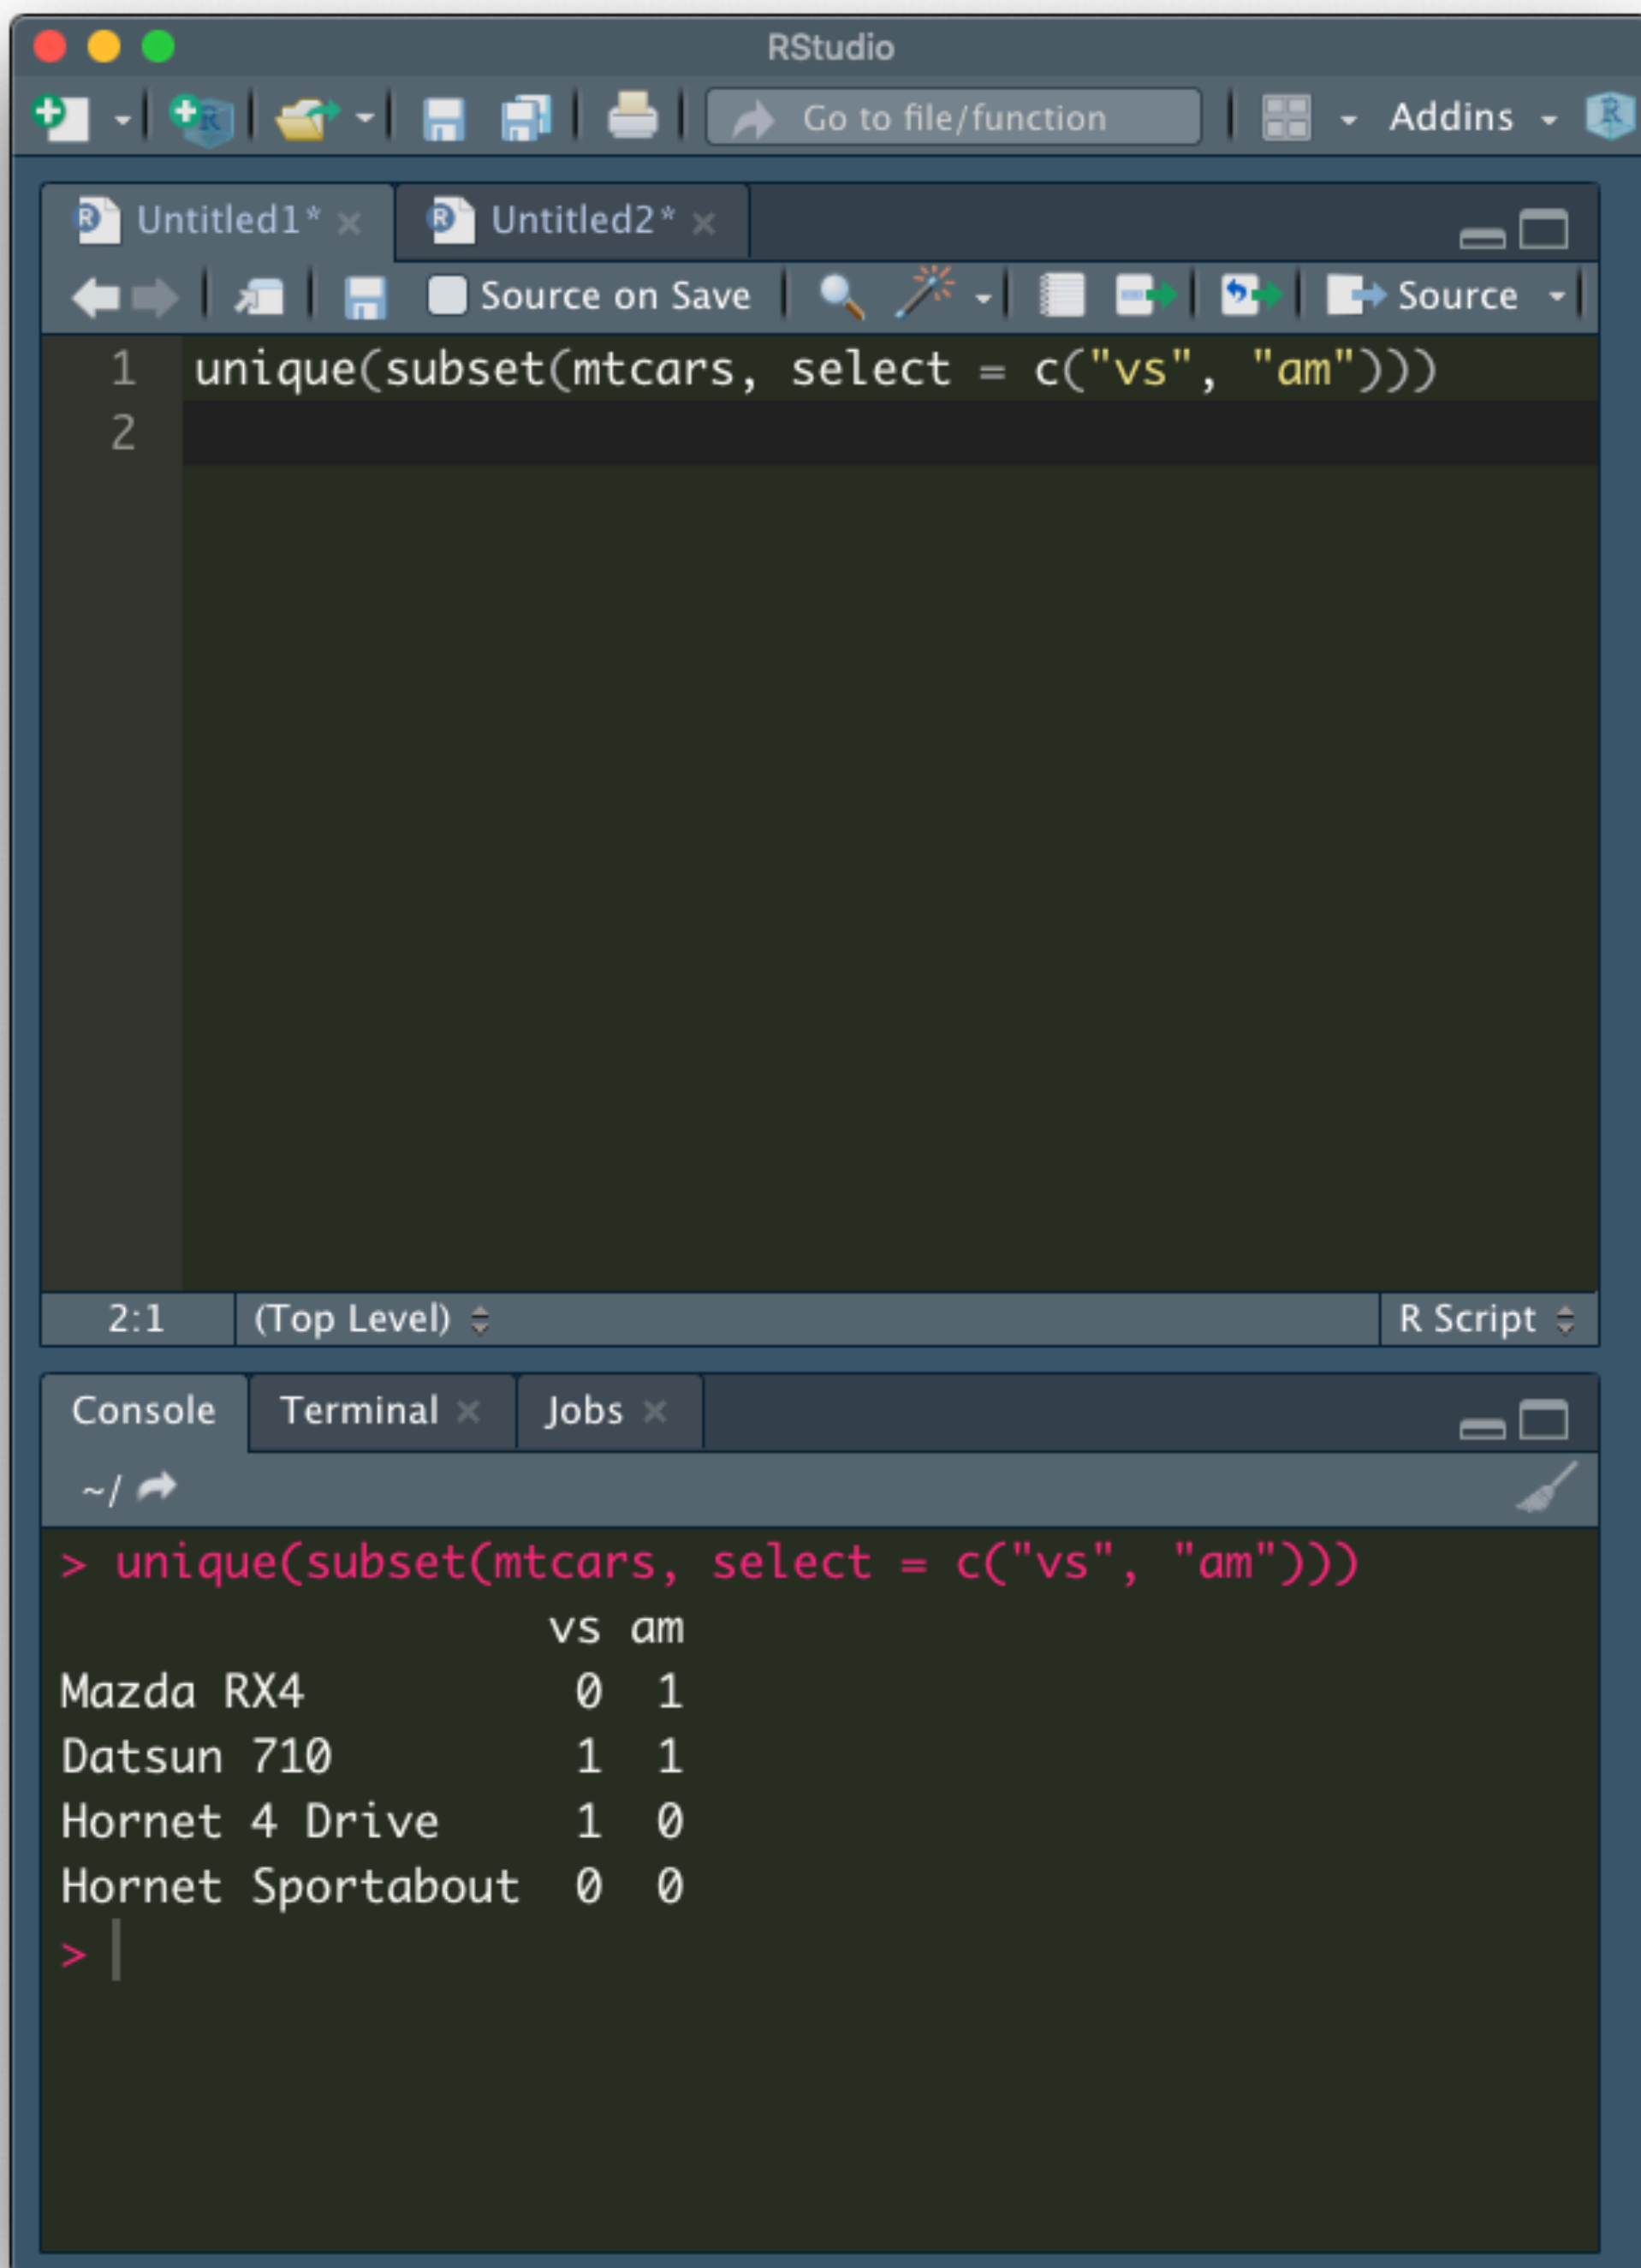











Before

After

RStudio

Go to file/function

Addins

Untitled1* x Untitled2* x

Source on Save

Source

```
1 unique(subset(mtcars, select = c("vs", "am")))
2 .....
```

2:1 (Top Level) R Script

Console

~/

```
> unique(subset(mtcars, select = c("vs", "am")))
      vs am
Mazda RX4      0  1
Datsun 710     1  1
Hornet 4 Drive  1  0
Hornet Sportabout 0  0
> |
```

RStudio

Go to file/function

Addins

Untitled1* x Untitled2* x

Source on Save

Source

```
1 mtcars %>%
2   distinct(vs, am)
3
```

3:1 (Top Level) R Script

Console

~/

```
> mtcars %>%
+   distinct(vs, am)
      vs am
1  0  1
2  1  1
3  1  0
4  0  0
> |
```