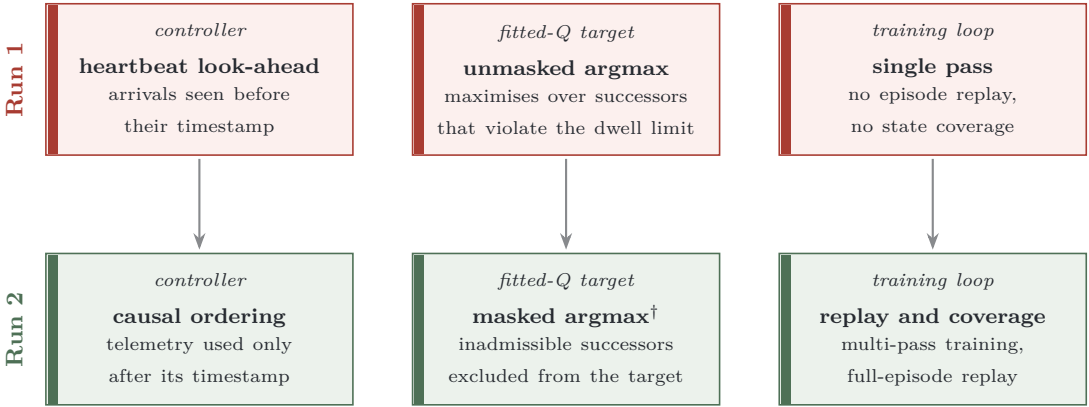


Run 1 is the pipeline as first implemented; Run 2 is a pre-registered re-run of the identical architecture, simulator and 21 held-out episodes. The two runs are reported separately and never pooled.