

Harbor harness

same staged task, model, output contract, verifier, and scorer across environments

● Env 1: context-only

durable memory: none
continuous session context only

● Env 2: markdown

durable memory: /app/memory.md
naive file-backed baseline

● Env 3: cr-mcp

durable memory: CR MCP
same task, CR memory substrate

one continuous agent session inside each environment


U docs/events -> memory

T form/task -> answer

stages revealed by /app/next_stage

Staged reveal timeline

Documents/events update the same retained state; downstream form/tasks read that accumulated state.

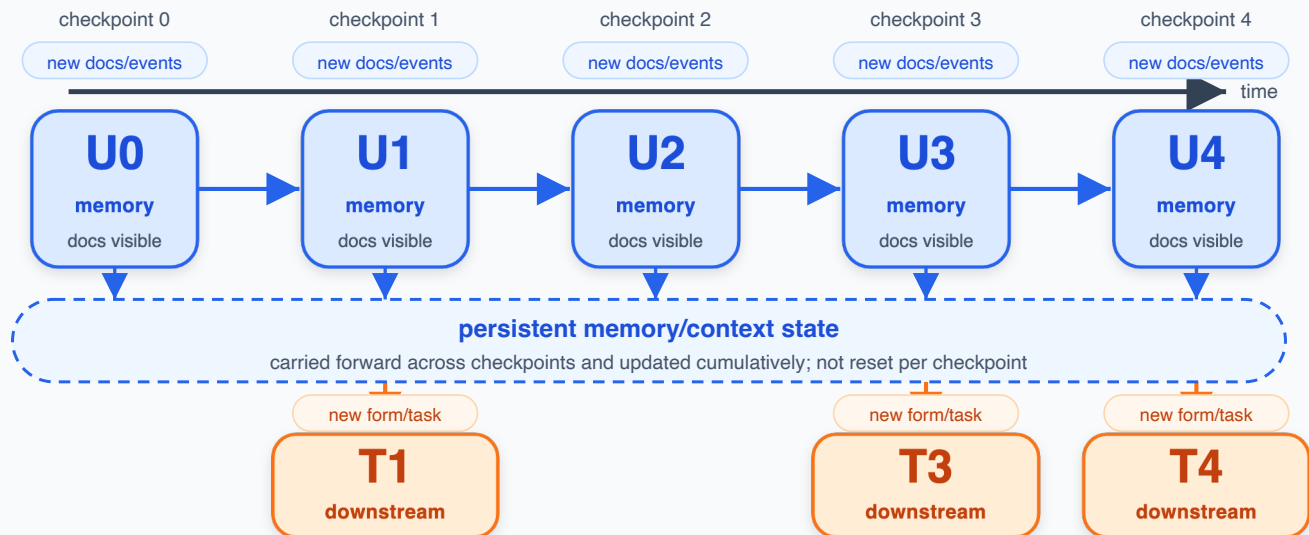

Example schedules

hidden final task: U -> U -> U -> T

interleaved probes: U -> U -> T -> U -> T