Taopix Control Centre & Taopix Online Customisation

Version 2022r1

Author:	Taopix Support (support@taopix.com)
Date:	28/06/2022
Document Name:	Taopix Control Centre & Taopix Online Customisation 2022r1.docx

1. Contents

1. Contents 2

2. Introduction 5

2.1 Creating a New Brand Site 5

2.2 Testing the Branded Site 6

3. Basic Customisation 7

3.1 Website Logos and images 7

3.1.1 Advertising - Left Sidebar 8

3.1.2 Dashboard Images 9

3.1.3 Favicon 10

3.2 Email Templates 10

3.2.1 Email Template Resources 11

3.2.2 Email template files 11

3.2.3 Example Email modification 16

3.3 Language Files 16

3.3.1 Language file details 17

3.4 Completing the installation 17

4. Intermediate Customisation 19

4.1 Introduction 19

4.2 Style Sheets - CSS 19

4.2.1 Finding the appropriate section in the CSS 19

4.2.2 CSS Examples 20

5. Advanced Customisation 23

5.1 Introduction 23
5.1.1 Technologies 23
5.2 Style Sheets - CSS 23
5.3 Templates - MediaAlbumWeb/templates 24
5.3.1 Template file Locations 24
5.3.2 Important Templates 28
5.3.3 Terms and Conditions – Shopping Cart 33
5.3.4 Trade tracker Tags 33
5.3.5 Different order confirmation templates for Desktop and Online orders 34
6. Emails 35
6.1 Email Logo and Signature 35
6.1.1 Email Logo 35
6.1.2 Email Signature 35
6.2 MediaAlbumWeb/Customise/email 36
6.3 Email Variables 37
6.4 Important Notes Concerning Files 43
7. Using different domain names for Brands. 44
7.1 Accessing Brands Via Domains 44
7.1.1 Basic Configuration – Using Redirection 44
7.1.2 Advanced Example – Using HTTP only 44
7.2 Advanced Example – Using HTTPS 46
7.2.1 Configuring SSL/HTTPS for Control Centre 46
7.2.2 Purchasing an SSL certificate 46
7.2.3 Creating a .pem file from certificates 46
7.2.4 Configuration Details 47
7.2.5 Apache Version 47

7.2.6 Choose the correct scenario 47

7.2.7 Obtain a Self-Signed certificate for testing. 48

7.2.8 Control Centre Server Apache Configuration 48

7.2.9 Apache log rotation 53

7.2.10 Changes to Branding on Taopix Control Centre: 53

7.2.11 Notes Concerning Branding 54

8. Taopix Online Customisation 55

8.1 Style Sheets 55

8.1.1 taopixonline/site/webroot/css/ 55

8.1.2 taopixonline/site/webroot/css/ 55

8.2 Customising Taopix Online 56

8.2.1 Customising at Global level: 56

8.2.2 Customising at a Brand level 56

8.2.3 Applying your own CSS styles 57

8.2.4 Icons 58

Asset Management Icon 60

8.2.5 Changing the logo 60

8.3 Language Files – taopixonline/site/lang 61

8.4 Templates - taopixonline/site/templates 62

8.4.1 Terms and Conditions 62

8.4.2 Mobile workflow Templates 63

8.4.3 Language strings 63

8.5 Advanced Online Customisation 64

8.5.1 External Content – not supported for mobile devices 65

2. Introduction

A Taopix Control Centre server can be configured in order to match the branding of an existing company website. This document explains the structure of the Taopix Control Centre web pages and the items that can be changed without causing any problems.

The processes for changing the appearance is technical and requires knowledge of HTML, CSS and some PHP knowledge. Therefore this document is split into three sections. The first is *Basic* and describes how to make changes to company logo and email templates. The second is *Intermediate* which describes how to change some colours and other appearance using CSS. The third is an *Advanced* description of the technologies and a more detailed explanation of the files.

2.1 Creating a New Brand Site

Use the branding functionality to create a new brand within the control centre.

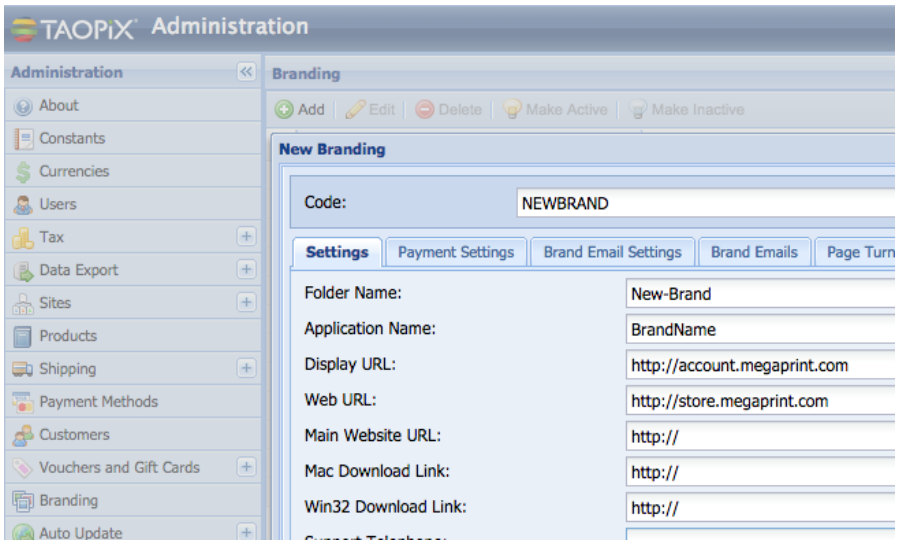

As well as creating an entry within the branding database table it will also create the following directories:

```
MediaAlbumWeb/Branding/xxx/

MediaAlbumWeb/Branding/xxx/email/

MediaAlbumWeb/Branding/xxx/templates/

MediaAlbumWeb/Branding/xxx/lang/
```

```
MediaAlbumWeb/webroot/Branding/xxx/

MediaAlbumWeb/webroot/Branding/xxx/css/

MediaAlbumWeb/webroot/Branding/xxx/images/
```

and the following file:

```
MediaAlbumWeb/webroot/Branding/xxx/index.php
```

(where *xxx* is the brand name that you created within the web admin)

2.2 Testing the Branded Site

To test the branded site is working correctly access it via http://www.mysite.com/*Branding/xxx/*. Initially the site should work correctly, although its appearance will be the same as the main non-branded site until making some customisation.

3. Basic Customisation

The aim of this section is to discuss how it is possible to make some basic changes to include the correct images and branding. This will allow the following to be changed:

- Website Logo
- Side Image
- Email Templates
- Language Files

NOTE: It is important that the entire system is tested after any modifications have been performed prior to it being available to your customers. Taopix Ltd. will not be responsible for any system failures due to customer modifications.

3.1 Website Logos and images

As of version 2018r5, the logo and left side bar image is stored in the Taopix database and must be uploaded to each brand through Taopix Control Centre.

The logo which appears as below, in the shopping cart and in the customer account pages is by default the Taopix logo. The longer image at the left side of the page is referred to as the left side bar image and can be used to display an advert or promotional information. It is recommended that the sizes of existing images are preserved, otherwise additional changes may be needed.

The recommended logo image size is 240px wide x 48px high.

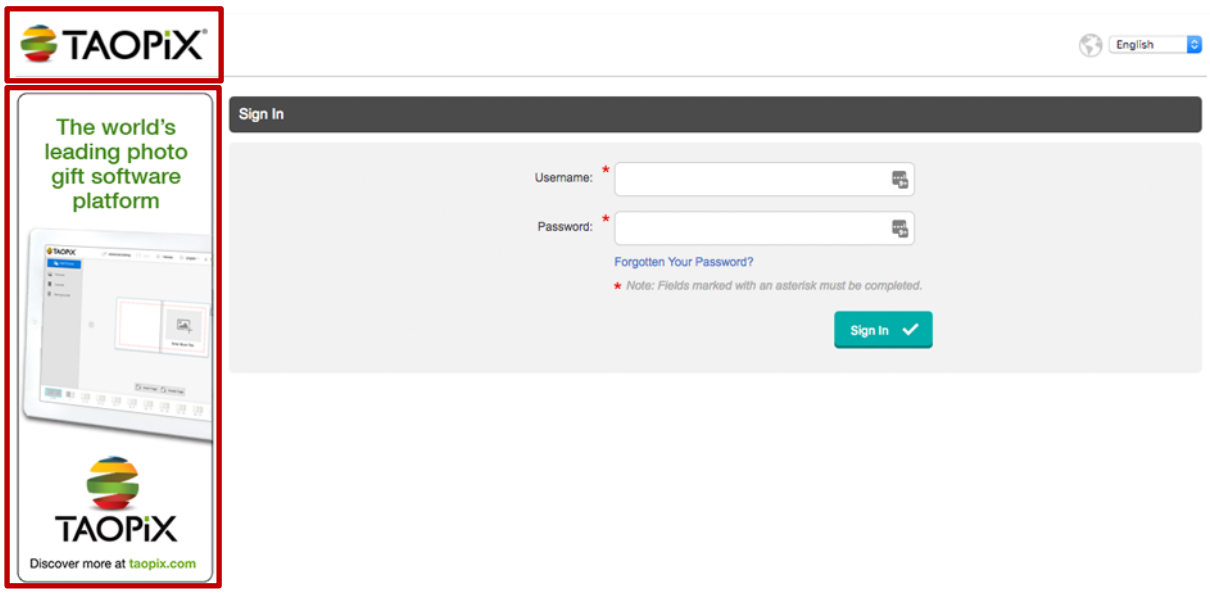

The logo file can be customised per brand. This can be added in Taopix Control Centre by editing each brand and uploading your logo

For mobile devices, the logo will be scaled by Taopix to a best fit for that device. Our provided (default) logo can be found in:

```
\Taopix\MediAlbumWeb\Webroot\Images\leftsidebar.png
```

IMPORTANT: As part of the new branding work in version 2018r1 and all subsequent versions, the top header background on customer pages is now white

3.1.1 Advertising - Left Sidebar

NOTE: The side bar images will only appear on large screen (desktop) browsers and will not appear on mobile or tablet devices.

The left side bar image can be customised per brand. This can be added in Taopix Control Centre by editing each brand and uploading your left sidebar image.

The recommended size of the left side bar image is 200px wide x 500px high. Our provided (default) left side bar can be found in:

```
\Taopix\MediAlbumWeb\Webroot\Images\leftsidebar.png
```

3.1.2 Dashboard Images

The images on the customer account pages (dashboard) can also be configured.

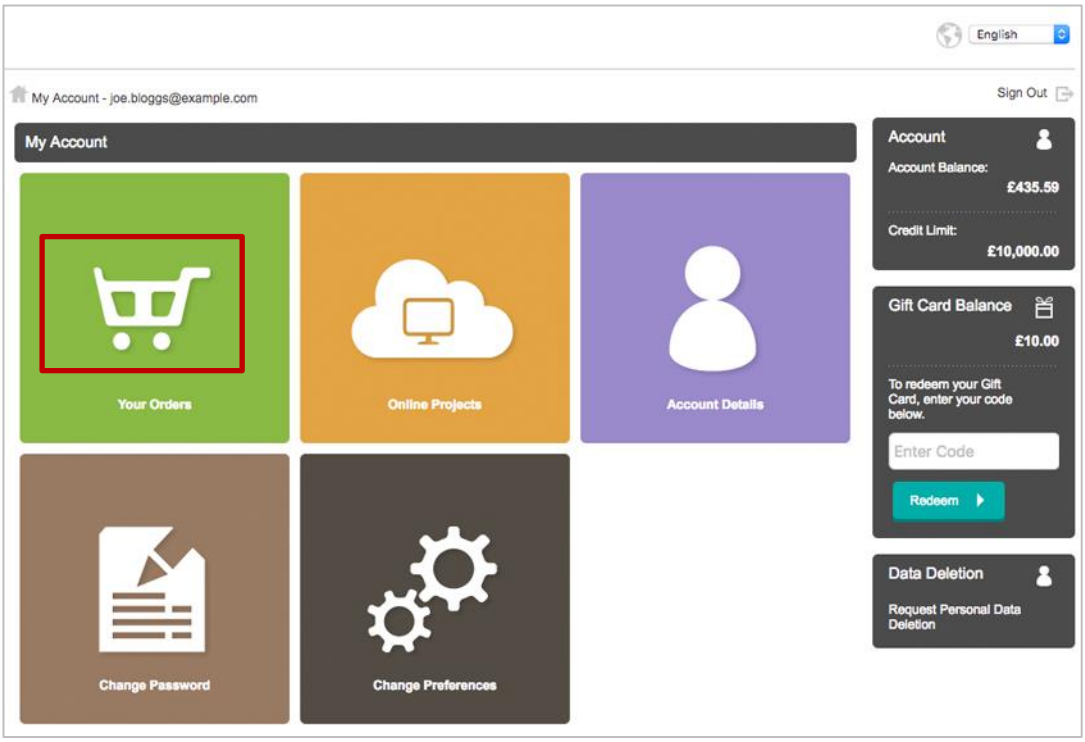

All of these graphics can be found in the:

`\Taopix\MediAlbumWeb\Webroot\Images\dashboard_icons\` folder.

Note: Changing the colour of the buttons is set using CSS. An example on how to do this is given in Section 4.2.2 - CSS Examples

3.1.3 Favicon

3.1.3.1 Control Centre

The favicon is displayed on the tab of a web page and will display when the shopping cart pages are open.



The icon can be customised in the following locations. The only supported file type for the favicon is a .ico file.

```
\Taopix\MediAlbumWeb\Webroot\Images\

\Taopix\MediAlbumWeb\Webroot\Branding\<brand name>\Images\
```

3.1.3.2 Taopix Online

The favicon is displayed on the tab of a web page and will display when a Taopix Online project is open.



The icon can be customised in the following locations. If no custom file is added for a brand it will revert to the default. The only supported file type for the favicon is a .ico file.

```
taopixonline/site/webroot/customise/image/icons

taopixonline/site/webroot/branding/<BRAND_CODE>/images/icons
```

3.2 Email Templates

Warning: Do not edit Taopix Email templates using Microsoft Word, use a plain text editor such as Notepad++ or TextWrangler.

NOTE: If upgrading from 2018r5 or earlier, no email templates can be copied across from old versions. Any customisations must be re-applied to the latest version of our provided email templates.

Taopix emails are sent to customers after certain events - e.g. when an order is created the customer receives an order summary email. Other emails can be configured for the production team, admin staff or managers. Editing the emails text content is relatively simple, changing the styling is a more complex task and will require web design skills. The email template files can be found in:

```
\Taopix\MediAlbumWeb\Customise\Emails\
```

Or

```
\Taopix\MediAlbumWeb\Branding\<Brand Folder>\Emails\
```

3.2.1 Email Template Resources

Items which are used in email are stored in the resources folder

```
\Taopix\MediAlbumWeb\Customise\Emails\Resources\
```

Or

```
\Taopix\MediAlbumWeb\Branding\<Brand Folder>\Emails\Resources\
```

3.2.1.1 Folder contents

- Logo.png - Is the default logo file which is included the emails if no logo has been added to the brand in Control Centre (see *Email Logo* section later in this document).
- emailcontent.css – Is a css file which controls appearance of the HTML content in the emails.

3.2.2 Email template files

Each email template has its own template folder. Any email that starts 'admin_' is not sent to the end user and whether it is customised or not is optional. Emails named 'customer_' are sent to the customer and may need to be customised.

The descriptions below explain the purposes of the various email templates.

Folder	Description
`account_locked`	This folder contains the email sent when a user locks their account due to unsuccessful login attempts
`admin_customerdataexport`	This folder contains the email sent to an admin when a customer data export is requested
`admin_emailtest`	This folder contains the test email sent when testing the emails within the control centre

admin_errornotification	Used to notify when there is a communication failure between the Taopix Control Centre and the Taopix Online server.
admin_offlinepaymentupdate	Used to notify when payments are updated after the transaction is completed. (This only applies to certain gateways)
admin_orderrouted	This folder contains the email templates that are generated to inform the print provider that an order has been routed to another site. (multisite only)
admin_ordersaved	This folder contains the email templates that are generated to inform the print provider that an order has been saved to disk rather than uploaded.
admin_orderuploaded	This folder contains the email templates that are generated to inform production that an order has been uploaded.
admin_paylaterorderuploaded	This folder contains the email templates that are generated to inform production that a Pay Later order has been uploaded.
admin_paylaterorderuploadedonline	This folder contains the email templates that are generated to inform production that a Pay Later order has been created in Taopix Online.
admin_requestforredaction	This folder contains the email templates that are generated to inform the administrator that a customer has request their personal data is removed.
customer_contactsupportforpasswordreset	This folder contains the email templates that are generated to inform a customer who does not have permission to reset their password to contact support for assistance
customer_detailsupdated	This email is sent to a customer to confirm any changes they have made to their account details (i.e change of address)
customer_emailupdatereques t	This email is sent to a customer when they change their email address in their Taopix account details, this email is sent to the new email address entered and the customer must click the link to confirm the change

customer_emailupdatereques texists	This email is sent to a customer when they change their email address in their Taopix account details, but the email already exists within the Taopix system and therefore the change has not been successful
customer_emailupdatereques tsuccess	This email is sent to a customer when they change their email address in their Taopix account details, and they have confirmed the change via the link in the customer_emailupdaterequest email. This email is sent to both the old email address and the new one for security reasons
customer_existingaccounts	This email is sent to a customer when they try to sign in with an email address that is attached to multiple customer accounts
customer_flaggedforpurge_o ld	This folder contains the email templates that are generated to inform a customer who has unordered project(s) that they have been marked for purge
customer_flaggedforpurge_u nsaved	This folder contains the email templates that are generated to inform a customer who has unsaved project(s) that they have been marked for purge
customer_flaggedforpurge_o rdered	This folder contains the email templates that are generated to inform a customer who has ordered project(s) that they have been marked for purge
customer_flaggedforredacti on	This folder contains the email templates that are generated to inform a customer their data has ben marked for deletion in x number of days
customer_immediateredactio n	This folder contains the email templates that are generated to inform a customer their personal data redaction request will take immediate effect
customer_marketingoptoutbr andusers	This folder contains the email templates that are generated to inform customers they have been unsubscribed from marketing emails
customer_newaccount	This folder contains the email templates that are generated to confirm to a customer that their account has been created.

customer_newaccountincludingtempuser	This email is sent to a customer who attempts to register using an email address that already exists in the system, they will be assigned a temporary username to use instead
customer_orderconfirmation	This folder contains the email templates that are generated to confirm to a customer that their order has been accepted and should now be uploaded.
customer_orderconfirmation_reorder	This folder contains the email templates that are generated to confirm to a customer that their re-order has been accepted.
customer_orderconfirmation2	This folder contains the email templates that are generated to confirm to a customer that their unconfirmed (pay later) order has been converted into a real order.
customer_orderconfirmation3	This folder contains the email templates that are generated to confirm an order where the customer has selected collect from store
customer_orderconfirmation3_reorder	This folder contains the email templates that are generated to confirm a re-order where the customer has selected collect from store
Customer_orderreadytocollect	This folder contains the email templates that are generated to confirm to a customer that their order can be collected. (Collect from store only)
customer_ordershipped	This folder contains the email templates that are generated to confirm to a customer that their order has been shipped.
customer_orderuploaded	This folder contains the email templates that are generated to confirm to a customer that their Taopix Desktop order has been upload successfully and includes a link for an online preview.
customer_orderuploadedonline	This folder contains the email templates that are generated to confirm to a customer that their Taopix Online order has been uploaded successfully and includes a link for an online preview.
customer_passwordreset	This folder contains the email templates that are generated to allow a customer to reset their password.

customer_passwordresetconfirmation	This folder contains the email templates that are generated to confirm to a customer that they have successfully reset their password.
customer_passwordresetincludingusernames	This email is sent to a customer who tries to reset their password using an email address assigned to multiple customer accounts
customer_paylater	This folder contains the email templates that are generated to confirm to a customer that they have created a Pay Later order for Taopix Desktop.
customer_paylateronline	This folder contains the email templates that are generated to confirm to a customer that they have created a Pay Later order for Taopix Online.
customer_requestforredaction	This folder contains the email templates that are generated to confirm to a customer that they have requested their personal data is removed from the Taopix system.
customer_shared	This folder contains the email sent when a customer shares with a friend their order by email
Customer_uploadreminder	This folder contains the email templates that are generated to remind a customer that they need to upload their order
Distributioncentre_ordershipped	This folder contains the email templates that are generated to inform the Distribution Centre that an order has been shipped to them. (Collect from store only)
Store_ordershipped	This folder contains the email templates that are generated to inform the Store that an order has been shipped to them. (Collect from store only)

For each email there are two template files, an HTML file (email.html) and text file (email.txt). For each email both template files should be edited. Depending on the configuration of the end users email client will depend on which email is displayed to them - e.g. If you remove the text template and the customer can only read text emails their client will show the html email formatted as text, which will look bad.

Emails are formatted using UTF8, so we recommend using a good text editor, for PC Notepad++ and for Mac TextWrangler, both are free and will preserve the formatting of the emails.

3.2.2.1 *Language*

If emails should be sent in different languages then the email template files can be duplicated per language. The email files should add _languagecode to the name of the file. E.g. for French add email_fr.html and email_fr.txt to the files.

3.2.3 Example Email modification

In section 6.3 Email Variables there is a list of all the variables that be used within the email templates. One example is the `Shippingtrackingreference` this can be used in the customer_ordershipped email. To allow you inform a customer of any value entered in the shipping tracking information field in Taopix Production.

```
<br>
{if $shippingtrackingreference!=''}
Your order has been shipped with: <Shipping Company Name> <br>
You can track your package by using the shipment number {$shippingtrackingreference}<br>
If you click <a
href="http://shippingcompany.com/?trackingid={$shippingtrackingreference}">here</a> you can
monitor the progress<br><br>
{/if}
<br>
```

```
29  <b>{#str_LabelShippingAddress#}:</b><br>
30  {$shippingaddress}<br>
31  <br>
32  <br>
33  {if $shippingtrackingreference!=''}
34  Your order has been shipped with <Shipping Company Name:>
35  You can track your package by using the shipment number {shippingtrackingreference}<br>
36  If you click <a href="http://shippingcompany.com/?trackingid={shippingtrackingreference}">here</a> you can monitor the progress<br>
37  {/if}
38  <br>
39  You can access your account at any time via the URL <a href="{$homeurl}">{$homeurl}</a><br>
40  <br>
41  <br>
```

3.3 Language Files

These are text files that contain the text (strings) used by the system. The default language template files can be found in:

```
C:\Taopix\MediAlbumWeb\lang\
```

If the text needs to be changed or customised they should be moved to:

```
C:\Taopix\MediAlbumWeb\Customise\lang\
```

If they need to be changed or customised per brand they should be moved to:

```
C:\Taopix\MediAlbumWeb\Branding\<brand folder>\lang\
```

All strings start with a variable name (eg: *str_DateFormat*) with the actual contents inside the double quotes. Items starting with the hash symbol are comments.

e.g. # Common Strings

```
str_LabelWelcome = "Welcome"
str_LabelNewAccount = "New Account"
```

in French this would be:

```
# Common Strings
str_LabelWelcome = "Bienvenue"
str_LabelNewAccount = "Nouveau compte"
```

As can be seen above, the part before the equals symbol does not change only the part in quotation marks is changed.

2nd e.g.

```
str_MessageCompulsoryPasswordLength2 = "The Password must be between ^0
and ^1 characters"
```

In this example ^0 and ^1 will be replaced by Taopix with the appropriate values. They must be preserved in this string.

3.3.1 Language file details

3.3.1.1 <Language code> format.conf

This file contains information on formatting for the language (en = English). The system detects the language to use from the information passed by the browser and attempts to find a format file that matches the language.

3.3.1.2 <Language code> strings.conf

This file contains the main strings used in the shopping cart and customer pages. The first list of strings are 'common' strings which means that they are used by different sections of the system. The ‘common’ strings are then followed by strings that are used by certain sections of the system. Sections are defined as a name within square brackets (eg: [Admin]). You must not modify the section name as this will prevent Taopix from finding the strings.

After copying the files you can delete all strings that do not need to be customised and then make the relevant changes to the strings that you do need to customise. If the strings belong to a section then you must also include the section line.

3.4 Completing the installation

There are two folders in Taopix which contain temporary cache files, after making any changes to any templates it is recommended to clear these folders. There is no need to make a backup of these files

because they regenerate as needed. Do not delete the folders; only delete the folder contents of the following folders.

```
C:\Taopix\MediAlbumWeb\parsed\
C:\Taopix\MediAlbumWeb\templates_c\
```

NOTE: Do not mistake the templates_c for the templates folder. The contents of the templates folder should not be deleted.

4. Intermediate Customisation

4.1 Introduction

The instructions in the section below allow for customisation of some of the colours and other items related to the appearance. An intermediate IT/web technology background may be helpful in understanding the changes that are being made. It is not the intention of this guide to explain the technologies used.

NOTE: It is important that the entire system is tested after any modifications have been performed prior to it being available to your customers. Taopix Ltd. will not be responsible for any system failures due to customer modifications.

4.2 Style Sheets - CSS

These are HTML style sheet files called CSS. The default CSS files can be found in:

```
C:\Taopix\MediAlbumWeb\webroot\css\
```

The file can be customised per brand and placed in:

```
C:\Taopix\MediAlbumWeb\webroot\Branding\<brand folder>\css\
```

The style sheets used for the customer pages are csscustomer_large.xxxxx.css and csscustomer_small.xxxxxxxxxx.css (used in the shopping basket and when they login to access their account pages). The csscustomer_large.xxxx.css file controls desktop browsers and the csscustomer_small.xxxxxxxxxx.css file controls mobile devices (including tablets).

Please note, CSS files have a version checksum (a unique number suffix to avoid caching issues). The version checksum of the CSS file may change for each Taopix release. You can find the version checksum by using Inspect Element in a web browser and looking at the CSS file name.

4.2.1 Finding the appropriate section in the CSS

One easy way to do this is by using the Inspect Element option in most web browsers. By right clicking on an object in the webpage you can view its properties. Typically, this will show the CSS element that should be searched for.

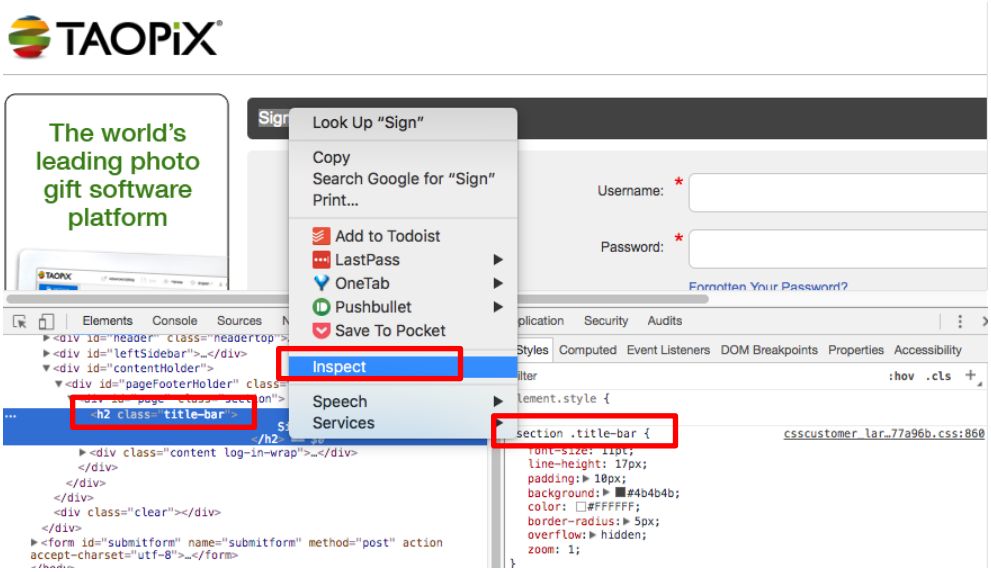

4.2.2 CSS Examples

In the csscustomer_large.xxxxxxxxxx.css there is a section related to the title bar. If you search for:

```
.title-bar
```

You will find the CSS as below (this is truncated to save space).

```
.section .title-bar {
    font-size: 11pt;
    line-height: 17px;
    padding: 10px;
    background: #4b4b4b;
    color: #FFFFFF;
    border-radius: 5px;
```

So by changing the variable `background` to:

```
    background: #3c73c6;
```

Would result in the background being blue.

To change the font colour for mobile browsers, find the following section in csscustomer_small.xxxxxxxxxx.css

```
.pageLabel{
      font-size: 16pt;
      line-height: 25px;
      color: #4c4c4c;
      font-weight: bold;
      padding: 15px 0 15px 0;
      text-align: left;
      word-wrap: break-word;
}
```

Changing the variable `color` to:

```
     color: #05A4E0;
```

This will result in the following change.

To change the colour of the icons on the customer account pages in a desktop browser search in the csscustomer_large.xxxxxxxxxx.css and find:

```
.menuItemCurrentOrder{
    background-color: #89BA44;
```

Change background-color to:

```
background-color: #4775FF;
```

This will result in the following change.

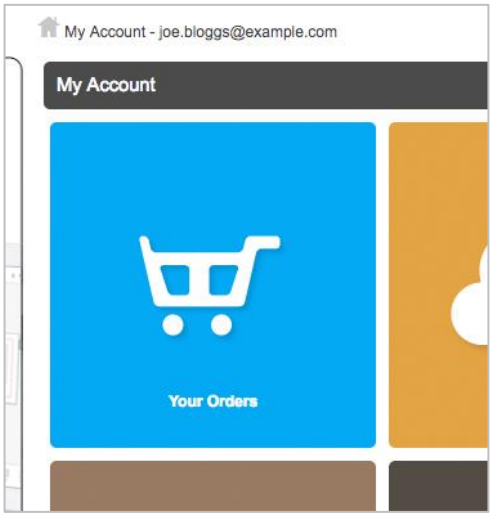

To change the colour of the icons on the customer account pages in a mobile browser search in the csscustomer_small.xxxxxxxxxx.css and find:

```
.menuItemYourOrder{
    background-color: #89B53F;
}
```

Change background-color to:

```
background-color: #4775FF;
```

This will result in the following change.

5. Advanced Customisation

5.1 Introduction

Changing webpages and websites can be technically challenging. The descriptions, actions and terminology are intended for a website designer or similar. The following sections are intended for those with substantial technical knowledge of the technologies described.

NOTE: It is important that the entire system is tested after any modifications have been performed prior to it being available to your customers. Taopix Ltd. will not be responsible for any system failures due to customer modifications.

5.1.1 Technologies

Taopix use two different technologies which control webpages and how they display in a web browser:

The first is *FuseBox* (http://www.fusebox.org/) which is an MVC (model-view-controller) framework for PHP. This allows input, business logic and output to be separated into a more structured layout.

The second technology is *Smarty* which is a HTML template engine (http://smarty.php.net/). The templates are mainly HTML and JavaScript that are processed by Smarty when the template needs to be displayed. This allows the templates to be separated from the actual PHP programming.

5.2 Style Sheets - CSS

These are HTML style sheet files called css. The default css files can be found in:

```
C:\Taopix\MediAlbumWeb\webroot\css\
```

The file can be customised per brand and placed in:

```
C:\Taopix\MediAlbumWeb\webroot\Branding\<brand folder>\css\
```

The style sheets used for the customer pages are csscustomer_large and csscustomer_small (used in the shopping basket and when they login to check their order status etc...)

5.3 Templates - MediaAlbumWeb/templates

These are the main templates. Although they have the extension .tpl you can open them as text files. You should see that they are mainly HTML and JavaScript apart from the following differences:

a) Smarty Tags

The Smarty Tags are identified by the brackets {}. Tags which start with $ (eg: *{$error}*) are assigned within the PHP programming. Smarty Tags which start with # (eg: *{#str_ErrorNoAddressLine1#}*) are assigned directly from the language file. If tags are used within JavaScript they have to be surrounded by the *{/literal}* and *{literal}* Smarty Tags to inform Smarty that the tag should be processed..

b) Scripting Language

Smarty has it's own scripting engine and it's commands are also surrounded by brackets (eg: *{if} {/if}*). We have used the scripting language in some of the customer facing templates so that it is easier for a designer to change the layout as well as functionality (although this may extend to other areas in future released).

The file `MediaAlbumWeb/templates/customer/main_large.tpl` and main_small.tpl demonstrates the use of the Smarty scripting language on large screen and small screen devices.

We have separated most of the templates into different sections such as *admin*, *customer*, *order* etc... so that it is easier to determine which templates are for which process. The templates in the main templates folder are used by different parts of the system.

5.3.1 Template file Locations

Template files (.tpl) stored in one of three locations.

The location below is for the default brand. **<u>These templates should not be modified.</u>**

```
C:\Taopix\MediAlbumWeb\templates\
```

Any modified templates should be copied to this location along with their dependencies:

```
C:\Taopix\MediAlbumWeb\Customise\templates\
```

As an example, if `error.tpl` is intended to be customised, `includes/maininclude.tpl` is a dependent file (as shown in the table below), so:

- Copy `error.tpl` from `C:\Taopix\MediAlbumWeb\templates\` to `C:\Taopix\MediAlbumWeb\Customise\templates\`
- Then the dependent file(s) needs to be copied: Copy `maininclude.tpl` from `C:\Taopix\MediAlbumWeb\templates\includes\` to `C:\Taopix\MediAlbumWeb\Customise\templates\includes\` (the subfolder 'includes' can be created manually if not already there, to follow the same folder structure between 'templates' and 'Customise' folders.

Template File	Dependent File(s)
browsernotsupported.tpl	includes/customerinclude_large.tpl
communicationerror.tpl	includes/customerinclude_large.tpl
customer/main_large.tpl	includes/customerinclude_large.tpl, customer/main.tpl
customer/main_small.tpl	includes/customerinclude_small.tpl, customer/main.tpl
error.tpl	includes/maininclude.tpl
forgotpassword_large.tpl	includes/customerinclude_large.tpl
includes/customerinclude_large.tpl	includes/customerinclude.tpl
includes/customerinclude_small.tpl	includes/customerinclude.tpl
login_large.tpl	includes/customerinclude_large.tpl
login_small.tpl	includes/customerinclude_small.tpl
newaccount_large.tpl	includes/customerinclude_large.tpl, newaccount.tpl
newaccount_small.tpl	addressform2.tpl
order/Paymentintegration/INILite.tpl	includes/maininclude.tpl, header_large.tpl
order/Paymentintegration/INILiteReturn.tpl	includes/maininclude.tpl, header_large.tpl
order/Paymentintegration/PaymentRequest_large.tpl	order/PaymentIntegration/PaymentRequest.tpl, header_large.tpl
order/Paymentintegration/PaymentReturn_large.tpl	order/PaymentIntegration/PaymentReturn.tpl, header_large.tpl
order/Paymentintegration/PaymentReturn_small.tpl	order/PaymentIntegration/PaymentReturn.tpl, header_small.tpl
order/Paymentintegration/error_large.tpl	order/PaymentIntegration/PaymentRequest.tpl, header_large.tpl
order/Paymentintegration/error_small.tpl	header_small.tpl
order/jobticket_large.tpl	includes/customerinclude_large.tpl, order/jobticket.tpl
order/jobticket_small.tpl	includes/customerinclude_small.tpl, order/jobticket.tpl, order/jobticketajax_small.tpl, order/jobticketajax_small.tpl
order/jobticketajax_small.tpl	order/componentdetail_small.tpl, order/orderfootercomponentdetail_small.tpl, order/subcomponentdetail_small.tpl, order/orderfootersubcomponentdetail_small.tpl
order/ordercancellation_large.tpl	includes/customerinclude_large.tpl, header_large.tpl

order/orderconfirmation_large.tpl	includes/customerinclude_large.tpl, order/orderconfirmation.tpl, header_large.tpl
order/orderconfirmation_reorder_large.tpl	includes/customerinclude_large.tpl, order/orderconfirmation.tpl, header_large.tpl
order/orderconfirmation_reorder_small.tpl	order/orderconfirmation.tpl, header_small.tpl
order/orderconfirmation_small.tpl	order/orderconfirmation.tpl, header_small.tpl
order/orderpaylatercancellation_large.tpl	includes/customerinclude_large.tpl, header_large.tpl
order/orderpaylaterconfirmation_large.tpl	includes/customerinclude_large.tpl, header_large.tpl
order/orderpaylaterconfirmation_reorder_large.tpl	includes/customerinclude_large.tpl, order/orderconfirmation.tpl, header_large.tpl
order/orderpaylaterconfirmation_reorder_small.tpl	order/orderconfirmation.tpl, header_small.tpl
order/orderpaylaterconfirmation_small.tpl	header_small.tpl
order/orderpreview.tpl	includes/maininclude.tpl, header_large.tpl
order/storelocator_large.tpl	order/storelocator.tpl
order/updateaddress2_small.tpl	includes/customerinclude_small.tpl, order/updateaddress.tpl, header_small.tpl, addressform.tpl
order/updateaddress_large.tpl	includes/customerinclude_large.tpl, order/updateaddress.tpl, header_large.tpl
order/updateaddress_small.tpl	addressform.tpl
productnotavailable.tpl	includes/customerinclude_large.tpl
share/preview_large.tpl	includes/customerinclude_large.tpl
share/previewcustomer_small.tpl	share/preview2_small.tpl
share/previewlogin_large.tpl	includes/customerinclude_large.tpl
share/previewlogin_small.tpl	includes/customerinclude_small.tpl
share/previewnotfound_large.tpl	includes/customerinclude_large.tpl
share/previewnotfound_small.tpl	includes/customerinclude_small.tpl
share/previewshare_small.tpl	includes/customerinclude_small.tpl, share/preview.tpl, share/preview2_small.tpl
share/previewunavailable_large.tpl	includes/customerinclude_large.tpl
share/previewunavailable_small.tpl	includes/customerinclude_small.tpl
share/reorderunavailable_large.tpl	includes/customerinclude_large.tpl
share/reorderunavailable_small.tpl	includes/customerinclude_small.tpl

For any other additional brand (non-default brand):

Specific template modifications for a brand should be located here:

```
C:\Taopix\MediAlbumWeb\Branding\<Brand Folder>\templates\
```

As an example, if `error.tpl` is intended to be customised for a brand, `includes/maininclude.tpl` is a dependent file (as shown in the table above), so:

- Copy `error.tpl` from `C:\Taopix\MediAlbumWeb\templates\` to `C:\Taopix\MediAlbumWeb\Branding\<Brand Folder>\templates\`
- Then the dependent file(s) needs to be copied: Copy `maininclude.tpl` from `C:\Taopix\MediAlbumWeb\templates\includes\` to `C:\Taopix\MediAlbumWeb\Branding\<Brand Folder>\templates\includes\` (the subfolder 'includes' can be created manually if not already there).

5.3.2 Important Templates

The templates that end in _large.xxxxxxxxxx.css are for desktop browsers. The equivalent file ending in _small.xxxxxxxxxx.css is for mobile device browsers (tablets and mobile phones).

Folder : MediaAlbumWeb/templates/	Description
header_large.tpl	This template contains the header that appears on all pages except the administration pages for desktop browsers This template is included via a Smarty {$include} tag.
login_large.tpl	This template contains the main login page for desktop browsers.
login2_large.tpl	This template contains the login page *create new account* link for desktop browsers. This template is conditionally included within the main login page via a Smarty {$include} tag.
forgotpassword_large.tpl	This template contains the *forgot password* page for desktop browsers.
newaccount_large.tpl	This template contains the *create new account* page for desktop browsers. The actual address form displayed is the *addressform.tpl* template.
addressform.tpl	This template contains the HTML form header for the address form and includes the *addressform2.tpl* template.

`addressform2.tpl`	This template contains the main address form.
`customer/main_large.tpl`	This template contains the main customer interface (your orders, change passwords etc…) for desktop browsers
`customer/information.tpl`	This optional template can be used to display an information panel within the main customer interface.
`customer/footer_large.tpl`	This optional template can be used to display footer information within each section of the customer interface.
`Customer/sidebaraccount_xxx`	This file displays the account balance and credit limit when a customer logs into their account. A separate file for each screen
`Customer/sidebaradditionalinfo_xxx`	This file displays the additional information box located at the bottom of each screen in the customer account pages. A separate file for each screen
`Customer/sidebarcontactdetails_xxx`	This file displays the contact information located on the right side of the customer account pages. A separate file for each screen
`Customer/sidebarleft_default.tpl`	This file contains the default sidebar image and is inherited by all other sidebarleft_xxx templates unless they have been modified. In version 2, the sidebar image was

	referenced using a remote URL. In Portfolio, the image is now a relative path to webroot/images/leftsidebar.jpg .
`Customer/sidebarleft_xxx`	These represent the advertising panel displayed on the left side of the order pages. There is a separate file for each order screen.
`order/jobticket_large.tpl`	This template contains. each stage of the ordering process is currently handled within the same template. Only parts of each ordering screen can be customised in this template
`order/changecomponent_large.tpl`	This template contains the component selection page when the component is a list item.
`order/updateaddress_large.tpl`	This template contains the update/change shipping and billing address page. The actual address form that is displayed (*addressform.tpl* or *order/contactdetailsform.tpl*) depends on what details a customer can change.
`order/contactdetailsform.tpl`	This template contains the page which allows a customer to only update their contact details.
`Order/orderconfirmation_large.tpl`	This template contains the page that is displayed when an order is confirmed.

Order/orderconfirmation_reorder_large.tpl	This template contains the page that is displayed when a reorder is confirmed.
Order/ordercancellation_large.tpl	This template contains the page that is displayed when an order is cancelled.
order/orderpaylaterconfirmation_large.tpl	This template contains the page that is displayed when a Pay Later order is confirmed.
order/orderpaylaterconfirmation_reorder_large.tpl	This template contains the page that is displayed when a Pay Later reorder is confirmed.
order/orderpaylatercancellation_large.tpl	This template contains the page that is displayed when a Pay Later order is cancelled.
order/orderpreview.tpl	This template contains the order preview page.
error.tpl	This template contains the page that is displayed when an internal error occurs within the system.
browsernotsupported.tpl	This template appears when the customer is using a browser that is not supported.
Order/paymentIntegration/error.tpl	This template contains the page that is displayed when a payment is not successful
Order/paymentIntegration/PaymentRequest_large.tpl	This template appears when the customer is transferring from the Taopix shopping cart to the payment gateway page
Order/paymentIntegration/PaymentReturn_large.tpl	This template appears when the customer is transferring

	from the payment gateway page to the Taopix shopping cart.
`order/storelocator_large.tpl`	This template appears when the customer chooses the collect from store shipping option
`Order/sidebarcontactdetails_xxx`	These represent the support email and contact telephone number displayed on the right side of the order pages. There is a separate file for each order screen

In theory, you can just modify the templates and they should be used when you navigate to that page in the browser. However, this does make things messy if we want to install an update. To help with this we have created a folder called *Customise* at the path `MediaAlbumWeb/Customise`. When the system displays templates it first looks for a template in the *Customise* area before using a standard template. This means that you can customise parts of the system without changing the main *MediaAlbumWeb/templates* folder.

eg: If you want to customise `MediaAlbumWeb/templates/order/main_large.tpl` you can copy it into `MediaAlbumWeb/Customise/templates/order` and then modify it.

Note: When testing modified templates, please be sure to clear the mediaalbumweb/parsed and mediaalbumweb/templates_c (NOT TEMPLATES) folders. These are cache folders that do not need to be backed up before clearing.

We have also made the engine look for localized versions of the templates as well. If you name the file *main_fr.tpl* then it will be used by browsers running under the French language. If you are not concerned about multi-lingual templates then you do not have to add the language to the filename.

The search order for templates is:

a) Customise Path - Localized Template

b) Customise Path - Non Localized Template

c) Default Templates Path - Localized Template

d) Default Templates Path - Non Localized Template

5.3.3 Terms and Conditions – Shopping Cart

A terms and conditions check box can be enabled for the Taopix shopping cart to force the customer to tick to agree to the terms before they complete an order. This is done by modifying the ordertermsandconditions.tpl file (**this file is provided with the Taopix_ControlCentre_vxxxx' zip file in the templates/order folder**). This needs to be placed in one of the following directories. The directories will be checked in this order

MediaAlbumWeb/templates/order
MediaAlbumweb/customise/templates/order
MediaAlbumWeb/Branding/[BrandFolderName]/templates/order

This allows the possibility of different terms and conditions per brand. If the file is not found in any of the listed directories the terms and conditions will not appear. Clicking the terms and conditions option will open it in a separate dialog window.

This file supports HTML strings. The following tags are styled by default but can be customised in the CSS. The CSS class must be in the following format for large screen devices

.contentFormTermsAndCondition <identifier>

Supported HTML tags are h1, h2, h3, h4, h5, h6, strong, em, p, ul, ol, li, a

5.3.4 Trade tracker Tags

The following tags can be used in the orderconfirmation_large and the orderconfirmation_small.tpl file to support trade tracker functionality. Adding these tags to the orderconfirmation_large.tpl will display their respective values on the final order confirmation page. The tags alone are:

```
{$ordernumber}
{$ordertotal}
```

An example of how this can be used would be to change the

```
<p>Order Number: {$ordernumber}</p>
<p>Order Total: {$ordertotal}</p>
```

So that it now reads as:

```
<p>{$str_MessageOrderConfirmation1}</p>
<p>{#str_MessageOrderConfirmation2#}</p>
<p>{#str_MessageOrderConfirmation3#}</p>
<p>{#cciCompletionMessage#}</p>
```

```
<p>Order Number: {$ordernumber}</p>
<p>Order Total: {$ordertotal}</p>

This modification must be done to the following files:

Order/orderconfirmation_large.tpl
Order/orderconfirmation_small.tpl

Order/orderconfirmation_reorder_large.tpl
Order/orderconfirmation_reorder_small.tpl

Order/orderpaylaterconfirmation_large.tpl
Order/orderpaylaterconfirmation_small.tpl
```

Once these changes are made, the modifications can be seen by placing an order. The values will display on the order confirmation page.

5.3.5 Different order confirmation templates for Desktop and Online orders

It is possible to output different text on the order confirmation template depending on whether the order is from desktop or online. The code to do this is as follows:

{if ($source == $TPX_SOURCE_DESKTOP)}

{/if}

It is possible to then do an If>else statement where different text can be output on the template depending on the order being from desktop or online. The templates this can be done on includes:

- orderconfirmation_large.tpl
- orderpaylaterconfirmation_large.tpl
- ordercancellation_large.tpl
- orderpaylatercancellation_large.tpl
- orderconfirmation_reorder_large.tpl
- orderpaylaterconfirmation_reorder_large.tpl

To customise the templates simply place them in one of the following folders.

For a specific brand

MediaAlbumWeb/branding/<BRANDNAME>/templates/order

For the default brand

MediaAlbumWeb/customise/templates/order

6. Emails

6.1 Email Logo and Signature

To change the logo and default email signature on all customer emails (these begin with customer_), this can be done on a per brand basis. To do this login to your control centre interface and edit the brand you wish to add an email logo/signature for. This can be done under the customise tab.

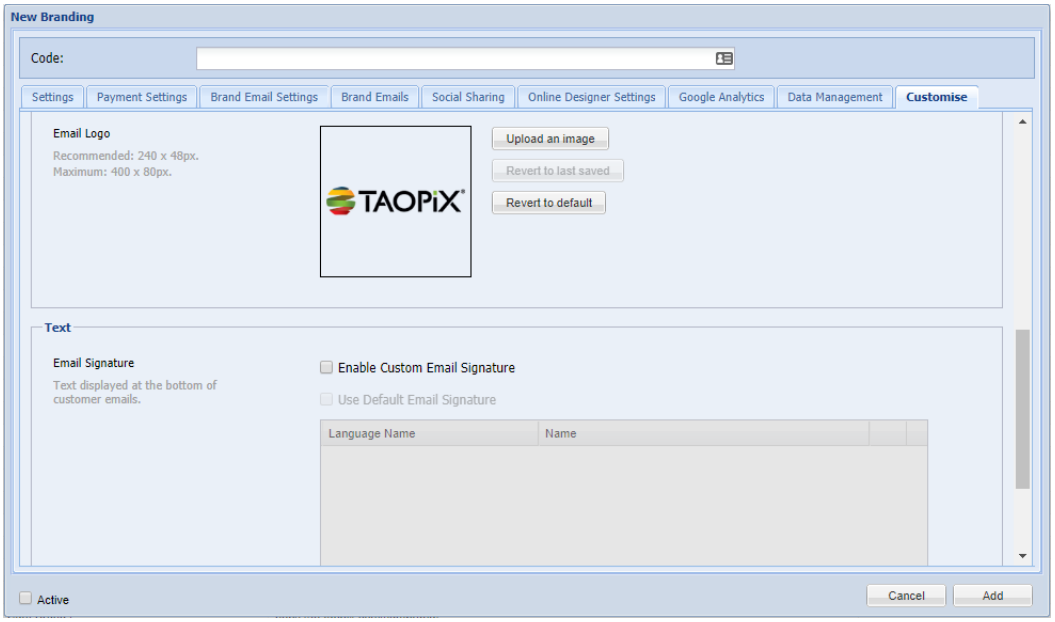

6.1.1 Email Logo

The email logo must be uploaded through Control Centre for each brand. This image has a recommended size. Any image uploaded will be applied to all customer emails for this brand.

NOTE: for this to work correctly the email template must contain the smarty variable *$brandLogo.* This is explained further in the following sections.

6.1.2 Email Signature

The email signature can be added within Taopix Control Centre for each brand. Any signature added will be applied to all customer emails for this brand. This can be added for multiple languages and will apply the correct signature based on the language the customer is using for Taopix Control Centre (customer account or shopping cart pages).

NOTE: for this to work correctly the email template must contain the smarty variable *$emailsignature.* Email variables are explained further in the following sections.

The email signature option supports some HTML text formatting tags, these are:

<b> - Bold

<i> - Italic

. – Important Text

 - Emphasised Text

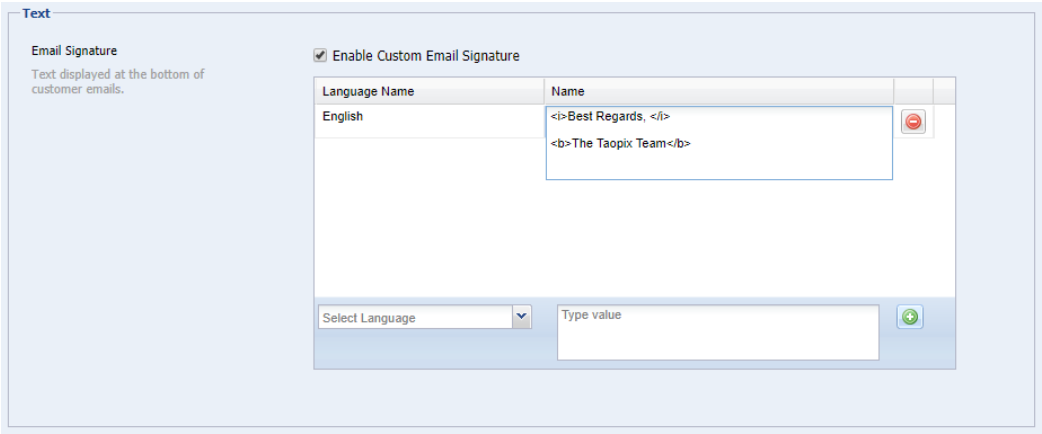

These changes will be displayed within the brand interface. The field is not displayed in multiline by default but once the field is edited it will show multiple lines and respect this within the email.

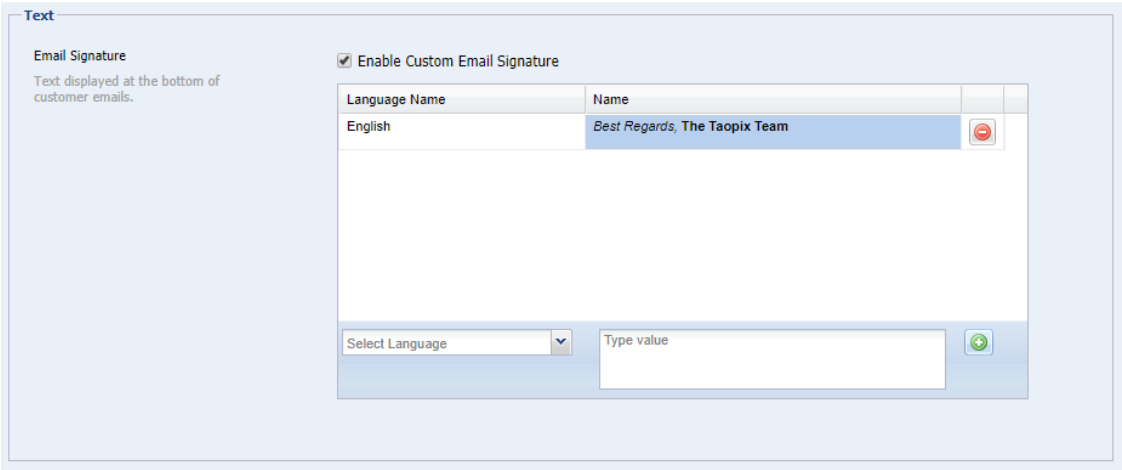

These settings will be respected within the Email template for all customer emails

6.2 MediaAlbumWeb/Customise/email

Each type of email is within its own folder (Do not rename the folders, the default names are required) and consists of a single *.html* file and a single *.txt* file. This is to allow the sending of HTML and plain text emails (including images for HTML). Both types of emails use the Smarty engine so that tags can be added to display specific information within the email. To set the email subject the HTML *<title>* tag

is used for HTML emails and the first line of the text is used for plain text emails. When the system generates emails it searches the folder for the *.html* and *.txt* files. If it finds both HTML and plain text files it will send them both in the email. If it only finds one type of file then it will only include that one.

The emails generated by the system can also be localized. This can be performed by first duplicating the files and then renaming them with their language code extension, using the same file name format as the template. For example *email_fr.html*

The different email template folders and their purpose are detailed in Section 3.2 Email Templates.

6.3 Email Variables

Taopix uses a technology called Smarty. The email templates make use of smarty tags. In addition to the tags already provided in the email templates the following codes can also be used. Tags should be included in '{' and '}' e.g. {status}.

6.3.1.1 Customer_orderconfirmation,customer_orderconfirmation2, customer_orderconfirmation3,customer_orderconfirmation_reorder, customer_orderconfirmation3_reorder, customer_paylater, customer_paylateronline

orderid	shippingcontactfirstname
temporderid	shippingcontactlastname
userid	shippingmethodcode
loginname	shippingmethodname
currencycode	shippingmethod
currencyname	shippingratecode
ordernumber	shippingrateinfo
qty	shippingratecost
pagecount	shippingratesell
productcode	shippingratesellnotax
productname	shippingratesellwithtax
defaultcovercode	shippingratediscountvalue
defaultpapercode	shippingratetotalsell
defaultpagecount	shippingratetotalsellnotax
covercount	shippingratetotalsellwithtax
covercode	shippingratetaxcode
covername	shippingratetaxname
papercount	shippingratetaxrate
papercode	shippingratetaxexempt

papername
vouchercode
vouchername
ordertotal
ordergiftcardtotal
ordertotaltopay
formattedordertotal
formattedgiftcardtotal
formattedordertotaltopay
orderdate
formattedorderdatetime
formattedorderdate
formattedordertime
expirydate
formattedexpirydatetime
formattedexpirydate
formattedexpirytime
shippingaddress
shippingcontactname
shippingqty
shippingcustomername
shippingcustomeraddress1
shippingcustomeraddress2
shippingcustomeraddress3
shippingcustomeraddress4
shippingcustomercity
shippingcustomercounty
shippingcustomerstate
shippingcustomerregioncode
shippingcustomerregion
shippingcustomerpostcode
shippingcustomercountrycode
shippingratecalctax
shippingratetaxtotal
storecode
storeopeningtimes
storeurl
storeemailaddress
storetelephonenumber
storecontactname
storeonline
billingcontactname
billingcustomeraccountcode
billingcustomername
billingcustomeraddress1
billingcustomeraddress2
billingcustomeraddress3
billingcustomeraddress4
billingcustomercity
billingcustomercounty
billingcustomerstate
billingcustomerregioncode
billingcustomerregion
billingcustomerpostcode
billingcustomercountrycode
billingcustomercountryname
billingcustomertelephonenumber
billingcustomeremailaddress
billingcontactfirstname
billingcontactlastname
billingaddress
paymentmethodcode
paymentmethodname
ccicardnumber

shippingcustomercountryname
shippingcustomertelephonenumber
shippingcustomeremailaddress
billingcustomerregisteredtaxnumbertype
billingcustomerregisteredtaxnumber
ccitransactionid
cciauthorisationid
ccipaymentmeans
ccitransactiontype
ccicharges
requiresupload
source
emailContent
status

6.3.1.2 customer_ordershhipped, distributioncentre_ordershipped, store_ordershipped, customer_orderreadytocollect:

orderid
orderitemid
userid
loginname
currencycode
currencyname
ordernumber
qty
pagecount
projectname
productcode
productname
defaultcovercode
defaultpapercode
defaultpagecount
covercount
covercode
covername
papercount
papercode
papername
shippingmethodcode
shippingratecode
shippingrateinfo
shippingratecost
shippingratesell
shippingratetaxcode
shippingratetaxname
shippingratetaxrate
shippingratecalctax
shippingratetaxtotal
shippeddate
formattedshippeddatetime
formattedshippeddate
formattedshippedtime
shippingtrackingreference
orderdate
formattedorderdatetime
formattedorderdate
formattedordertime
distributioncentrecode
distributioncentrename

vouchercode
vouchername
ordertotal
formattedordertotal
shippingcontactname
shippingcontactfirstname
shippingcontactlastname
shippingaddress
shippingmethodname
shippingmethod
shippingqty
shippingcustomername
shippingcustomeraddress1
shippingcustomeraddress2
shippingcustomeraddress3
shippingcustomeraddress4
shippingcustomercity
shippingcustomercounty
shippingcustomerstate
shippingcustomerregioncode
shippingcustomerregion
shippingcustomerpostcode
shippingcustomercountrycode
shippingcustomercountryname
shippingcustomertelephonenumber
shippingcustomeremailaddress
paymentmethodname

storecode
storeopeningtimes
storeurl
storeemailaddress
storetelephonenumber
storecontactname
storeonline
billingcontactname
billingcontactfirstname
billingcontactlastname
billingaddress
billingcustomeraccountcode
billingcustomername
billingcustomeraddress1
billingcustomeraddress2
billingcustomeraddress3
billingcustomeraddress4
billingcustomercity
billingcustomercounty
billingcustomerstate
billingcustomerregioncode
billingcustomerregion
billingcustomerpostcode
billingcustomercountrycode
billingcustomercountryname
billingcustomertelephonenumber
billingcustomeremailaddress
billingcustomerregisteredtaxnumbertype
billingcustomerregisteredtaxnumber

6.3.1.3 New Account confirmation

contactfirstname

contactlastname

emailaddress

userid

loginname

appname

6.3.1.4 customer_flaggedforpurge

emailaddress

flaggedProjectsList

contactfirstname

login

contactfullname

6.3.1.5 customer_passwordreset

userid

loginname

6.3.1.6 customer_shared

customer_shared

emailTitle

orderitemid

emailText

userid

sharednames

sharedurl

6.3.1.7 customer_requestforredaction

id

redactionnotificationdays

brandcode

redactiondate

login

redactiondatelocal

emailaddress

brandname

contactfirstname

displayurl

contactlastname

smtpadminaddress

contactfullname

6.3.1.8 customer_flaggedforredaction

id

contactlastname

brandcode

contactfullname

brandname

redactiondays

redactionnotificationdays

displayurl

login

emailaddress

contactfirstname

displayurl

login

emailaddress

contactfirstname

redactiondate

redactiondatelocal

6.3.1.9 customer_immediateredaction

id

brandcode

login

emailaddress

contactfirstname

contactlastname

contactfullname

redactiondays

redactionnotificationdays

redactiondate

redactiondatelocal

brandname

displayurl

smtpadminaddress

6.3.1.10 customer_orderuploaded, customer_orderuploadedonline

orderid

orderitemid

userid

ordernumber

billingcontactfirstname

billingcontactlastname

sharedurl

projectname

6.4 Important Notes Concerning Files

1. Any files that are modified (including text files, templates, emails etc…) must be saved in the *UTF-8* format otherwise you will experience problems with characters not displaying correctly. Failure to do this may also cause the system not to operate correctly. We recommend using Notepad++ (don't use the built-in applications) on Windows and TextWrangler on a Mac to edit the files. Both applications are free to use.

2. If you need to add comments within templates that you modify you must use the /* */ format for comments rather than //. This is because the Smarty engine removes any carriage returns before sending the data back to the browser and the // comments breaks this.

3. Please make sure that all Smarty Tags are named correctly (including case) otherwise Smarty will just stop processing the template. This will usually result in the user being presented with an empty browser page and may also prevent the system from functioning correctly (eg: orders not uploading). If the {#} tag is within a named section of the strings file (under a name with square brackets) then the tag can only be used if the template has been setup within the PHP programming to use this section.

7. Using different domain names for Brands.

7.1 Accessing Brands Via Domains

Brand sites are normally accessed by appending the text */Branding/<brandname>* onto the end of the browser URL. It should also be possible to point a specific domain directly to a brand folder. The following examples show how it can be done using the *VirtualHost* functionality.

7.1.1 Basic Configuration – Using Redirection

The following is an example which could be added to the Apache *httpd.conf* file to allow a site called *www.megaprint.com* to be redirected to a URL containing a branded site called *MEGAPRINT*. When the user accesses the URL *www.megaprint.com* their browser will be re-directed to the URL *http://www.company.com/branding/megaprint/*.

```
<VirtualHost 192.168.1.100>

    ServerName www.megaprint.com

    RedirectMatch ^/$ http://www.company.com/branding/megaprint/

</VirtualHost>
```

7.1.2 Advanced Example – Using HTTP only

The following is an example which could be added to the Apache *httpd.conf* file to allow a brand to use a custom display URL of *http://displayURL.brand1.com* and a custom webURL of *http://webURL.brand1.com*. When the user accesses the URL *http://displayURL.brand1.com* Apache will internally re-direct any requests for resources to the relevant location without changing the user's browser URL. This example shows how to configure different display and web url's for multiple brands.

Find the following line in http.conf or in the Taopix\httpd-control-centre.conf

```
DocumentRoot "C:/Taopix/MediaAlbumWeb/webroot/"
```

Replace this with:

Default brand URL (the URL in your license key)

```
<VirtualHost 192.168.1.100>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/
        ServerName orders.company.com
        ServerAlias webURL.brand1.com webURL.brand2.com
        Alias /webroot C:/Taopix/MediaAlbumWeb/webroot/
        Alias /paymentintegration C:/Taopix/MediaAlbumWeb/webroot/PaymentIntegration
</VirtualHost>

<VirtualHost 192.168.1.100>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/Branding/BRAND1/
        ServerName displayURL.brand1.com
        Alias /webroot C:/Taopix/MediaAlbumWeb/webroot
        Alias /paymentintegration C:/Taopix/MediaAlbumWeb/webroot/PaymentIntegration
</VirtualHost>

<VirtualHost 192.168.1.100>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/Branding/BRAND2/
        ServerName displayURL.brand2.com
        Alias /webroot C:/Taopix/MediaAlbumWeb/webroot
        Alias /paymentintegration C:/Taopix/MediaAlbumWeb/webroot/PaymentIntegration
</VirtualHost>

<Directory  "C:/Taopix/MediaAlbumWeb/webroot/">
        Options Indexes FollowSymLinks
        AllowOverride None
        Order allow,deny
        Allow from all
</Directory>
```

There is no longer a need to change webroot value in the mediaalbumweb.conf as there was with previous versions.

7.2 Advanced Example – Using HTTPS

The following assumes that the licensee's default brand is already configured for HTTPS and that the relevant Apache modules are enabled. This must be configured BEFORE configuring any brands for SSL. To configure this, see the Taopix Upgrade guide.

Taopix now strongly recommends using SSL for all brands for increased security. The following is an example which could be added to the Apache *httpd.conf* file to allow a brand to use a custom display URL of https://displayURL.brand1.com *and a custom webURL of https://webURL.brand1.com*. When the user accesses the URL https://*displayURL.brand1.com* Apache will internally re-direct any requests for resources to the relevant location without changing the user's browser URL. This example shows how to configure different display and web url's for multiple brands.

7.2.1 Configuring SSL/HTTPS for Control Centre

SSL provides encryption on the data that is transferred. This is done using an SSL certificate, to do this effectively a certificate must be purchased from a trusted global SSL provider. A certificate for each URL that your system needs would be required. Wildcard SSL certificates that cover your entire domain (e.g. *.taopix.com which means anything.taopix.com would work) can also be used.

Taopix systems can be configured to run using SSL. To make this possible we need to configure settings in the Apache Web server which runs the Taopix Control Centre.

7.2.2 Purchasing an SSL certificate

In order for your system to use SSL most efficiently, you must obtain a trusted certificate and this can be obtained from numerous providers e.g. verisign.com, godaddy.com. (Taopix does not recommend any specific provider). To request a certificate for Apache use the instructions from the Apache site http://httpd.apache.org/docs/2.0/ssl/ssl_faq.html#realcert.

7.2.3 Creating a .pem file from certificates

You must create a .pem file based on your certificates. Please contact your certificate provider for details on how to create this file

7.2.4 Configuration Details

The following configuration is not supported for Internet Explorer 7 for control centre. If the licensee requires their customers to be able to use Internet Explorer 7 then we do not recommend using SSL.

7.2.5 Apache Version

The following instructions are based on using Apache 2.4.x VC11

7.2.6 Choose the correct scenario

Depending on circumstances will depend how it will be necessary to configure the SSL. Taopix Desktop is not able to understand Apache re-direction and gives an error message to the customer.

To avoid this message, choose the correct scenario as described below.

7.2.6.1 Taopix Desktop with deployed End-user licence keys

This scenario is for licensee's who have already deployed end user license keys with http in the URL. When you are using Taopix Desktop and end-users have a licence key on their desktop computers that is http:// rather than https://. Port 80 on the control centre server will **have** to remain open, if it is closed customers will have problems using the software.

7.2.6.2 Taopix Desktop without deployed End-user licence keys.

This scenario is for licensee's who have yet to deploy Taopix end user license keys. As end-users have not started to use the software it would be possible to re-build the installers using the new https licence key. In this instance Port 80 on the control centre server could be closed on the firewall. Re-direction could be enabled so that if someone chooses http:// they will be re-directed to https:// in their browser.

7.2.7 Obtain a Self-Signed certificate for testing.

For initial testing you could use a self-signed certificate. This MUST only be used for testing and must not be deployed on a live production environment. You can create a self-signed certificate by running the following command.

Apache 2.4.x

To run this use a command prompt and navigate to your apache bin folder. This is typically C:\ Apache24\bin\.

openssl req -config c:/Apache24/conf/openssl.cnf -new -x509 -days *365* -sha1 -newkey rsa:1024 -nodes -keyout server.key -out server.crt -subj "/O=Company/OU=Department/CN=***dnsname"***

WARNING: A self-signed certificate will display a warning to a customer that this site is not safe, so **ONLY** use this for testing/checking the SSL configuration.

7.2.8 Control Centre Server Apache Configuration

Copy the server.key, server.crt and the .pem file to the Apache config folder. (Typically at *C:\ Apache24\Conf*)

In the file httpd-control-centre.conf (typically *C:/Apache24/conf/taopix*) add the following lines and comment out the DocumentRoot line (by adding a # at the start of the line) that already exists in the file.

Apache 2.4.x

If your scenario is that described in the section `Taopix Desktop with deployed End-user licence keys` you will need to add the following, changing the items in bold to your settings:

```
<VirtualHost 192.168.1.100:80>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot
        ServerName orders.company.com
        ServerAlias webURL.brand1.com
        Alias /webroot C:/Taopix/MediaAlbumWeb/webroot
        Alias /paymentintegration C:/Taopix/MediaAlbumWeb/webroot/PaymentIntegration
</VirtualHost>
```

Default brand URL (the URL in your license key)

```
<VirtualHost 192.168.1.100:80>
```

```
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/Branding/BRAND1/
        ServerName displayURL.brand1.com
        Alias /webroot C:/Taopix/MediaAlbumWeb/webroot
        Alias /paymentintegration C:/Taopix/MediaAlbumWeb/webroot/PaymentIntegration
</VirtualHost>

<Directory  "C:/Taopix/MediaAlbumWeb/webroot/">
        Options Indexes FollowSymLinks
        AllowOverride None
        Order allow,deny
        Allow from all
</Directory>
   <VirtualHost *:443>
            DocumentRoot C:/TAOPIX/MediaAlbumWeb/webroot
            ServerName webURL.brand1.com
            ServerAlias webURL.brand1.com:443
            SSLEngine on
            SSLProtocol ALL -SSLv3 -SSLv2
            SSLCipherSuite "!DH EECDH+ECDSA+AESGCM EECDH+aRSA+AESGCM
                EECDH+ECDSA+SHA384 EECDH+ECDSA+SHA256 EECDH+aRSA+SHA384
                EECDH+aRSA+SHA256 EECDH+AESGCM EECDH EDH+AESGCM EDH+aRSA
                HIGH !MEDIUM !LOW !aNULL !eNULL !LOW !RC4 !MD5 !EXP !PSK !SRP
                !DSS"
            SSLHonorCipherOrder On
            Header always set Strict-Transport-Security "max-age=63072000;
                includeSubDomains"
            SSLCertificateFile "C:/Apache24/conf/MY_SERVER.crt"
            SSLCertificateKeyFile "C:/Apache24/conf/MY_SERVER.key"
            SSLCACertificateFile  "C:/Apache24/conf/ca-bundle.pem"
            SSLVerifyClient none
            SSLProxyEngine off
             <IfModule mime.c>
```

```
            AddType application/x-x509-ca-cert .crt
        AddType application/x-pkcs7-crl .crl
        </IfModule>
</VirtualHost>



<VirtualHost *:443>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/Branding/BRAND1/
        ServerName displayURL.brand1.com
        ServerAlias displayURL.brand1.com:443
        SSLEngine on
        SSLProtocol ALL -SSLv3 -SSLv2
        SSLCipherSuite "!DH EECDH+ECDSA+AESGCM EECDH+aRSA+AESGCM
            EECDH+ECDSA+SHA384 EECDH+ECDSA+SHA256 EECDH+aRSA+SHA384
            EECDH+aRSA+SHA256 EECDH+AESGCM EECDH EDH+AESGCM EDH+aRSA
            HIGH !MEDIUM !LOW !aNULL !eNULL !LOW !RC4 !MD5 !EXP !PSK !SRP
            !DSS"
        SSLHonorCipherOrder On
        Header always set Strict-Transport-Security "max-age=63072000;
            includeSubDomains"
        SSLCertificateFile "C:/Apache24/conf/MY_SERVER.crt"
        SSLCertificateKeyFile "C:/Apache24/conf/MY_SERVER.key"
        SSLCACertificateFile  "C:/Apache24/conf/ca-bundle.pem"
        SSLVerifyClient none
        SSLProxyEngine off
         <IfModule mime.c>
            AddType application/x-x509-ca-cert .crt
        AddType application/x-pkcs7-crl .crl
        </IfModule>
</VirtualHost>
```

If your scenario is that described in the section `Taopix Desktop without deployed End-user licence keys.`, you will need to add the following, changing the items in bold to your settings:

```
<VirtualHost *:443>
        DocumentRoot C:/TAOPIX/MediaAlbumWeb/webroot
        ServerName webURL.brand1.com
        ServerAlias webURL.brand1.com:443
        SSLEngine on
        SSLProtocol ALL -SSLv3 -SSLv2
        SSLCipherSuite "!DH EECDH+ECDSA+AESGCM EECDH+aRSA+AESGCM
                EECDH+ECDSA+SHA384 EECDH+ECDSA+SHA256 EECDH+aRSA+SHA384
                EECDH+aRSA+SHA256 EECDH+AESGCM EECDH EDH+AESGCM EDH+aRSA
                HIGH !MEDIUM !LOW !aNULL !eNULL !LOW !RC4 !MD5 !EXP !PSK !SRP
                !DSS"
        SSLHonorCipherOrder On
        Header always set Strict-Transport-Security "max-age=63072000;
                includeSubDomains"
        SSLCertificateFile "C:/Apache24/conf/MY_SERVER.crt"
        SSLCertificateKeyFile "C:/Apache24/conf/MY_SERVER.key"
        SSLCACertificateFile  "C:/Apache24/conf/ca-bundle.pem"
        SSLVerifyClient none
        SSLProxyEngine off
         <IfModule mime.c>
                AddType application/x-x509-ca-cert .crt
        AddType application/x-pkcs7-crl .crl
        </IfModule>
</VirtualHost>
```

```
<VirtualHost *:443>
        DocumentRoot C:/Taopix/MediaAlbumWeb/webroot/Branding/BRAND1/
        ServerName displayURL.brand1.com
        ServerAlias displayURL.brand1.com:443
        SSLEngine on
        SSLProtocol ALL -SSLv3 -SSLv2
        SSLCipherSuite "!DH EECDH+ECDSA+AESGCM EECDH+aRSA+AESGCM
            EECDH+ECDSA+SHA384 EECDH+ECDSA+SHA256 EECDH+aRSA+SHA384
            EECDH+aRSA+SHA256 EECDH+AESGCM EECDH EDH+AESGCM EDH+aRSA
            HIGH !MEDIUM !LOW !aNULL !eNULL !LOW !RC4 !MD5 !EXP !PSK !SRP
            !DSS"
        SSLHonorCipherOrder On
        Header always set Strict-Transport-Security "max-age=63072000;
            includeSubDomains"
        SSLCertificateFile "C:/Apache24/conf/MY_SERVER.crt"
        SSLCertificateKeyFile "C:/Apache24/conf/MY_SERVER.key"
        SSLCACertificateFile  "C:/Apache24/conf/ca-bundle.pem"
        SSLVerifyClient none
        SSLProxyEngine off
         <IfModule mime.c>
            AddType application/x-x509-ca-cert .crt
        AddType application/x-pkcs7-crl .crl
        </IfModule>
</VirtualHost>
```

Ensure you update the *ServerName* entry to match that of your server (and if your Apache install location is not in the standard location you will need to update the SSLCertificateFile and SSL CertificateKeyFile Paths as well).

7.2.9 Apache log rotation

Taopix strongly recommends rotating the Apache logs for each virtual host (or brand) in the Taopix system. This will help tidy up logs and make them more readable for Taopix support.

Create a folder in the following folder location for each virtualhost(brand) in Taopix. For example, if your brand is named BRANDA, create a folder called ‘BRANDA’ in

C:\Apache24\logs

Next we need to specify in Apache where the logs will be output. We want to write all logs for that brand to the folder we have created in logs.

Edit the taopix\httpd-control-centre.conf file. Copy the following lines into each virtualhost, replacing BRANDA with the name of the folder you created in the Apache logs folder. Repeat this process for each brand and each virtualhost.

ErrorLog "|bin/rotatelogs.exe logs/BRANDA/error-%Y%m%d-%H.log 10M -l"

CustomLog "|bin/rotatelogs.exe logs/BRANDA/access-%Y%m%d-%H.log 10M -l" common

You should end up with a Virtualhost similar to this example below

<VirtualHost xxx.xx.xx.xx>

DocumentRoot "C:/Taopix/MediaAlbumWeb/webroot/Branding/BRANDA/"

ServerName branda.taopix.com

Alias /webroot "C:/Taopix/MediaAlbumWeb/webroot"

ErrorLog "|bin/rotatelogs.exe logs/BRANDA/error-%Y%m%d-%H.log 10M -l"

CustomLog "|bin/rotatelogs.exe logs/funphoto/AccessLog.%d-%m-%Y_%H_%M_%S.log 86400 -300" combined

</VirtualHost>

7.2.10 Changes to Branding on Taopix Control Centre:

Ensure the display and web URLS entered both contain HTTPS otherwise customers will get an error about mixed SSL mode, which customers will find confusing and probably cause them to close the page.

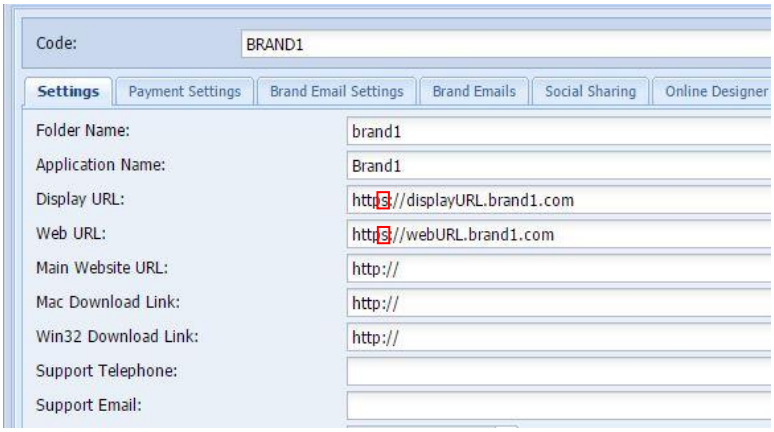

7.2.11 Notes Concerning Branding

- The user that the web server is running under must have read/write access to the following directories:
  - `MedaAlbumWeb/Branding`
  - `MediaAlbumWeb/webroot/Branding`

  If a brand is created and the correct privileges have not been set on those folders then the system will not be able to create the brand directories. This can be resolved in one of two ways:
  - Delete the brand, update the directory privileges and re-create the brand again.
  - Create the brand directories manually and copy the images and css folders into the MediaAlbumWeb/webroot/Branding/xxx folder.
- To prevent Unix permission issues when creating the brand directories and files they are created with the read/write/execute permission. It is your responsibility to lock-down the permissions of the directories and files after you have created the brand.
- The rules on how templates should be modified and saved which have been described earlier in this document still apply.
- If the system cannot find a template within the brand site then it will look for it within the `MediaAlbumWeb/Customise` path and then in the main templates folder.
- If you wish to change the webroot *Branding* folder name (eg: to *Customers*) then you must also update the *WEBBRANDFOLDERNAME* preference within the configuration file. You must also update the name of branding folder within the *MediaAlbumWeb* root folder.

8. Taopix Online Customisation

Taopix Online can be customised to suit your brand requirements.

By default, Taopix Online uses the style sheet tomain.xxxxxxxxxx.css which is located in taopix\taopixonline\webroot\css. The version number will change if there are amendments between each Taopix release.

It is possible to override certain elements of the main style sheet in order to give the designer a unique look and feel. We do this by creating an empty CSS file (named the same as the main style sheet), adding in your own CSS rules, and placing this in your brand directories.

The elements of the interface that can be customised include:

- Logo images
- Toolbar icons
- Fonts used in the interface
- Colours used in the interface
- Colours available in the colour palette

8.1 Style Sheets

The following style sheets can be customised specifically for the Advanced Editor, Easy Editor and 3D Editor workflows and for the Photo Prints workflow. Each file will have a checksum on the end in place of xxxxxxxxxx. The tomain.xxxxxxxxxx.css file in webroot/css applies to all workflows.

8.1.1 taopixonline/site/webroot/css/

a) photobooks.min.xxxxxxxxxx.css

This is the style sheet used for the Taopix Online Advanced Editor, Easy Editor and 3D Editor workflows

8.1.2 taopixonline/site/webroot/css/

a) photoprints.min.xxxxxxxxxx.css

This is the style sheet used for the Taopix Online Photo Prints workflow

Note: The version checksum of the CSS file may change for each release. The CSS files should not be copied from the default location, a new file for each brand should be created with the name specified above.

8.2 Customising Taopix Online

You can customise Taopix Online at different levels:

- Global – This will apply the same styles across all brands
- Brand – This will apply styles just to a particular brand

Customisation styles are applied by overriding lower priority styles: Taopix will check to see if there are any customised Brand styles first, then customised Global styles, and then it will fall back to the default Taopix styles.

This means if there are any Brand customisation files, they will override the Global ones and any Global styles will not get picked up.

If you don't customise at all, the interfaces will use the default Taopix styles.

8.2.1 Customising at Global level:

If you want to customise Global styles, you will need to create the following folders and CSS files:

- `taopixonline/site/webroot/customise/css/tomain.XXXXXX.css`
- `taopixonline/site/webroot/customise/css/workflows/photoprints/photoprints.XXXXXX.css`
- `taopixonline/site/webroot/customise/css/workflows/photobooks/photobooks.XXXXXX.css`

It's important the folder and file names match exactly, as this allows the styles to be overridden.

The CSS files will contain only the styles you want to override – it's possible they'll only have a couple of selectors each in them.

8.2.2 Customising at a Brand level

If you want to customise Brand styles, you will need to create the following folders and CSS files:

- `taopixonline/site/webroot/branding/<BRAND_FOLDER>/css/tomain.XXXXXX.css`

- `taopixonline/site/webroot/branding/<BRAND_FOLDER>/css/workflows/photoprints/photoprints.XXXXXX.css`
- `taopixonline/site/webroot/branding/<BRAND_FOLDER>/css/workflows/photobooks/photobooks.XXXXXX.css`

Replace <BRAND_FOLDER> with the folder name given in Control Centre (Branding > Edit Branding > 'Folder Name').

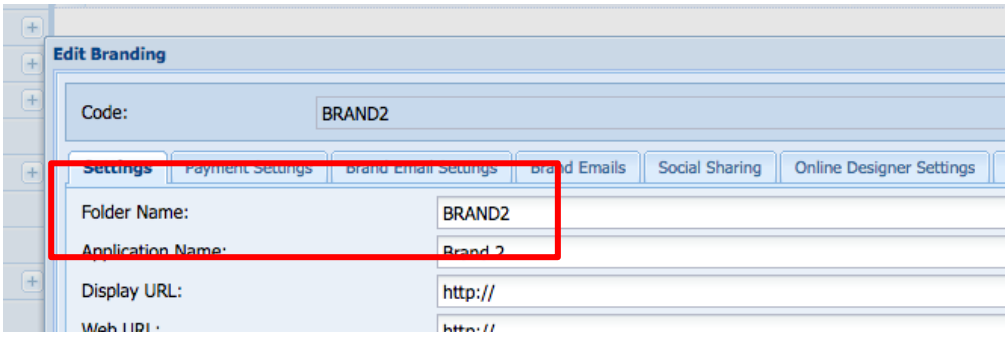

It's important the folder and file names match exactly, as this allows the styles to be overridden.

The CSS files will contain only the styles you want to override – it's possible they'll only have a couple of selectors each in them.

Note: If there are any Brand styles added, Global styles will be ignored.

8.2.3 Applying your own CSS styles

To apply your own styles, you need to find out what the default style is and override it in either a Global or Brand style sheet.

The best way to find the styles you want to override is to use Inspect Element in a browser.

For example, if you wanted to change the background colour of the top header bar, you would right click on the header bar and choose Inspect Element.

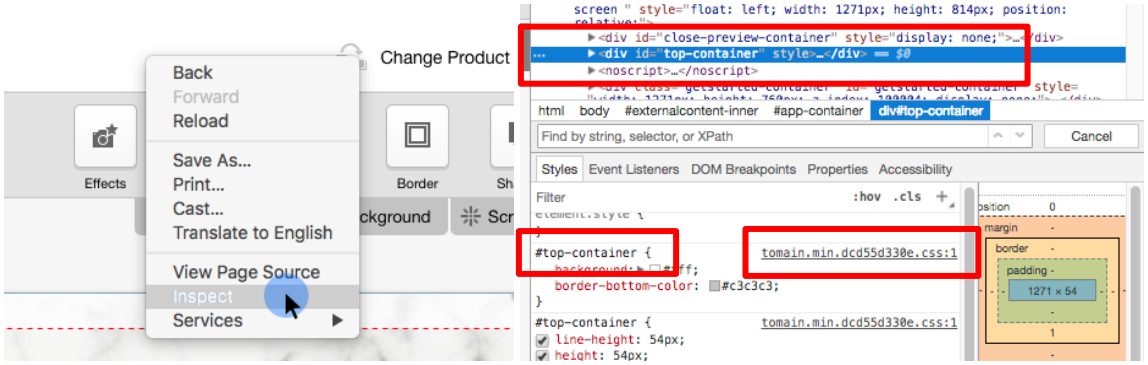

This would show that the header bar has a selector of `#top-container`.

You can also find which CSS file that style sits in, so you can add it into the correct file to allow it to be overridden – in this case it is in the 'tomain' CSS file.

For example, if you wanted to make your **top header bar** blue across **all your brands**, you would add the following styles into the **tomain.XXXXX.css** file in the '**customise'** folder:

```
#top-container
{
    background: #345570;
}
```

And if you wanted to make your **top header bar** blue across **just one of your brands**, you would add the same style into the **tomain.css** file in the relevant '**branding'** folder instead.

IMPORTANT: The .min must be removed from the filename for customised and branded css changes

8.2.4 Icons

Taopix Online uses SVG sprites for background images for a couple of reasons:

- Using sprites improves the page load, as there's less items to load in (and often combining multiple files results in a lower overall file size too).
- Using sprites also improves the perceived speed, as there's no flickering while individual images load (for example, on hover).
- Using SVG means the icons are vector instead of bitmap and are much clearer, even on higher resolution screens.

If you customise any icons, we recommend that you also use SVG sprites.

You can customise icons in much the same way as applying CSS customisations – by overriding the default or global styles in CSS files.

Inspect the icon you want to change, to see where it is referenced in the CSS.

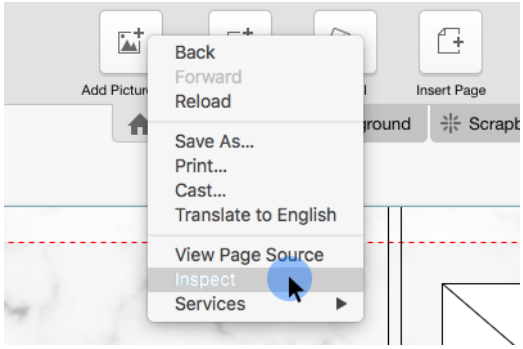

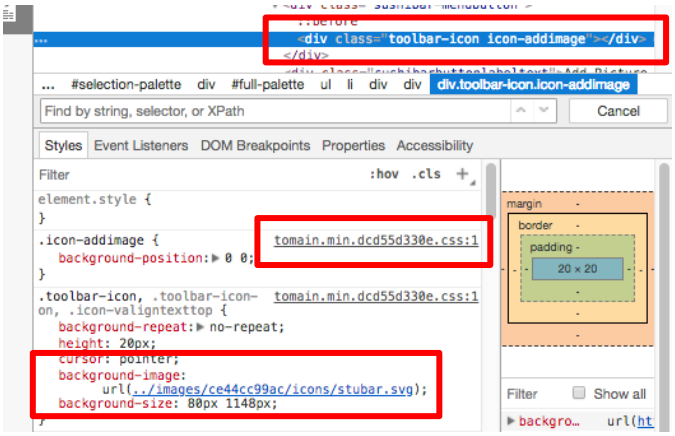

You can either duplicate the sprite and update it, or you can create a new image instead.

To update the sprite, open the svg file in a vector editor such as Sketch and replace the icon. Make sure the new icon is no bigger than the old one to avoid it getting cut off.

If you want to create a new image instead, create your icon either as single image or as part of your own, new, sprite.

Put your customised images in either the Global or Branding folder structures.

For global images create a new folder within the ‘customise’ folder:

```
taopixonline/site/webroot/customise/images
```

For branding images create a new folder within the relevant ‘branding’ folder:

```
taopixonline/site/webroot/branding/<BRAND_FOLDER>/images
```

If you’ve created a new image, you’ll need to update the CSS to point to your new image instead – this may also include updating the background-position of the element so that the correct section of the sprite is showing.

This is done the same way as overriding CSS above – using the same class name and the same CSS file name to allow it to override.

For example, to change the icons in the editing toolbar across all brands, you would add the following classes to the tomain.css file in the ‘customise’ folder:

```
.toolbar-icon
```

```
{
    background-image: url("../images/editing-toolbar.svg");
}

.icon-addimage
{
    background-position: 10px 20px;
}
```

Asset Management Icon

To change the icon of a custom asset management system in the add pictures dialog:

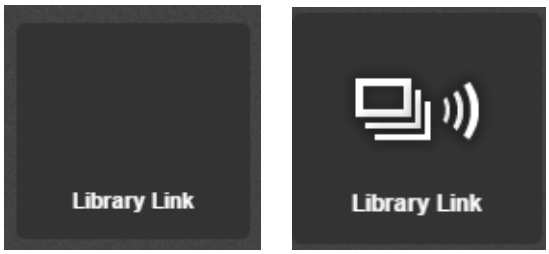

In the custom (or brand) tomain.xxxxxxxxxx.css file add the following line:

```
.asset-service-icon#<library_link_asset_service_code>
{
    background-image: url("<path_to_icon>");
}
```

<library_link_asset_service_code> = The asset service code entered in the asset management section of Taopix Creator

The recommended image size is 100px x 80px.

8.2.5 Changing the logo

The Online Designer logo file can be customised per brand. This can be added in Taopix Control Centre by editing each brand and uploading your logo. This will be stored in the Taopix database and must be changed through the Control Centre interface each time an update is required.

Our provided (default) logo can be found in:

`taopixonline/site/webroot/customise/images/XXXX/other/top_bar_logo.png`

The size and other properties of the logo can still be overwritten in css

IMPORTANT: As part of the new branding work in version 2018r1 and all subsequent versions, the top header background on customer pages is now white

8.3 Language Files – taopixonline/site/lang

These are text files that contain the strings used by the system. All strings start with a variable name (eg: *str_DateFormat*) with the actual contents inside the double quotes. Items starting with the hash symbol are comments.

a) en format.conf

> This file contains information on formatting for the language (en = English). The system detects the language to use from the information passed by the browser and attempts to find a format file that matches the language. To support different language formatting you can duplicate this file, rename it (eg: *fr format.conf*) and then change any relevant settings (do not change the variable names).

b) en strings.conf

> This file contains the main strings used by the web site. The first list of strings are 'common' strings which means that they are used by different sections of the system. The 'common' strings are then followed by strings that are used by certain sections of the system. The section is defined as a name within square brackets (eg: [Autofill]). You must not modify the section name as this will prevent the system from finding the strings. To support different languages you can duplicate this file, rename it (eg: *fr strings.conf*) and change any relevant strings (do not change the variable names or the section names in the square brackets).

If you wish to customize individual strings then it is recommended that you do not edit this file as it will be replaced when an upgrade is performed. Instead, you should first copy the relevant strings file(s) into the *lang* sub-folder inside `taopixonline/site/Customise`. After copying the files you can delete all strings that do not need to be customized and then make the relevant changes to the strings that you do need to customize. If the strings belong to a section then you must also include the section line.

8.4 Templates - taopixonline/site/templates

These are the main templates. Although they have the extension .tpl you can open them as text files. You should see that they are mainly HTML and JavaScript apart from the following differences:

a) Smarty Tags

The Smarty Tags are identified by the brackets {}. Tags which start with $ (eg: *{$error}*) are assigned within the PHP programming. Smarty Tags which start with # (eg: *{#str_ErrorNoAddressLine1#}*) are assigned directly from the language file. If tags are used within JavaScript they have to be surrounded by the *{/literal}* and *{literal}* Smarty Tags to inform Smarty that the tag should be processed..

b) Scripting Language

Smarty has its own scripting engine and it's commands are also surrounded by brackets (eg: *{if} {/if}*). We have used the scripting language in some of the customer facing templates so that it is easier for a designer to change the layout as well as functionality (although this may extend to other areas in future released).

The file `MediaAlbumWeb/templates/customer/main_large.tpl` demonstrates the use of the Smarty scripting language.

8.4.1 Terms and Conditions

The terms and conditions can be modified for Taopix online to force the customer to tick to agree to the terms before they register. This is done by modifying the newaccounttermsandconditions.tpl file (**this file is provided with the Taopix_ControlCentre_vxxxx' zip file in the templates folder**). This needs to be placed in one of the following directories. The directories will be checked in this order

Taopixonline/site/Branding/[BrandFolderName]/templates/dialogs

Taopixonline/site/customise/templates/dialogs/

Taopixonline/site/templates/dialogs/

This allows the possibility of different terms and conditions per brand. If the file is not found in any of the listed directories the terms and conditions dialog will not appear. Clicking the terms and conditions option will open it in a separate dialog window.

This file supports HTML strings. The following tags are styled by default but can be customised in the CSS. The CSS class must be in the following format

#termsandconditions-dialog .tpx-dialog-content <identifier>

Supported HTML tags are h1, h2, h3, h4, h5, h6, strong, em, p, ul, ol, li, a

8.4.2 Mobile workflow Templates

The following templates can be created for use with the mobile workflows. These templates are only supported on mobile. They will appear in the banner bar for mobile projects. They must be placed in one of the following places depending on whether it appears for a brand or the entire system:

Taopixonline/site/Branding/[BrandFolderName]/templates/dialogs

Taopixonline/site/customise/templates/dialogs/

Taopixonline/site/templates/dialogs/

about.tpl

The template can be used when a customer clicks about in the top banner bar when in a mobile project. The template only needs to contain the text to be displayed to the customer. Line breaks and paragraph tags can be used to display the text in a nicer way.

help.tpl

The template can be used when a customer clicks help in the top banner bar when in a mobile project. The template only needs to contain the text to be displayed to the customer. Line breaks and paragraph tags can be used to display the text in a nicer way.

8.4.3 Language strings

Default: <taopix_install_dir>/site/lang/

The language files can be customised so that the text displayed in the online designer can be different to the files supplied by Taopix. This can be done globally for all brands or each brand can have its own language configuration.

Copy the <taopix_install_dir>/site/lang/en string.conf file into either of the below folders:

Global: <taopix_install_dir>/site/customise/lang/

Branded: <taopix_install_dir>/site/branding/<brandname>/lang/

As with the other branding and customisation Taopix checks the brand first, followed by the customise folder and then the default.

8.5 Advanced Online Customisation

As well as customising the interface, it is also possible to show additional content in the space that surrounds the application container, as illustrated in blue below:

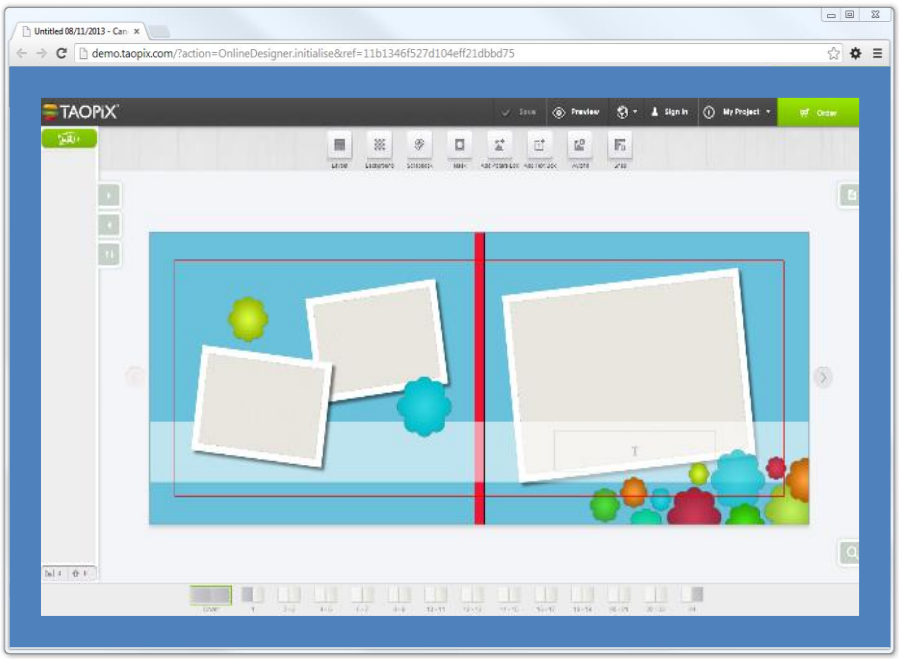

It is also possible to customise text labels and information or warning messages used in the Online Designer.

8.5.1 External Content – not supported for mobile devices

Custom content can be added to the space surrounding the Online Designer application container.

For example, a ‘help’ sidebar with customer service details could be displayed to the side of the Designer. Alternatively, an advertising banner could be displayed at the top of the screen to promote a new product.

Content can be added on all four sides of the application container in any of the following four combinations:

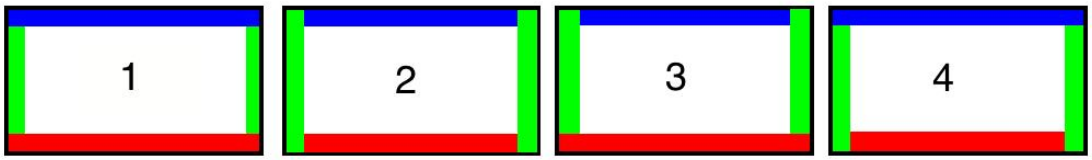

1. Top and bottom content spans full length of the window, the left and right span the gap between.
2. Left and right content spans full height of the window, the top and bottom fill the remaining width.
3. The bottom area spans the full width of the window with the left and right content reaching to the top and the top content filling the remaining space across the top.
4. The top content is the full width of the windows with the left and right content reaching to the bottom of the window and the bottom content filling the remaining space across the bottom.

To enable one of these options;

1. Locate the ‘taopixonline.conf’ file in the ‘config’ folder on the Online server and open the file for editing. Typically this is located at:

   C:\Taopix\taopixonline\site\config\taopixonline.conf

2. In that file, locate the line ‘EXTERNALCONTENTOPTION=1’ and set the value to one of the four options above.

   For example, setting ‘EXTERNALCONTENTOPTION=2’ would cause the left and right content to span the full height of the screen, with the top and bottom content filling the remaining space.

   Please note that currently, there is no way to specify this option per brand.

3. Copy the folder ‘externalcontent’, including its contents, from the ‘taopixonline\site\templates\’ folder to the following folder:
   taopixonline\site\customise\templates\
   or
   taopixonline\site\branding\BrandFolderName\templates\

4. The ‘externalcontent’ folder contains four templates; left.tpl, right.tpl, top.tpl and bottom.tpl. Add HTML content to these files as desired.

5. Open the file in ‘taopixonline\site\webroot\css\externalcontent.css’ and copy its contents to either:

   taopixonline\site\webroot\customise\css\tomain.xxxxxxxxxx.css

   or

   taopixonline\site\webroot\branding\BrandFolderName\css\tomain.xxxxxxxxxx.css

   Where ‘XX’ is the version of the equivalent CSS file in the folder

   taopixonline\site\webroot\css\

6. Edit the CSS properties for the #topContent, #rightContent, #bottomContent and #leftContent objects as necessary. Note that you will need to set the CSS height and width as appropriate to either hide or show each content area.