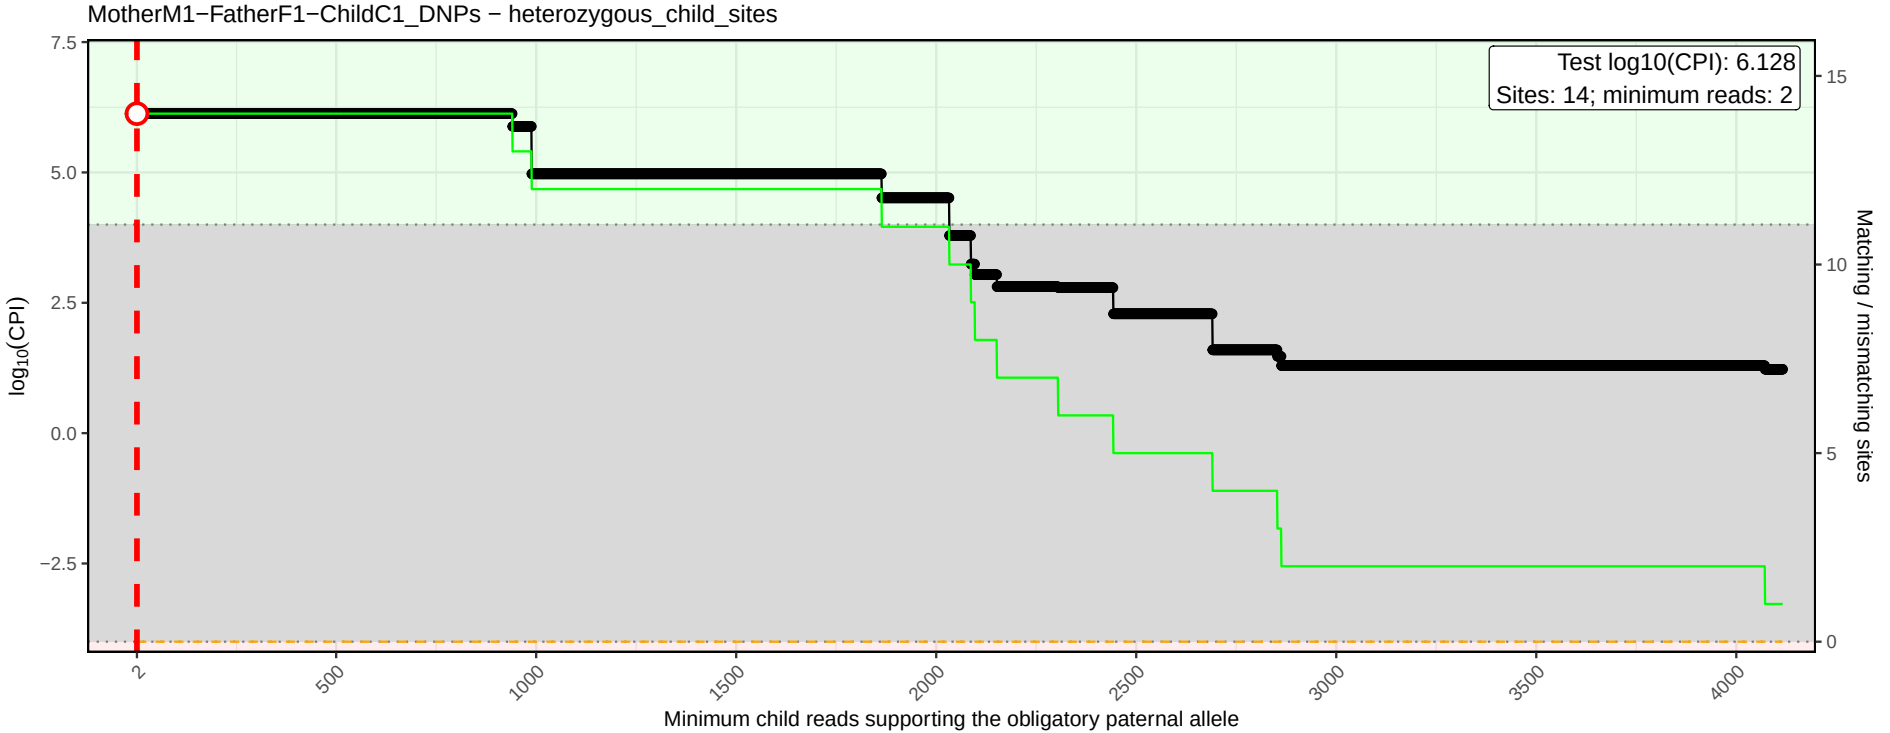
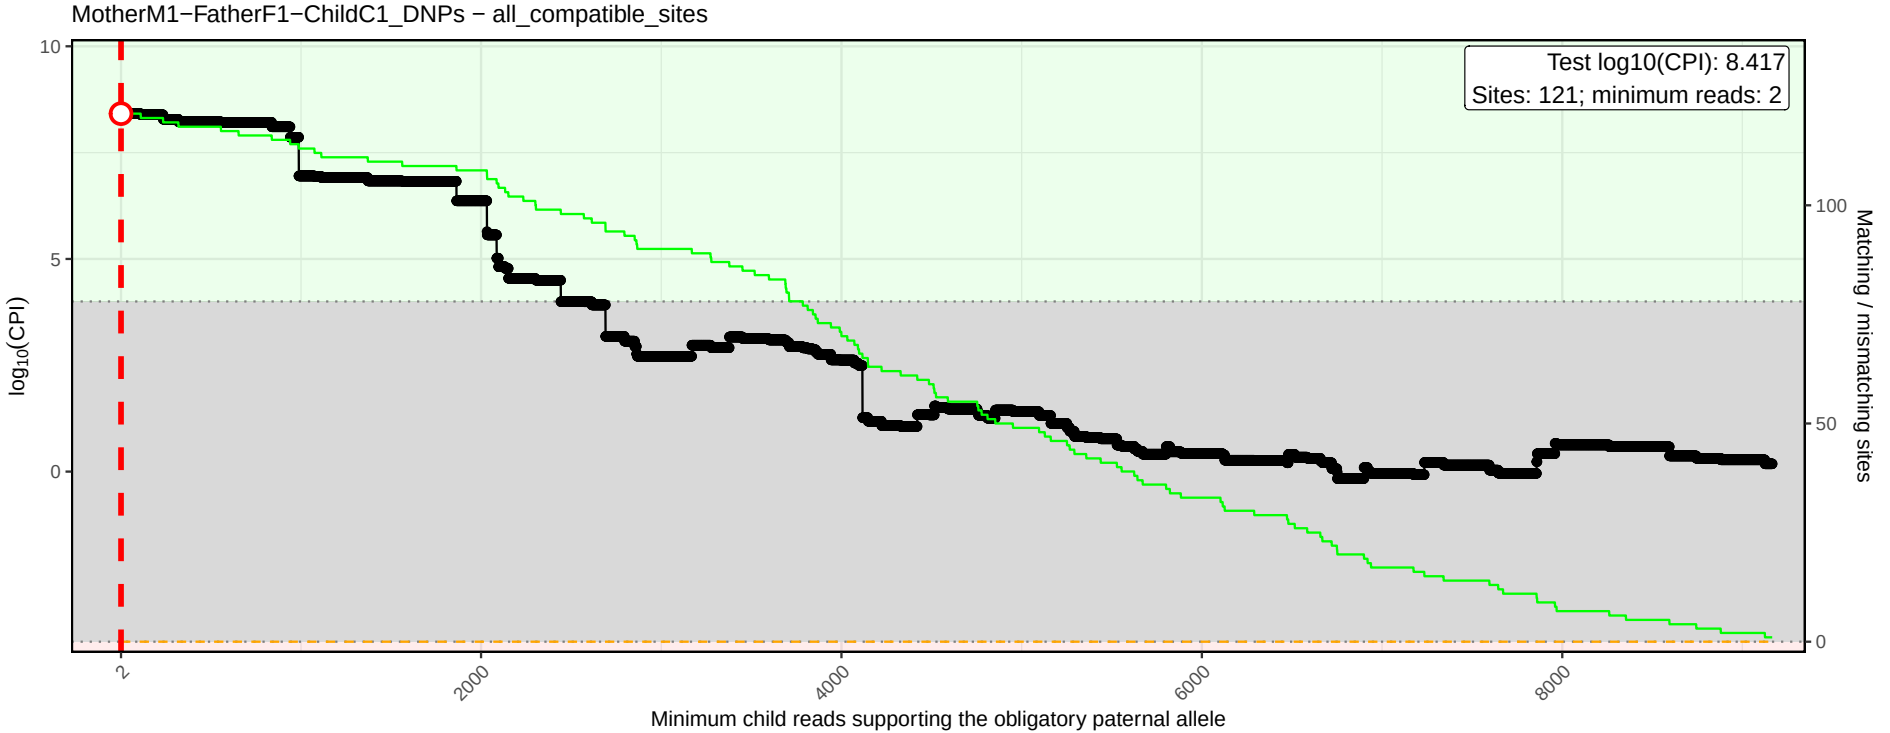

MotherM1−FatherF1−ChildC1_DNPs − heterozygous_child_sites
Test log10(CPI): 6.128
Sites: 14; minimum reads: 2
log10(CPI)
Matching / mismatching sites
Minimum child reads supporting the obligatory paternal allele
7.5
5.0
2.5
0.0
−2.5
15
10
5
0
2
500
1000
1500
2000
2500
3000
3500
4000


MotherM1−FatherF1−ChildC1_DNPs − all_compatible_sites
Test log10(CPI): 8.417
Sites: 121; minimum reads: 2
log10(CPI)
Matching / mismatching sites
Minimum child reads supporting the obligatory paternal allele
10
5
0
100
50
0
2
2000
4000
6000
8000