

Multi-modal fusion for violent scene detection in Hollywood movies

Elsevier¹

Radarweg 29, Amsterdam

Elsevier Inc^{a,b}, Global Customer Service^{b,}*

^a1600 John F Kennedy Boulevard, Philadelphia

^b360 Park Avenue South, New York

Abstract

Violent scene detection (VSD) is a challenging problem because of the heterogeneous content, large variations in video quality, high semantic meaning of the concepts. In the last few years, combining multiple features from multimodalities is proven as an effective strategy for a wide range of video classification tasks and almost existing works have focused on general multimedia event detection (MED), the specific event detection like VSD has been comparatively less studied. In this work, we try to study the value of multi features and combination of these features for VSD in Hollywood movies. We rigorously analyze and combine a set of low-level features and deep learning feature that capture appearance, color, texture, motion and audio in videos. We also evaluate the utility of mid-level visual information obtained from detecting related violent concepts. Experiments are performed on MediaEval VSD 2014 dataset, made publicly available. Results show the performance of visual and motion features are better than audio features. The performance of mid-level features was nearly as good as that of low-level visual features. Experiments with a number of fusion methods show that all single features are complementary and help to

[☆]Fully documented templates are available in the elsarticle package on CTAN.

^{*}Corresponding author

Email address: support@elsevier.com (Global Customer Service)

URL: www.elsevier.com (Elsevier Inc)

¹Since 1880.

improve overall performance. This study also provides an empirical foundation for selecting feature sets that are capable of dealing with heterogeneous content data as violent scenes in movies.

Keywords: violent scene detection, video retrieval, multi-modal fusion, multiple features

1. Introduction

Nowadays, the movie industry generates thousands of movies each year. However, not all movies are suitable for young people (especially children, teenagers, e.g.) to watch, because they might have violent contents. The re-
 5 search from University of Pittsburgh² reports that watching violence in movies or TV programs tends to make children more aggressive and leads to unhealthy attitudes. It is crucial to have violent scene detection (VSD) system which en-
 10 ables the parents to choose movies that are suitable for their children. More general, for content provider, the violent scene detection technique can be used to assist in movie rating; for general end users, it can block the violent content in client terminal devices.

²<http://www.oed.pitt.edu/Files/PDF/Parenting/TvAndMovieViolence.pdf>

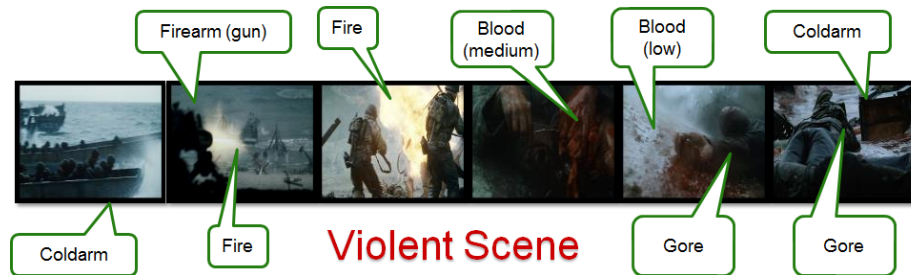


Figure 1: Following the violent definition in [1], this is an example of a violent scene in Saving Private Ryan Movie because it contains physical violence or accident resulting (fighting scene: boats approaching, guns shooting, fire guns shooting,...) in human injury or pain (blood and gore, dead soldiers)

Detecting violent scene is a challenging task mainly due to the large variation of violence concept and the semantic gap between the concept and low-level features provided in the media. To capture violence insights, multiple features
 15 (e.g. global or local static visual features, motion-based features, and audio features) are extracted for learning and prediction. Besides, to narrow the semantic gap, a set of various mid-level concepts and their spatial temporal relationships can be used to characterize violence e.g. **object-based concepts**: blood, gun,
 cold arm, firearm; **action-based concepts**: fighting, running, shooting, etc.;
 20 **activity-based concepts**: car chase, boat chase; **scene-based concepts**: gory scene, overcast, scene; **sound-based concepts** such as gun shot, scream, explosion. Figure 1 demonstrate an example of violent scene in a Hollywood movie. However, how to precisely detect mid-level concepts and efficiently utilize their relationships is yet another challenging and unsolved problem.

25 Given a movie as input, the expected output of a VSD system is all shots and segments having violent information. A general framework contains 4 main processing steps: video segmentation, feature extraction, learning models, and prediction. In the first step, the input movie is divided into fundamental processing units i.e. video shots. Then, features are extracted from the shots in
 30 second step. The goal of this step is to extract meaningful features which will be used for learning and predicting concepts in shots in later steps. Related studies

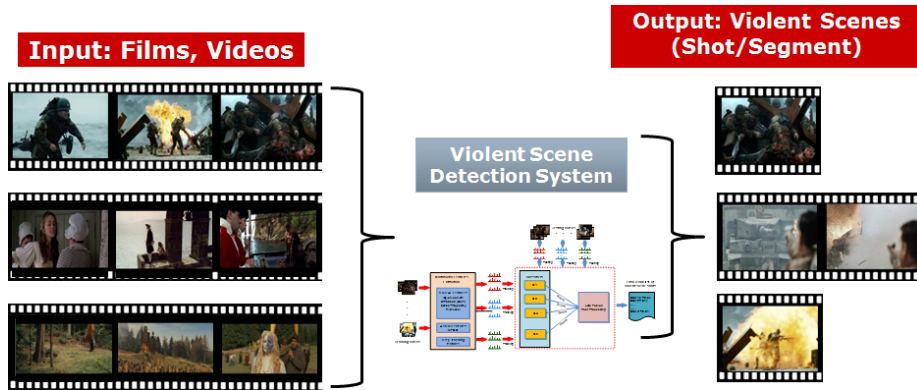


Figure 2: Overview of violent scene detection system.

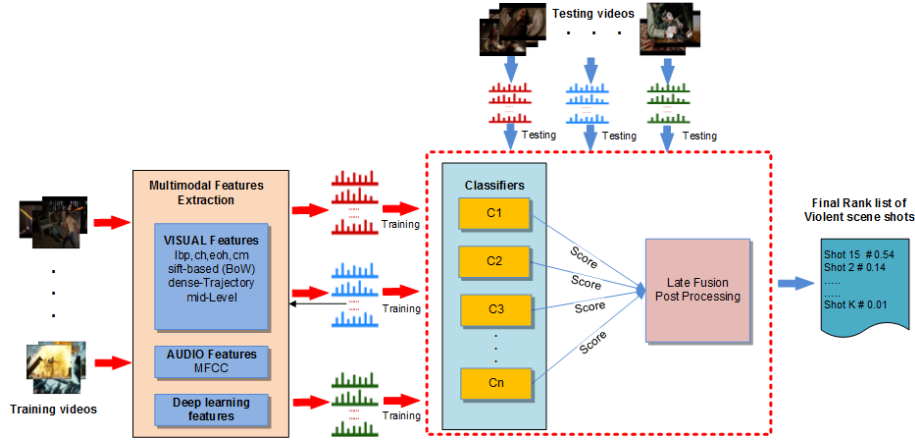


Figure 3: Overview of violent scene detection framework.

for similar system (e.g. multimedia event detection, action recognition, scene classification) have shown that selecting relevant features and their combination is essential for accurate detection.

In this paper, we evaluate various types of features and their combinations for VSD.

- Visual features.** We select following features for evaluation: color moments, color histogram, edge orientation histogram, and local binary patterns, SIFT, Color-SIFT, Opponent-SIFT. Visual features are expected to be able to convey visual characteristics of the original violence concept, the object-based concepts, and the scene-based concepts.
- Audio feature.** We use the standard MFCC as audio feature. It is used for capturing specific sound signals in violent scenes to discriminate them from non-violent scenes (e.g. sounds of gun shots, a scream, or explosions).
- Motion features.** We employ Dense Trajectory feature with Motion Boundary Histogram (MBH), Histograms of Oriented Gradients (HoG), and Histograms of Optical Flow (HoF) as features in presentation of action-based and activity-based concepts. This is to take the advantages of videos compared to static images.

50 • **Mid-level based feature.** To narrow the semantic gap, we use mid-level features to describe the original violence concept. Scores from classifiers of mid-level concepts are composed to form a unified feature for each shot. We then use these features for shot classification.

The main focus is to provide a comparative analysis on features and their contributions to the final performance of a VSD system. The observation drawn from our work may be helpful to future works in the field.

We perform our experiments of a standard benchmark, MediaEval VSD 2014[1] which are made publicly available³. Our system is trained and tested on Hollywood movies within MediaEval VSD Dataset and evaluated by MediaEval VSD official metric (MAP-mean average precision). By using this standard dataset and evaluation protocol makes our proposed methods to be fair to compare with results by other MediaEval VSD participants (results did not use the external data). Results show the performance of visual features are the best. Low-level visual features and motion feature play very important role when fusing all modalities. Audio and mid-level features are not good as low-level visual features but they are complementary to improve overall performance. Experiments with several fusion methods show that all single features are complementary and help to improve overall performance.

The rest of this paper is organized as follows. We review some related work in section 2. Section 3 introduces our framework, our approaches for feature extraction, and detail of feature configurations, fusion methods. The experimental results and their analysis will be in section 4, as well as the conclusion and future works are described in the section 5 of this paper.

³<http://www.technicolor.com/en/innovation/research-innovation/scientific-data-sharing/violent-scenes-dataset>

2. Related work

75 Violent scene detection is a kind of multimedia event detection. Although combining multiple features from multi-modalities has been proven as an effective strategy for multimedia event detection, relatively few works have been proposed to apply these approaches for violent scene detection in video. The main reason is that the definition of violence is ambiguous. It is difficult to describe
80 this high-level concept using mathematical formulation precisely. In general, the violence concept is not well-defined and recent approaches addressed the problem by their own definitions.

Some of the previous works applied different kind of visual features to detect flame, blood, explosion as the informative cues for violence. As a first
85 approach in this field, Jeho [2] propose an approach to recognize violent scenes in videos by detecting flame and blood, capturing the degree of motion activity, the soundtrack and characterization of sound effects of violent events. Meanwhile, Chen [3] decompose violent scene detection into action scene detection and bloody frame detection. Clarin [4] present a system which uses a Kohonen
90 self-organizing map, which is for detecting skin and blood pixels in each frame, and motion intensity analysis to detect violent actions involving blood. More recently, Gong Yu [5] introduce a violence detector using low-level visual and auditory features and high-level audio effects to identify potential violent content in movies. Jian [6] describe a weakly-supervised audio violence classifier
95 combined using co-training with a motion, explosion and blood video classifier to detect violent scenes in movies. Penet [7] compared two modality fusion methods, namely Early Fusion and Late Fusion. Early Fusion concatenates features from both modalities before machine learning, while Late Fusion fuses probabilities of both modalities already calculated. They reported Late Fusion
100 was superior to Early Fusion.

Beside low-level based approaches, violent scene detection is also a kind of high level recognition task. The major challenge is to deal with the gap of semantic meaning. In recent years, there are some approaches using attributes

to narrow the semantic gap in high-level recognition task, such as object recog-
105 nition using attributes, scene classification using attributes, action recognition
using actions bank[8]. Li [9] propose Object Bank (OB), a new representa-
tion of natural images based on objects (using objects as attributes to describe
scenes). Liu [10] use high-level semantic concepts, also called attributes, to
represent human actions from videos and argue that attributes enable the con-
110 struction of more descriptive models for human action recognition. Sasanand
[8] present Action Bank, a new high-level representation (kind of attributes) of
video. For VSD, Bodgan [11] rely on fusing mid-level concept predictions made
using multi-layer perception classifiers to automatically localize the occurrence
of violence within a video. They proposed a frame-level violence prediction,
115 applying a multi-layer perceptron in order to utilize these concepts. They put
the first layer for the concept prediction, and the second layer for the violence
prediction. In addition to those provided concepts, Tan [12] have utilized extra
42 violence concepts such as bomb and war from ConceptNet[13]. ConceptNet
is composed of nodes representing concepts in the form of words or short phrases
120 with their relationships. On their system those extra concepts are trained using
YouTube videos which are crawled additionally.

In the last few years, MediaEval Violent Scene Detection affect Task is be-
come popular, many state-of-the art systems have been developed and reported
recently[1]. Most systems extract a large number of multimodal features from
125 visual, audio signals and text. The features include low-level features such as
color histogram, edge of histogram, local binary pattern, SIFT based, Space-
Time Interest Points (STIP), Histograms of Oriented Gradients (HoG), His-
tograms of Optical Flow (HoF), Motion Boundary Histograms (MBH), visual
activity, MFCCs, trajectory-based features (cite each team). Different state-of-
130 the-art features encoding are used, such as Bag-of-Visual-Words representation,
Fisher vector representations. In addition, some approaches use of pre-defined
concept detectors like part-level attributes FUDAN Team[14], mid-level con-
cept description, with provided concepts from ConceptNet (e.g., punishment,
victim, rape, etc) VIREO team[12]. The video shots are classified by using dif-

135 ferent machine learning techniques (Support Vector Machines (SVMs), k nearest neighbors (kNN), Bayesian Network). Multimodal integration is achieved via early fusion[15] and late fusion[15, 16, 17, 14] where score fusion is often used to combine scores independently computed from different subsets of features.

In this paper, we present a novel violent scene detection framework which
140 is designed to incorporate many of the above-mentioned success principles in its architecture. In particular, our work incorporates novel developments into the system, which can be summarized into major contributions. First, our work developed and incorporated multi modal features at diverse granularities to evaluate the value of different types of features for VSD. Second, our work
145 explores the use of mid-level concept features, which are detected based on low-level features, aiming to provide more semantic understanding capability into our system. Third, we present several approaches to learn fusion functions which combine violent scores (late fusion) to improve overall performance.

3. VSD system

150 3.1. Framework Overview

We use a unified framework to evaluate the performance of each feature as well as the performance of feature combination methods. The framework should be flexible so that we can easily test different kind of features or fusion strategies. It also should be designed in a component-based manner so that we
155 can evaluate each component separately while keeping other components intact. In this spirit, our framework can be decomposed into following components: (1) Pre-processing, (2) Feature Extraction, (3) Feature Encoding, (4) Feature Classification and (5) Feature Fusion. The detail of each component is described in the following sections. We especially focus on the feature encoding and feature
160 fusion component. The former is used to evaluate features while the later is used to evaluate fusion strategies for VSD. An overview of our framework is shown in Figure 3.

3.2. Pre-processing

To create a feature representation for each shot: firstly, we extract five
165 keyframes per second; secondly, we extract visual feature for each keyframe;
lastly, we apply maximum and average pooling methods to create shot-based
features.

3.3. Feature Extraction

The feature extraction component aims to make a discriminative vector rep-
170 resentation for each shot that is extracted from the pre-processing step. The
extraction method depends on what type of feature will be used. To conduct
a comprehensive evaluation of features for VSD, we support a large variety of
features including global and local visual features. Global features capture the
global statistics of each extracted shot. These statistics can be calculated di-
175 rectly from sub regions of a sampled frame and then concatenated to form the
vector representation for that frame, before being aggregated to make the final
representation for each shot. It is more complicated to calculate the feature
vector representation for local features. The number of local features vary from
frame to frame, therefore it requires a special encoding technique which will be
180 described in 3.4.

Besides global and local features, other features are also supported in our
evaluation framework. Audio feature can be extracted from pre-defined tempo-
ral windows. Feature of each temporal window provide a local audio character-
istic at that temporal location. Therefore, audio feature can be considered as a
185 local feature and can be well-integrated into our feature extraction framework.
Another feature that is also supported is mid-level feature, which is represented
from violent concept detectors. We consider both the in-domain and out-domain
concept detectors. In case the concepts are used from off-the-shelf datasets, we
employ the state-of-the-art deep learning features which are extracted from a
190 pre-trained model. The detail description of each feature is presented in Section
4.

3.4. Feature Encoding

We employed the bag-of-words model with codebook size of 1000 and soft-assignment technique to generate a fixed-dimension feature representation for each keyframe. Besides encoding the whole image, we also divided it into grids of 3x1 and 2x2 to encode spatial information. Besides the bag-of-words repre-

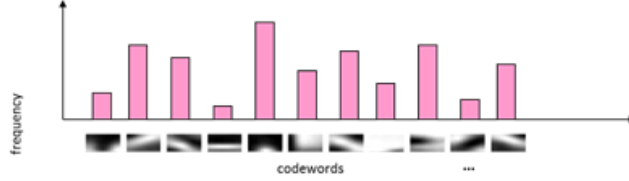


Figure 4: Bag of visual words.

sentation for the whole image, we divided each key frame into 2×2 and 1×3 sub-regions to cover information about the spatial layout of features, which is a trade off between performance and computation cost brought by the high dimensionality of the feature vector, and computed the bag-of-word representation for each sub-region. We applied this method for visual local features.

3.5. Feature Classification

LibSVM [18] is used for training and testing at shot level. To generate training data, shots which fall into positive segments more than 80% will be considered as positive shots. The remaining shots are considered as negative. Extracted features are scaled to $[0, 1]$ using the svm-scale tool of LibSVM. We use chi-square kernel to calculate the distance matrix. The optimal (C;g) parameters for learning SVM classifiers are found by conducting a grid search with 5-fold cross validation on the original dataset.

3.6. Feature Fusion

3.6.1. Late Fusion

Fusing information coming from different media seems a natural way to handle multimedia content. Fusing of multi-modal information has been widely used

for tasks including multimedia event detection, video search, etc. Naturally different semantic events, types of multimedia data have their own characteristics so their fusion strategies could be different also. For violent scene detection, we investigated several simple but effective fusion schemes to construct a better violence prediction system that exploits the advantages of each type of modalities.

4. VSD features

4.1. Visual global features

We evaluate both global features and local features. We selected the best configuration of each types of features from our previous work[19]. The global features include color moments, color histogram, edge orientation histogram, and local binary patterns with different configuration:

- Granularity: Since global features do not capture spatial information, to overcome this problem, a grid nm usually used to divide the input image into non overlapping sub-regions. The features extracted from these regions are concatenated to form the feature vector for the image.
- Color space: Local binary patterns (LBP) and edge orientation histogram (EOH) are extracted from gray scale image. For color moments and color histogram, color spaces including HSV, RGB, Luv, and YCrCb are used.
- Quantization: For color histogram, we only use 8-bin histogram for each channel. For edge orientation histogram, we quantize orientations into histograms of 36 (edge) + 1(non-edge) bins. For local binary patterns, we quantize binary patterns into histograms of 30, 59 bins.

4.2. Visual local features

4.2.1. Still image feature

For local feature, we use popular SIFT with both Hessian Laplace interest points and dense sampling at multiple scales. For dense sampling, besides

normal SIFT descriptor, we also use Opponent-SIFT and C-SIFT. For Harlap interest point detector, we only use normal SIFT descriptor.

4.2.2. Motion feature

As shown by Wang et al. [20], Dense Trajectory feature is one of the best
245 approaches for action classification. Dense Trajectory has an efficient solution to remove camera motion. In the Hollywood movies, there are a lot of action with different movie effects in the violent scenes. We try to apply the dense trajectory to capture these information. Trajectories are obtained by tracking the densely sampled points in the optical flow fields. We use Motion Boundary
250 Histogram (MBH) to describe each trajectory. This feature descriptor is good for handling camera motion.

4.2.3. Audio feature

We use the popular MFCC for extracting audio feature. We choose the audio segment of 25ms and step size of 10ms. The 13d MFCCs along with each
255 first and second derivatives are used for representing each audio segment. Raw MFCC features are also encoded using BoW.

4.3. Mid-level feature

4.3.1. In domain: VSD concepts

Violent scene detection is also a kind of highlevel recognition task. Violence
260 concept has high semantic meaning and high variability in appearance. Besides that, due to lack of training data for this concept, training violence classifier directly from low-level features is not effective. Instead of focusing on selecting the low-level features for VSD, we try to investigate how to use related violent information as mid-level feature to detect violent scene in the movie. We man-
265 ually select the violent information which are annotated by human assessors as related attributes of violence concept. Then we propose to use such concepts as related semantic attributes of the original violence concept. Figure 1 shows how to describe the violent scene by their semantic attributes. These attributes

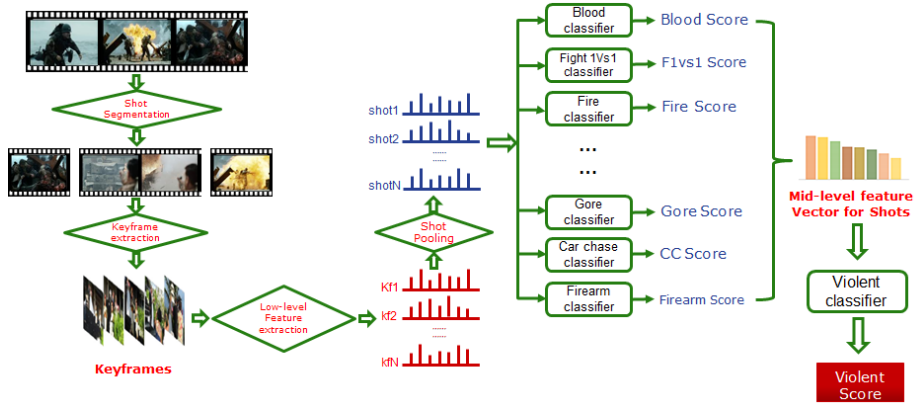


Figure 5: Overview of Mid-level framework.

which can be more well-presented by low-level features (e.g. the attribute about
 270 blood can be sufficiently presented by color) are used to create the mid-level fea-
 tures. In other words, the attributes have smaller gap to the low-level features,
 compared to the original violence concept. For example, in Figure 1, because
 violence occurred during the whole scene, it is very hard to use low-level features
 to represent the violence concept. But, we can use the low-level visual features
 275 to represent some attributes such as fire, blood. By doing this, we narrow the
 semantic gap between the original violence concept and low-level features ex-
 tracted from video shots. Attributes related to violence concept are manually
 defined. We used seven related concepts provided in MediaEval Dataset as vi-
 olent attributes. Our mid-level framework is shown in Figure 5. Firstly, each
 280 corresponding attribute classifier is trained by using low-level features. Sec-
 ondly, the mid-level features of a training (or test) video shots are formulated
 by concatenating scores returned by attribute classifiers. At the moment, we
 use the same weights for concatenating different scores. Then thirdly, we use
 this feature to train the mid-level feature-based violence classifier. Finally, we
 285 apply this violence classifier on test set to get the violence score for each shot
 (these shots are also represented by mid-level features).

4.3.2. Out domain: Deep learning feature

5. Experiments

5.1. Dataset

290 In this paper, we used the dataset from MediaEval Affect Task 2014 [1], this
is a set of 31 Hollywood movies that must be purchased the original DVD due
to copyright issues. The movies are of different genres (from extremely violence
movies to movies without violence). In this dataset, we focus on the violent
concept with subjective definition, which is defined as those which one would
295 not let an 8 years old child see because they contain physical violence. Follow
the proposed method, we divide this dataset into 2 parts:

- DEVEL (Table 1): this is training dataset; used to train violence classi-
fiers; has 24 movies, total 34779 shots, 48.29 hours.
- TEST (Table 2): this is testing dataset; used to test and evaluate the
300 system; has 7 movies, total 10006 shots and 13.89 hours.

Total duration are about 62.18 hours, with 44.785 shots. To reduce the com-
putation cost, when we extract keyframes, we resize the keyframes to 500x400
pixels.

5.2. Groundtruth

305 By using subjective definition in MediaEval VSD 2014[1], the ground truth
is created by human assessors and provided by the MediaEval organizers. In
addition to segments containing physical violence, annotations also include the
following high-level concepts: presence of blood, fights, presence of fire, pres-
ence of guns, presence of cold arms, car chases and gory scenes, for the visual
310 modality; gunshot, explosion and scream for the audio modality. The ground
truth data are provides in segment. To generate training data, we consider
the positive shots are the ones which have 80% overlapping with ground truth
segments.

No.	Video Name	Length (in second)	# keyframes	# shots
1	Armageddon-1998-dvd2002	8681.05	217026	1737
2	BillyElliot-2000-dvd2003	6349.36	158734	1270
3	Eragon-2006-dvd2007	5985.57	149639	1198
4	HarryPotter5-2007-dvd2008	7954.72	198868	1591
5	IAmLegend-2007-dvd2010	5780.58	144514	1157
6	Leon-1994-dvd2004	6344.49	158612	1269
7	MidnightExpress-1978-dvd2008	6960.96	174024	1393
8	PiratesOfTheCaribbean1-2003-dvd2006	8241.01	206025	1649
9	ReservoirDogs-1992-dvd2004	5712.98	142825	1143
10	SavingPrivateRyan-1998-dvd2006	9750.89	243772	1951
11	TheSixthSense-1999-dvd2000	6178.01	154450	1236
12	TheWickerMan-2006-dvd2008	5870.89	146772	1175
13	TheBourneIdentity-2002-dvd2006	6816.29	170407	1364
14	TheWizardofOz-1939-dvd2000	5859.29	146482	1172
15	DeadPoetsSociety-1989-dvd2002	7415.17	185379	1484
16	FightClub-1999-dvd2001	8006.34	200158	1602
17	IndependenceDay-1996-dvd2010	8834.96	220874	1767
18	TheGodFather-1972-dvd2008	10194.96	254874	2039
19	PulpFiction-1994-dvd2009	8887.97	222199	1778
20	ForrestGump-1994-dvd2006	8176.97	204424	1636
21	Fargo-1996-dvd2004	5646.34	141158	1130
22	ThePianist-2002-dvd2007	8567.1	214177	1714
23	FantasticFour1-2005-dvd2005	6094.41	152360	1219
24	LegallyBlond-2001-dvd2002	5523.49	138087	1105
	Total	173833.8	4345840	34779

Table 1: DEVEL set includes 24 Hollywood movies.

No.	Video Name	Length (in second)	# keyframes	# shots
1	V_FOR_VENDETTA	7626.49	190662	1526
2	TERMINATOR_2	8831.37	220784	1767
3	JUMANJI_COLLECTORS_EDITION	5993.98	149849	1199
4	GHOST_IN_THE_SHELL	4966	124150	994
5	DESPERADO	6012.89	150322	1203
6	BRAVEHEART	10224.49	255612	2045
7	8_MILE	6355.53	158888	1272
	Total	50010.75	1250267	10006

Table 2: TEST set includes 7 Hollywood movies.

5.3. Evaluation Metrics

315 We use mean average precision (mAP), an evaluation metric that is widely used for classification and retrieval systems. The mAP is computed based on the ranked list of shots returned by the detection system and the ground truth provided by the task organizers. Mean average precision (mAP) is calculated as below:

$$MAP = \frac{\sum_{v=1}^V AP(v)}{V}$$

320 , where V is number of test videos and AP is average precision for each video.

5.4. Results and comparison

5.4.1. Evaluation of global features

5.4.2. Evaluation of local features

5.4.3. Evaluation of motion features

325 5.4.4. Evaluation of audio features

5.4.5. Evaluation of mid-level features

5.4.6. Evaluation of deep learning features

5.4.7. Evaluation of fusion schema

5.4.8. Comparison with MediaEval teams

330 6. Conclusion

We evaluate the performance of multi features for the violent scene detection. The performance of global features and local features that are widely used in state of the art classification systems are compared. Our study can be served as a baseline for comparison of advanced algorithms or systems in the violent scene detection. Still image based feature (SIFT) has better performance than motion based feature (Dens-trajectory + MBH). Fusion of global features is effective, while fusion of local features is not (only SIFT is enough). Fusion of local features, global features, motion features and audio feature achieves the best performance. Post-processing method is very effective to improve overall performance. Mid-level representation shows promising results compared to using raw feature only, however the performance is still limited. But adding mid-level feature in fusion schema is not effective. Experimental results on MediaEval 2013 VSD benchmark dataset show the validity of the approach and its comparable performance to state-of-the-art methods.

345 References

- [1] C.-H. Demarty, B. Ionescu, Y.-G. Jiang, V. L. Quang, M. Schedl, C. Penet, Benchmarking violent scenes detection in movies, in: Content-Based Multimedia Indexing (CBMI), 2014 12th International Workshop on, IEEE, 2014, pp. 1–6.

- 350 [2] J. Nam, M. Alghoniemy, A. H. Tewfik, Audio-visual content-based violent scene characterization, in: Image Processing, 1998. ICIP 98. Proceedings. 1998 International Conference on, Vol. 1, IEEE, 1998, pp. 353–357.
- [3] C. Liang-Hua, H.-W. Hsu, L.-Y. Wang, , C.-W. Su, Violence detection in movies, Computer Graphics, Imaging and Visualization (CGIV) (2011) 355 119–124.
- [4] C. C., J. Dionisio, M. Echavez, P. C. Naval., Dove: Detection of movie violence using motion intensity analysis on skin and blood, Workshops and Demonstrations - ECCV (2005) 150–156.
- [5] G. Yu, W. Wang, S. Jiang, Q. Huang, W. Gao, Detecting violent scenes in 360 movies by auditory and visual cues, Advances in Multimedia Information Processing-PCM (2008) 317–326.
- [6] L. Jian, W. Wang, Weakly-supervised violence detection in movies with audio and video based co-training, Advances in Multimedia Information Processing-PCM (2009) 930–935.
- 365 [7] P. Cdric, C.-H. Demarty, G. Gravier, P. Gros, Technicolor and inria/irisa at mediaeval 2011: Learning temporal modality integration with bayesian networks, MediaEval Multimedia Benchmark Workshop.
- [8] S. Sadanand, J. J. Corso, Action bank: A high-level representation of activity in video, in: Computer Vision and Pattern Recognition (CVPR), 370 2012 IEEE Conference on, IEEE, 2012, pp. 1234–1241.
- [9] L. Li-Jia, H. Su, L. Fei-Fei, E. P. Xing, Object bank: A high-level image representation for scene classification & semantic feature sparsification, Advances in Neural Information Processing Systems (2010) 1378–1386.
- [10] L. Jingen, B. Kuipers, S. Savarese, Recognizing human actions by attributes, IEEE Conference on Computer Vision and Pattern Recognition (CVPR) (2011) 3337–3344.

- [11] I. Bogdan, J. Schluter, I. Mironica, M. Schedl, A naive mid-level concept-based fusion approach to violence detection in hollywood movies, ACM Conference on International Conference on Multimedia Retrieval (2013) 215–222.
- [12] C. C. Tan, C.-W. Ngo, The vireo team at mediaeval 2013: Violent scenes detection by mid-level concepts learnt from youtube., in: MediaEval, 2013.
- [13] H. Liu, P. Singh, Conceptneta practical commonsense reasoning tool-kit, BT technology journal 22 (4) (2004) 211–226.
- [14] Q. Dai, J. Tu, Z. Shi, Y.-G. Jiang, X. Xue, Fudan at mediaeval 2013: Violent scenes detection using motion features and part-level attributes., in: MediaEval, 2013.
- [15] C. Penet, C.-H. Demarty, G. Gravier, P. Gros, et al., Technicolor/inria team at the mediaeval 2013 violent scenes detection task, MediaEval 2013 Working Notes.
- [16] M. Sjöberg, J. Schlüter, B. Ionescu, M. Schedl, Far at mediaeval 2013 violent scenes detection: Concept-based violent scenes detection in movies., in: MediaEval, 2013.
- [17] N. Derbas, B. Safadi, G. Quénot, et al., Lig at mediaeval 2013 affect task: Use of a generic method and joint audio-visual words., in: MediaEval, Citeseer, 2013.
- [18] C.-C. Chang, C.-J. Lin, LIBSVM: A library for support vector machines, ACM Transactions on Intelligent Systems and Technology 2 (2011) 27:1–27:27, software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>.
- [19] V. Lam, D.-D. Le, S.-P. Le, S. Satoh, D. A. Duong, Nii, japan at mediaeval 2012 violent scenes detection affect task., in: MediaEval, Citeseer, 2012.

- [20] H. Wang, A. Kläser, C. Schmid, C.-L. Liu, Action Recognition by Dense Trajectories, in: IEEE Conference on Computer Vision & Pattern Recognition, Colorado Springs, United States, 2011, pp. 3169–3176.
- 405 URL <http://hal.inria.fr/inria-00583818/en>