



(a) the series: five disjoint client shards (10/10/20/20/30 %), a validation tail (v), and the test segment shared by the five clients

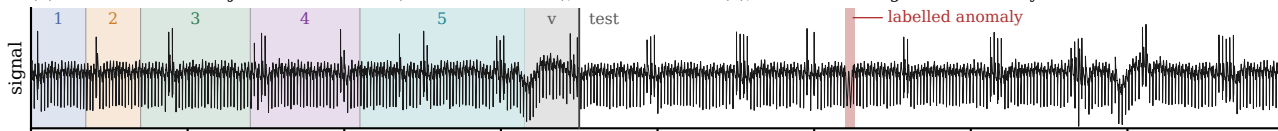

(b) anomaly score of each client, numbered as in (a): faint trace = the client's own shard, dashes = its train-fitted threshold, shaded = what that threshold declares anomalous, marker = the single location the client returns

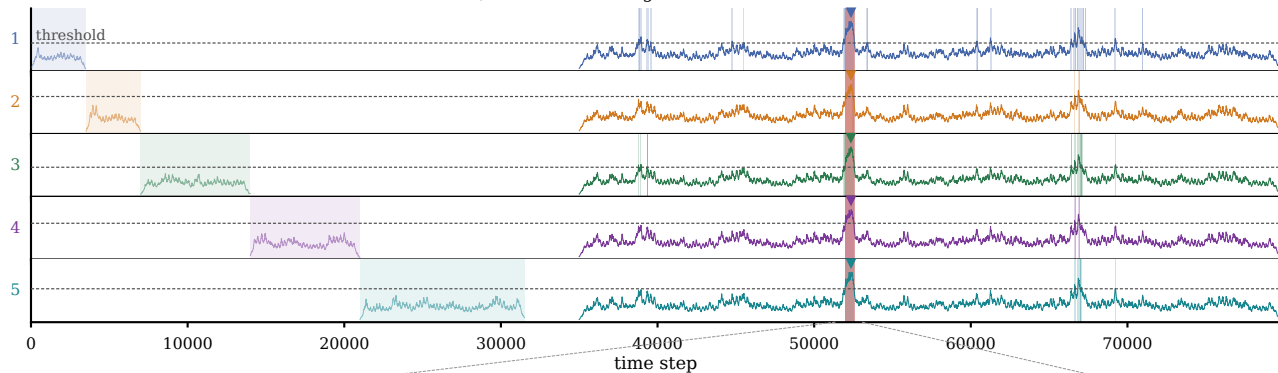

(c) the same event at scale: the repair client 1 proposes for it (grey = the tokens it rewrote), and what each party calls anomalous

