



# 期末复习班

科目: COMP3331/9331

进度: 第二堂 W6~W10知识点





# 目录

CONTENTS

01

**Network intro**

02

**Application layer**

03

**Transport - UDP**

04

**Transport - TCP**

# NETWORK



### Circuit Switching (p34)

- Inefficient
- Fixed data rate
- Connection state maintenance

### Packet Switching (p40)

- Data is sent as chunks of formatted bits
- Packets consist of a “header” and “payload”

**例题:**

**What are the pros and cons of circuit switching?**



## 重要知识点

**例题:**

**In \_\_\_\_\_ resources are allocated on demand**

- A. Packet switching**
- B. Circuit switching**



## 重要知识点


### 例题:

A message from device A to B consists of packet X and packet Y. In a circuit switched network, packet Y' s path \_\_\_\_\_ packet X' s path

- A. is the same
- B. is independent
- C. is always different from



### Statistical multiplexing: pipe view (p59)

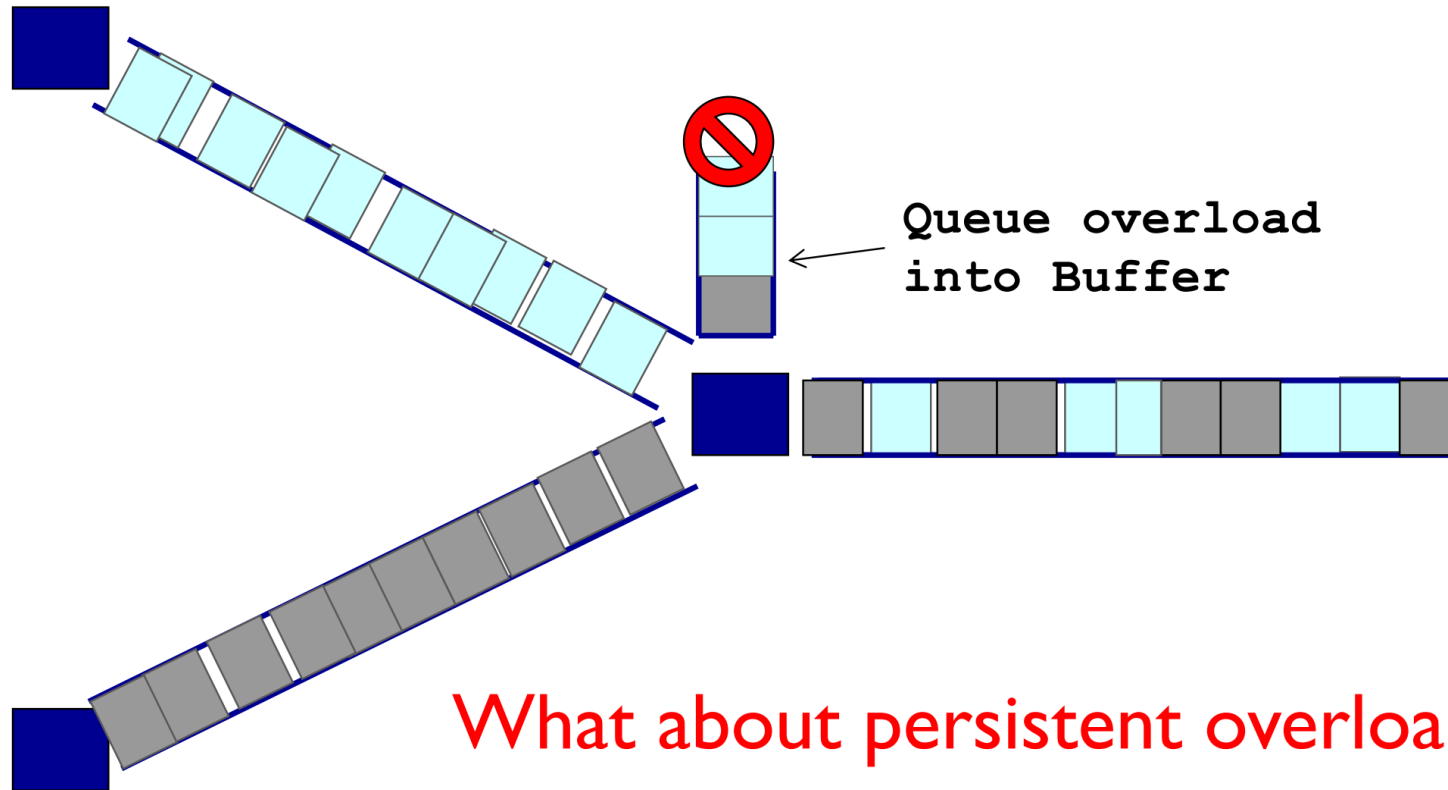


What about persistent overload?

Will eventually drop packets





### Statistical multiplexing: pipe view (p59)

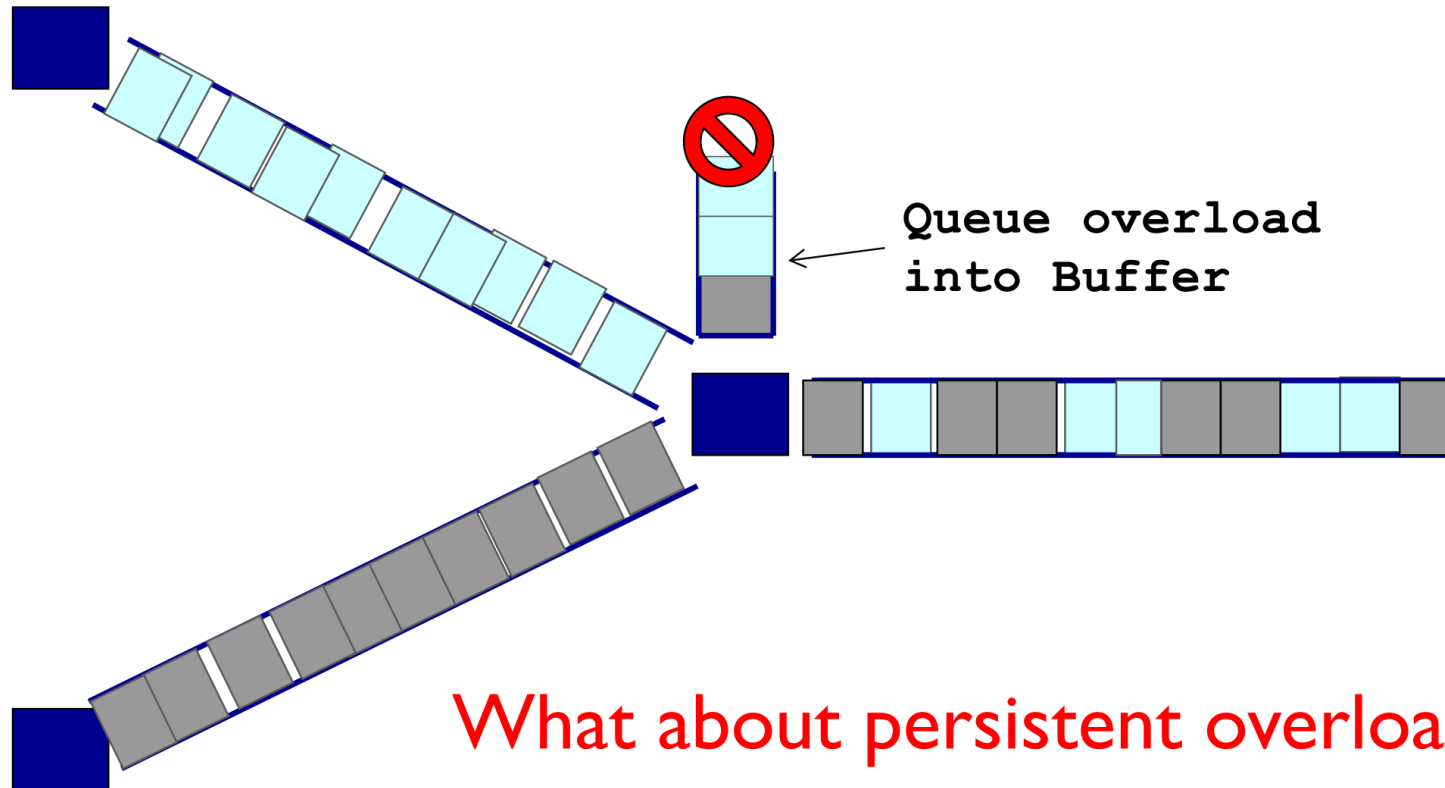


What about persistent overload?

Will eventually drop packets



### Delays (p85)

- 处理时延 Nodal processing dPROC
- 排队时延 Queuing delay dQUEUE
- 传输时延 Transmission delay dTRANS
- 传播时延 Propagation delay dPROP

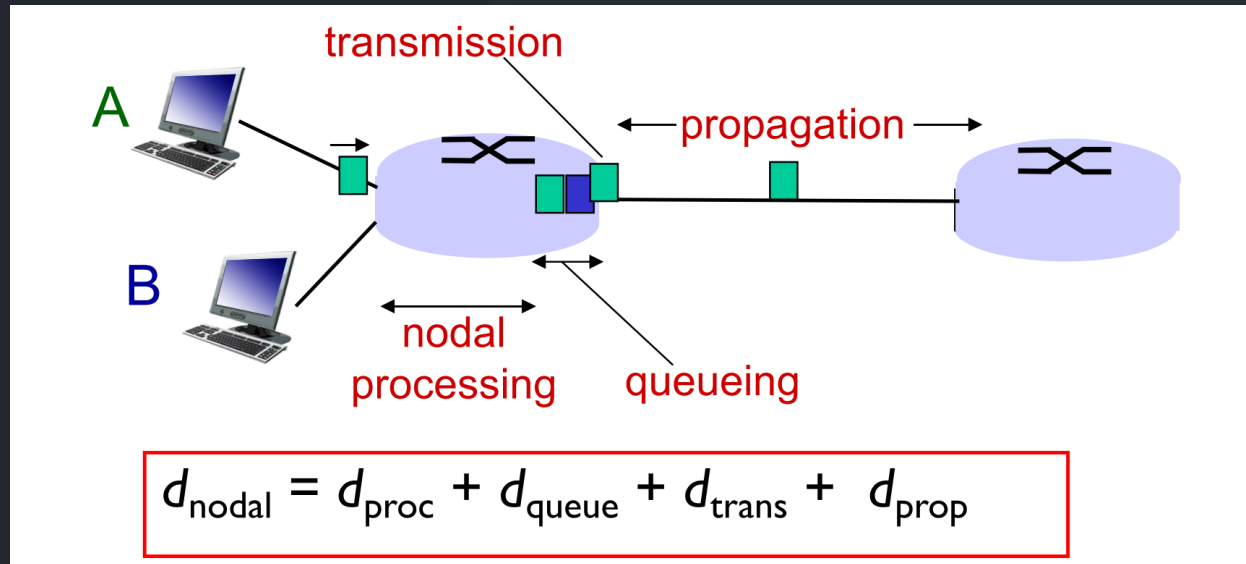



## 重要知识点

### 例题

**Propagation delay depends on the size of the packet**

**A. True**

**B. False**



### 例题

**Consider a packet that has just arrived at a router. What is the correct order of the delays encountered by the packet until it reaches the next-hop router?**

- A. Transmission, processing, propagation, queuing
- B. Propagation, processing, transmission, queuing
- C. Processing, queuing, transmission, propagation
- D. Queuing, processing, propagation, transmission



## 重要知识点

### 例题

Consider a circuit-switched network with  $N=100$  users where each user is independently active with probability  $p=0.2$  and when active, sends data at a rate of  $R=1\text{Mbps}$ . How much capacity must the network be provisioned with to guarantee service to all users?

- A. 100 Mbps
- B. 20 Mbps
- C. 200 Mbps
- D. 50 Mbps
- E. 500 Mbps



## 重要知识点

### 例题

Consider a packet-switched network with  $N=100$  users where each user is independently active with probability  $p=0.2$  and when active, sends data at a rate of  $R=1\text{Mbps}$ . What is the expected aggregate traffic sent by the users?

- A. 100 Mbps
- B. 20 Mbps
- C. 200 Mbps
- D. 50 Mbps
- E. 500 Mbps




## 重要知识点

### 例题

Consider a network connecting hosts A and B through two routers R1 and R2 like this: A-----R1-----R2-----B. Does whether a packet sent by A destined to B experiences queuing at R1 depend on the length of the link R1-R2?

- A. Yes, it does
- B. No, it doesn't

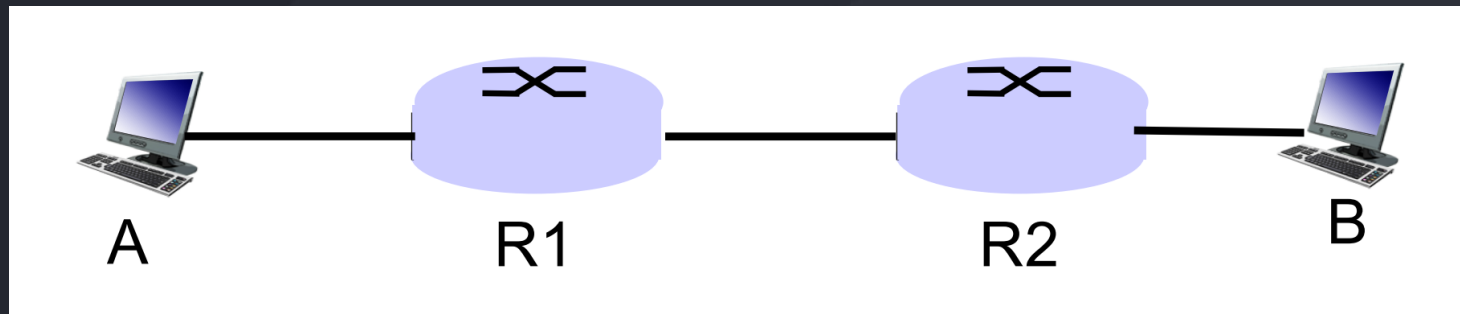

# Application Layer



## **Layering & Encapsulation (p123-126)**

- 1. application**
- 2. transport**
- 3. network**
- 4. link**
- 5. physical**

## 例题

**What are two benefits of using a layered network model ?  
(Choose two)**

- A. It makes it easy to introduce new protocols
- B. It speeds up packet delivery
- C. It allows us to have many different packet headers
- D. It prevents technology in one layer from affecting other layers
- E. It creates many acronyms

## 例题

**Pick the true statement**

- A. TCP provides reliability and guarantees a minimum bandwidth
- B. TCP provides reliability while UDP provides bandwidth guarantees
- C. TCP provides reliability while UDP does not
- D. Neither TCP nor UDP provides reliability



# Application with TCP&UDP (p143)

application	application layer protocol	underlying transport protocol
e-mail	SMTP [RFC 2821]	TCP
remote terminal access	Telnet [RFC 854]	TCP
Web	HTTP [RFC 2616]	TCP
file transfer	FTP [RFC 959]	TCP
streaming multimedia	HTTP (e.g., YouTube), RTP [RFC 1889]	TCP or UDP
Internet telephony	SIP, RTP, proprietary (e.g., Skype)	TCP or UDP



# HTTP协议 (p150)

1. 是什么
2. 运行原理
3. 状态码
4. Methods
5. HTTP/1.0 (Non-persistent)
6. HTTP 1.1
7. pipelining
8. Caching

## RTT

**time for a small packet to travel from client to server and back**

## 例题

**Pick the true statement**

- A. TCP provides reliability and guarantees a minimum bandwidth
- B. TCP provides reliability while UDP provides bandwidth guarantees
- C. TCP provides reliability while UDP does not
- D. Neither TCP nor UDP provides reliability



## 重要知识点

### 例题

Consider an HTML page with a base file of size  $S_0$  bits and  $N$  inline objects each of size  $S$  bits. Assume a client fetching the page across a link of capacity  $C$  bits/s and RTT of  $D$ . How long does it take to download the page using non-persistent HTTP (without parallelism)?

- A.  $D + (S_0 + NS)/C$
- B.  $2D + (S_0 + NS)/C$
- C.  $N(D + S/C)$
- D.  $2D + S_0/C + N(2D + S/C)$
- E.  $2D + S_0/C + N(D + S/C)$

## 例题

Consider an HTML page with a base file of size  $S_0$  bits and  $N$  inline objects each of size  $S$  bits. Assume a client fetching the page across a link of capacity  $C$  bits/s and RTT of  $D$ . How long does it take to download the page using persistent HTTP (without parallelism or pipelining)?

- A.  $2D + (S_0 + NS)/C$
- B.  $3D + (S_0 + NS)/C$
- C.  $N(D + S/C)$
- D.  $2D + S_0/C + N(2D + S/C)$
- E.  $2D + S_0/C + N(D + S/C)$





### 例题

Consider an HTML page with a base file of size  $S_0$  bits and  $N$  inline objects each of size  $S$  bits. Assume a client fetching the page across a link of capacity  $C$  bits/s and RTT of  $D$ . How long does it take to download the page using persistent HTTP with pipelining?

- A.  $2D + (S_0 + NS)/C$
- B.  $4D + (S_0 + NS)/C$
- C.  $N(D + S/C)$
- D.  $3D + S_0/C + NS/C$
- E.  $2D + S_0/C + N(D + S/C)$



# DNS协议 (p215)

1. 是什么
2. 运行原理
3. Hierarchy
4. DNS name
5. DNS Cache Poisoning (P241)

## 例题

If a local DNS server has no clue about where to find the address for a hostname then the

- a) Server starts crying
- b) Server asks the root DNS server
- c) Server asks its neighbouring DNS server
- d) Request is not processed

## 例题

Which of the following are respectively maintained by the client-side ISP and the domain name owner?

- a) Root DNS server, Top-level domain DNS server
- b) Root DNS server, Local DNS server
- c) Local DNS server, Authoritative DNS server
- d) Top-level domain DNS server, Authoritative DNS server
- e) Authoritative DNS server, Top-level domain DNS server

## 例题

Suppose you open your email program and send an email to salil@unsw.edu.au, your email program will trigger which type of DNS query?

- a) A
- b) NS
- c) CNAME
- d) MX
- e) All of the above

## 例题

You open your browser and type `www.zeetings.com`. The minimum number of DNS requests sent by your local DNS server to obtain the corresponding IP address is:

- A. 0
- B. 1
- C. 2
- D. 3
- E. 42



# P2P协议 (p249)

1. 是什么
2. 运行原理
3. .torrent files
4. Tit-for-tat
5. DHT(Distributed Hash Table)

## 例题

BitTorrent uses tit-for-tat in each round to

- a) Determine which chunks to download
- b) Determine from which peers to download chunks
- c) Determine to which peers to upload chunks
- d) Determine which peers to report to the tracker as uncooperative
- e) Determine whether or how long it should stay after completing download



## 例题

Suppose Todd joins a BitTorrent torrent, but he does not want to upload any data to any other peers. Todd claims that he can receive a complete copy of the file that is shared by the swarm. Is Todd's claim possible? Why or Why not (one short sentences)?

# Content Distribution Networks (p280)

1. 是什么
2. 作用

# Transport Layer



# Reliable Data Transfer (RDT)

## VERSION

- 1.0 - Transfer over a perfectly reliable channel (not a realistic model)
- 2.0 - Transfer over a channel with bit errors (more realistic model)
- 2.1 - Protocol includes sequence numbers #0 #1 to track expected packets
- 2.2 - NAK-free protocol
- 3.0 - Transfer over a channel with bit errors and loss

## PIPELINED PROTOCOLS

- Go-Back-N (GBN)
- Selective Repeat (SR)



# TCP

- **Establishment:**

(1) SYN -> (2) SYN-ACK -> (3) ACK + DATA -> Data exchange


- **Teardown:**

Data exchange -> (1) FIN -> (2) ACK-FIN -> (3) ACK -> (4) WAIT / Retransmit ACK -> (4) CLOSE



## 重要知识点

- Fast Retransmission

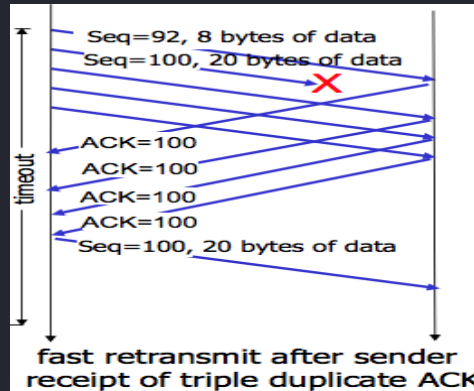

- If sender receives 3 duplicate ACKs for the same data, resend the un-ACK' d data with the smallest sequence #.

- Timeout periods are often long, so there is a long delay before resending lost packets. No need to wait for timeout.

- EstimatedRTT

$$\text{EstimatedRTTCURR} = (1 - a) * \text{EstimatedRTTPREV} + a * \text{SampleRTTRECEN}$$



# TCP – Congestion Control

- CWND
- SStresh
- Flavors
  - Tahoe: CWND = 1 on DupACK and Timeout
  - Reno: Same as above.
  - New-Reno: TCP Reno + improved fast recovery



每周课程资料内容都会更新在Github : [LINK](https://github.com/lrlrlrlr/COMP9331_COMP3331_20T3)

[https://github.com/lrlrlrlr/COMP9331\\_COMP3331\\_20T3](https://github.com/lrlrlrlr/COMP9331_COMP3331_20T3)



# 谢谢观看

DueApe – 让你的海外学习更简单