### Zlatý slavík, Karel GIT

Pavla Kratochvílová Lukáš Růžička

Fall 2020

# Co je GIT?

- verzovací systém
- open source
- s aktivním vývojem
- vytvořil je Linus Torvalds
- distribuovaný (necentralizovaný)

#### Proč?

#### Vytváření věcí duševní povahy často zahrnuje:

- přepisování
- mazání
- zkoušení slepých cest
- návraty k předchozímu
- revize a korekce od spolupracovníků

# Srovnání s kdysi

| pravěk                                  | gitvěk     |
|---|------------|
| opište si zadání                        | fork       |
| průběžně odevzdávejte                   | git commit |
| zkus ještě další verzi                  | git branch |
| použij obě verze, přepiš                | git merge  |
| tady jsou opravy, přepiš                | git merge  |
| raději bych přece jen tu dřívější verzi | git reset  |
| zahoď to                                | git rm     |
| cos to zahodil, ty jelito?              | git clone  |

Prostě ... Vždycky GIT!

# Co potřebujeme?

- účet na nějakém serveru s gitem
- nainstalovaný git

# Úkol 1 - Přípravné práce

- Fedora: sudo dnf install git
- Debian: sudo apt-get install git
- Mac: http://git-scm.com/download/mac
- Windows: http://git-scm.com/download/win
- github.com založit účet


### Konfigurace gitu

- git config --global user.name "Your Name"
- git config --global user.email
  "yourname@example.com"

# Vytváříme první repozitář

- Běžte na stránku svého profilu.
- Klikněte na Repositories.
- Klikněte na New.
- Vyplňte údaje.
- Klikněte na Create repository.


# Stránka profilu

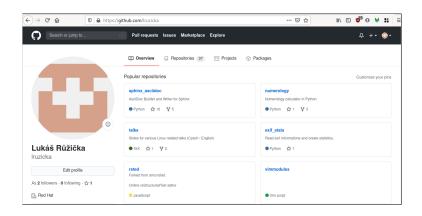

# Nový repozitář



## Vytvořit nový repozitář

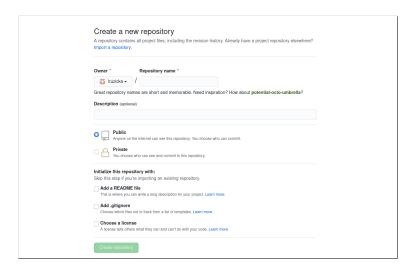

# Plán úkolů před

- Založit účet.
- Nainstalovat git.

## Plán úkolů github.

- Vytvořit nové repo s README.
- Nastavit github.io.
- Naklonovat toto repo. (git clone)

# Plán úkolů – první kroky

- Upravit README.
- Přidat úpravy ne server.
- git status
- git add
- git commit
- git push
- git log

Několikrát opakovat pro vytvoření commit historie.

# Plán úkolů – vývoj oddělený od produkce

- Vytvořit novou větev a pokračovat vývoj tam.
- git checkout (-b)
- git push --set-upstream origin branch
- git branch
- o git branch -d (-D)
- git push -d origin branch

Několikrát opakovat pro vytvoření commit historie.

# Plán úkolů – upravujeme commit historii

- o git rebase -i
- git push --force

# Plán úkolů – zveřejnění vývoje

- Vzít obsah vývojové větve do produkční.
- git merge
- git rebase

#### Plán úkolů – řešíme konflikt

- Dvě větve s vývojem (master, develop).
- řešení konfliktu
- merge

# Plán úkolů – návrat k původnímu

- Vracíme se k dřívější verzi.
- git revert
- git reset (soft, hard)
- git checkout <commit>

# Plán úkolů – úkládáme na později

- Uložit pro strýčka Příhodu-
- git stash

#### Tree and Branches

### Terminology 2

merge merge two different branches together and keep chronological order

rebase put a branch on top of another

pull a shortcut for *fetch* and *merge*conflict a problem that blocks merging of changes

squash put two (or more) commits into one

blame display the author of a change

## How does merging work?

## How does rebasing work?

### Fork the repository

- creates a server-based copy of the repo
- go to your Git forge webUI
- push the Fork button

## Clone the repository

- creates a local copy of the repository in a new directory
- git clone <repo-address>
- git clone <repo-address> <directory>

#### Task 1

- As a group, fork repository https://github.com/dokumentarista/trygit.git.
- Set up commit rights for your members.
- Clone the fork to your machine.
- Go to that directory.
- Display its content (1s -a)

# Developing the project (adding changes)

- open, edit, save files as you would normally do
- see the new status
  - ▶ git status
- add files you want git to start tracking
  - ▶ git add
- save the changed files into the git tree
  - ▶ git commit -m "Explain why"
- synchronize your git tree with the server version
  - git push

#### Task 2

#### Although a group, work individually

- Open the names.txt file in the repo
- Add your name to the list of names
- Commit your changes
- Push them onto the server

### Getting the first conflict

Git conflict, sometimes referred to as **merge conflict**, happens when:

- two (or more) versions of one change
- at the same time

When in conflict, you cannot work with the remote repository because Git protects your data from being damaged.

# When do I get a merge conflict?

### When you try to push

```
! [rejected]
                    master -> master (fetch first)
error: failed to push some refs to
'https://github.com/dokumentarista/trygit.git'
hint: Updates were rejected because the remote
hint: contains work that you do
not have locally.
hint: This is usually caused by another repository
hint: pushing
to the same ref. You may want to first
hint: integrate the remote changes
(e.g., 'git pull ...')
hint: before pushing again.
hint: See the 'Note about fast-forwards' for details.
```

### When you try to pull

```
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 6 (delta 2), reused 0 (delta 0)
Unpacking objects: 100% (6/6), done.
From https://github.com/dokumentarista/trygit
34c12d6..d8a0bea master -> origin/master
Auto-merging names.md
CONFLICT (content): Merge conflict in names.md
Automatic merge failed; fix conflicts and then
commit the result.
```

#### In the file

```
# Names of login names.
```

```
<><<< HEAD ### Add your login name to the last available slot.
```

1. pkratoch

```
======
```

### Add your login name to the last available slot.

- 1. lruzicka
- >>>>> d8a0beae9626d523d509b9fc53de06c435999d24
- 2..
- 3.
- 4.
- 5.

#### How to solve merge conflicts?

- Open the conflicting file.
- Explore the marked area.
- Your changes are marked HEAD above the division line.
- ====== is the division line.
- Remote changes are bellow the division line.
- Rewrite the file as you want it to be and save it.
- git add corrected-file.
- git merge --continue
- Edit the commit message if asked.

#### Conflict fixed

```
# Names of login names.
```

### Add your login name to the last available slot.

- 1. pkratoch
- 2. lruzicka
- 3.
- 4.
- 5.

### How to limit conflicts?

- Work in branches.
- Fork the project and work in your version.
- Plan ahead.
- Communicate.

Conflicts will always happen, love them, nurture them and fix them carefully.

### What is a branch?

- alternate development version
- it checks out from a certain commit
- it can branch from master or another branch
- it typically diverges from its origin very quickly
- it allows you to work individually without having to solve many conflicts as you go

### How to work in a branch?

- Create a new branch (git checkout -b new)
- Write your changes there.
- Fix merge conflicts if any.
- Merge or rebase possible changes in the original branch to your branch to make it merge ready.
- Have it merged (or rebased) back into its origin.

## git merge

- Merges two branches into one.
- The checked-out branch will be altered.
- It keeps track of history.
- It is chronological.
- It produces a merge message

## git rebase

- Merges two branches into one.
- The checked-out branch will be altered.
- It does not keep track of history.
- It is not chronological.
- It accepts foreign commits, merges them to your branch, and puts your commits on top of that.
- It helps to keep the history of the master branch free from merge commits.

### Task 3

- Delete the repo files and clone it again.
- Each person in the group creates their own branch.
- Communicate with the team.
- Add your name to the list of names in your branch.
- Merge or rebase the original branch onto your branch.
- Fix conflicts.
- Have it merged.

### Task 4

- As a group, fork repository https://github.com/dokumentarista/crossword.git.
- Set up commit rights for your members.
- Clone the repo.
- Solve the crossword.

# What if I don't have access to repository?

- Very common in open source world
- Send patch via email?

### Fork workflow

- Fork a repository
- Clone a repository
  - git clone <repo-address> <directory>
- See remote repositories
  - ▶ git remote -v
- Add the other remote repository
  - git remote add <name> <repo-address>
- Make changes and push them to your fork
  - git push -set-upstream <remote> <branch>
- Make pull request

# Changing the history – interactive rebase

- Can change commit messages.
- Can merge two (or more) commits squash them.
- Can throw away commits.
- Makes severe changes to the repo structure risky.
- It changes the fundaments for your collaborators.
- Needs to be force pushed.
- Should only be done in individual branches.

### How to recover from interactive rebase?

- Checkout the branch.
- Fetch the new repo data
  - ▶ git fetch origin
- Rebase your branch onto the original branch.
  - git rebase origin/master
- All changes from your branch will appear on top of the original branch.
- Alternatively, you can use an option that will do the rebase for you, if possible.
  - ▶ git pull --rebase
- Merging the branch would never work, because the history has been changed.

## Undo local changes – reset

- You can reset the HEAD to a previous commit.
- You can either use hashes or HEAD~3
- You can use soft, mixed or hard reset.
- Default is mixed it changes the HEAD marker and unstages files, but leaves them untouched.
- Hard reset will delete your files think twice.
- The operation goes back in history needs rebasing.
- All changes can be recovered until you push to the server.
- Should only be done in individual branches.

## Undo local changes – revert

- You can revert to a previous commit.
- You can either use hashes or HEAD~3
- A new commit will be added, that undoes the changes.
- The operation does not go back in history, can be forwarded.
- All changes can be recovered any time locally.
- Can be done in cooperative branches.

## Questions?

If you have any questions, just ask now ...

... or hold it forever.

Thank you for your attention and have a great day!