

Assignment – 2 (RMI)

AddClient:-

```
package RMI;

import java.rmi.*;

public class AddClient {

    public static void main(String args[]) {

        try {

            String addServerURL = "rmi://" + args[0] + "/AddServer";

            AddServerIntf addServerIntf =

            (AddServerIntf)Naming.lookup(addServerURL);

            System.out.println("The first number is: " + args[1]);

            double d1 = Double.valueOf(args[1]).doubleValue();

            System.out.println("The second number is: " + args[2]);

            double d2 = Double.valueOf(args[2]).doubleValue();

            System.out.println("The sum is: " + addServerIntf.add(d1, d2));

        } catch (Exception e) {

            System.out.println("Exception: " + e);

        } } }
```

AddServer

```
package RMI;

import java.net.*;

import java.rmi.*;

public class AddServer {

    public static void main(String args[]) {

        try {

            AddServerImpl addServerImpl = new AddServerImpl();


            Naming.rebind("AddServer", addServerImpl);

        } catch (Exception e) {

            System.out.println("Exception: " + e);

        } } }
```

Output:-

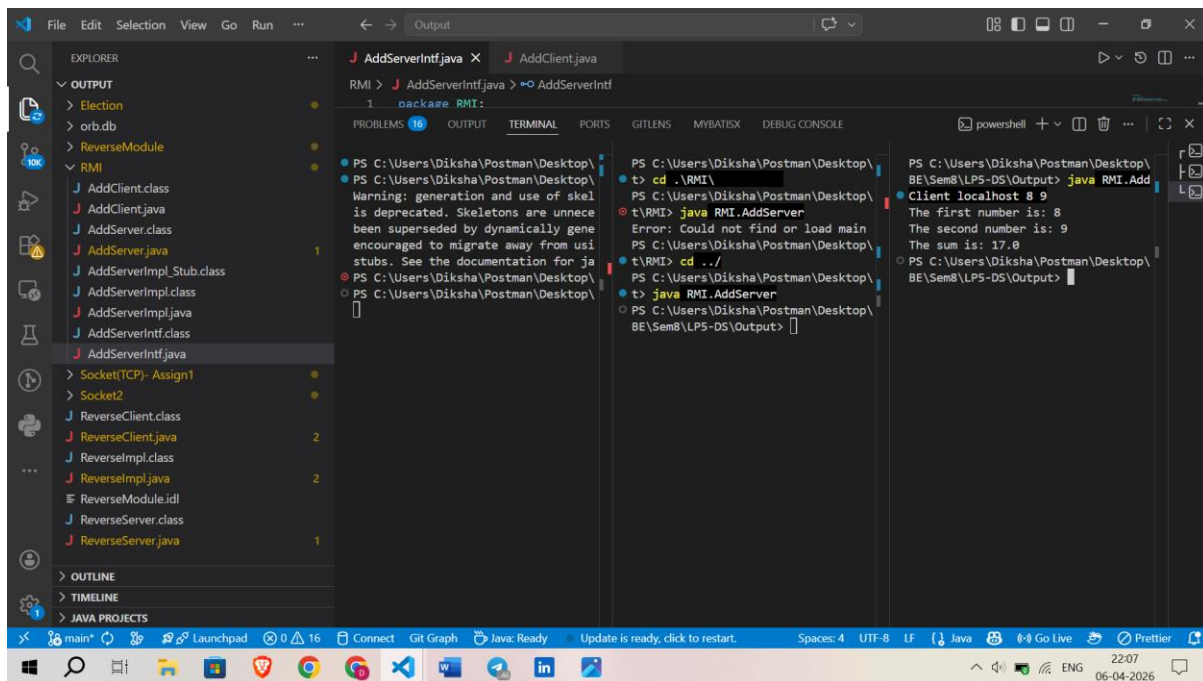

The screenshot displays an IDE interface with the following components:

- EXPLORER:** Shows a project structure with folders like `Election`, `ReverseModule`, and `RMI`. The `RMI` folder contains several Java files, including `AddClient.class`, `AddClient.java`, `AddServer.class`, `AddServer.java`, `AddServerImpl_Stub.class`, `AddServerImpl.class`, `AddServerImpl.java`, `AddServerIntf.class`, `AddServerIntf.java`, `Socket(TCP)- Assign1`, `Socket2`, `ReverseClient.class`, `ReverseClient.java`, `ReverseImpl.class`, `ReverseImpl.java`, `ReverseModule.idl`, `ReverseServer.class`, and `ReverseServer.java`.
- OUTPUT:** Displays the output of the `ReverseModule` folder.
- PROBLEMS:** Shows 16 errors and warnings, including a warning about deprecated skeletons and several errors related to the `AddServerIntf` interface.
- TERMINAL:** Contains the following commands and output:

```
PS C:\Users\Diksha\Postman\Desktop\BE\Sem8\LP5-DS\Output> java RMI.AddClient localhost 8 9
The first number is: 8
The second number is: 9
The sum is: 17.0
PS C:\Users\Diksha\Postman\Desktop\BE\Sem8\LP5-DS\Output>
```
- STATUS BAR:** Indicates the current file is `main*`, the project is `Launchpad`, and the language is `Java`. It also shows the number of spaces (4) and the encoding (UTF-8).