

Experiment 1 Code:

MyRemoteClass.java

```
public class MyRemoteClass extends
java.rmi.server.UnicastRemoteObject implements MyInterface {

    public MyRemoteClass() throws java.rmi.RemoteException {
        super();
    }

    public String sayHello() throws java.rmi.RemoteException {
        return "Hello, world!";
    }
}
```

MyInterface.java

```
public interface MyInterface extends java.rmi.Remote {

    public String sayHello() throws java.rmi.RemoteException;
}
```

MyClient.java

```
public class MyClient {


    public static void main(String[] args) {
        try {
            MyInterface obj = (MyInterface)
java.rmi.Naming.lookup("//localhost/MyRemoteClass");
            System.out.println(obj.sayHello());
        }
    }
}
```

```
    } catch (Exception e) {  
        e.printStackTrace();  
    }  
}  
}
```

MyServer.java

```
public class MyServer {  
    public static void main(String[] args) {  
        try {  
            MyInterface obj = new MyRemoteClass();  
            java.rmi.registry.LocateRegistry.createRegistry(1099);  
            java.rmi.Naming.rebind("//localhost/MyRemoteClass", obj);  
            System.out.println("MyRemoteClass bound in registry");  
        } catch (Exception e) {  
            System.err.println("MyRemoteClass exception:");  
            e.printStackTrace();  
        }  
    }  
}
```

Output Screenshots:

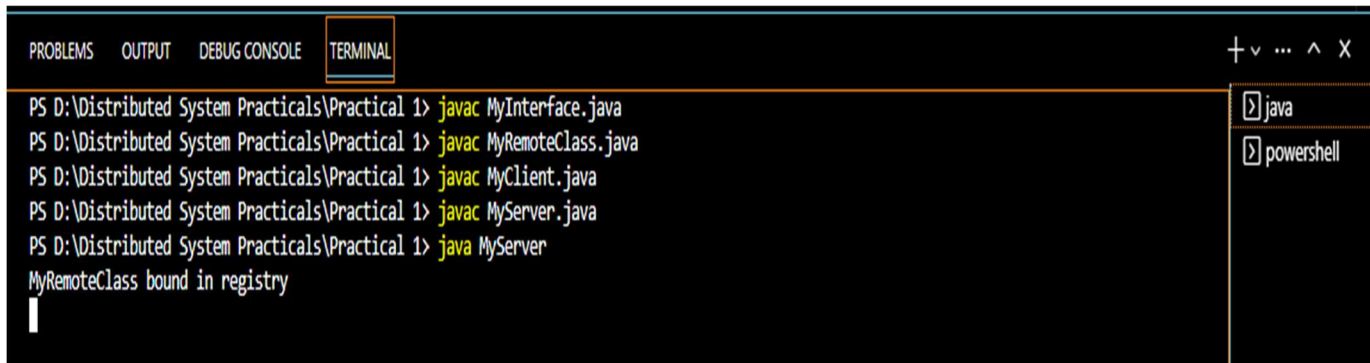


A screenshot of a terminal window with a dark background. The title bar at the top shows 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', and 'TERMINAL' (which is highlighted with a blue border). On the right side of the title bar are icons for window management: a plus sign, a downward arrow, an upward arrow, and a close 'X' icon. The terminal content shows the following commands and output:

```
PS D:\Distributed System Practicals\Practical 1> javac MyInterface.java
PS D:\Distributed System Practicals\Practical 1> javac MyRemoteClass.java
PS D:\Distributed System Practicals\Practical 1> javac MyClient.java
PS D:\Distributed System Practicals\Practical 1> javac MyServer.java
PS D:\Distributed System Practicals\Practical 1> java MyServer
MyRemoteClass bound in registry

```

On the right side of the terminal, there is a vertical list of tabs: 'java' and 'powershell'. The 'java' tab is currently selected, indicated by a small icon to its left.

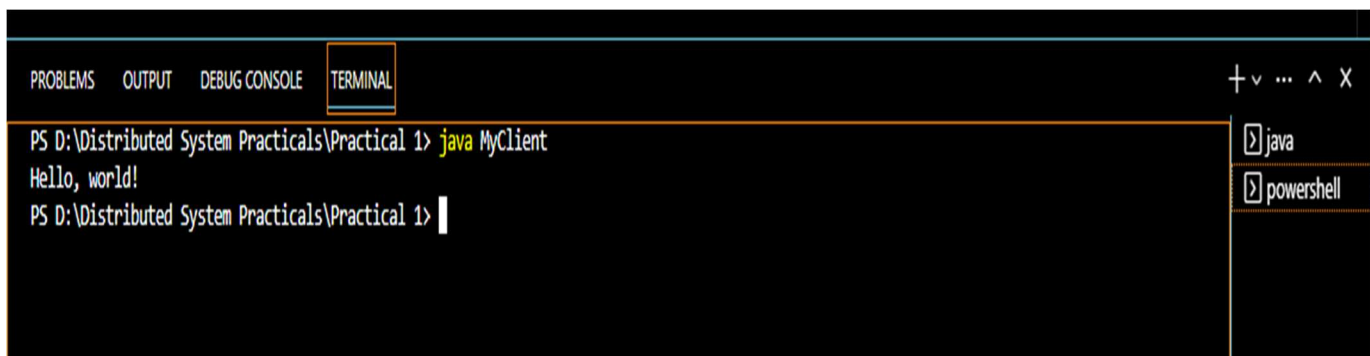

A screenshot of a terminal window with a dark background. The title bar at the top shows 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', and 'TERMINAL' (which is highlighted with a blue border). On the right side of the title bar are icons for window management: a plus sign, a downward arrow, an upward arrow, and a close 'X' icon. The terminal content shows the following commands and output:

```
PS D:\Distributed System Practicals\Practical 1> java MyClient
Hello, world!
PS D:\Distributed System Practicals\Practical 1>

```

On the right side of the terminal, there is a vertical list of tabs: 'java' and 'powershell'. The 'java' tab is currently selected, indicated by a small icon to its left.

Experiment 2 Code:

Hello_World.java

```
import HelloWorldApp.HelloWorld;
import HelloWorldApp.HelloWorldHelper;
import org.omg.CosNaming.*;
import org.omg.CORBA.*;
import org.omg.PortableServer.*;

public class HelloWorldApp {
    public static void main(String[] args) {
        try {
            // Initialize the ORB
            ORB orb = ORB.init(args, null);

            // Create and activate the root POA
            POA rootPOA =
POAHelper.narrow(orb.resolve_initial_references("RootPOA"));
            rootPOA.the_POAManager().activate();

            // Create the HelloWorld servant
            HelloWorldImpl helloWorldImpl = new HelloWorldImpl();

            // Get the object reference for the servant
            org.omg.CORBA.Object ref =
rootPOA.servant_to_reference(helloWorldImpl);
            HelloWorld helloWorldRef = HelloWorldHelper.narrow(ref);

            // Get the root naming context
            org.omg.CORBA.Object objRef =
orb.resolve_initial_references("NameService");
```

```
NamingContextExt ncRef =
NamingContextExtHelper.narrow(objRef);

    // Bind the object reference to the naming context
    NameComponent[] path = ncRef.to_name("HelloWorld");
    ncRef.rebind(path, helloWorldRef);

    // Run the ORB event loop
    orb.run();
} catch (Exception e) {
    e.printStackTrace();
}
}

class HelloWorldImpl extends HelloWorldPOA {
    public String sayHello() {
        return "Hello, world!";
    }
}

class HelloWorldClient {
    public static void main(String[] args) {
        try {
            // Initialize the ORB
            ORB orb = ORB.init(args, null);

            // Get the root naming context
            org.omg.CORBA.Object objRef =
            orb.resolve_initial_references("NameService");
            NamingContextExt ncRef =
            NamingContextExtHelper.narrow(objRef);

            // Resolve the object reference from the naming context
```

```
    HelloWorld helloWorldRef =  
    HelloWorldHelper.narrow(ncRef.resolve_str("HelloWorld"));  
  
    // Invoke the remote method  
    String message = helloWorldRef.sayHello();  
    System.out.println("Server says: " + message);  
} catch (Exception e) {  
    e.printStackTrace();  
}  
}  
}
```

Experiment 3 Code:

ArraySumMPI.java


```
import mpi.MPI;
public class ArraySumMPI {
    public static void main(String[] args) {
        MPI.Init(args);
        int rank = MPI.COMM_WORLD.Rank();
        int size = MPI.COMM_WORLD.Size();
        int[] array = {1, 2, 3, 4, 5, 6, 7, 8, 9, 10}; // Sample array
        int n = array.length;
        int localSum = 0;
        int globalSum = 0;
        // Calculate the local sum
        int startIndex = rank * (n / size);
        int endIndex = (rank == size - 1) ? (n - 1) : (startIndex + (n / size) - 1);
        for (int i = startIndex; i <= endIndex; i++) {
            localSum += array[i];
        }
        // Compute the global sum by reducing local sums
        MPI.COMM_WORLD.Reduce(new int[]{localSum}, 0, new
int[]{globalSum}, 0, 1, MPI.INT, MPI.SUM, 0);
        if (rank == 0) {
            System.out.println("Global sum: " + globalSum);
        }

        MPI.Finalize();
    }
}
```

Experiment 4 Code:

berkeley_algorithm.py

```
def berkeley_algorithm(time_offsets):  
    # Calculate the average time offset  
    avg_offset = sum(time_offsets) / len(time_offsets)  
  
    # Adjust the clocks  
    adjusted_clocks = [time - avg_offset for time in time_offsets]  
  
    return adjusted_clocks  
  
time_offsets = [1.2, 0.5, -0.3, 2.1, -1.0]  
adjusted_clocks = berkeley_algorithm(time_offsets)  
print(adjusted_clocks)
```

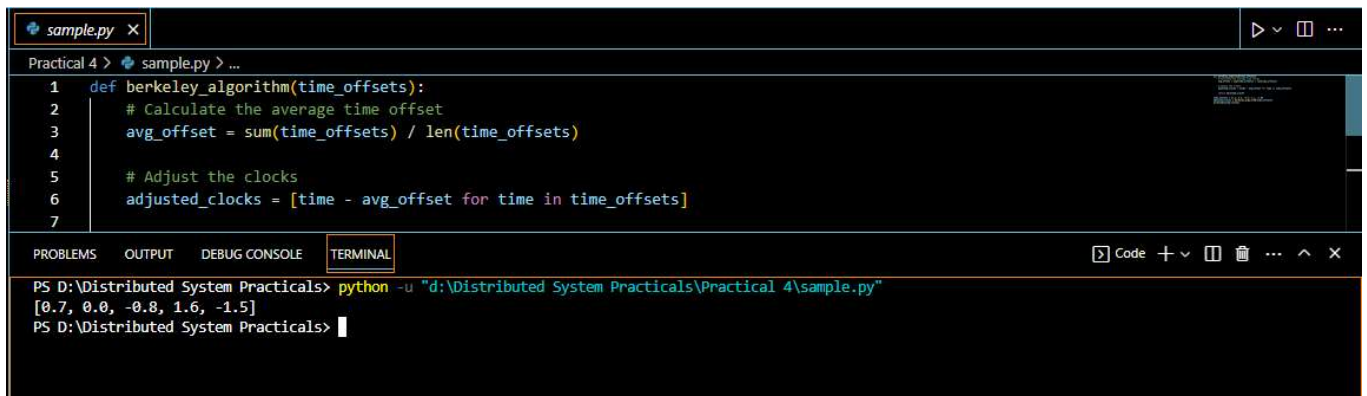

The screenshot shows a code editor window with a file named `sample.py`. The code defines a function `berkeley_algorithm` that takes a list of time offsets, calculates the average offset, and returns a list of adjusted clock times. Below the code editor is a terminal window showing the command `python -u "d:\Distributed System Practicals\Practical 4\sample.py"` being executed, which outputs the result `[0.7, 0.0, -0.8, 1.6, -1.5]`.

```
sample.py x  
Practical 4 > sample.py > ...  
1 def berkeley_algorithm(time_offsets):  
2     # Calculate the average time offset  
3     avg_offset = sum(time_offsets) / len(time_offsets)  
4  
5     # Adjust the clocks  
6     adjusted_clocks = [time - avg_offset for time in time_offsets]  
7  
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL  
PS D:\Distributed System Practicals> python -u "d:\Distributed System Practicals\Practical 4\sample.py"  
[0.7, 0.0, -0.8, 1.6, -1.5]  
PS D:\Distributed System Practicals>
```

Experiment 5 Code:

token_ring.py

```
class TokenRing:
    def __init__(self, num_nodes):
        self.num_nodes = num_nodes
        self.nodes = [None] * num_nodes

    def set_node(self, node_id, data):
        self.nodes[node_id] = data

    def run(self):
        token = self.nodes
        current_node = 0

        while True:
            # Check if the token is received
            if token:
                print(f"Node {current_node}: Received token with data '{token}'")

            # Process the token or perform some action
            # In this example, we print the data of the current node
            print(f"Node {current_node}: Processing data '{self.nodes[current_node]}'")

            # Pass the token to the next node
            next_node = (current_node + 1) % self.num_nodes
            token = self.nodes[next_node]
            self.nodes[next_node] = None

            # Break the loop if the token completes a full rotation
            if current_node == 0 and token is None:
```

```
break
```

```
# Move to the next node  
current_node = next_node
```

```
# Create an instance of TokenRing with 4 nodes  
token_ring = TokenRing(4)
```

```
# Set the data for each node  
token_ring.set_node(0, "Data 1")  
token_ring.set_node(1, "Data 2")  
token_ring.set_node(2, "Data 3")  
token_ring.set_node(3, "Data 4")
```

```
# Run the token ring algorithm  
token_ring.run()
```

```
PS D:\Distributed System Practicals> python -u "d:\Distributed System Practicals\Practical 5\sample.py"  
Node 0: Received token with data ['Data 1', 'Data 2', 'Data 3', 'Data 4']  
Node 0: Processing data 'Data 1'  
Node 1: Received token with data 'Data 2'  
Node 1: Processing data 'None'  
Node 2: Received token with data 'Data 3'  
Node 2: Processing data 'None'  
Node 3: Received token with data 'Data 4'  
Node 3: Processing data 'None'  
Node 0: Received token with data 'Data 1'  
Node 0: Processing data 'None'
```

Experiment 6 Code:

bully.py

```
class BullyAlgorithm:
    def __init__(self, nodeId, nodes):
        self.nodeId = nodeId
        self.nodes = nodes

    def startElection(self):
        highestNodeId = self.nodeId

        # Send "Coordinator Election" messages to all higher ID nodes
        for i in range(self.nodeId + 1, len(self.nodes) + 1):
            if i in self.nodes:
                print(f"Node {self.nodeId} sends Coordinator Election message to Node {i}")

        # Wait for "OK" messages from all higher ID nodes
        for i in range(self.nodeId + 1, len(self.nodes) + 1):
            if i in self.nodes:
                print(f"Node {self.nodeId} waiting for OK message from Node {i}")

        # Check if there is a higher ID node that responded
        for i in range(self.nodeId + 1, len(self.nodes) + 1):
            if i in self.nodes:
                print(f"Node {self.nodeId} received OK message from Node {i}")
                highestNodeId = i

        # If there is a higher ID node, send "Coordinator" message to that node
        if highestNodeId != self.nodeId:
```

```
print(f"Node {self.nodeId} sends Coordinator message to Node  
{highestNodeId}")
```

```
# Otherwise, become the coordinator
```

```
else:
```

```
print(f"Node {self.nodeId} is the new coordinator")
```

```
# Create a list of node IDs
```


```
nodes = [1, 2, 3, 4, 5]
```

```
# Create an instance of BullyAlgorithm with a specific node ID and the list  
of nodes
```

```
bully = BullyAlgorithm(3, nodes)
```

```
# Start the election process
```

```
bully.startElection()
```

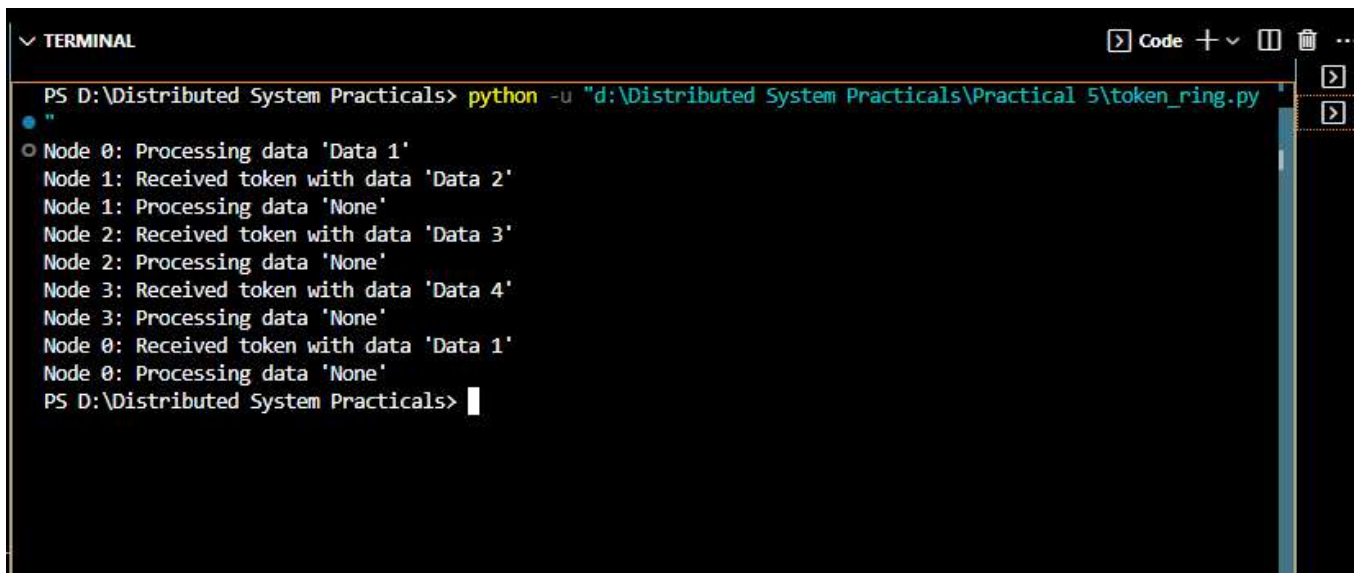

```
▼ TERMINAL
PS D:\Distributed System Practicals> python -u "d:\Distributed System Practicals\Practical 5\token_ring.py"
"
○ Node 0: Processing data 'Data 1'
Node 1: Received token with data 'Data 2'
Node 1: Processing data 'None'
Node 2: Received token with data 'Data 3'
Node 2: Processing data 'None'
Node 3: Received token with data 'Data 4'
Node 3: Processing data 'None'
Node 0: Received token with data 'Data 1'
Node 0: Processing data 'None'
PS D:\Distributed System Practicals>
```

Experiment 7 Code:

(server code)

Sample1.py

```
from flask import Flask, jsonify, request
app = Flask(__name__)
@app.route('/add', methods = ['POST'])
def add():
    data = request.get_json()
    a = data['a']
    b = data['b']

    result = a + b
    answer = jsonify({'result':result})
    return answer

if __name__ == '__main__':
    app.run()
```


(client code)

Sample2.py

```
import requests
data = {
    'a':10,
    'b':20
}

response = requests.post('http://localhost:5000/add', json = data)
result = response.json()
print(result['result'])
```

Output Screenshots

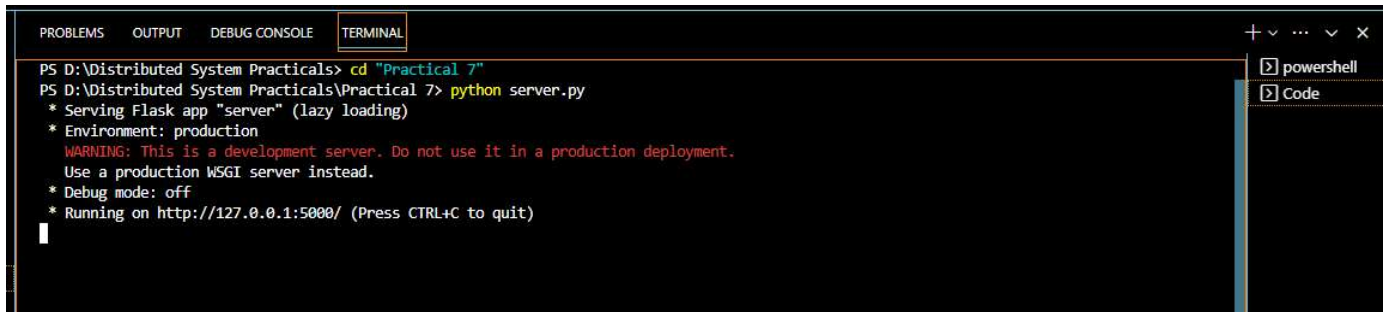

```
PS D:\Distributed System Practicals> cd "Practical 7"
PS D:\Distributed System Practicals\Practical 7> python server.py
* Serving Flask app "server" (lazy loading)
* Environment: production
  WARNING: This is a development server. Do not use it in a production deployment.
  Use a production WSGI server instead.
* Debug mode: off
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
```



```
PS D:\Distributed System Practicals> cd "Practical 7"
PS D:\Distributed System Practicals\Practical 7> python client.py
30
PS D:\Distributed System Practicals\Practical 7>
```

Steps to run the practical:

If necessary install the Flask module using: `pip install flask`

The first step is to run the `server.py` file on a separate terminal.

1. So, open a terminal and type:

- `python server.py` (for windows)
- `python3 server.py` (for linux)

2. Then open another terminal in the same directory in which both the code file lie. Type:

- `python client.py` (for windows)
- `python3 client.py` (for linux)