




### Centred chars in default char set (ISO Latin1)

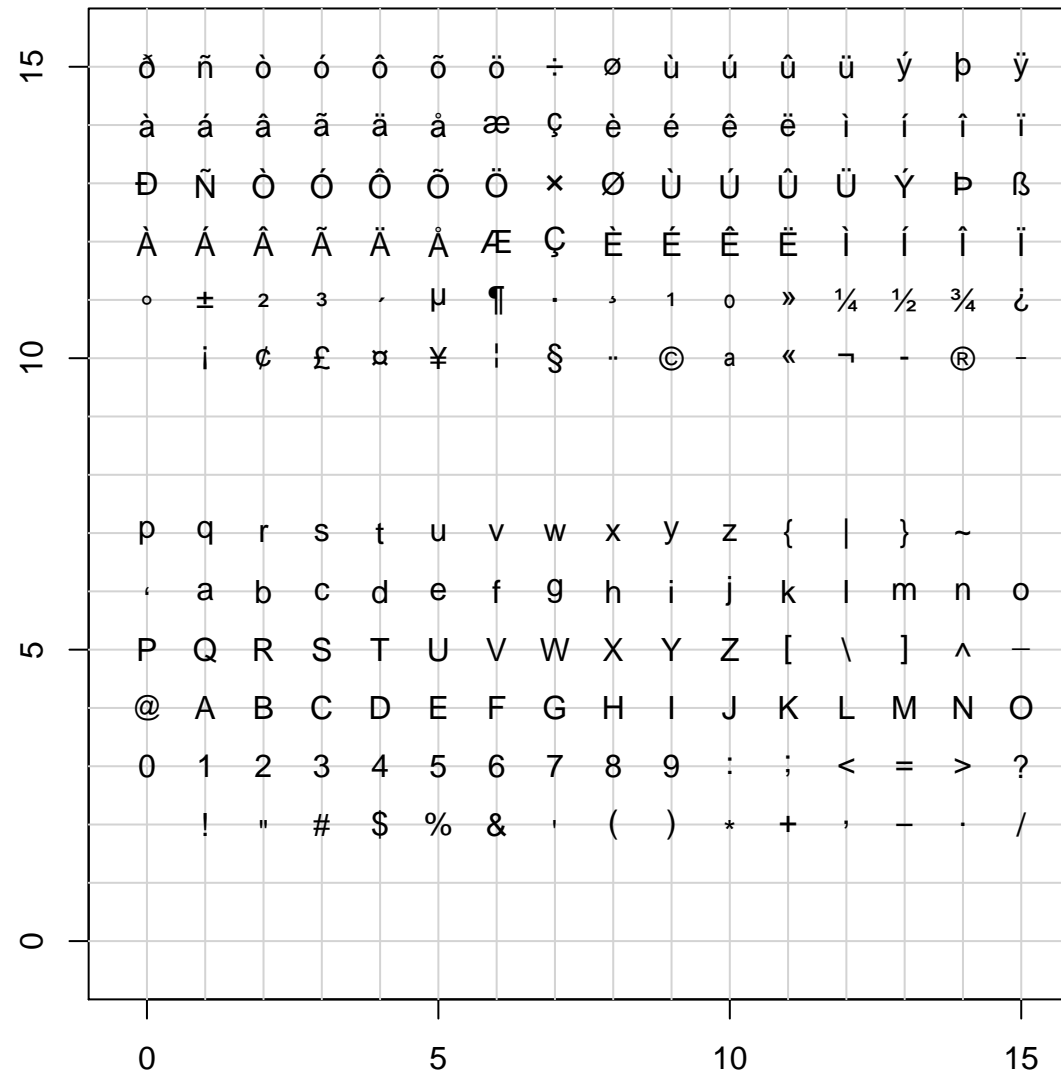



Death Rates in Virginia – 1940

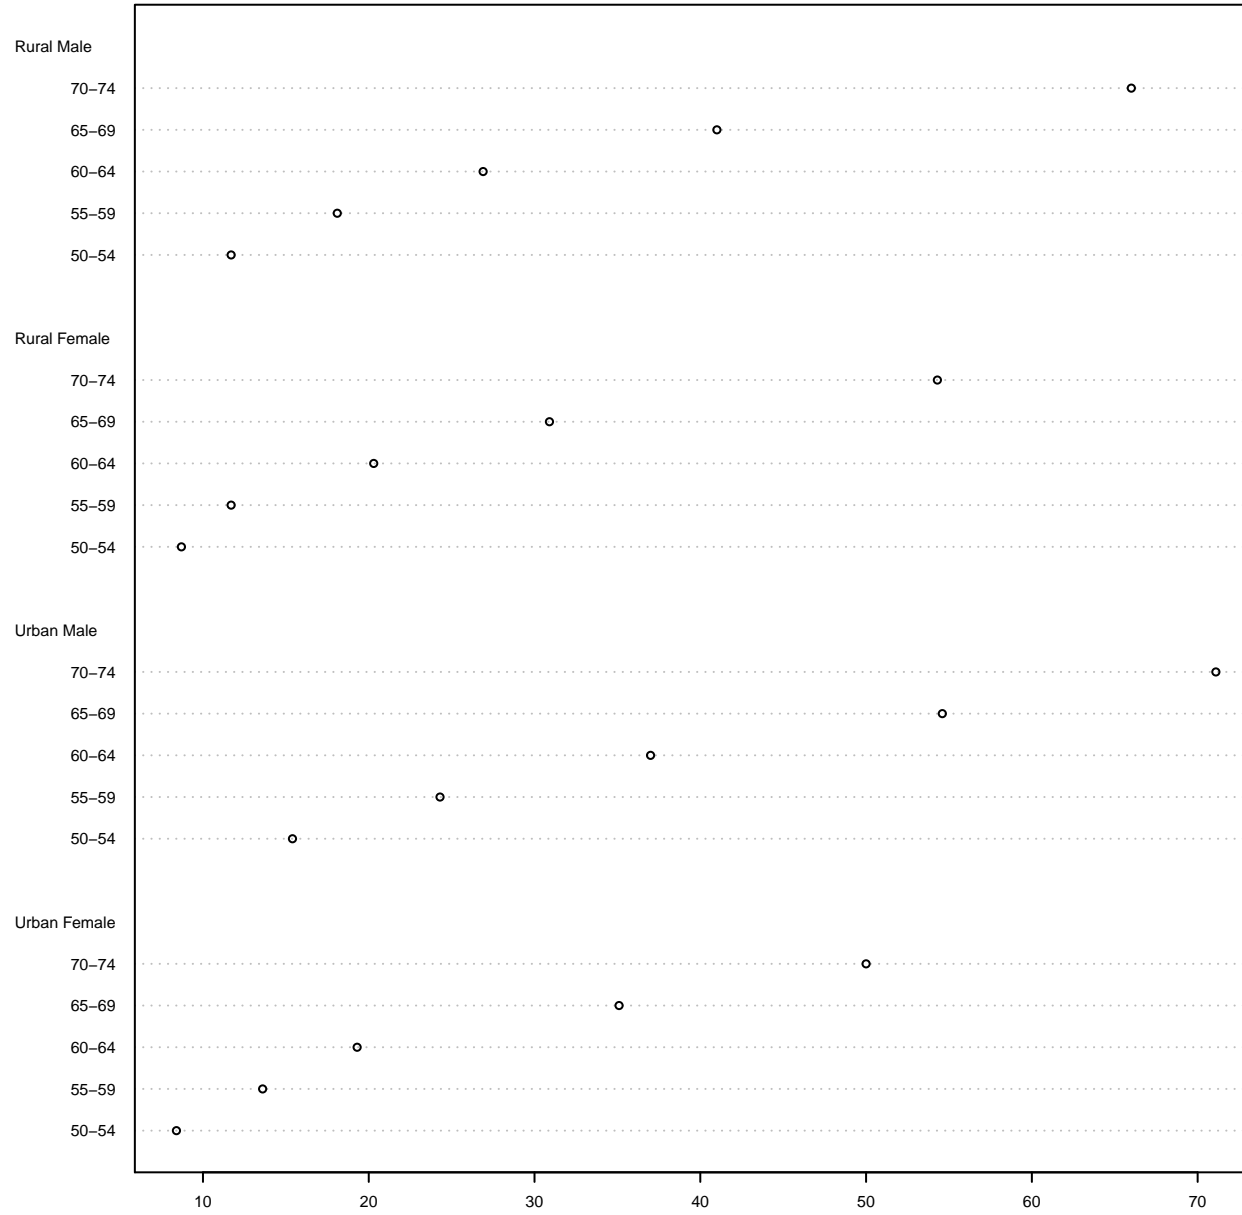



# Death Rates in Virginia – 1940

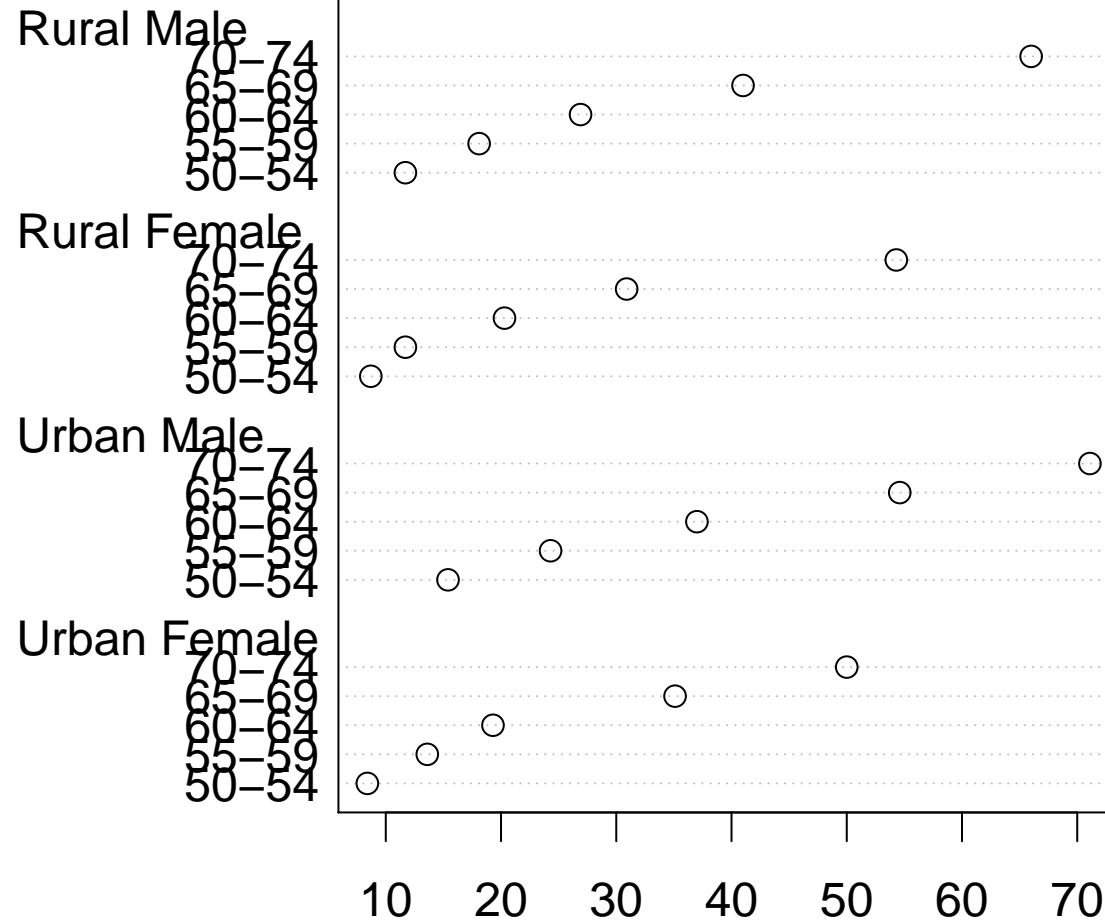

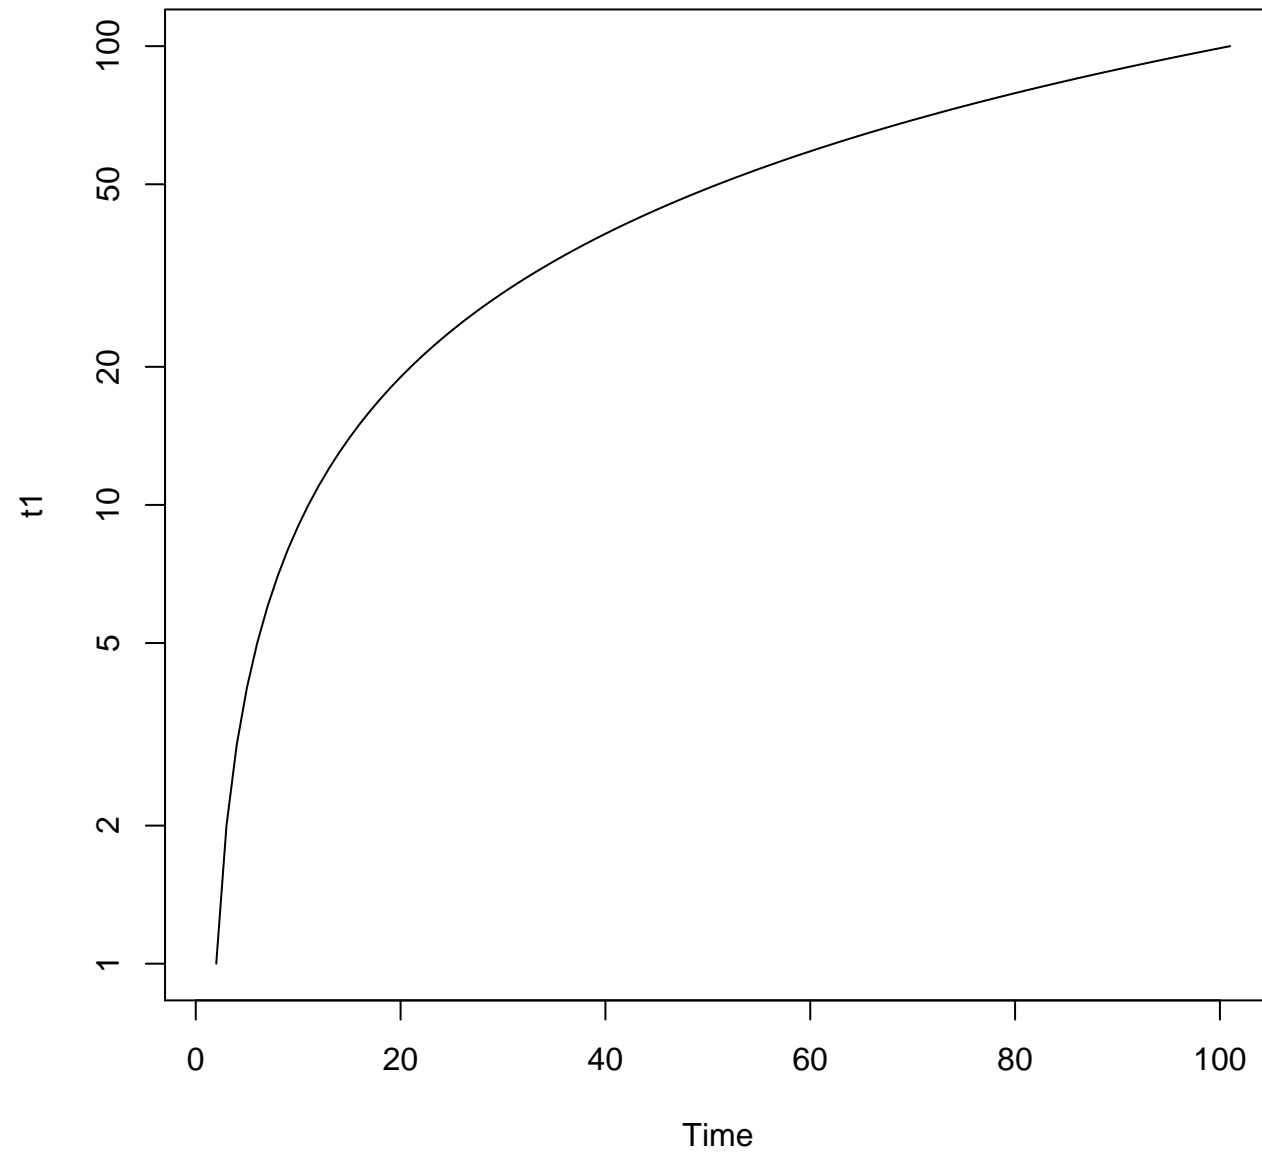

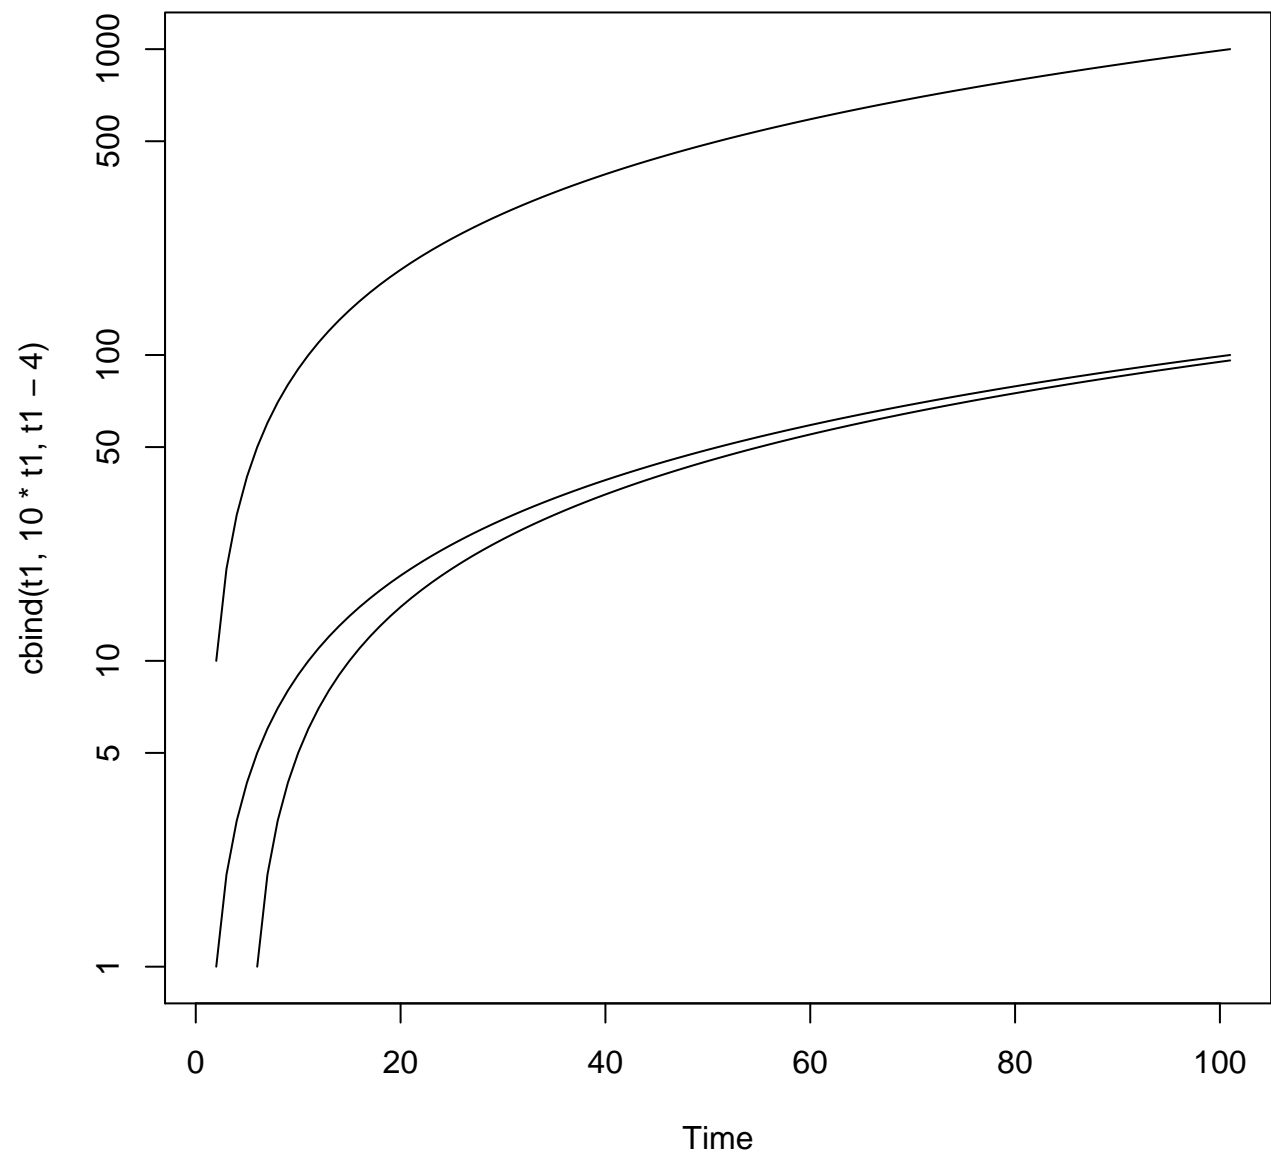


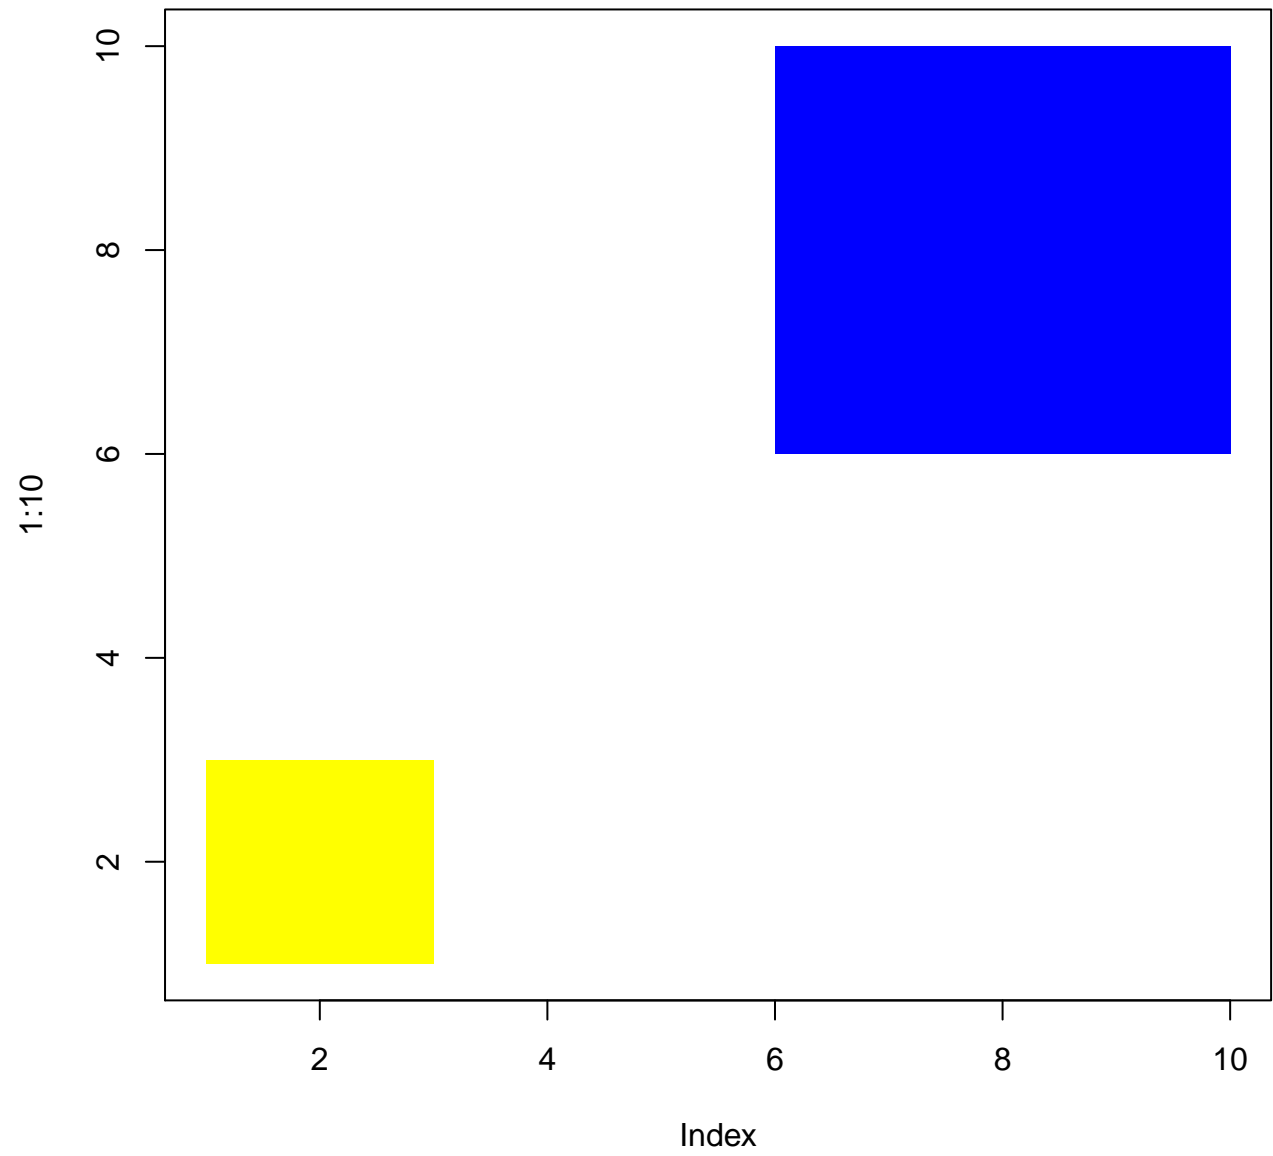

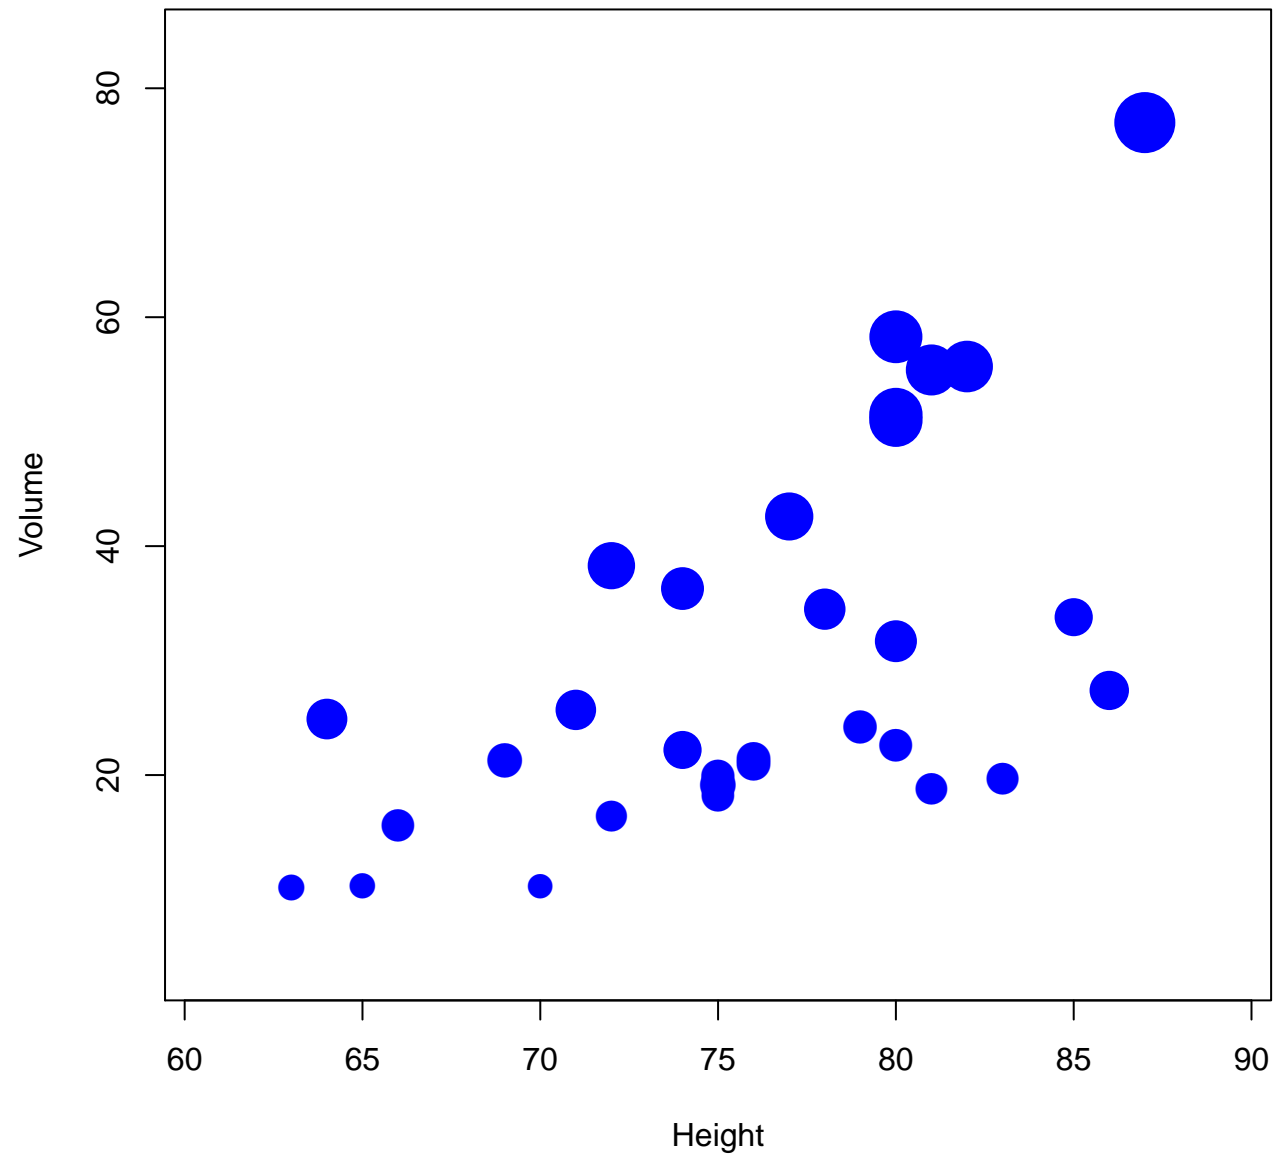





**mgp < 0: all ticks and labels inside 'frame'**

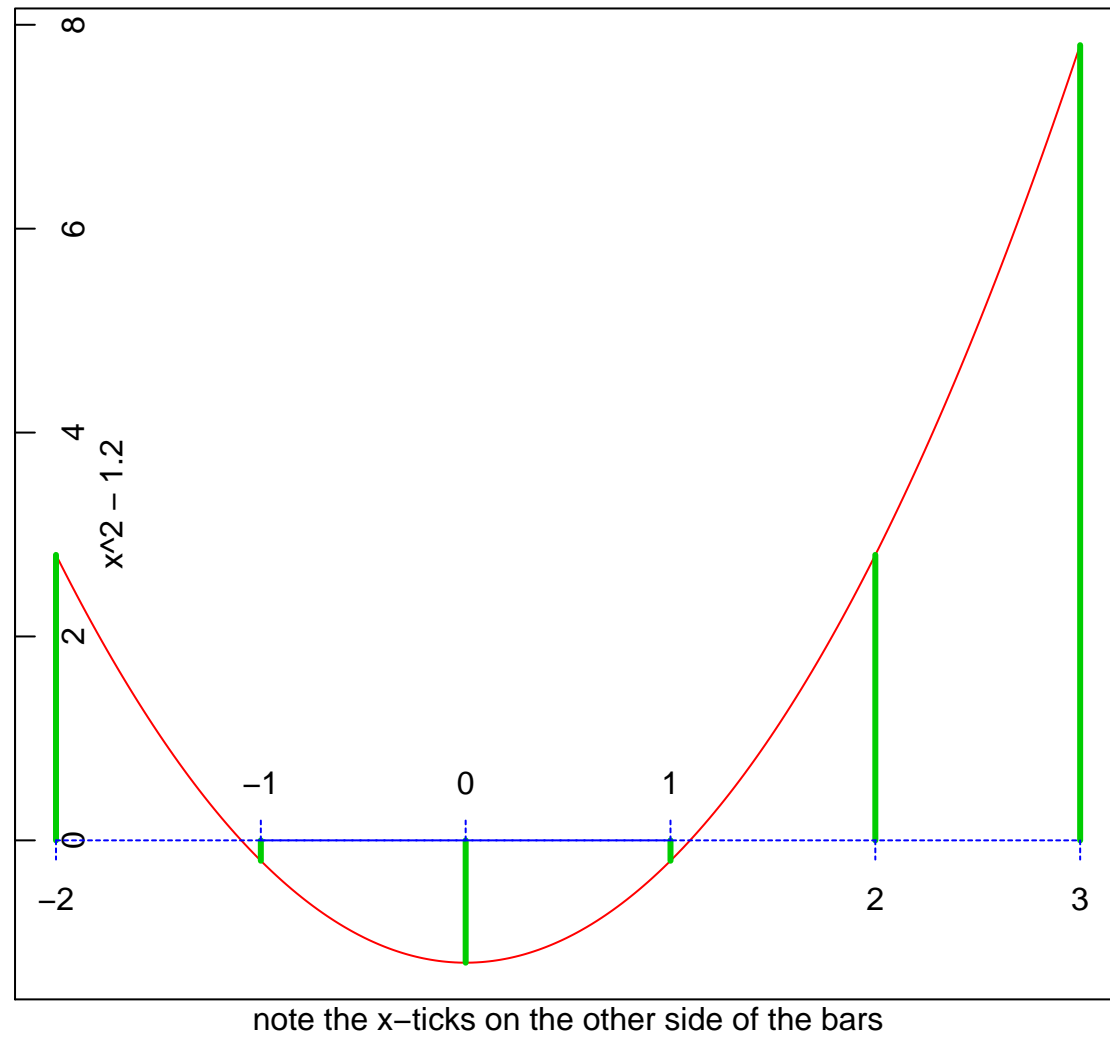


UCBAdmissions

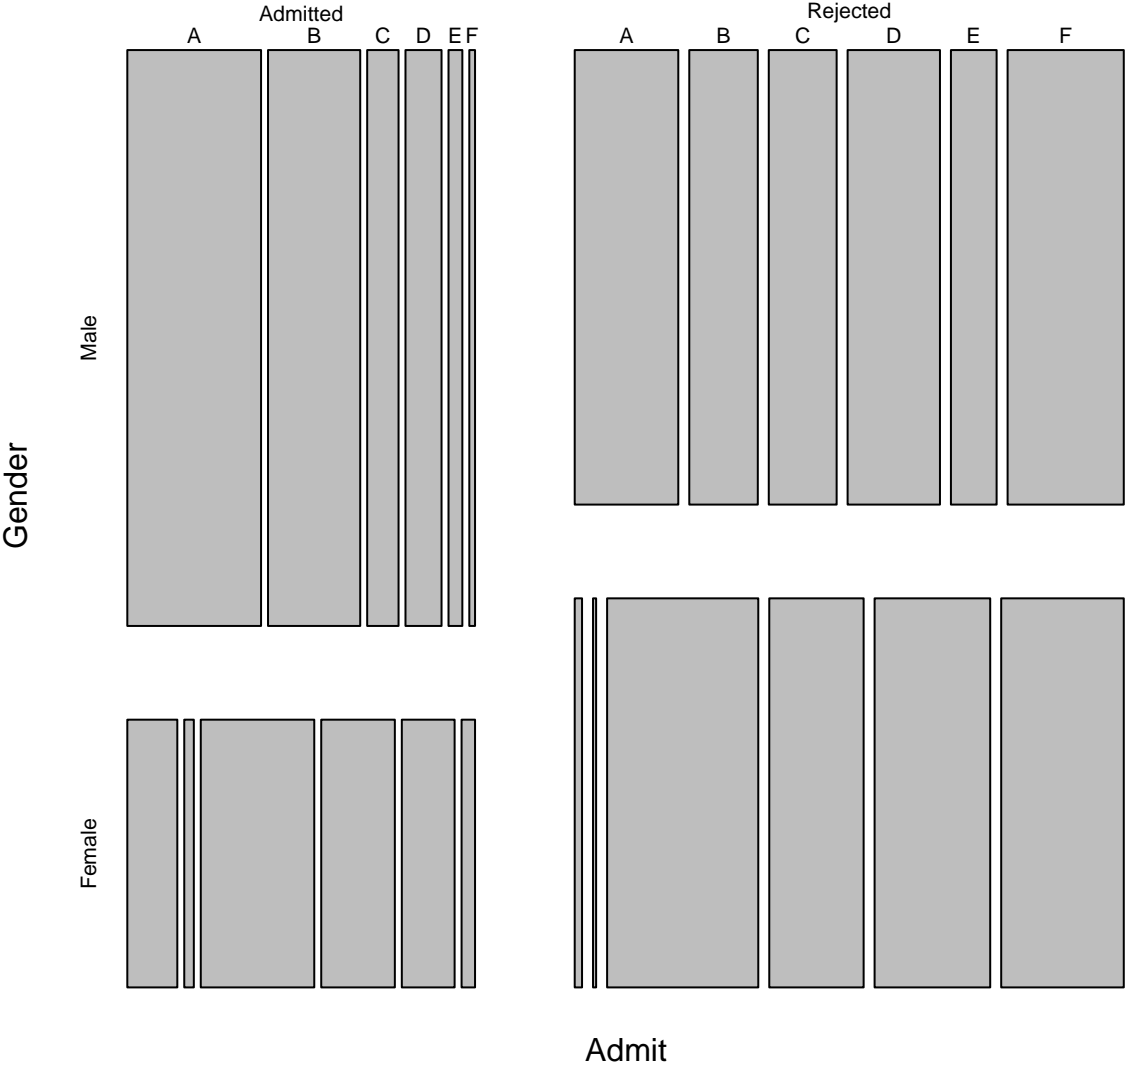



UCBAdmissions

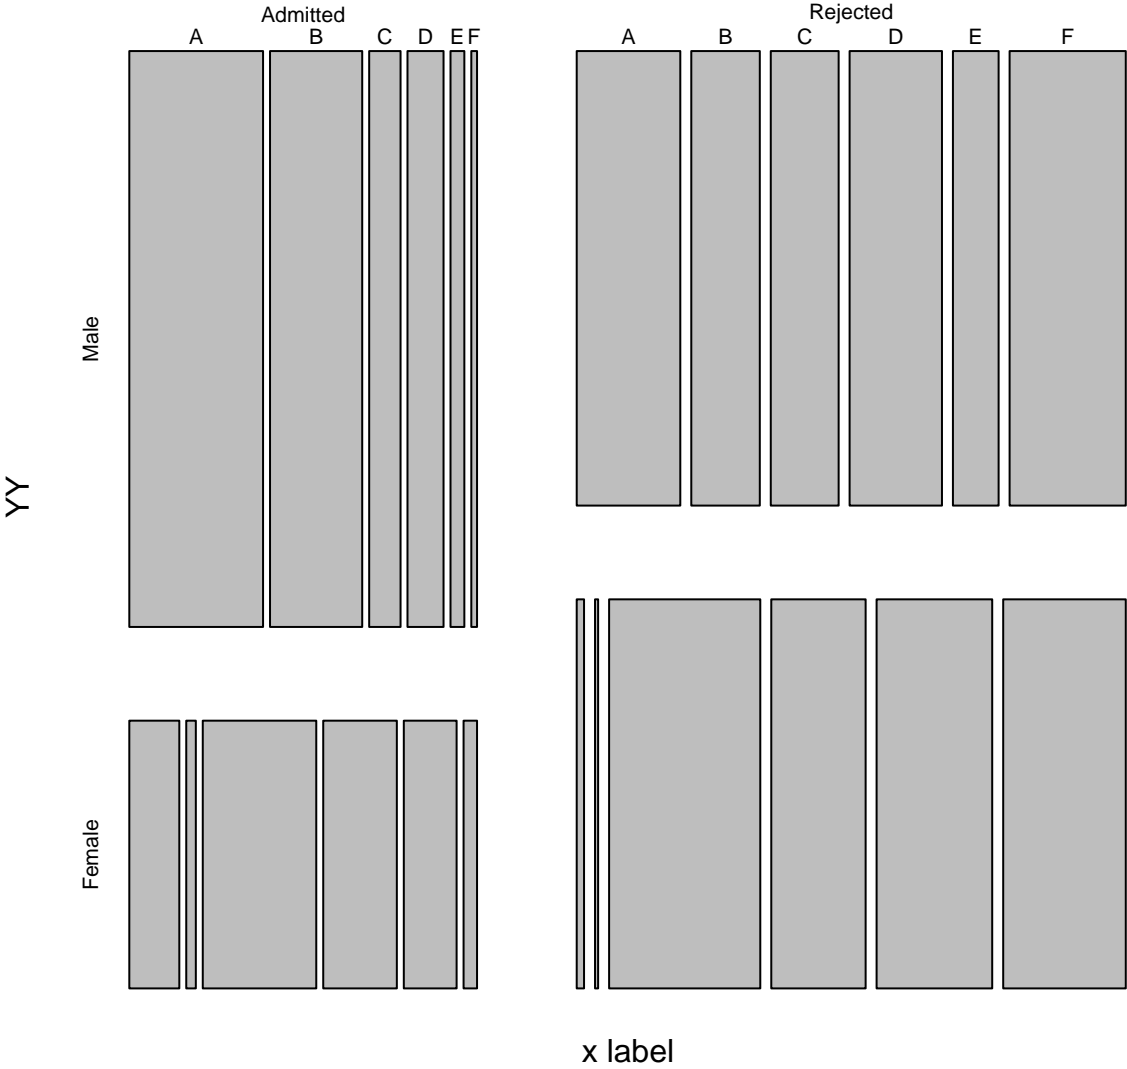



```
tt <- table(c(rep(0, 7), rep(1, 4), rep(5, 3)))
```



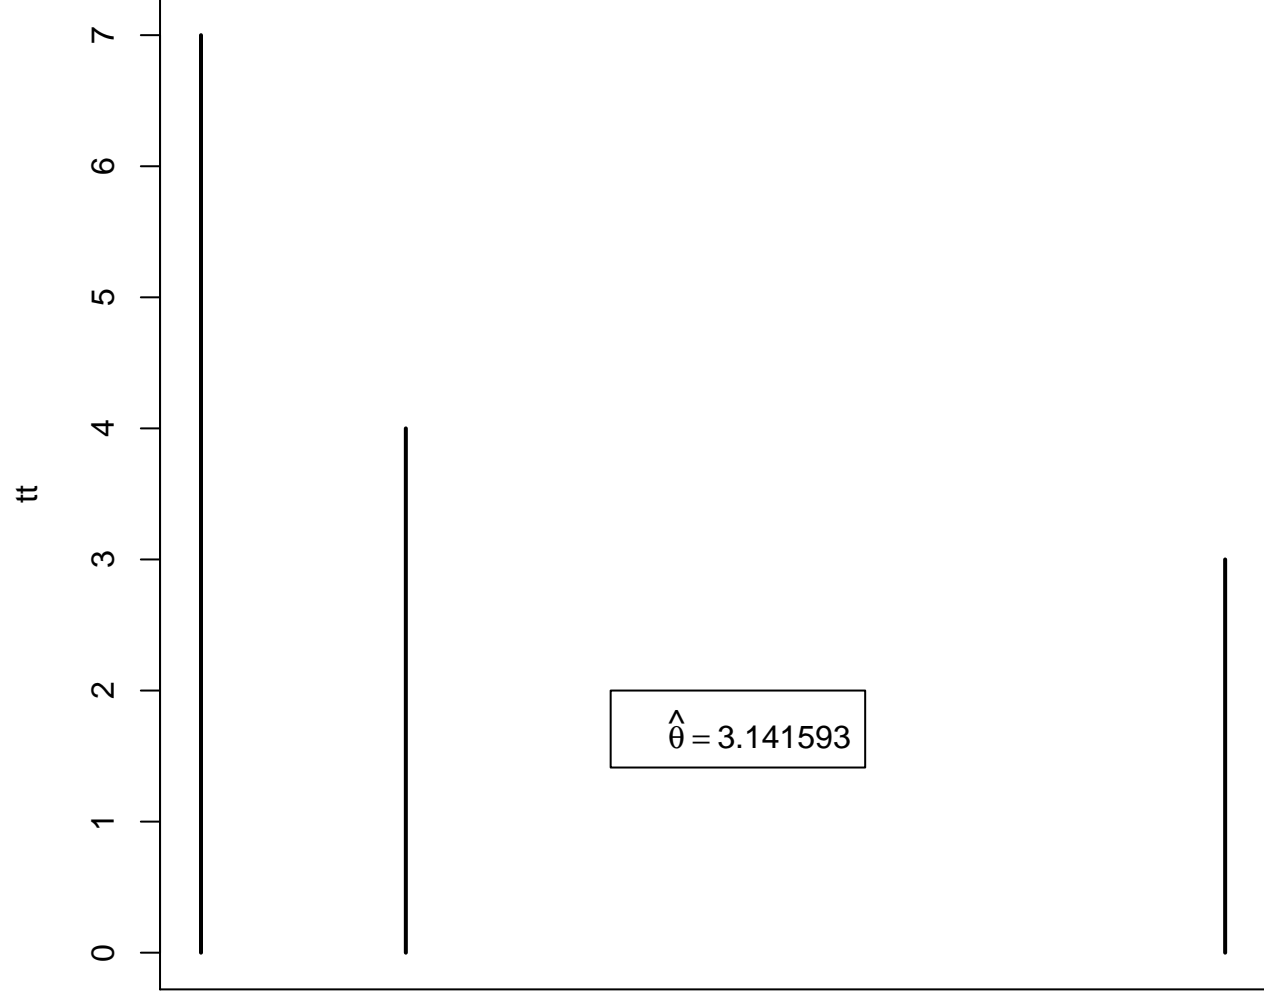


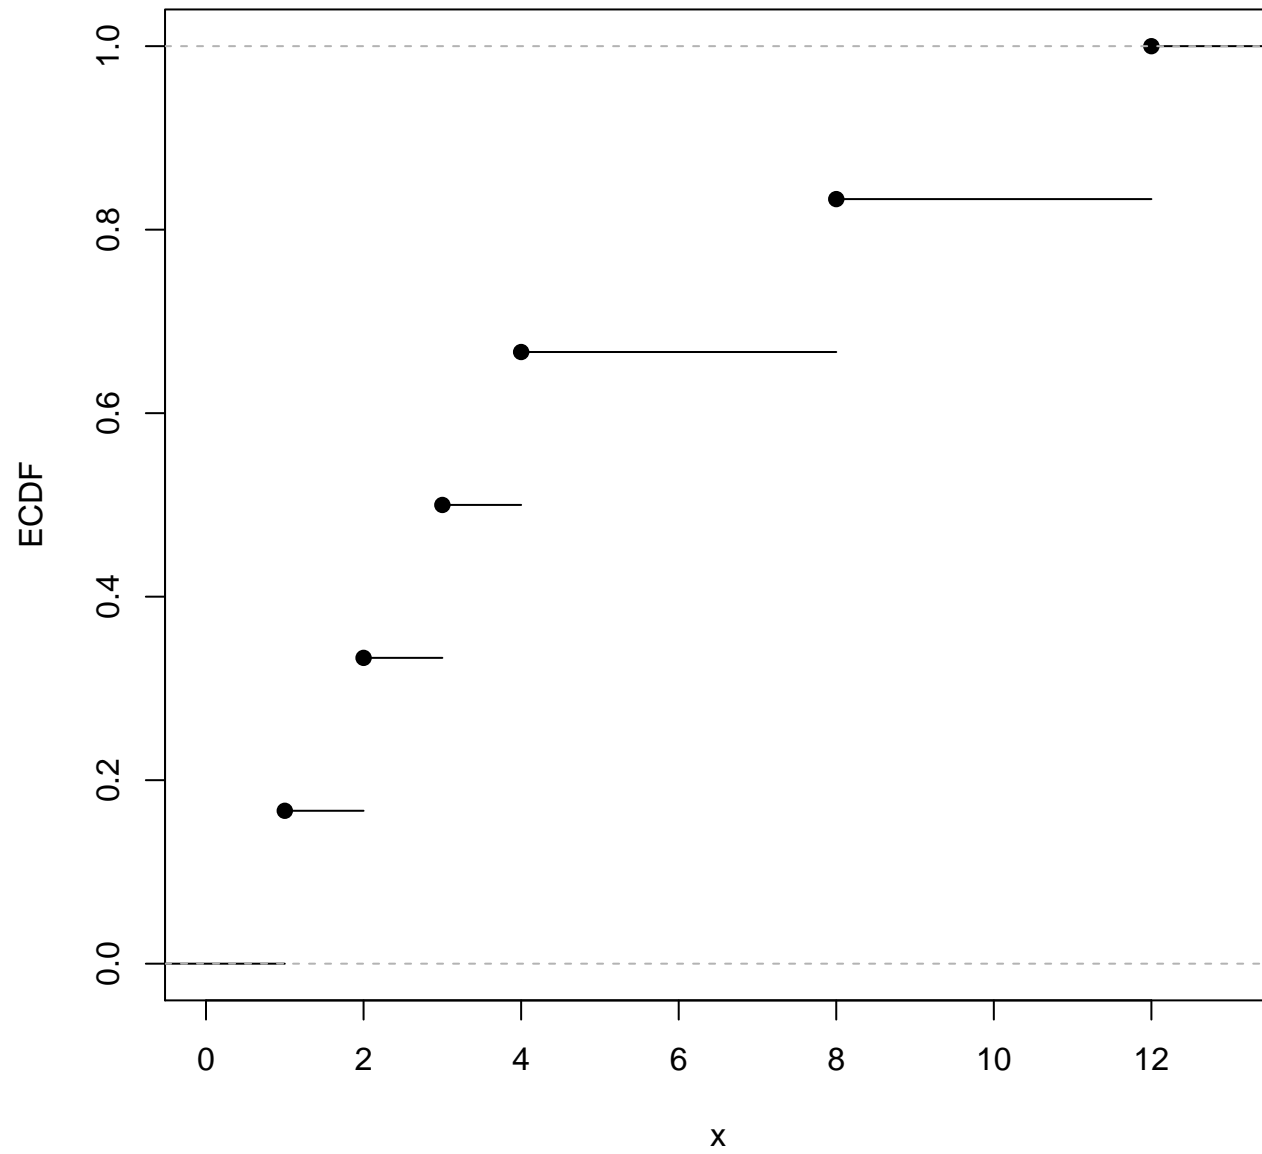


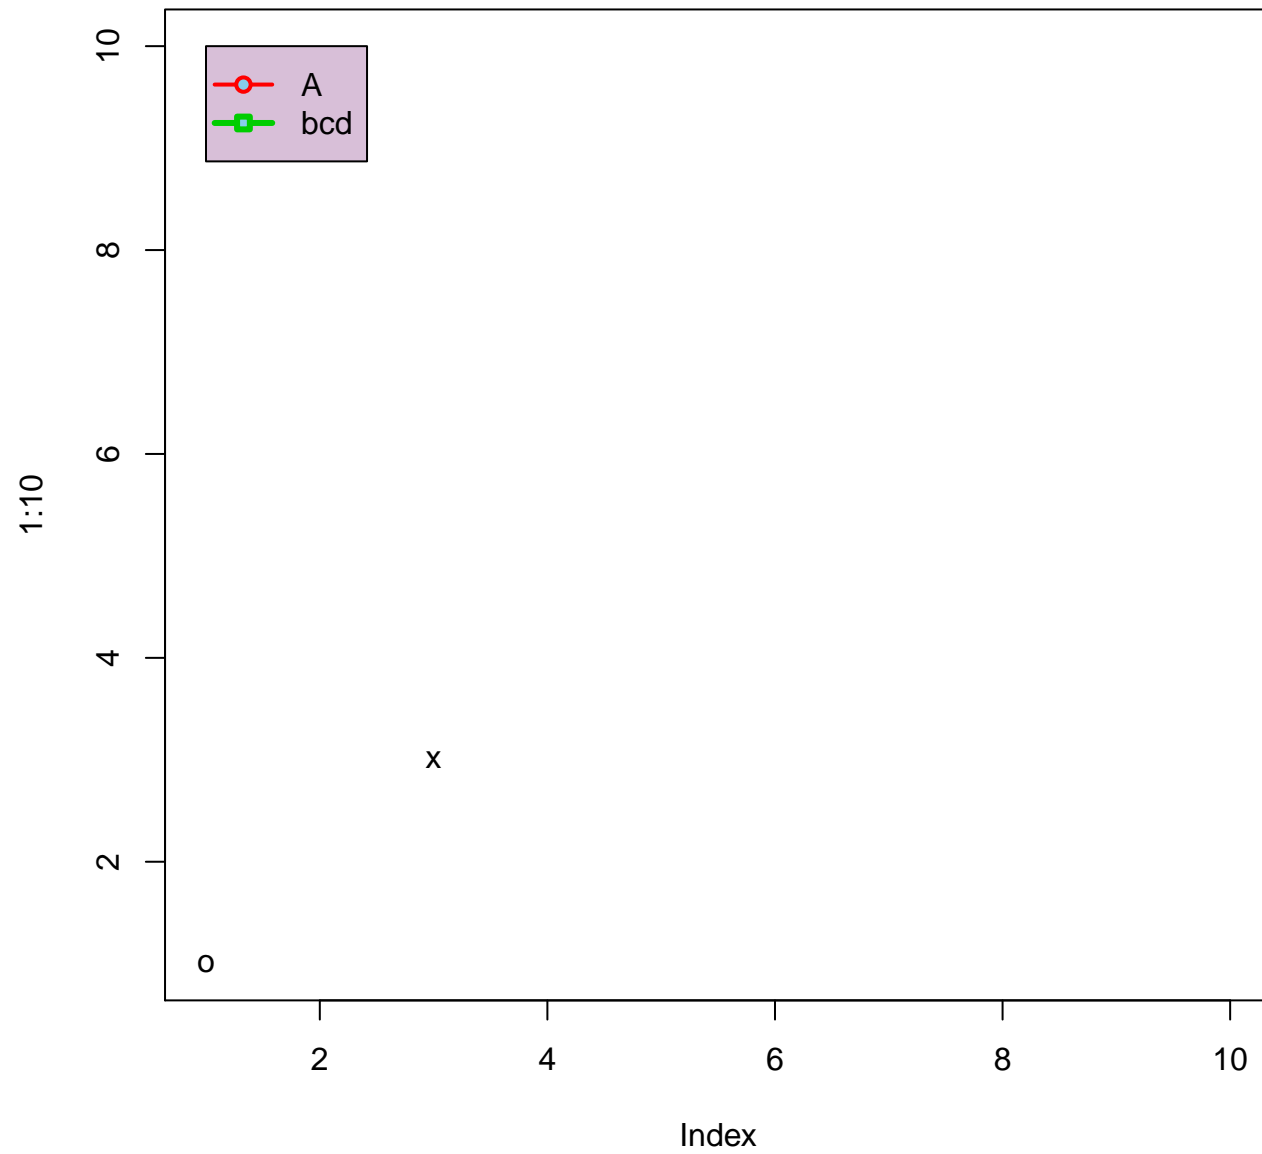

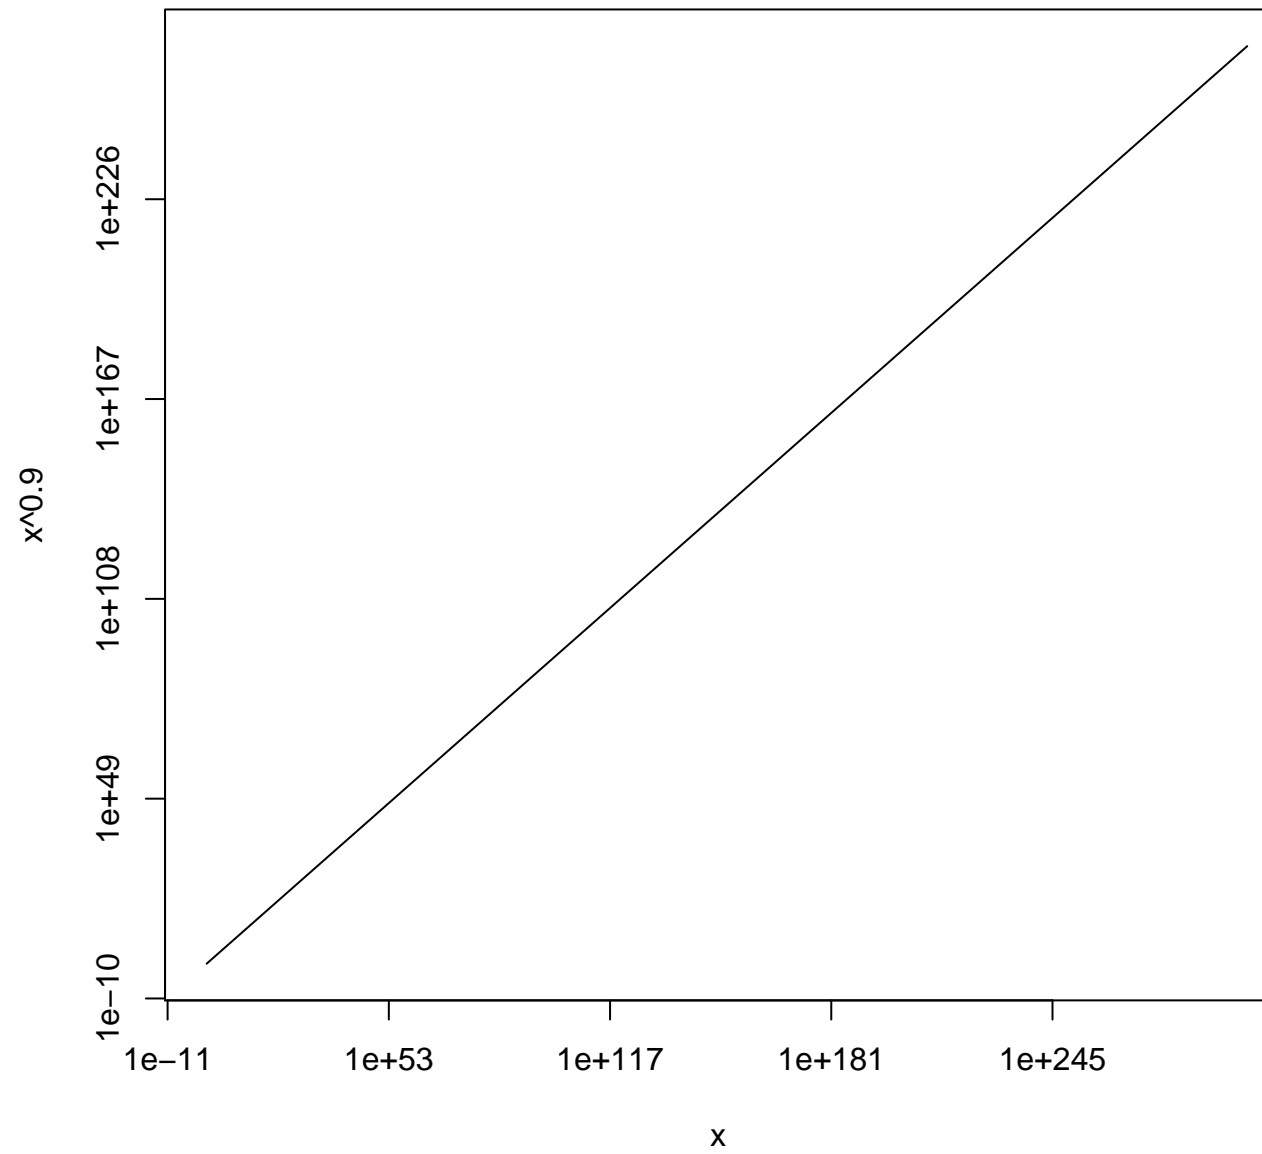




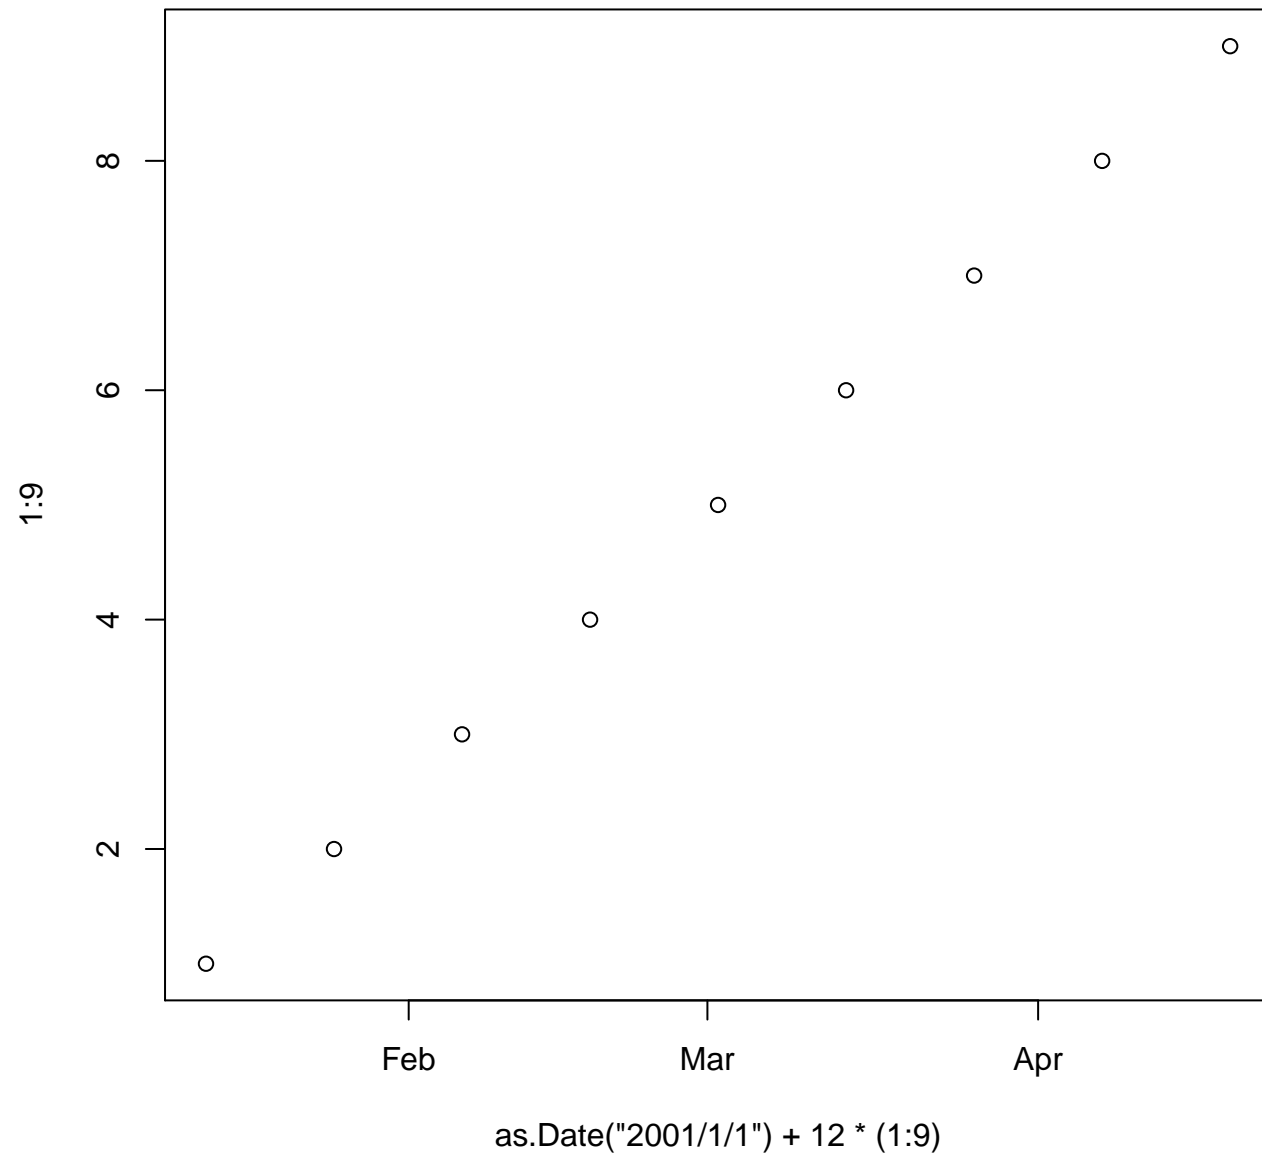

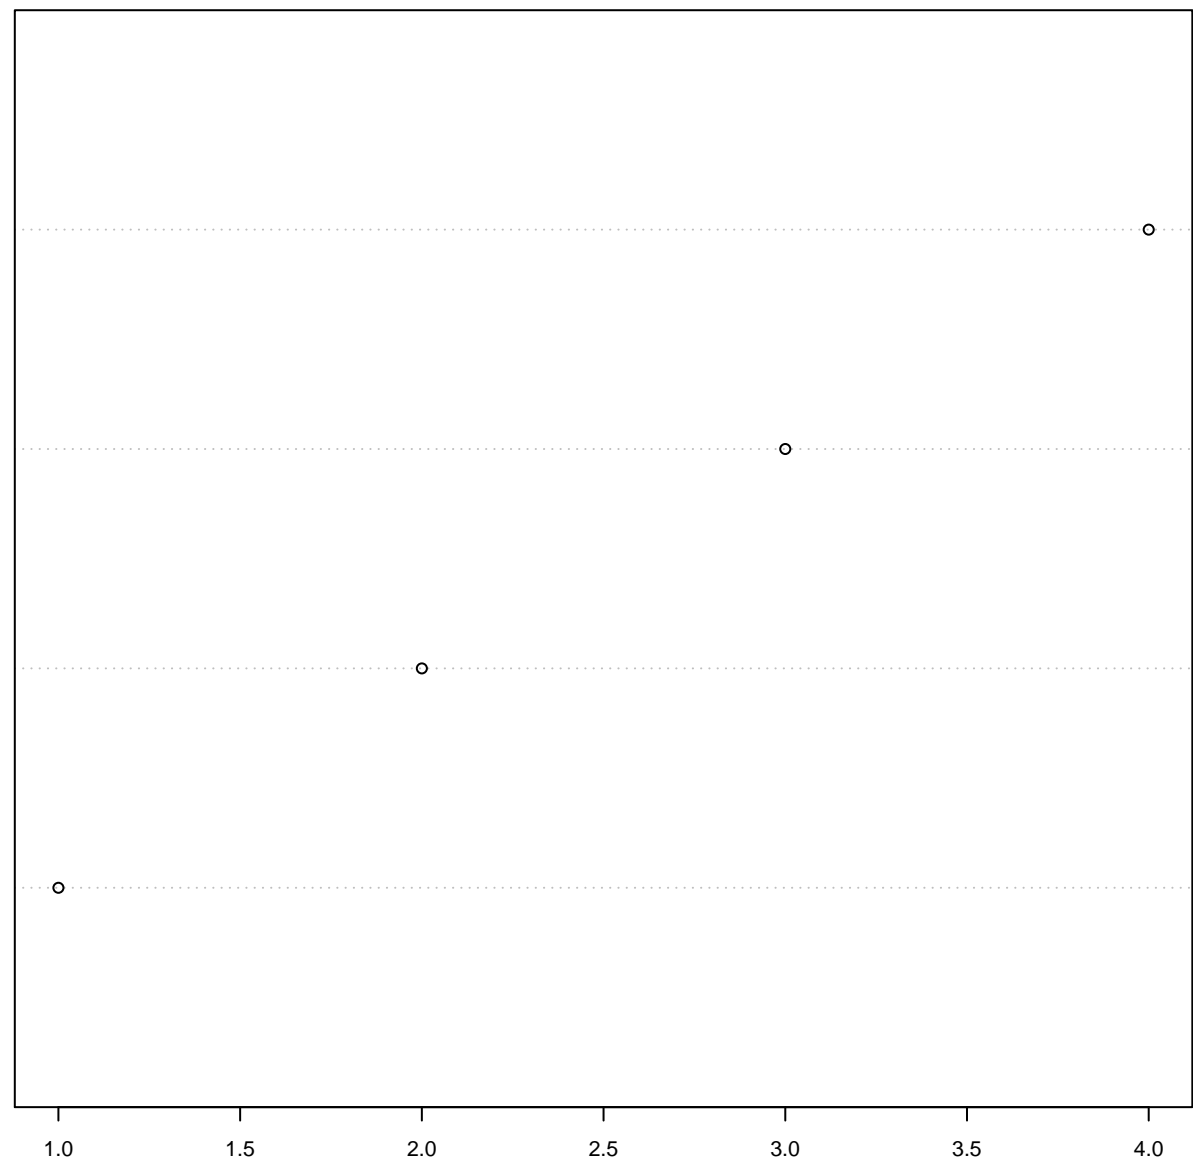


cos

x

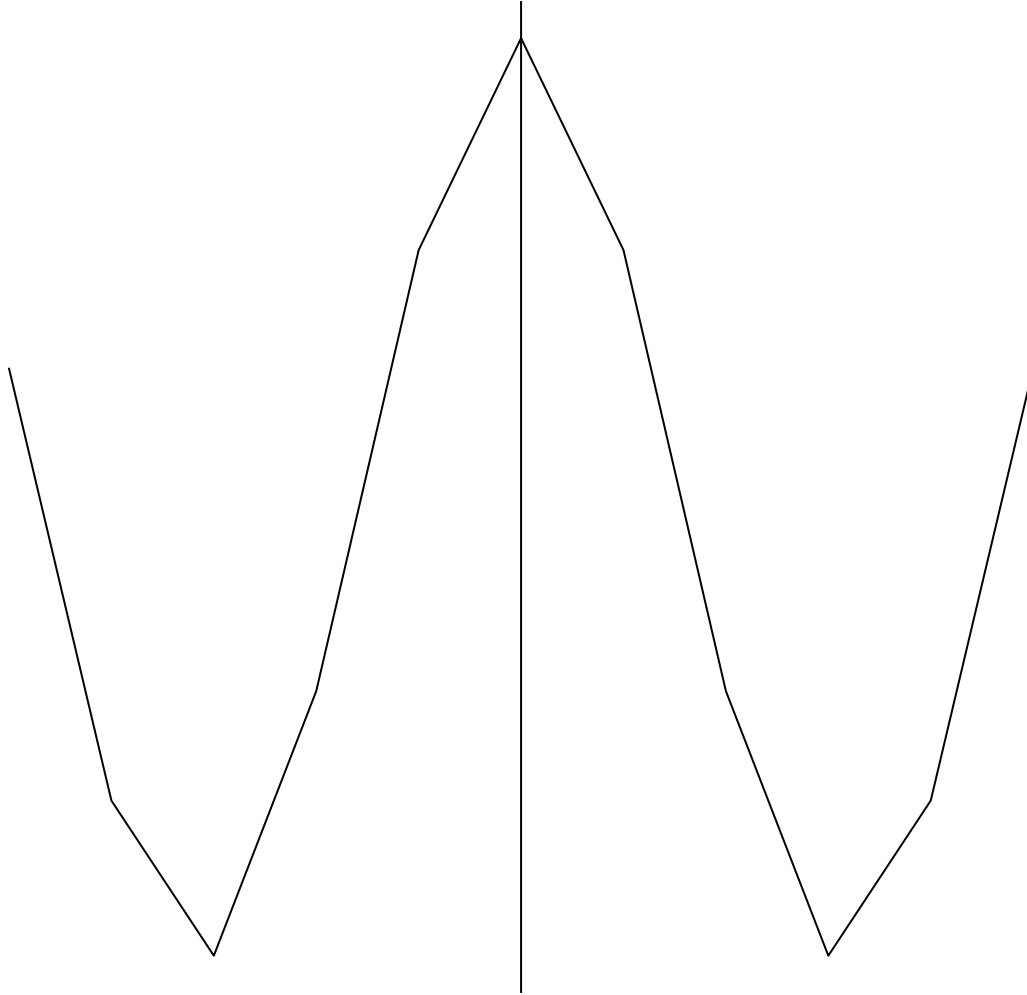


sin

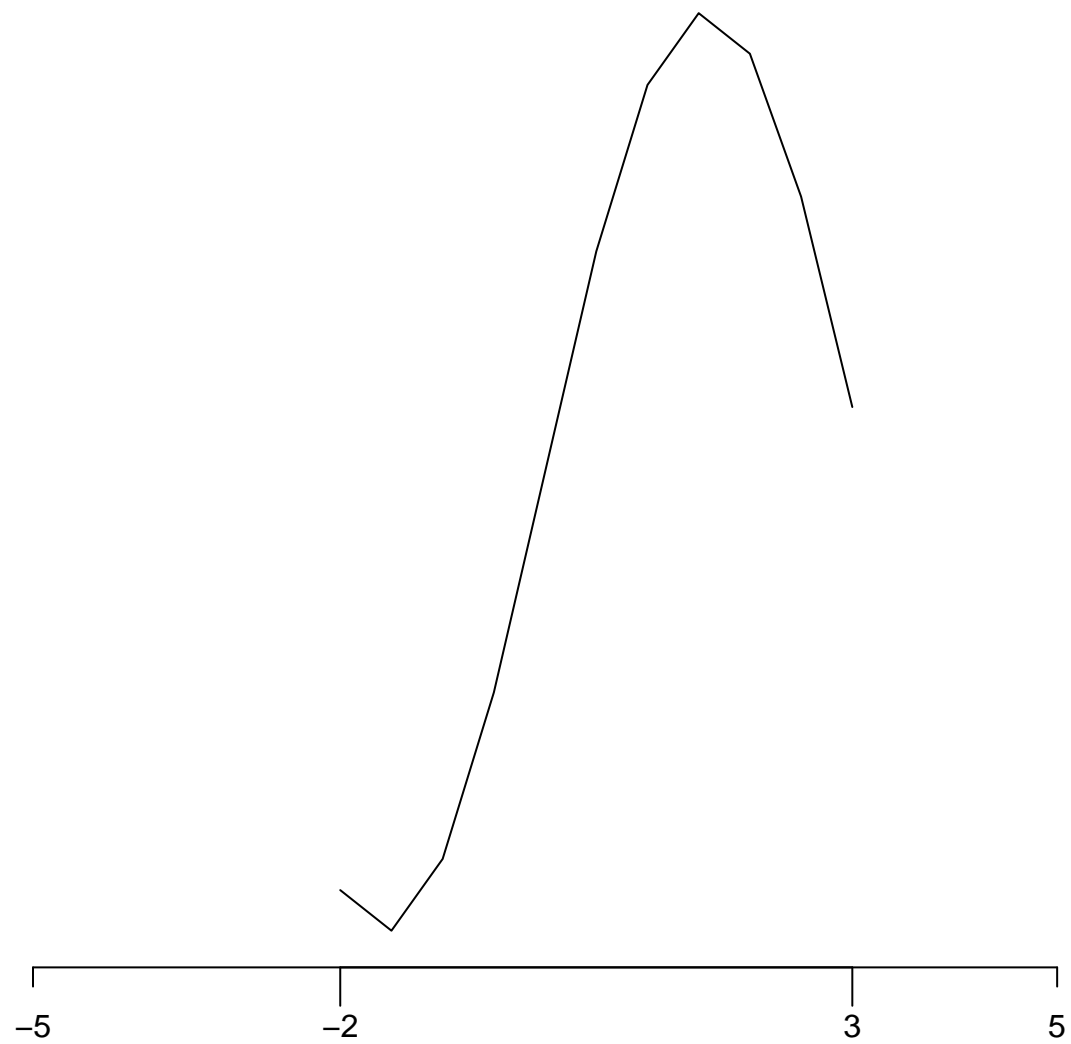


cos


x

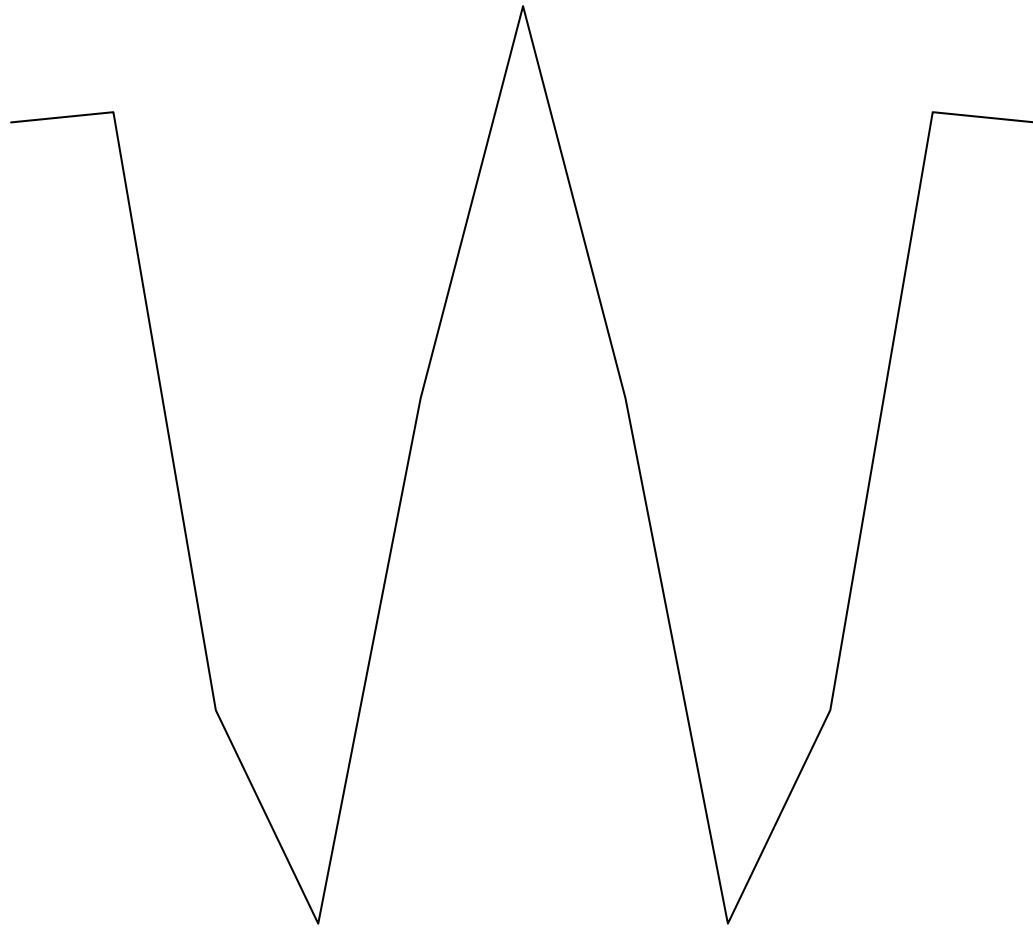


Cosine  $\cos(x)$


x

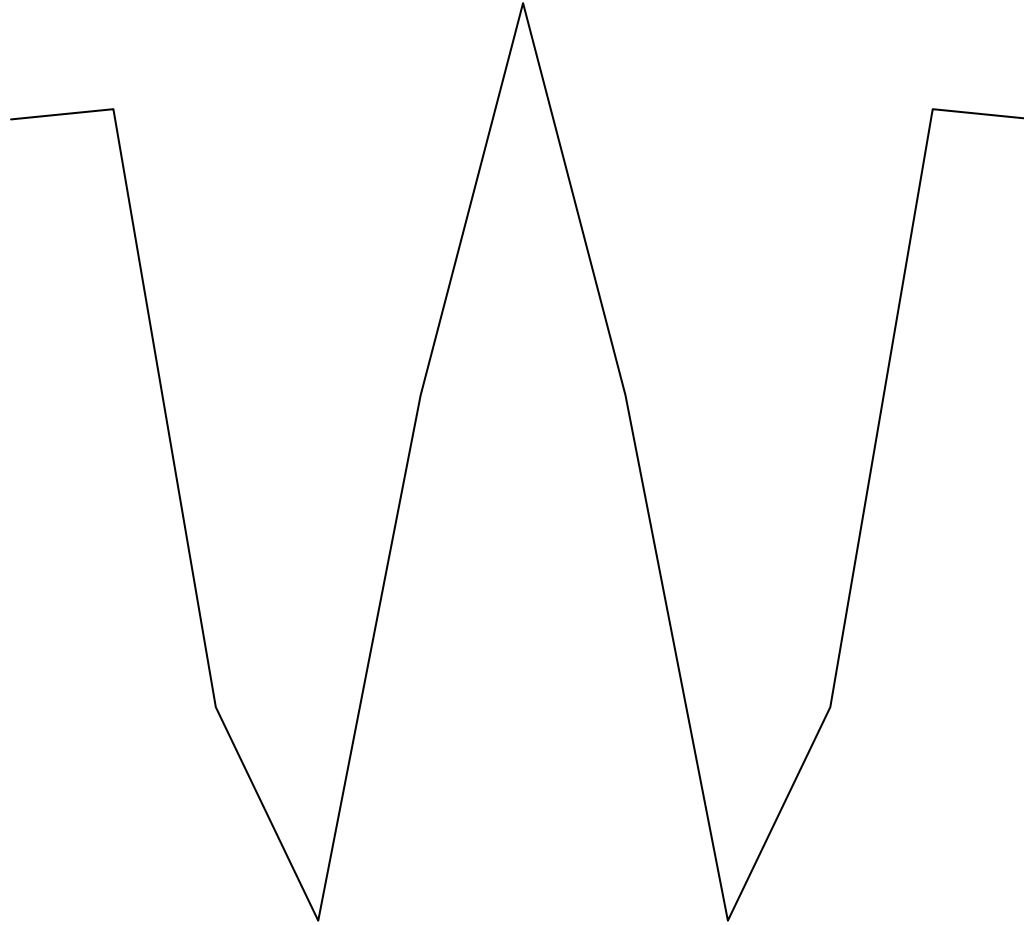

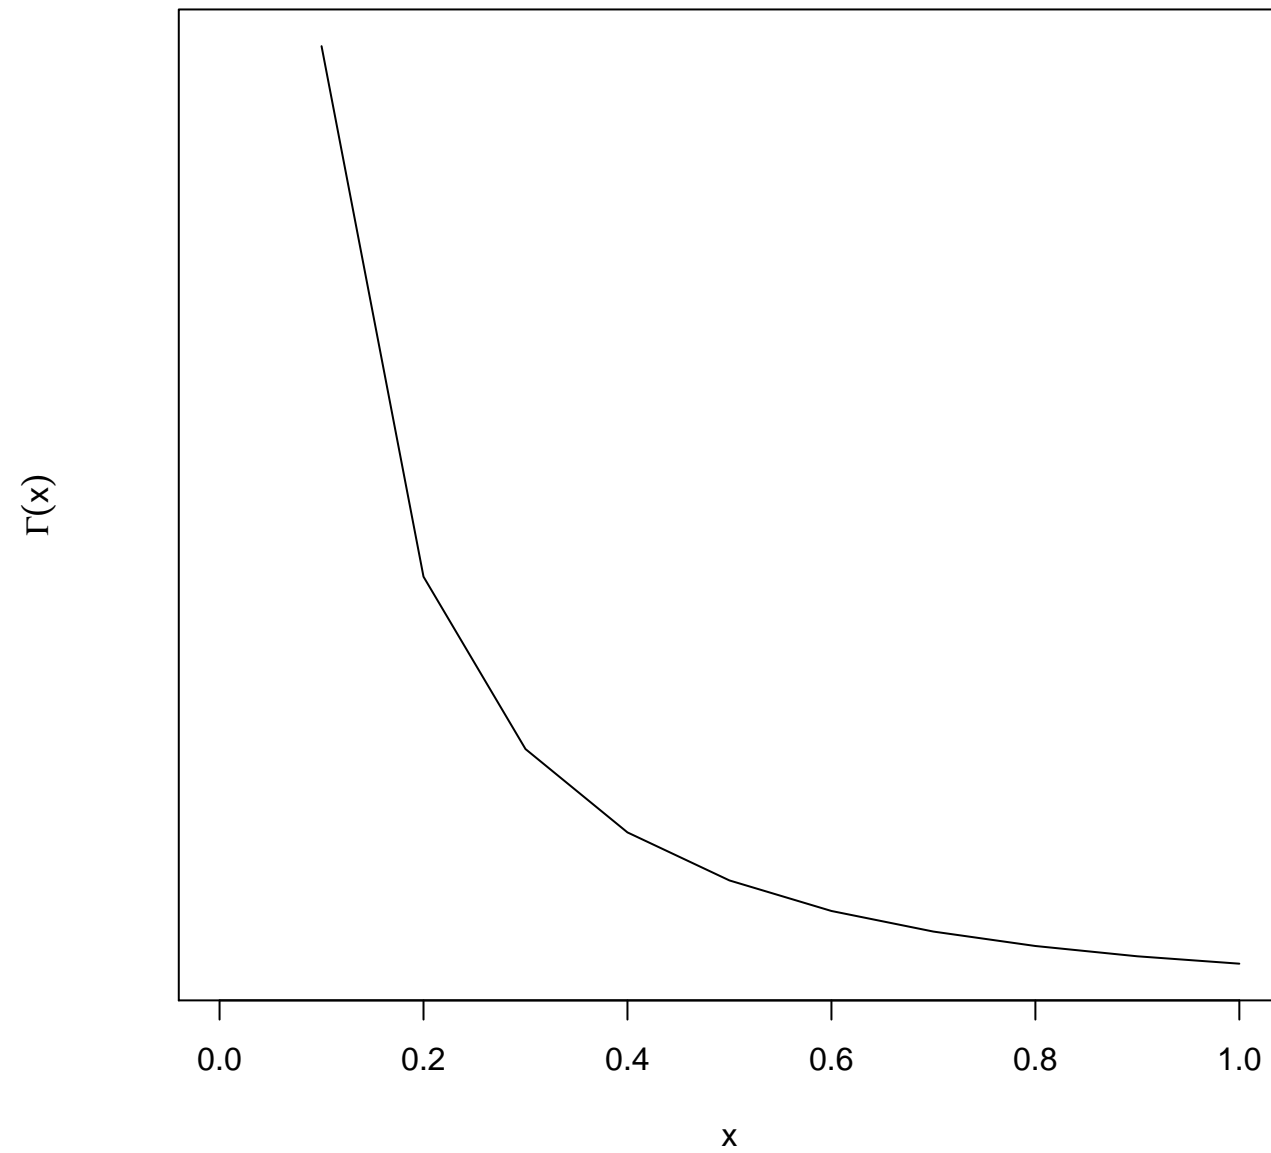


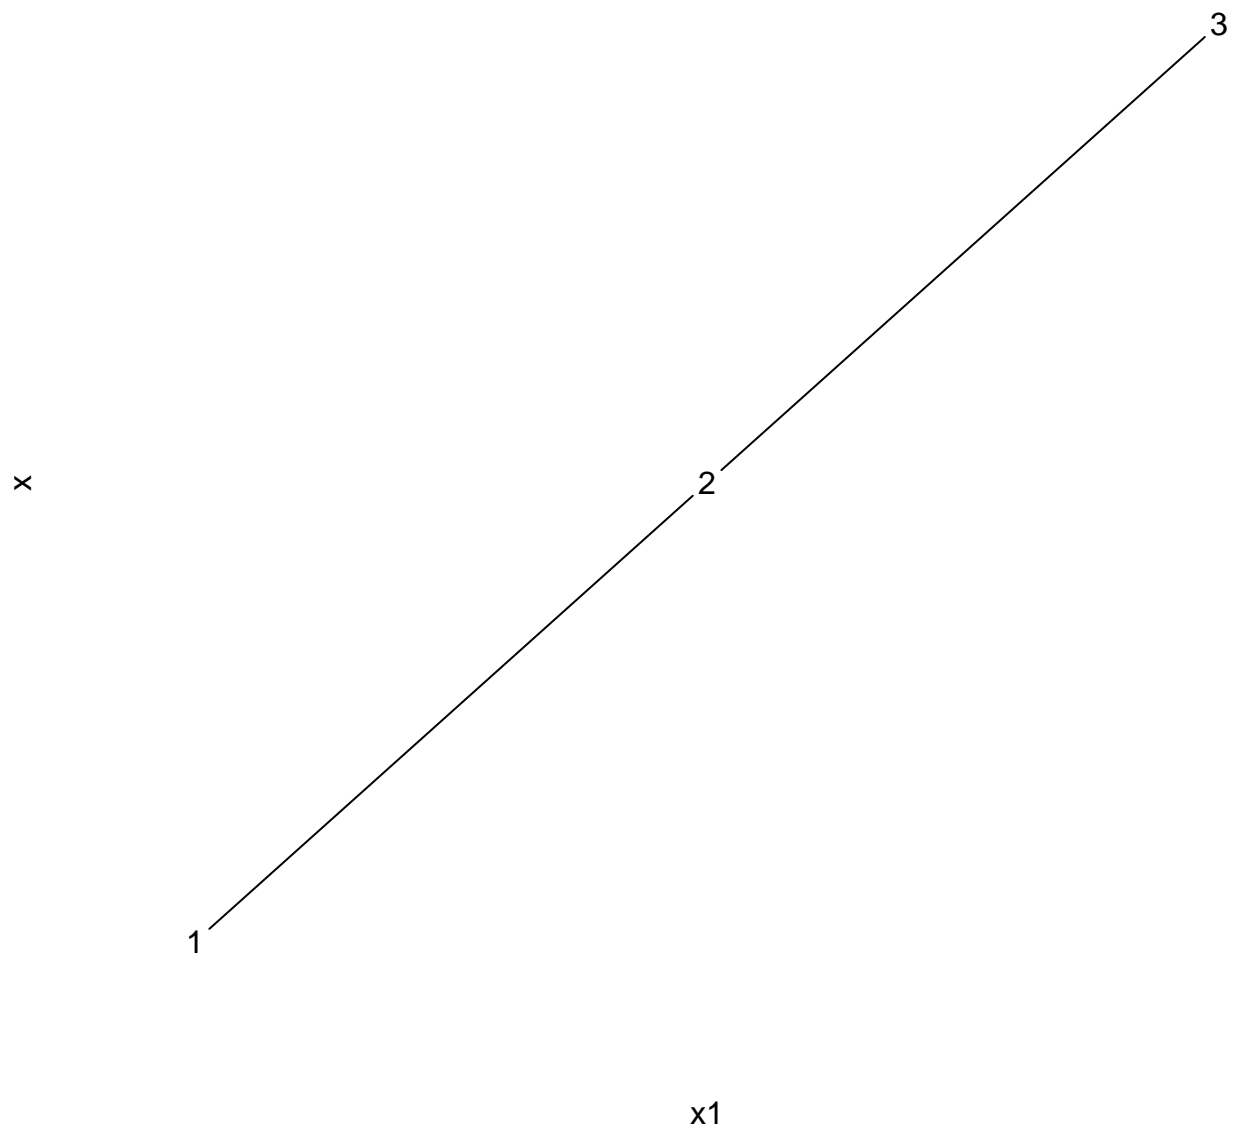



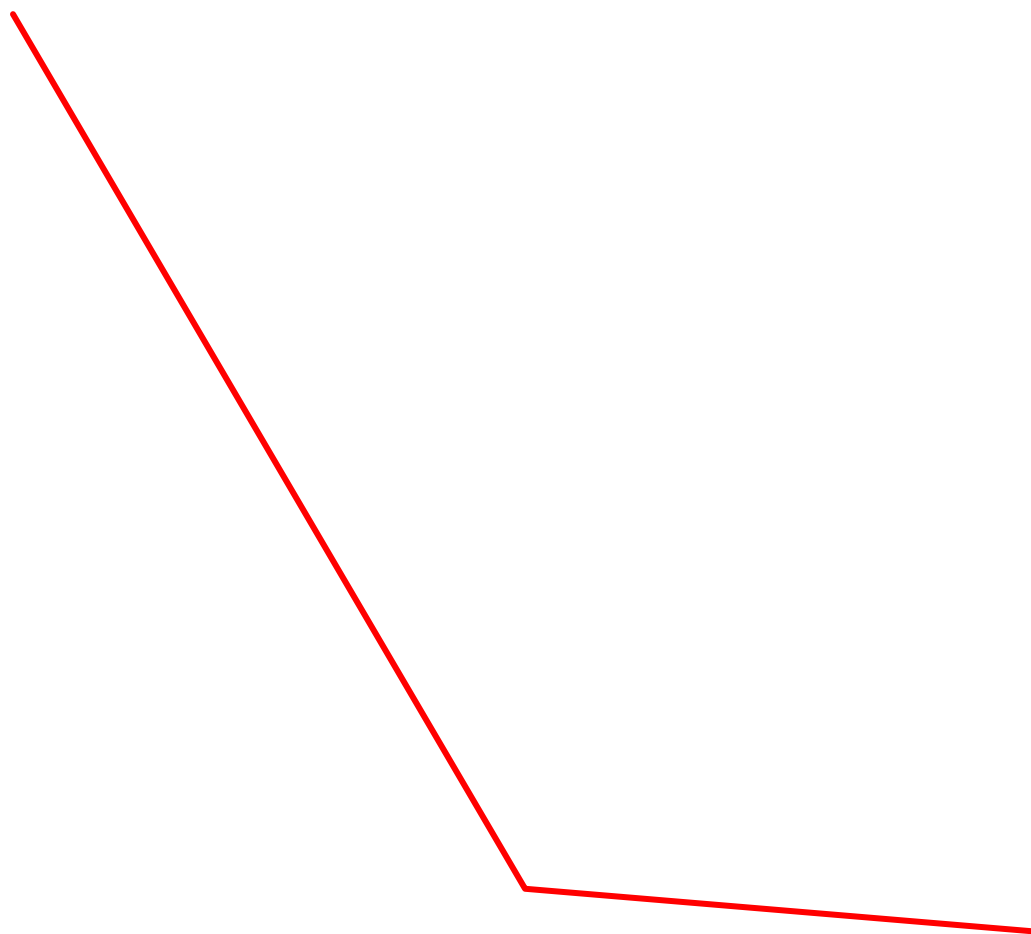

x

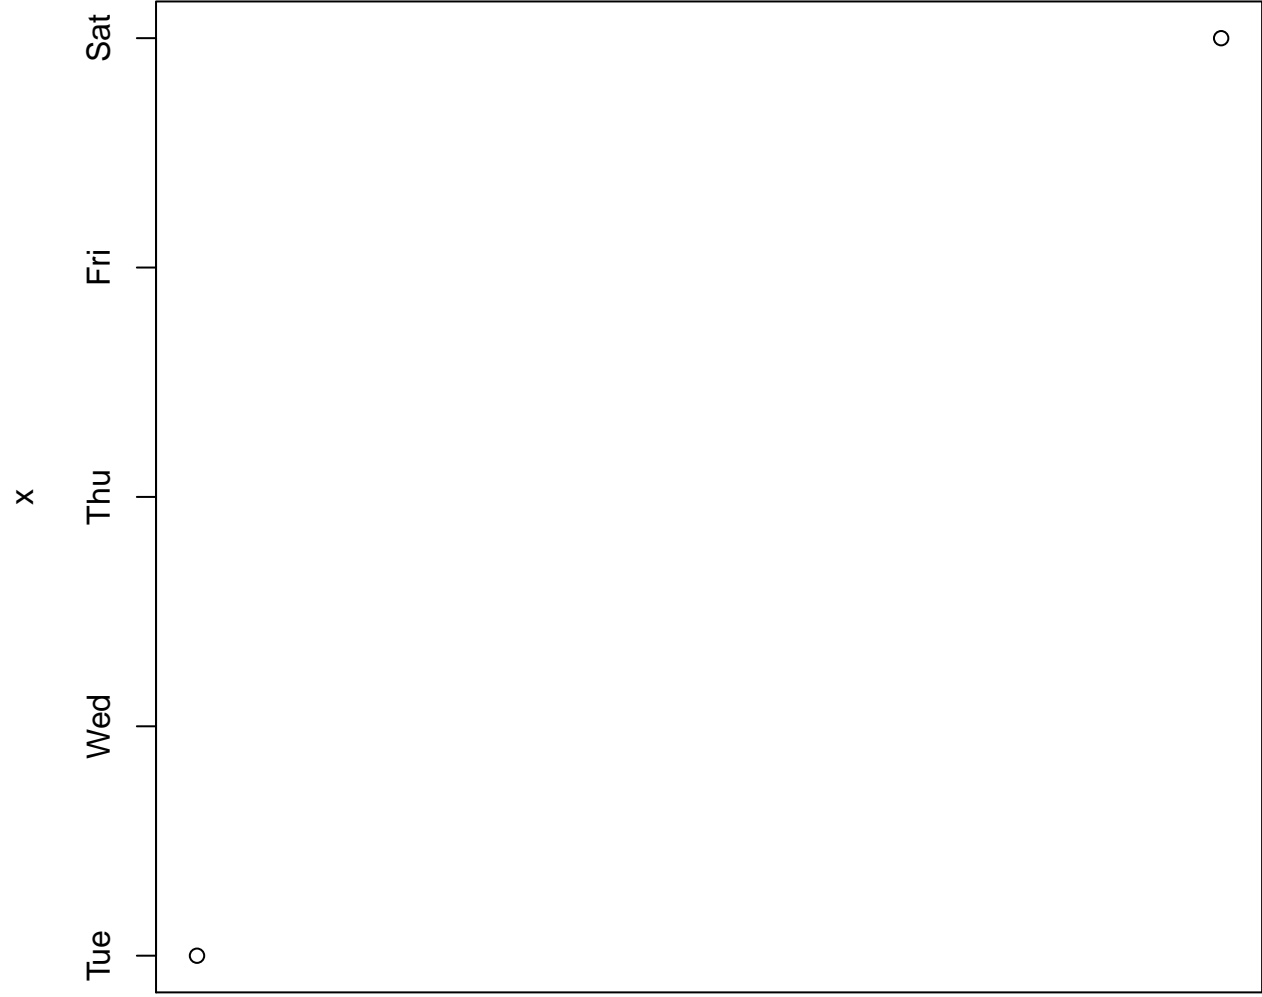

Index

