



Unicycle · 2026 paper RHS, constant w in speed derivative · full initial box


Saved whole-step x_1 tube (500×0.02 s)

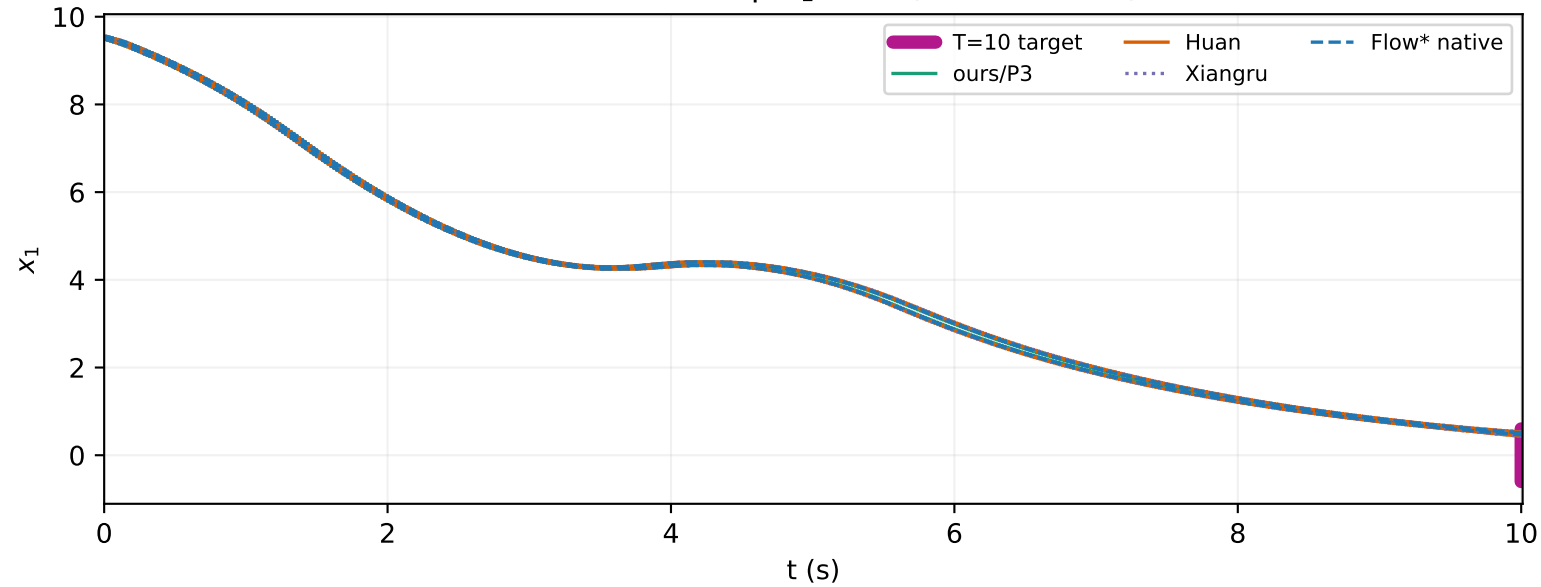


$T = 10$ x_3 endpoint; target $[-0.06, 0.06]$

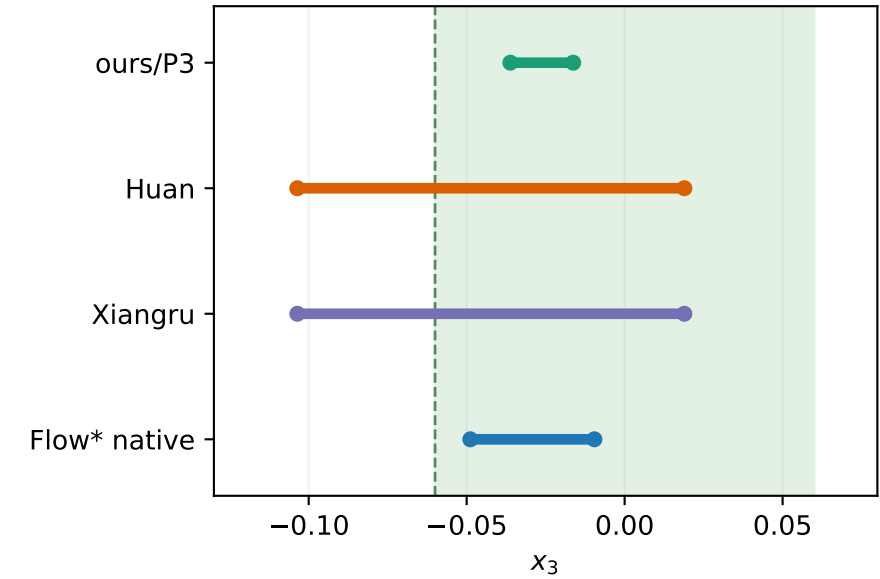

Saved whole-step x_3 tube (500×0.02 s)

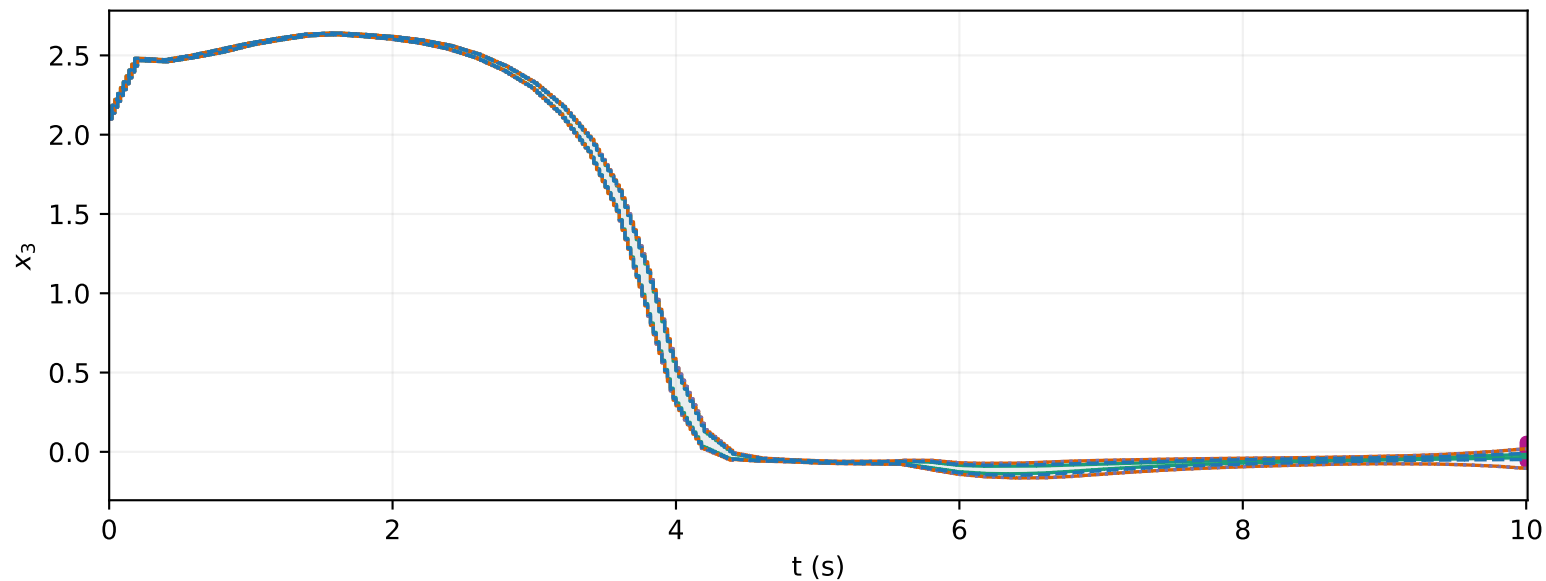

$T = 10$ x_4 endpoint; target $[-0.3, 0.3]$

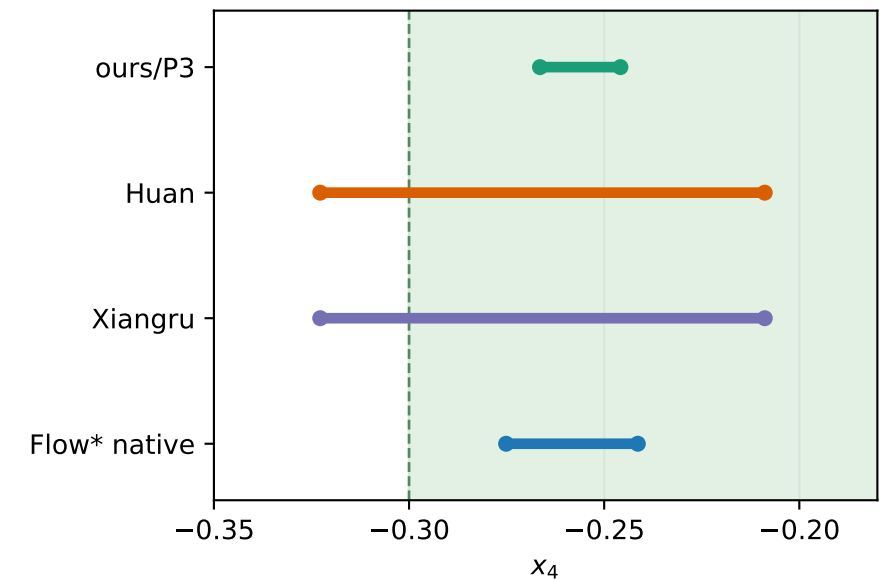

Magenta target segments apply only at $T=10$; right panels show the saved endpoint box, separately from whole-step tubes.
P3/native $T=10$ full endpoint boxes are inside target. Huan/Xiangru x_3 and x_4 extend below target: saved criterion Unknown, not unreachable.
Huan/Xiangru x_1/x_3 saved bounds coincide. Axis boxes, adjacent run outcomes; no independent end-to-end floating-point NNCS proof.