

Software Requirements Specification and

Technology Neutral Process Design Name of project Version: 1.0

Maree, Armand 12017800

14032644

Watt, Brenton

Meyers, Charl 14024633

Tom, Elton 13325095

Tswene, Kamogelo 12163555

Molefe, Keletso 14222583

Spazzoli, Lorenzo 13304862

February 26, 2016

Contents

1	\mathbf{Intr}	oduction	1
2	Visi	on	1
3	Bac	kground	1
4	Architecture Requirements		
	4.1	Access channel requirements	1
	4.2	Quality requirements	1
	4.3		2
	4.4	Architecture constraints	2
5	Functional requirements and application design		
	5.1	Use case prioritization	2
	5.2	Use case/Services contracts	4
	5.3	Required functionality	5
	5.4	Process specifications	5
	5.5	Domain Model	5
6	Ope	en Issues	5

1 Introduction

In this document it would be specified how a system would be developed for the department of computer science at the University of Pretoria in order for them to replace their current, not so efficient Microsoft Office Excel spreadsheet, system with a more concurrent and reliable option.

2 Vision

The client requires a system that would allow them to retrieve and submit meta-data about academic papers published by the department of computer science at the University of Pretoria. Certain users would be able to create new papers and the project leader would then be able to control certain properties of the project, like the current progress of the paper. It should also have a web interface where changes can be made and also an Android app.

3 Background

What lead to the project is the fact that that the client is facing a problem with the current system they are using. The spreadsheet which does fulfill its task of storing details about user's publications, does not have a user friendly interface, and does not allow researchers to see any changes made to the system immediately, it is also not a concurrent system and is deemed less reliable. The client wants a system that would improve the manner the users would be able to view their submissions and be able to modify the system to their liking, with changes immediately visible to researchers. Another aspect which lead to the development of a new system which would simplify the collaboration between the University of Pretoria users and users from other universities, is that instead of having a system which is local; a web interface could be used which is more accessible. The lack of ability to easily access previously entered user information data such as oneâÅŹs username or contact details also was a factor that lead to this project, as it would be more convenient and efficient to have to have an interface that would for example have a drop down list of all the user information data on the system.

4 Architecture Requirements

4.1 Access channel requirements

The system requires 2 interfaces:

- Item 1
- Item 2

4.2 Quality requirements

The following quality aspects needs to be addressed:

- Scalability:
- Security:
- Reliability:
- Audibility:
- Maintainability:
- Cost:

4.3 Integration requirements

Paragraph here

Paragraph here

Paragraph here

4.4 Architecture constraints

There are currently no architecture constraints that the client mentioned.

5 Functional requirements and application design

5.1 Use case prioritization

Critical:

- There must be some web hosting server in order to be able to host a web interface, this interface will be the main access channel to the system as it makes it easier to access the system on a computer or non-Android device. If there is no web-server then there will be no web interface that can be accessed from research groups all over the country. This defeats the whole purpose of the system.
- The web interface needs to be accessible from the Internet preferably so that other research groups outside the University are able to access the system.
- The system needs to be able to save data in some way. If there is no possible way to store data then the system might as well not exist, because the purpose of the system is to store meta data about research papers.

Important:

- Users must be able to download a bibliography of papers released in a selected period.
- An Android app must be available that can access the system to make it easier to access the system on the go.
- Users must create their user profile manually and will not be able to link the system with a web service in order to create their profile.
- No item should ever be deleted in the system. Everything is kept. Old unaccessed data may be archived but never deleted. There needs to be some sort of recovery or backup system that enables a user to restore accidently deleted data.
- The system must be able to handle a max of at least 50 concurrent users as there is a possibility that at least 50 users may access the system all at once. There will also be an estimate of at least a 1000 users. The system must be able to handle that amount of users.

Nice-to-have:

- The system must be lightweight.
- The system must show the completion of a paper in percentage that a user specifies after editing the paper.
- The system may link with Google Calender to synchronise due dates and alerts for the paper a user is busy working on.
- The web interface can be designed to work on mobile phones for those who want to access the system on the go but do not have an Android device.

5.2 Use case/Services contracts

• Use Case: Add a paper.

Primary Actor: Registered author or HOD.

Brief: Only an author or head of department can add new papers.

Postconditions:

- The article is saved to the database.
- All authors are notified of their new paper.
- The changes are logged.
- Paper is displayed.

Triggers: The user invokes the Add New Paper request.

Basic flow:

- 1. Present the actor with a new paper form.
- 2. Actor fill in the form and clicks submit.
- 3. The data is sent to the server and added to the database and logs the event.
- 4. Actor is presented with a success message.
- 5. Paper is presented to the actor.
- 6. Authors are notified.
- Use Case: Editing a paper.

Primary Actor: Author of paper or HOD.

Brief: Only an author involved with the paper or head of department can edit the paper.

Preconditions:

• Author is presented with the paper in edit mode.

Postconditions:

- The article is saved to the database.
- All authors are notified of the changes.
- The changes are logged.
- Paper is displayed.

Triggers: The user invokes the Edit Paper request.

Basic flow:

- 1. Present the actor with the paper in edit mode.
- 2. Actor makes all desired changes and clicks submit.
- 3. The data is sent to the server and added to the database and logs the event.
- 4. Actor is presented with a success message.
- 5. Paper is presented to the actor.
- 6. Authors are notified.
- Use Case: Viewing a paper.

Primary Actor: Author of paper or HOD.

Brief: Only an author involved with the paper or head of department can view the paper.

Preconditions:

• Author is presented with the paper in read-only mode.

Triggers: The user invokes the View Paper request.

Basic flow:

- 1. Present the actor with the paper in read-only mode.
- 2. When the actor is done viewing they simply navigate away. No changes or events has to be logged.

Request and Results Data Structures: See figure 1.

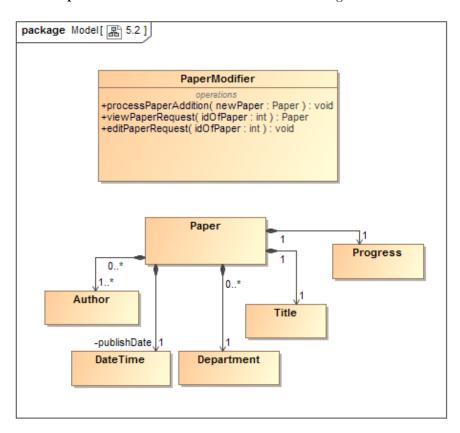


Figure 1: UML diagram for Request and Results Data Structure.

5.3 Required functionality

- Add a paper Use case: See figure 2
- Edit a paper Use case: See figure 3

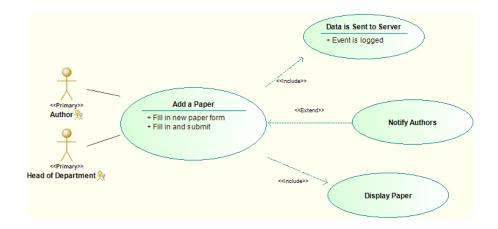


Figure 2: Use case diagram for adding a paper

• View a paper Use case: See figure 4

5.4 Process specifications

 \bullet Activity diagram to add a paper: See figure 5

 \bullet Activity diagram to edit a paper: See figure 6

5.5 Domain Model

6 Open Issues

• To be determined

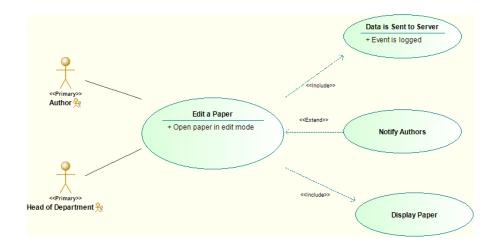


Figure 3: Use case diagram for editing a paper

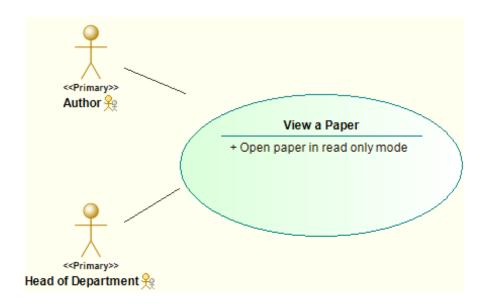


Figure 4: Use case diagram for viewing a paper

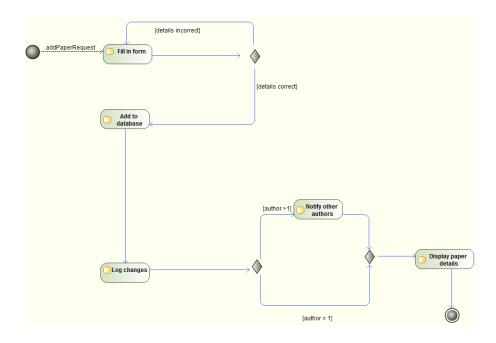


Figure 5: Adding a paper to the database

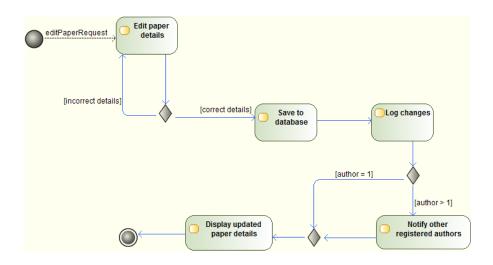


Figure 6: Editing a paper