


Vera C. Rubin Observatory Data Management

Rubin Observatory Data Security Standards Response

William O'Mullane, Russ Allbery, Yusra AlSayyad, Eric Bellm, Andy Clements, Richard Dubois, Joshua Hoblitt, Cristián Silva, Ian Sullivan, Kian-Tat Lim

DMTN-199

Latest Revision: 2022-08-05

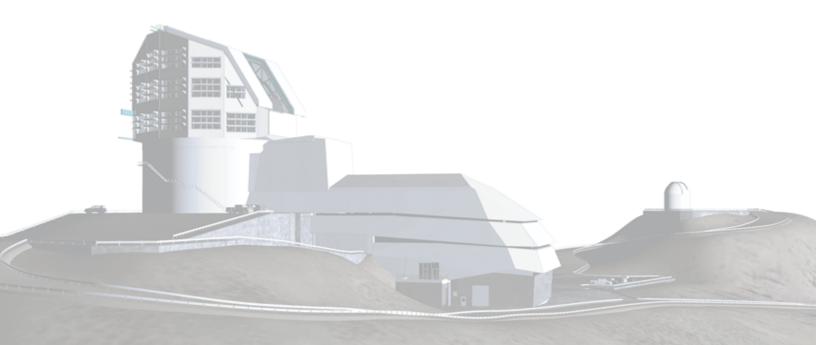



Abstract

This is a response to the security document from the agencies.



Change Record

Version	Date	Description	Owner name
0.1	2021-07-19	Unreleased. Set up structure	William O'Mullane
0.2	2021-09-28	Unreleased. First draft for JSR 2021	William O'Mullane
0.3	2021-10-04	Unreleased. Second draft for JSR 2021	William O'Mullane
0.4	2021-10-05	Unreleased. Tidy for JSR 2021	William O'Mullane
0.5	2021-11-23	Unreleased. Fix router price, inclide Huawei	William O'Mullane
		Avoid	
1.0	2022-02-02	Remomved Huawei from this plan and added	Victor Krabbendam
		descriptions	
1.1	2022-08-02	Simplify summary in intro	William O'Mullane

Document source location: https://github.com/lsst-dm/dmtn-199



Contents

1	Introduction	1
2	Cost Summary	1
3	Response to the requirements	2
	3.1 Encrypt Data	3
	3.2 Install Firewalls and other physical security devices	3
	3.3 Delay public release	6
	3.4 Eliminate earth orbiting satellites	7
	3.5 Perform earth orbiting satellite processing in separate facility	8
	3.6 Publish nominal schedule	8
	3.7 Request approval for non sidereal tracking	8
4	Conclusion	8
Α	Compliance with NIST Standard	10
В	References	14
C	Acronyms	15



Rubin Observatory Data Security Standards Response

1 Introduction

The agencies have provided a set of requirements for data security which are addressed in this upgrade plan. This document addresses the upgrades specifically and will augment the overall security plan for Rubin observatory (see LDM-324). This document addresses the specific requirements given to us by the agencies.

A summary of requirements are:

- 1. Encrypt data following National Institute of Standards and Technology (USA) (NIST).
- 2. Use firewalls to prevent unauthorized access.
- 3. Hold focal plane scientific data for a few days following the observation. Hold engineering and commissioning imaging data for several weeks
- 4. Do not alert on artificial Earth-orbiting satellites.
- 5. Check some alerts in a separate facility that has access to appropriate satellite catalogs.
- 6. Publish the survey schedule 24 hours in advance.
- 7. Request approval for use without sidereal tracking.

Section 3 provides a subsection response for each of these bullets.

2 Cost Summary

A summary of the costs associated with implementing these enhanced security measures are summarized in Table 1 below. The table includes both non-recurring, up-front, costs as well as the costs to operated with these enhanced measures for a 10-year operation period.



Table 1: Cost Sumary Table for Enhance Security Requirements.

Item	Construction Cost	Operations Cost
Encryption (Table 2)	\$2,124,000	\$2,724,000
Firewalls and physical security (Table 3)	\$1,428,624	\$4,800,000
Delayed Data Store (Table 4)	\$800,000	\$800,000
Alert Vetting System (Table 5) ROP value		\$13,662,042
Total Construction	\$4,352,624	
Total Operations Cost		\$21,986,042

Execution of this plan will begin immediately upon approval to complete the changes prior to data collection in the system commissioning phase of Construction.

3 Response to the requirements

This plan follows the applicable elements of NIST.SP.800-171. The application of this standard to the Rubin Observatory requires some interpretation. A compliance matrix is provided in Appendix A. In this matrix and in this document we assume the requirements apply to embargoed images before release to the collaboration and the derived difference image sources. Hence it applies to Prompt Processing, the embargoed data store(s), and the summit in Chile. It does not apply to DACs nor the actual alert stream.

The non-recurring costs in this plan include necessary end-equipment to manage the data entering the USDF. The incrimental operating costs at the USDF, expecting that they too will follow NIST 800-171, are provided in this document as reference.

From Section 2.1 of NIST.SP.800-171 we note that the confidentiality impact value for the data is no less than moderate. So we may assume our NIST.FIPS.200 security category would be { moderate, low, low}¹.

¹{confidentiality, availability, integrity}



3.1 Encrypt Data

As outlined in DMTN-108 we shall buy four routers which can perform Internet Protocol Security (IPsec) AES-256 bit encryption between Chile and SLAC. We will not transfer embargoed images to France - hence we should keep a secure data store at Chile and at SLAC National Accelerator Laboratory (SLAC) for redundancy. The router cost in Table 2 is based on a quotation from Cisco as one of the vendors explicitly specified in the agency document. While we have shown that Transport Layer Security (TLS) with AES-256 can provide sufficient performance to meet our Alert timing budget, we have not yet measured performance with the specified routers using IPsec. We assume that performance will be adequate.

NIST also suggests out of band access - an independent network for access to the Summit systems in case the main network is down. A quote for Telconor to give a backup control link is included in Table 2.

See Table 2 for the cost breakdown. The Out Of Bound (Alternative network access) (OOB) access is in Chile only and the routers and cabling are an even split.

Item	Cost	number	Total	Notes
Cisco Router (2@Chile 2@USDF)	\$500,000	4	\$2,000,000	Cisco quote
Cabling	\$1,000	4	\$4,000	
Out of Bounds (OOB) link install (Chile)	\$60,000	2	\$120,000	Times 2, we need summit-base and base-internet
Total Construction			\$2,124,000	
OOB Ops running cost/month	\$3,000	240	\$720,000	
Router rehresh			\$2,000,000	
Cabling	\$1,000	4	\$4,000	
Total Operations			\$2,724,000	

Table 2: This table provides cost estimates for encrypted data transfer.

3.2 Install Firewalls and other physical security devices

This requirement is for physical and cyber security. It includes installing cameras and locks on racks. Some of this such as Firewalls is already in the project plan but much of it is not.

Items already in the baseline include:

- Card access to server rooms.
- Backup network in case main link fails (though the microwave link is a new addition ..)
- Auditable process to handle onboarding/offboarding



• Some cameras are in the project but not complete coverage.

The firewalls and physical security will be upgraded to meet the enhanced standard. Table 3 includes the items needed for this upgrade.

Important Note: We shall ring fence the Camera in its own firewall with more restricted access than the restricted control network. However we will treat it as a black box deliverable for this requirement. We shall not expect encryption of the internal disks of the camera system. Any perturbation to the camera system will have a deleterious effect on the camera with significant development and schedule impacts.

Signage and labeling, as required in NIST 171 3.8.4 ², will be developed as appropriate.

NIST 1.7.1 Section 3.10.6 pulls in extra standards for remote work namely NIST.800-46 and NIST.800-114. NIST.800-114 is the broader scope and we are pretty much in line with how it is written - we note Section 5.2.1 that we use Onepassword as a vault for Information Technology (IT) passwords - not paper in a fire proof safe as recommended. Some other suggestions are understood to be useful in general but often not suitable for developers - personal firewalls, application filtering and aggressive antivirus software often trip over developer code and tools.

NIST.800-46 and other related NIST documentation suggest threat modeling - we do this in a limited way e.g SQR-041 and SQR-037. A more exhaustive risk assessment by a third party is not anticipate at this time but the Project team will discuss with SLAC on any plans to review the United States Data Facility (USDF). We do not store sensitive information on the virtual private network (VPN) nor bastion nodes. We do use Network Address Translation (NAT) in a limited number of places - this will be more important in operations if/when we move to IPv6.

Table 3: This table provides cost estimates for firewalls and other physical security in Chile and at SLAC not in the project plan.

Item	Cost	number	Total	Notes
Locks USDF	\$200	30	\$6,000	
Cameras Detectors USDF	\$2,000	1	\$2,000	
Sensors USDF	\$38	30	\$1,140	https://www.server-rack-online.com/ig-dsw-2m.html
Sensor hub USDF	\$448	1	\$448	https://www.server-rack-online.com/ec-300m.html
Locks Chile	\$200	30	\$6,000	1 set has 2 locks, front and back, https://www.apc.com/shop/in/en/products/Combination
				Lock-Handles-Qty-2-for-NetShelter-SX-SV-VX-Enclosures/P-AR8132A
Cameras Detectors Chile	\$2,000	2	\$4,000	
Sensors Chile	\$38	30	\$1,140	
Sensor hub Chile	\$448	2	\$896	https://www.server-rack-online.com/ec-300m.html

²https://www.archives.gov/files/cui/20161206-cui-marking-handbook-v1-1.pdf



Faster CPU to handle disk encryption on summit	\$13,000	20	\$260,000	sizing model rome price
(node price)				
SSD price differnce to SATA (cost/TB)	\$250	260	\$65,000	from sizing model NVMe price
Labor to redeploy all summit systems (contract)	\$100	1,200	\$120,000	Hey Siri FaceTime
Labelling and signage	\$2,000	1	\$2,000	https://www.archives.gov/files/cui/20161206-cui-marking-handbook-v1-1.pdf
Security related contracts/month	\$40,000	24	\$960,000	
Total Construction			\$1,428,624	
Operations Security contracts	\$40,000	120	\$4,800,000	
Total Operations			\$4,800,000	

This enhanced security plan includes support from an outside security provider. It is estimated running an Security Operations Centre (SOC) could cost upward of \$1.4M per year³. This article⁴ outlines the pros and cons of an outsourced SOC and estimates it at between 300 and 800K per year. For budgeting purposes \$40K a month is included in Table 3. Such a contract (or contracts) should cover:

- 1. Proactive monitoring and alerting (NIST 171 section 3.3.5)
 - · Write alerts for suspicious behaviors
 - Analyze collected logs for anomalies
- 2. Root cause analysis of any alert or anomaly
- 3. Incident response
 - Isolation of attacker
 - Forensic analysis leading to timeline and inventory of compromise
 - · Identifying systems that will need to be rebuilt
- 4. Vulnerability scanning including filtering out false positives
- 5. Asset inventory including patch status
- 6. Penetration testing to proactively look for vulnerabilities

This will require extensive coordination and integration with existing IT services and processes, included as part of this cost.

³https://expel.io/blog/how-much-does-it-cost-to-build-a-24x7-soc/

⁴https://www.linkbynet.com/outsourced-soc-vs-internal-soc-how-to-choose



Since we will have to encrypt systems on the summit (see ITTN-014) for a list of systems) we anticipate upgrade processors and solid state drives (Solid-State Disk (SSD)) are required. Determining the detailed specifications will require experimentation so the values in the table for this are engineering estimates.

Note that compute facilities for the Commissioning Cluster at the Base as well as Alert Production and the Staff RSP at the USDF are not considered to be within the physical security area. Rubin considers the short-term, ephemeral processing on these resources outside of the enhanced security requirmenets. Including them would approximately double the cost of this item for Construction.

3.3 Delay public release

Rubin considers the best approach to managing public release of data is to keep the embargoed data on a secure device separate from other systems and migrate images to the regular repository as they become *public*. This can be an object store with encryption like MinIO 5 . We will need to have one at SLAC and one at Chile for redundancy to ensure no data loss.

With the commissioning constraint that means this needs to be approxemately a one month store for full images and engineering data. Looking at DMTN-135 table 40 this comes out to about 500TB of usable disk. Table 4 gives the cost calculation or this.

The nominal embargo for regular operations we understand as between a few days (most images) and ten days (some images as specified by Alert Vetting).

Description	value	
Number of days data to store	30	
Raw data size per day (TB compressed)	16	Years data from Table 40 of DMTN-135/ 298.3 observing nights (Key Numbers Confluence)
Useable size needed (TB)	484	
Allowing for RAID (TB)	1000	
Cost for 1 store	\$400,000	Using SLAC Fast Disk Price from Table 28 of DMTN-135
Total for 2 stores - Construction	\$800,000	
Total Ops Cost at least 1 Refresh	\$800,000	

Table 4: This table provides costs for the embargoed data store.

Note: To enact these enhanced security measures on Commissioning data, this plan focuses on early data processing at the SLAC USDF and not the resources originally planned at NCSA. The SLAC USDF must be ready with sufficient services and capacity for ComCam, on sky work.

⁵https://min.io/product/enterprise-object-storage-encryption



Figure 1 depicts the encrypted storage and network. Embargoed (delayed) data would be held in the encrypted stores for the time specified. We assume temporary processing for alerts does not have to be encrypted, NIST allows ephemeral unencrypted data for processing.

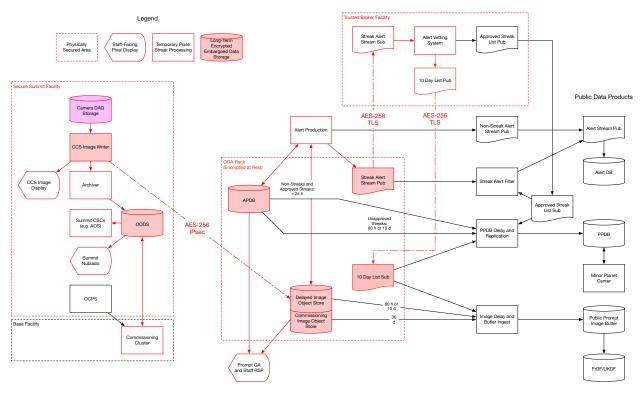


FIGURE 1: OGA architecture showing the long term encrypted storage and encrypted network from Chile to SLAC.

3.4 Eliminate earth orbiting satellites

Rubin does not publish alerts for streaks associated with artificial satellites. A subset of streaks, potentially consistent with Earth-orbiting satellites or Solar System objects, will be evaluated by the Alert Vetting System (AVS). AVS is under discussion currently in terms of design and how it may be implemented. The cost here is based on FTE and non labor after initial discussions with Lawrence Livermore National Laboratory (LLNL). They are assuming a high availability service. An estimate is given in Table 5. This also includes the current value in the operations plan. The cost of delaying the data in an encrypted store is already covered in Section 3.3

Table 5: The Alert Vetting System is all FTE cost - apart from unknown hardware at LLNL.

Description	Cost	Count	Total
FTE per year	\$416,000	2.6	\$1,081,600
Mission years		10	\$10,816,000
Pre operations years	\$1,000,000	2	\$2,000,000
non labor 1 off	\$611,000	1	\$611,000



non labor recurring	\$25,000	10	\$250,000
Total			\$0
Rubin Operations Plan Value			\$13,662,042

3.5 Perform earth orbiting satellite processing in separate facility

This is under discussion with LLNL - initial cost estimates are given in Section 3.4. It is shown in Figure 1.

3.6 Publish nominal schedule

The project was already planning to publish the observing schedule to allow co observing of sources, see Section 2.1 of LSE-30. The Observatory System Specifications; LSST Systems Engineering (Document Handle) (LSE)-30 (OSS) requires publication at least two hours ahead of observing - the request here is to have the schedule twenty four hours in advance. This is not a problem as long as one understands the fidelity of the schedule decreases with the look ahead time. The agency requirement acknowledges this.

The schedule is to be delivered to the trusted broker - we shall arrange this with LLNL.

We consider no delta cost for this as it was in the project plan.

3.7 Request approval for non sidereal tracking

This is best handled Procedurally and as such will not produce a delta cost on the project.

4 Conclusion

We can comply with the requirements and NIST 1.7.1 at the cost outlined in Section 2.

There are a few assumptions explicitly made above which we feel comply with given requirements but did require interpretation. To be explicit:

Section 3 Assumes embargoed images before release to the collaboration are treated



securely. After the embargo is lifted there is no longer a need to secure the images at the higher requirements.

- Section 3 Assumes NIST 1.7.1 also applies to SLAC even though NIST.FIPS.200 should be applicable.
- Section 3.2 Makes an important note about *not encrypting* internal camera storage.
- Section 3.2 Assumes NIST.800 documents were written as guidance they will be noted but we may not always follow all recommendations in all cases.
- Section 3.3 Assumes the embargo for commissioning applies to use of encrypted storage and transfers. This potentially implies National Center for Supercomputing Applications (NCSA) could not be used for commissioning at all.
- Section 3.2 and Section 3.3 Assumes short stays of data on unencrypted machines for processing is ok (it is in line with NIST).



A Compliance with NIST Standard

Table 6: This table provides an overview of the NIST.SP.800-171 and Rubin compliance with it.

NIST 800-171	2021 Status	Intended Compli- ance	Note
3.1 ACCESS CONTROL		-	
3.1.1 Limit system access to authorized users, processes acting on behalf of autho-	Υ	Y	
rized users, and devices (including other systems).		'	
3.1.2 Limit system access to the types of transactions and functions that authorized	N	Y	There are many non-administrative users with unrestricted sudo ac-
users are permitted to execute.		,	cess, this will be addressed.
3.1.3 Control the flow of CUI in accordance with approved authorizations.	Υ	Υ	cess, and will be dudicessed.
3.1.4 Separate the duties of individuals to reduce the risk of malevolent activity with-	N	Y	Principle of least privilege is applied. Many users have access to
out collusion.	IN.	'	hosts that is unneeded.
3.1.5 Employ the principle of least privilege, including for specific security functions	N	Υ	Targeted sudo rules are needed for common operations. IPA con-
	IN	'	
and privileged accounts.		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	trols sudo centrally
3.1.6 Use non-privileged accounts or roles when accessing nonsecurity functions.	Υ	Y	
3.1.7 Prevent non-privileged users from executing privileged functions and capture		Υ	This is probably sudo attempts audits. Full commands can be logged
the execution of such functions in audit logs.			in at the cost of extra load for the servers.
3.1.8 Limit unsuccessful login attempts.	N	Y	Web Services such as love, foreman, ipa console, nublado, etc. may
			need rate limiting. We dont use passwords in ssh hosts only ssh keys
			which many conisder more secure - we are not aware of a retry limit
			for ssh-key access, an approriate extra security would be to not use
			the default port 22. However, we do limit attemtps to 6 with a block
			of 600 minutes, this will efectively block failed SUDO logins.
3.1.9 Provide privacy and security notices consistent with applicable CUI rules.	N	Υ	Check login notices etc. A login banner can be displayed upon login
3.1.10 Use session lock with pattern-hiding displays to prevent access and viewing of	Υ	Y	This is our policy.
data after a period of inactivity.			, , , , , , , , , , , , , , , , , , ,
3.1.11 Terminate (automatically) a user session after a defined condition.	N	Y	ssh sessions are generally not limited on hosts; some network equip-
),		'	ment has timeouts set; nublado has a session limit for notebooks?
3.1.12 Monitor and control remote access sessions.	N	Υ	We currently check who and from where is connecting.
	Y	Y	VPN is in use
3.1.13 Employ cryptographic mechanisms to protect the confidentiality of remote ac-	T .	l t	VPIN IS III use
cess sessions.			5 1 1101: 1 1 11 1
3.1.14 Route remote access via managed access control points.	N	Y	Bastion nodes – LHN is an open back door with no ACLs
3.1.15 Authorize remote execution of privileged commands and remote access to	Υ	Υ	
security-relevant information.			
3.1.16 Authorize wireless access prior to allowing such connections.	Υ	Υ	All devics attaching in Chile need to be registered by Mac address.
3.1.17 Protect wireless access using authentication and encryption.	Υ	Υ	
3.1.18 Control connection of mobile devices.	Y	Y	In the sense there is no open wifi, and on the summit devices must be registered.
3.1.19 Encrypt CUI on mobile devices and mobile computing platforms.23	Υ	Y	Data will not exist on mobile devices - in the case where an image
			may exist on say commissioning team laptop we will have disk en-
			cryption enabled.
3.1.20 Verify and control/limit connections to and use of external systems.	Υ	Υ	This implies vetting of devices that connect to the control network
			- we use mac address for laptops and personal mobile phones can
			not connect to the control network. We also have a separation with
			the long haul network (LHN) Service Set Identifier (SSID) and Virtual
			Local Area Network (VLAN)s.
3.1.21 Limit use of portable storage devices on external systems.	N	Y	Can be rolled out with puppet but there are some servers that need
		'	usb.
3.1.22 Control CUI posted or processed on publicly accessible systems.	Y	Υ	We do not intend to post images on publicly accessible systems.
3.2 AWARENESS AND TRAINING	<u> </u>	<u> </u>	The second of th
	V	<u> </u>	
3.2.1 Ensure that managers, systems administrators, and users of organizational systems are made aware of the security risks associated with their activities and of the	'	'	
,			
applicable policies, standards, and procedures related to the security of those sys-			
tems.			
3.2.2 Ensure that personnel are trained to carry out their assigned information	N	Υ	
security-related duties and responsibilities.		1	l .
3.2.3 Provide security awareness training on recognizing and reporting potential in-	Y	Y	We would like to do more here like capture flag exercises for devel-
3.2.3 Provide security awareness training on recognizing and reporting potential indicators of insider threat.	Y	Y	We would like to do more here like capture flag exercises for developers or blue/red teams events
3.2.3 Provide security awareness training on recognizing and reporting potential in-	Y	Y	· -
3.2.3 Provide security awareness training on recognizing and reporting potential indicators of insider threat.	Y	Y	· -
3.2.3 Provide security awareness training on recognizing and reporting potential indicators of insider threat. 3.3 AUDIT AND ACCOUNTABILITY			· -
3.2.3 Provide security awareness training on recognizing and reporting potential indicators of insider threat. 3.3 AUDIT AND ACCOUNTABILITY 3.3.1 Create and retain system audit logs and records to the extent needed to enable			·
3.2.3 Provide security awareness training on recognizing and reporting potential indicators of insider threat. 3.3 AUDIT AND ACCOUNTABILITY 3.3.1 Create and retain system audit logs and records to the extent needed to enable the monitoring, analysis, investigation, and reporting of unlawful or unauthorized sys-			·



3.3.4 Formities and recover from an audit logging process failure. 3.5 Formities and recover fewer and an audit logging processes for investigation. N. Y. Applin shall look for third party contract for this and response to indications of unlimbul, unauthorized supplication, or unusual activity. 3.5 Formities audit information and quiet logging functions and supplications or unusual activity. 3.6 Formities audit information and quiet logging functionally to a subset of privilegal users. 3.7 Formities audit information and audit logging functionally to a subset of privilegal users. 3.8 Formities audit information and audit logging functionally to a subset of privilegal users. 3.10 Experimental forms and information and under logging tools from unauthorized across, and formation and under logging functionally to a subset of privilegal users. 3.10 Experimental formation and under logging functionally to a subset of privilegal users. 3.10 Experimental formation and under logging functionally to a subset of privilegal users. 3.11 Experimental formation and under logging functionally to a subset of privilegal users. 3.12 Experimental formation and under logging functionally to a subset of privilegal users. 3.13 Formities audit logging functionally to a subset of privilegal users. 3.14 Experimental functions, understanding functions, profits and functionally functions, profits and functionally functions, profits and functional functions, profits and functionally functions, profits and functionally functions, profits and functional functional functional functions, profits and functional func	3.3.3 Review and update logged events.	Р	Υ	We may look for a third party contract for this.
3.3.5 Foreign and information and unable unable to expert growing and response to indications of unable unable to applications of		N	Υ	
and response to indications of unlawful, unauthorized supplication or numeral activity. 3.5.8 Fronder audit scord reduction and perior generation to appropriate production of anything and reporting. 3.3.7 Fronder a system capability that compares and synchronizes internal system. V.		N	Υ	Again shall look for third party contract for this
analysis and reporting. 3.7 Provide a system capability that compares and synchronizes internal system cocks with an authorizative course to generate merestamps for audit records. 3.8 Procest and information and subli Enging tools from musuhorized access, and information and subli Enging tools from musuhorized access, and information and subli Enging foot from musuhorized access, and information and sublified information and sublified for a sublified and an authorized access to a sublified access to a sublified and an authorized access to a sublified acc				
3.3.7 Provide a system capability that compares and synchronizes interend system (costs with an authorizaties source to generate interscanps for authorizations (and deletion.) 3.3.8 Provide a system capability that compares and synchronizes across. You will be a system of deletion. 3.3.9 Interest and information and outel logging functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful signify functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful signify functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful significant continues and documentation) perceptions of the respective synchronized events and documentation perceptions. 3.4 Famplish and entirize security configuration certains and documentation perceptions. 3.4 Famplish and entirize security configuration extensities for information technology. You will be substitution as a straight of the systems. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes to organizational systems. 3.4 Famplish and entirized security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes in provide and entirized security impact of changes to the security impact of changes in provide and entirized security impact of changes in provide and entirized security im	3.3.6 Provide audit record reduction and report generation to support on-demand	N	Υ	
3.3.7 Provide a system capability that compares and synchronizes interend system (costs with an authorizaties source to generate interscanps for authorizations (and deletion.) 3.3.8 Provide a system capability that compares and synchronizes across. You will be a system of deletion. 3.3.9 Interest and information and outel logging functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful signify functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful signify functionality on a subset of privileged users. 3.4 Famplish and reasonate beautiful significant continues and documentation) perceptions of the respective synchronized events and documentation perceptions. 3.4 Famplish and entirize security configuration certains and documentation perceptions. 3.4 Famplish and entirize security configuration extensities for information technology. You will be substitution as a straight of the systems. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirize security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes to organizational systems. 3.4 Famplish and entirized security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes prior to implementation. 3.4 Famplish and entirized security impact of changes in provide and entirized security impact of changes to the security impact of changes in provide and entirized security impact of changes in provide and entirized security im	analysis and reporting.			
tocks with an authoritative source to generate timestamps for audit records. 3.3 Froeters and information and audit logging functionality to a subset of privileged users. 3.4 ConSiGURATION MANAGEMENT 3.5 Experiment evelopment life of begins configurations and inventiories of organizational systems (including hardware, software, firmware, and documentation) broughout the respective system development life of educe. 4.4 Expective system development life of educe. 5.4 Tools, rever, approve or disapprove, and log changes to organizational systems. 3.4 Form, expective proving organizational systems. 3.4 Considerate with through to organizational systems. 3.4 Considerate with through through the organizational systems or developed to organizational systems. 3.4 Considerate with through through through the organizational systems or developed to organizational systems. 3.4 Control and monitor user intelligible software. 3.4 Control and monitor user int	, , ,	Y	Υ	
3.3.5 Protect audit information and sidel togging functionality to a subset of privileged users. 3.3.0 Limit management of audit logging functionality to a subset of privileged users. 3.3.0 Limit management of audit logging functionality to a subset of privileged users. 3.4.1 Establish and maintain baseline configurations and inventories of organizational systems (including in produces, and the information information) throughout visual products prolipped in produces, and the information information in the products prolipped in organizational systems. 3.4.2 Establish and enforce security configuration settings for information technology products prolipped in organizational systems. 3.4.3 Establish and enforce security impact of changes prior to implementation of the products and the products an				
inodification, and deletion. 3.4 SI stain immagnement of audit logging functionality to a subset of privileged users, V V V 3.4 CONTRURATION MANAGEMENT 3.4 Exability and maritarial baseline configurations and inventories of organizational systems (including hardware, software, firmware, and documentation) bringshout the respective system development let getes. 3.4 Exability and enforce security configuration seeings for information technology V V V We use mainly infrastructure as code approaches so the software is well tracked. If inventory all the hardware. Well tracked in respective system development let getes. 3.4 Exability and enforce security configuration seeings for information technology V V V V V V V V V V V V V V V V V V V		Υ	Υ	
3.3.5 CONFIGURATION AMACREMENT 3.4.1 Stabilish and maintain hasheline configurations and inventories of organizational systems (including harbors, software, firmour, and documentation) throughout the respective system development (file cycles. 3.4.2 Fisabilish and maintain hasheline configurations and inventories of organizational systems, (including harbors, software, firmour, and documentation) throughout the respective system development (file cycles. 3.4.2 Fisabilish and maintain hasheline configurations settings for information technology products employed in organizational systems. 3.5.3.1 Firacl, reveal endergrowers, and log changes to organizational systems, team, and all the security impact of changes prior to implementation. 3.5.2 Firacles, and anything the security impact of changes prior to implementation. 3.5.3.5 Employers the security impact of changes prior to implementation. 3.5.4 Employer the security impact of changes prior to implementation. 3.5.4 Employers the security impact of changes prior to implementation. 3.5.5 Employers (including by configuring organizational systems to provide only assertial capabilities. 3.6.4 Employers the use of nonescential programs, functions, ports, provide only assertial capabilities. 3.6.5 Employers by exception tibardisting policy to prevent the use of unauthorized software. 3.6.5 Exployers and the provided programs and software. 3.6.5 Exployers and the provided programs and software. 3.6.5 Exployers and the provided programs and software. 3.6.5 Exployers were processes acting on behalf of users, and devices. 3.6.5 Exployers were processes acting on behalf of users, and devices. 3.6.5 Exployers and the processes acting on behalf of users, and devices. 3.6.5 Exployers activity and the provided programs and processes acting on behalf of users, and devices. 3.6.5 Exployers activity and the processes acting on behalf of users, and devices. 3.6.5 Exployers activities and the proper of processes acting on behalf of users, and devices. 3.6.5 E	55 5		'	
3.4 ESablish and maintain basiline configurations and inventories of organizational yespeems (including hardware, software, firmware, and documentation) throughout the respective systems (including hardware, software) firmware, and documentation) throughout the respective system development if cycles. 3.4.2 Esablish and enforce security configuration settings for information technology products employed in organizational systems. 3.4.3 Faci, review, approve or disapprove, and log changes to organizational systems. 3.4.3 Faci, review, approve or disapprove, and log changes to organizational systems. 3.4.3 Facility devices and entering products and indicate and indicate sections associated with changes to organizational systems and provided engine expensive capabilities. 3.4.3 Feeting, discussion, approved, and enforce physical and logical access restrictions associated with changes to organizational systems and provided engine expensive capabilities. 3.4.3 Feeting, discussion, approved engine expensive capabilities. 3.4.3 Feeting, discussion, approved engine expensive capabilities. 3.4.3 Feeting, discussion, and provided engine expensive capabilities. 3.4.4 Feeting, discussion, and the expension of authorized software. 3.4.5 Centrol and monitor user-installed software. 3.5.1 Identity symmetry expensive stating on behalf of users, and devices. 4.7.4 Y. 4.7.5 Feeting environmentation for local and network access to privilege accounts of the review and access to engine expension and previous and previous access to engine expension and previous and pre	,	V	V	
3.4.1 Establish and maintain baseline configurations and inventories of organizational yspeems (including hardware, software, firmware, and courtenation) through performance of the product of the product amployed in organizational systems. 3.4.2 Establish and enforce security configuration settings for information technology products employed in organizational systems. 3.4.5 Technic enforce security configuration settings for information technology or tems. 3.4.5 Technic amployed in organizational systems. 3.4.5 Technic approve or disapprove, and log changes to organizational systems. 3.4.6 Technic produce and enforce physical and logical access restrictions or tems. 3.4.6 Enfonce of central expabilities. 3.4.6 Enfonce of central expabilities. 3.4.6 Enfonce of central expabilities. 3.4.7 Restruct, disable, or prevent the use of nonesternial programs, functions, ports, portection, and secretical expabilities. 3.4.7 Restruct, disable, or prevent the use of nonesternial programs, functions, ports, portection, secretical expabilities. 3.4.8 English driving depretations of the programs, functions, ports, p		•		
systems (including hardware, software, firmware, and documentation) throughout the respective system development if cycles. 3.4.2 Establish and enforce security configuration settings for information sectionogy products employed in organizational systems. 3.4.3 Frack, review, approve or disapprove, and log changes to organizational systems. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.5 Enfolds, the principle of less furticional hystems or provided with changes to organizational systems to provide only essential capabilities. 3.4.6 Engley the principle of less furticionality by configuring organizational systems to provide only essential capabilities. 3.4.6 Engley deny-by-exception this clisting policy to prevent the use of inauthorized software. 3.4.6 Septile deny deny-by-exception this clisting policy to prevent the use of inauthorized software. 3.4.6 Septile deny-by-exception this clisting policy to prevent the use of inauthorized software. 3.4.5 Central and monitor user installed software. 3.5.1 Gentiley system users, processed, or devices, as a previous and provided accusary and provided accusary. 3.5.2 Employrephyresistant authentication for local and network access to privileged accusary. 3.5.3 Employrephyresistant authentication for local and network access to privileged accusary. 3.5.3 Employrephyresistant authentication nechanisms for network access to privileged accusary. 3.5.3 Employrephyresistant authentication nechanisms for network access to privileged accusary. 3.5.3 Employrephyresistant authentication nechanisms for network access to privileged accusary. 3.5.3 Employrephyresistant authentication nechanisms for network access to privileged accusary. 3.5.3 Employrephyresistant authentication nechanisms for network access to privileged accusar		V	V	Wo use mainly infrastructure as code approaches so the software is
the respective system development life cycles. A 2.8 Establish and enforce security configuration settings for information technology of products employed in organizational systems. A 3.4 Tack, review, approve of disapprove, and leg changes to organizational systems. A 3.4 Tack, review approve of disapprove, and leg changes to organizational systems or them. A 4.4 Analyze the security impact of changes prior to implementation. Y Y Y We have CCBs and code change process in place which also cover them. A 4.5 Enfoyth grey the security impact of changes prior to implementation. Y Y Y A 4.4 Analyze the security impact of changes prior to implementation. Y Y Y A 5.4 Analyze the security impact of changes prior to implementation. Y Y Y A 6.5 Enfoyth grey principle of least functionality by configuring organizational systems. A 7.6 Entry by the principle of least functionality by configuring organizational systems. A 8.6 Enploy deep by exception (blacklisting policy to prevent the use of unauthorized to have considered outside a service). A 8.7 Enploy deep by exception (blacklisting policy to prevent the use of unauthorized to have considered outside a service). A 8.7 Enploy deep by exception (blacklisting policy to prevent the use of unauthorized to have considered outside a service). A 8.7 Enploy deep by exception (blacklisting policy to prevent the use of unauthorized to have considered outside a service). A 8.7 Enploy deep by exception (blacklisting policy to allow the execution of authorized outside a service). A 8.7 Enploy deep by exception (blacklisting policy to allow the execution of authorized outside a service). A 9 We get a lot of this by mainly containerizing the applications. A 9 We get a lot of this by mainly containerizing the applications. A 9 We get a lot of this by mainly containerizing the applications and having users work within deployed containers. A 9 We get a lot of this by mainly containerizing the applications and the necessary of the applications and the necessary of	Ü	'	'	1 ''
3.4.2 Exablish and enforce security configuration settings for information technology or products employed in organizational systems. 3.4.3 Track, review, approve or disapprove, and log changes to organizational systems. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.5 Defines, document, approve, and enforce physical and logical across restrictions or associated with changes to organizational systems. 3.4.6 Employ the principle of less trutionality by configuring organizational systems to provide only essential capabilities. 3.4.6 Employ the principle of less trutionality by combining and protocols, and services. 3.4.8 Apply deeply exception fibricitisting policy to prevent the use of unauthorized a utriburized software. 3.4.9 Control and monitor user-installed software. 3.4.9 Control and monitor user-installed software. 3.5.1 User multifactor of verify) the divertises of users, processes acting on behalf of users, and devices. 3.5.2 Attentificator or verify) the divertises of users, processes acting on behalf of users, and devices. 3.5.3 User multifactor autherication of focial and network access to privileged accounts. 3.5.4 Employ register season autherities of users, processes, or everes, or everes, or every device devices of users, processes to repulsive devices or verify the divertises of users, processes to privileged accounts. 3.5.4 Employ register establishment for focial and network access to privileged accounts. 3.5.5 Prevent exert of verify the divertised of users, processes to privileged accounts. 3.5.6 Province manipulation and processes of privileged accounts. 3.5.6 Province manipulation devices are defined period of institutive. 3.5.7 Entrace and infendence of a defined period of institutive. 3.5.8 Province manipulation devices and processes of privileged accounts. 3.5.9 Province annipulation devices are define				went tracked. It inventory an the naraware.
JA 3 Tack, revew, aprove or disapprove, and log changes to organizational systems. 3.4.3 Fandy, revew, approve or disapprove, and log changes to organizational systems. 3.4.3 Fandy, revew, approve or disapprove, and log changes to organizational systems. 3.4.4 Analyze the security impact of changes prior to implementation. 3.4.5 Employ the principle of least functionality by configuring organizational systems. 3.4.6 Employ the principle of least functionality by configuring organizational systems. 3.4.7 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizational systems. 3.4.8 Employ the principle of least functionality by configuring organizations and hardware or deny-lip permit-by-exception (britishing) policy to allow the execution of authorized software. 3.4.9 Control and monitor user-installed software. 3.4.9 Control and monitor user-installed software. 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.3 Lip employer provides accounts on privileged accounts and for network access to many-integed accounts. 3.5.3 Employ replayer establish or privileged accounts. 3.5.4 Employ replayer establish or privileged accounts. 3.5.5 Employ replayer establish or privileged accounts. 3.5.8 Employ replay resistant authentication inchanges or privileged account		V	V	
3.4.3 Favore from the security impact of changes prior implementation. 3.4.4 Analyze the security impact of changes prior implementation. 3.4.4 Analyze the security impact of changes prior implementation. 3.4.4 Analyze the security impact of changes prior implementation. 3.4.5 Define, document, approve, and enforce physical and logical access restrictions of associated with changes to organizational systems. 3.4.6 Employ the principle of loss tutionality by configuring organizational systems. 3.4.6 Employ the principle of loss tutionality by combined programs, functions, ports, to provide only essential capabilities. 3.4.7 Restrict, dashbe, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent the use of nonessential programs, functions, ports, or authorized solds, or prevent with use of nonessential programs, functions, ports, or authorized solds, or prevent with use of nonessential programs, functions, ports, or authorized solds, or prevent with use of nonessential programs, functions, ports, or authorized solds, or authorized to allow the security of authorized solds, and or authorized solds, or authorized to allow the security of authorized solds, and for network access to privileged accounts. 3.5		'	'	
thems. We need to implementation. Ye is a separate the security impact of changes prior to implementation. Ye is a separate that the security impact of changes prior to implementation. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical acess restrictions. Ye is a separate physical and logical physical		V	V	We have CCPs and code change process in place which also sever
3.4.4 Spefing document, approve, and enforce physical and logical access restrictions y associated with changes to organizational systems. 3.4.5 Enfonce by intrological fase functionality by configuring organizational systems to provide only essential capabilities. 3.4.6 Enfonce by intrological fase functionality by configuring organizational systems to provide only essential capabilities. 3.4.7 Restrict, deaths or prevent the use of nonessential programs, functions, ports, provide only essential capabilities. 3.4.8 Apply depthy-exception (blacklisting) policy to prevent the use of nonessential programs, functions, ports, provide only essential capabilities. 3.4.8 Apply depthy-exception (blacklisting) policy to prevent the use of nauthorized software. 3.4.9 Apply depthy-exception (blacklisting) policy to prevent the use of unauthorized of authorized software. 3.4.9 Control and monitor user-installed software. 3.4.9 Control and monitor user-installed software. 3.5.1 Function (1900) And DAITHENITACITON 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate or nearly the intervention of total and network access to privileged accounts and provided control of total and network access to privileged accounts and provided accounts. 3.5.3 Function (1901) And DAITHENITACITON (19		ľ	'	
3.4.5 Employ the principle of least functionality by configuring organizational systems to provide only essential oppolitions of the secution of the principle of least functionality by configuring organizational systems to provide only essential oppolitions and protections, and service. 3.4.7 Restrict, disable, or prevent the use of nonescential programs, functions, ports, protections, and services. 3.4.8 Apply deny-by-exception (blacklisting) policy to prevent the use of unauthorized software or deny-null permit—by-exception (blacklisting) policy to allow the execution of authorized software. 3.4.5 Apply deny-by-exception (blacklisting) policy to prevent the use of unauthorized authorized software. 3.4.5 Control and monitor user-installed software. 3.5.1 DENTIFICATION AND AUTHEMPTICATION 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticator or venty the devites of users, processes, or devices, as a previous to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts and for network access to non-privileged accounts. 3.5.5 Frewart resolution for local and network access to privileged accounts and for network access to non-privileged accounts. 3.5.5 Frewart resolution for the privileged accounts. 3.5.5 Frewart resolution for the privileged accounts. 3.5.5 Frewart resolution for the privileged accounts. 3.5.5 Prevention for the privileged accounts. 3.5.7 Prevention for the privileged accounts. 3.5.8 Prohibit password ruse of derificies for a defined period of inactivity. 4 V V V V V V V V V V V V V V V V V V		V	V	the initiastructure as code.
As 6 Employ the principle of fises in functionality by configuring organizational systems. As 6. Employ the principle of fises in functionality by configuring organizational systems to provide only essential capabilities. A 7. Restrict, dashle, or prevent the use of nonessential programs, functions, ports, and protocols, and services. A 8. Apply devely—by-exception (blacklisting) policy to prevent the use of nonessential programs, functions, ports, and alternative or deny-all, permit by exception (blacklisting) policy to allow the execution of authorized software. A 1.4. Restrict, dashle, or prevent the use of nonessential programs, functions, ports, and services. A 1.4. Restrict, dashle, or prevent the use of nonessential programs, functions, ports, and services. A 1.4. Restrict, dashle, or prevent the use of nonessential programs, functions, ports, and services. A 1.4. Restrict, dashle, or prevent the use of nonessential programs, functions, ports, and services or authorized software. A 1.4. Restrict, dashle dashle, or prevent the use of nonessential programs, functions, ports, and having users work within deployed containers. A 1.4. Restrict, dashle dashle, or prevent the use of nonessential programs, functions, ports, and having users work within deployed containers. A 1.4. Restrict, dashle dashle, or prevent the use of nonessential programs, functions, ports, and having users work within deployed containers. A 1.4. Restrict, dashle				
3.4.7 Employ the principle of least functionality by configuring organizational systems by provide only seasmal capabilities. 3.4.7 Restrict, disabile, or prevent the use of nonessential programs, functions, ports, ports or protection, and services. 3.4.8 Apply deny-by-exception (blacklisting) policy to prevent the use of unauthorized software or deny-day, all permits by-exception (vibricialisting) policy to prevent the use of unauthorized software or deny-day, all permits by-exception (vibricialisting) policy to allow the execution of authorized software. 3.4.9 Control and monitor user-installed software. 3.5.1 OBNTIFICATION AND AUTHENTICATION 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate or verify the identities of users, processes, or devices, as a pre-requisite to allowing access to organizational systems. 3.5.3 Lembify and the control of the con		Y	Y	
Le provide only essential capabilities. A.7 Restrict, disable, or prevent the use of nonessential programs, functions, ports, 4.7 Restrict, disable, or prevent the use of nonessential programs, functions, ports, 4.8 Apply deny-by-exception (blacklisting) policy to prevent the use of unauthorized software. A.8 A Control and monitor user-installed software. 3.5 Destrict, and monitor user-installed software. 3.5 DESTRICKATION AND AUTHENTICATION 3.5 I Identify system users, processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 3.5 I Very system users processes acting on behalf of users, and devices. 4 Y 5.5 I Very system users processes acting on behalf of users, and devices. 5.5 I Very system users processes acting on behalf of users, and devices. 5.5 I Very system users processes acting on behalf of users, and devices. 5.5 I Very system users processes acting on behalf of users, and devices. 7 Y 7 V 7 Chile dont require 2FA at the moment. 7 V 7 Chile dont require 2FA at the moment. 8 V 8 V 8 Chile dont require 2FA at the moment, but certificates are deployed to prevent mitm. 9 V 9 Chile dont require 2FA at the moment, but certificates are deployed to prevent mitm. 9 V 9 V 9 V 9 V 9 V 9 V 9 V 9		N.		
3.4.7 Require a fastric, disable, or prevent the use of nonessential programs, functions, ports, protocols, and services. 3.4.8 Apply deny by-exception (blacklisting policy to prevent the use of unauthorized software or deny-all, permit-by-exception (whitelisting) policy to allow the execution of authorized software. 3.4.9 Control and monitor user-installed software. 3.5.1 DENTIFICATION AND AUTHENTICATION 3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate or verify) the identities of users, processes, or devices, as a prevaignment to allowing access to organizational systems. 3.5.3 Use multicate or verify) the identities of users, processes, or devices, as a prevaignment of the intention of the analysis of the intention of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes, or devices, as a prevaignment of the intention of the identities of users, processes or devices, as a prevaignment of the identities of users, processes, or devices, as a prevaignment of the identities of users, processes, or devices, as a prevaignment of the identities of users, processes, or devices, as a prevaignment of the identities of users, processes, or devices, as a prevaignment of the identities of users, processes or devices to private of users, and the identities of users, processes or devices, as a prevaignment of the identities of users, processes, or devices, as a prevaignment of users of users, processes or devices, as a prevaignment of users, and the identities of u		N	Y	
As As Apply deny-by-exception (blacklisting) policy to prevent the use of unauthorized software or deny-all, permit-by-exception (whitelisting) policy to allow the execution of authorized software. 3.4.9 Control and monitor user-installed software. 3.5 Dentri (and Deny-all) permit-by-exception (whitelisting) policy to allow the execution of authorized software. 3.5 DENTRICATION AND AUTHENTICATION (AND AUTHENTICATION) and DENTRICATION (AUTHENTICATION) and DENT				
3.4.9 Control and monitor user-installed software. 3.4.9 Control and monitor user-installed software. 3.4.9 Control and monitor user-installed software. 3.5.1 Dentification was processed across of evices, and devices. 3.5.1 Identify system users, processes acroing on behalf of users, and devices. 3.5.2 Authenticate for verify by the identities of users, processes, or devices, as a previous to allowing access to organizational systems. 3.5.3 Use multificator authentication for local and network access to privileged accounts. 3.5.3 Use multifactor authentication for local and network access to privileged accounts. 3.5.4 Employ replayeresistant authentication mechanisms for network access to privileged accounts. 3.5.5 Frenotre uses of identifiers of soft and enteropy and the process of adended period. 3.5.5 Premote uses of identifiers of a defined period. 3.5.5 Premote uses of identifiers of a defined period. 3.5.5 Priotice a minimum password complexity and change of characters when new passwords are created. 3.5.5 Priotice a minimum password use for system logans with an immediate change to a permanent password. 3.5.7 Priotice and unsamit only cryptographically-protected passwords. 3.5.10 Store network of the protection of the tool of the protection of t		Y	Y	
software or deny-all, permit-by-exception (whitelisting) policy to allow the execution of authorized software. 3.4.9 Control and monitor user-installed software. 3.5.1 Centrol system users, processes acting on behalf of users, and devices. 3.5.1 Centrol system users processes acting on behalf of users, and devices. 3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a pre-requisite to allowing access to organizational systems. 3.5.3 Live multifactor authentication for local and network access to privileged accounts and for network access to on-privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Prevent reuse of identifiers for a defined period. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prolibit password reuse for a specified number of generations. 3.5.9 Rivolibit password reuse for a specified number of generations. 3.5.9 No verified password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.1 Test, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to very example the decidence of the programation of the programation of the stabilish nonlocal maintenance sessions. 4.7.3 Ensure equipment removed for off-site maintenance is s	•			
of authorized software. 3.4.3 Control and monitor user-installed software. 3.5 IDENTIFICATION AND AUTHENTICATION 3.5.1 Identify system users, processes atting on behalf of users, and devices. 3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a pre-requisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and on-privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and on-privileged accounts. 3.5.5 Disable identifiers after a defined period. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Parolibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logors with an immediate change to a permanent password. 3.5.1 Doscure feedback of authentication information. 4. Y.		N	Y	· ·
3.5.1 Dentification And Dathentification 3.5.1 Dentification And Dathentification 3.5.1 Dentification And Dathentification 3.5.1 Dentify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate (or verify) the identifies of users, processes, or devices, as a prequisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts and for network access to non-privileged accounts. 3.5.5 Processes acting of network access to non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Provent reuse of identifiers for a defined period. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Provent password use for system logons with an immediate change to paramanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.6.1 Testablish an operational incident-handling capability for organizational systems varied and external to the organizational systems of the incident formation. 4.7 Y Y A Stabilish an operational incident-handling capability for organizational systems. 3.6.1 Testablish and operational incident-handling capability for organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to y V Y Conduct system maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to y V Y Conduct system maintenance on organizational systems. 3.7.3 Provide controls on the tools, techniques, mechanisms, and personnel used to y V Y Conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance bersonnel without required acce				could be related to blacklisting of applications.
3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a prerequisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts. 3.5.4 Employ replay-resistant authentication for local and network access to privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Disable identifiers after a defined period. 3.5.7 Disable identifiers after a defined period. 3.5.7 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store redeaback of authentication information. 4.7 Y 4.7 Y 4.7 Y 4.7 Y 5.5.10 Event reuse of identifiers after a few of a specified number of generations. 4.8 Y 5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 5.1.10 Store and transmit only cryptographically-protected passwords. 5.1.10 Store redeaback of authentication information. 5.1.10 Store redeaback of authentication information. 7.1.10 Y 7.1.10 Y 8.1.10 Event reduced a country of the programation of the country of the properties of the programation of the country of the country of the programation of the country of t				
3.5.1 Identify system users, processes acting on behalf of users, and devices. 3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a prerequisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts. 3.5.3 Disc multifactor authentication for local and network access to privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 4. Y. Y. AURA have insurance which covers this. But we really should have a contract to look over logs etc. to note when we are hit. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.7.1 Perform maintenance on organizational systems. 3.7.2 Perform maintenance on organizational systems. 4. Y.		Υ	Υ	
3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a pre-requisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts. 3.5.4 Employ replay-resistrant authentication mechanisms for network access to privileged accounts. 3.5.5 Premote reuse of identifiers for a defined period. 3.5.5 Premote reuse of identifiers for a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Polhoit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organizational incident response capability. 3.7.1 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance used in organizational systems. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Enquire multifactor authentication to establish nonlocal maintenance sessions when nonlocal maintenance activities of maintenance personnel without required access to privileged accounts. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access at authorization.	3.5 IDENTIFICATION AND AUTHENTICATION			
requisite to allowing access to organizational systems. 3.5.3 Use multifactor authentication for local and network access to privileged accounts and for network access to non-privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.5 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.6 Disable identifiers for a defined period. 3.5.6 Disable identifiers for a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Doscure feedback of authentication information. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to various acceptance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Chile dont to 2FA yet. 2 factor authentication system (Duo) has the capability to kill sessions.	3.5.1 Identify system users, processes acting on behalf of users, and devices.	Y	Υ	
3.5.3 Use multifactor authentication for local and network access to privileged accounts and for network access to non-privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.7 Previde an immunimum password complexity and change of characters when new passwords are created. 3.5.9 Prevent reuse of identifiers for a specified number of generations. 3.5.9 Allow temporary password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.6.1 NCIDENT RESPONSE 3.6.1 REstablish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities but hinternal and external to the organization. 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to rounduct system maintenance. 3.7.3 Feequire multifactor authentication to establish nonlocal maintenance sessions with a nonlocal maintenance activities of maintenance personnel without require 2FA at the moment. Y V V Chille dont require 2FA at the moment to prevent mitim. Y V V V V V V V V V V V V V V V V V V	3.5.2 Authenticate (or verify) the identities of users, processes, or devices, as a pre-	Υ	Y	
counts and for network access to non-privileged accounts. 3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.7.4 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Fiscure equipment removed for off-site maintenance is sanitized of any CUI. Y Y Chille dont require 2FA at the moment, but certificates are deployed to prevent mitim Y Y Y A Chille dont require 2FA at the moment, but certificates are deployed to prevent mitim Y Y Y 3.5.6 Disable identifiers after a defined period. N Y Y A URA have insurance which covers this. But we really should have a contract to look over logs etc. to note when we are hit. Y Y Y 3.6.1 Testablish an operational incident reponse capability. N Y Y 3.7.2 Provide corrols on the tools, techniques, mechanisms, and personnel used to conduct system maintenance on organizational systems. 3.7.2 Provide corrols on the fools, techniques, mechanisms, and personnel used to conduct system maintenance on off-site maintenance is sanitized of any CUI. Y Y Chille dont d	requisite to allowing access to organizational systems.			
3.5.4 Employ replay-resistant authentication mechanisms for network access to privileged and non-privileged accounts. 3.5.6 Prevent reuse of identifiers for a defined period. 3.5.6 Prevent reuse of identifiers for a defined period. 3.5.6 Prevent reuse of identifiers for a defined period. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 4 Y Y ALRA have insurance which covers this. But we really should have a contract to look over logs etc. to note when we are hit. 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 4 Y Y Chile dont do 2FA yet. 2 factor authentication system (Duo) has the capability to kill sessions.	3.5.3 Use multifactor authentication for local and network access to privileged ac-	N	Y	Chile dont require 2FA at the moment
lileged and non-privileged accounts. 3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.4 MAINTENANCE 3.7.12 Proform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Finsure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Snequire multifactor authentication to establish nonlocal maintenance sessions will access authorization. N Y Chile dont do 2FA yet, 2 factor authentication system (Duo) has the capability to kill sessions.	counts and for network access to non-privileged accounts.			
3.5.5 Prevent reuse of identifiers for a defined period. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Discore and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.5.11 Obscure feedback of authentication information. 3.6.1NCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.4 NaINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions was accessed authorization. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	3.5.4 Employ replay-resistant authentication mechanisms for network access to priv-		Υ	Chile dont require 2FA at the moment, but certificates are deployed
3.5.6 Disable identifiers after a defined period of inactivity. 3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.4 Preform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions with an immediate change to a process of the solution of terminate such connections when nonlocal maintenance is complete.	ileged and non- privileged accounts.			to prevent mitm
3.5.7 Enforce a minimum password complexity and change of characters when new passwords are created. 3.5.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 Maintenance 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance essions with an immediate technique presonnel without required access authorization.	3.5.5 Prevent reuse of identifiers for a defined period.	N	Υ	
passwords are created. 3.3.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	3.5.6 Disable identifiers after a defined period of inactivity.	Υ	Υ	
passwords are created. 3.3.8 Prohibit password reuse for a specified number of generations. 3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	3.5.7 Enforce a minimum password complexity and change of characters when new	Υ	Υ	
3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance activities of maintenance personnel without required access authorization.				
3.5.9 Allow temporary password use for system logons with an immediate change to a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance activities of maintenance personnel without required access authorization.	3.5.8 Prohibit password reuse for a specified number of generations.	Υ	Y	
a permanent password. 3.5.10 Store and transmit only cryptographically-protected passwords. 7 Y Y 3.5.11 Obscure feedback of authentication information. 8 Y Y 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	· · · · · · · · · · · · · · · · · · ·	Υ	Υ	
3.5.10 Store and transmit only cryptographically-protected passwords. 3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance cativities of maintenance personnel without required access authorization.				
3.5.11 Obscure feedback of authentication information. 3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	·	Υ	Y	
3.6 INCIDENT RESPONSE 3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.				
3.6.1 Establish an operational incident-handling capability for organizational systems that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.				
that includes preparation, detection, analysis, containment, recovery, and user response activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.4 MINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		V	V	ALIRA have insurance which covers this. But we really should have a
sponse activities. 3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7.4 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		'	'	,
3.6.2 Track, document, and report incidents to designated officials and/or authorities both internal and external to the organization. 3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.				contract to look over logs etc. to note when we are mit.
both internal and external to the organization. 3.6.3 Test the organizational incident response capability. N Y 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	•	V	V	
3.6.3 Test the organizational incident response capability. 3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		'	'	
3.7 MAINTENANCE 3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		N	V	
3.7.1 Perform maintenance on organizational systems. 3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		IN	1	
3.7.2 Provide controls on the tools, techniques, mechanisms, and personnel used to conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		V	V	
conduct system maintenance. 3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.				
3.7.3 Ensure equipment removed for off-site maintenance is sanitized of any CUI. 3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		Y	Y	
3.7.4 Check media containing diagnostic and test programs for malicious code before the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	,			
the media are used in organizational systems. 3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	, , , , , , , , , , , , , , , , , , , ,			
3.7.5 Require multifactor authentication to establish nonlocal maintenance sessions via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.		Y	Y	
via external network connections and terminate such connections when nonlocal maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	<u> </u>			
maintenance is complete. 3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.	· ·	N	Y	
3.7.6 Supervise the maintenance activities of maintenance personnel without required access authorization.				capability to kill sessions.
quired access authorization.	'			
		Y	Y	
I 3.8 MEDIA PROTECTION	•			
	3.8 MEDIA PROTECTION			



3.8.1 Protect (i.e., physically control and securely store) system media containing CUI, both paper and digital.	N	Y	
3.8.2 Limit access to CUI on system media to authorized users.	N	Y	
3.8.3 Sanitize or destroy system media containing CUI before disposal or release for reuse.	Υ	Y	
3.8.4 Mark media with necessary CUI markings and distribution limitations.	N	Y	We understand we should label rooms and machines acording to https://www.archives.gov/files/cui/20161206-cui-marking-handbook-v1-1.pdf
3.8.5 Control access to media containing CUI and maintain accountability for media during transport outside of controlled areas.	Y	Y	
3.8.6 Implement cryptographic mechanisms to protect the confidentiality of CUI stored on digital media during transport unless otherwise protected by alternative physical safeguards.	N	Y	
3.8.7 Control the use of removable media on system components.		Y	Can be rolled out with puppet but there are some servers that need usb.
3.8.8 Prohibit the use of portable storage devices when such devices have no identifiable owner.	Y	Y	
3.8.9 Protect the confidentiality of backup CUI at storage locations.	Υ	Υ	
3.9 PERSONNEL SECURITY			
3.9.1 Screen individuals prior to authorizing access to organizational systems containing CUI.	Y	Y	Only project team members will have access to early images - all are know individuals. This doesn't suggest background security screening and it was also explicitly not required by the agencies in section 2 of the requirements document.
3.9.2 Ensure that organizational systems containing CUI are protected during and after personnel actions such as terminations and transfers.	Υ	Y	
3.10 PHYSICAL PROTECTION			
3.10.1 Limit physical access to organizational systems, equipment, and the respective operating environments to authorized individuals.	Υ	Y	This physical access limitations will increase with locks on server cabinets etc. but key card access is already in place.
3.10.2 Protect and monitor the physical facility and support infrastructure for organizational systems.	Y	Y	Security is in place on Cero Pachon and at the entrance to the mountain - though not only for Rubin so not permanently at the observatory.
3.10.3 Escort visitors and monitor visitor activity.	Υ	Y	Actual visitors are escorted on the summit - contractors are considered more like staff.
3.10.4 Maintain audit logs of physical access.	N	Y	Chile use Noirlab key-card system, we should reach to them to inquire about their audit procedures
3.10.5 Control and manage physical access devices.	Υ	Υ	
3.10.6 Enforce safeguarding measures for CUI at alternate work sites.	Y	Y	This brings in NIST.800-46 and NIST.800-114. Threat analysis suggested. NAT considered bad.
3.11 RISK ASSESSMENT			
3.11.1 Periodically assess the risk to organizational operations (including mission, functions, image, or reputation), organizational assets, and individuals, resulting from the operation of organizational systems and the associated processing, storage, or transmission of CUI.	Y	Y	
3.11.2 Scan for vulnerabilities in organizational systems and applications periodically and when new vulnerabilities affecting those systems and applications are identified.	N	Y	Third party contract
3.12 SECURITY ASSESSMENT			
3.12.1 Periodically assess the security controls in organizational systems to determine if the controls are effective in their application.	Y	Y	
3.12.2 Develop and implement plans of action designed to correct deficiencies and reduce or eliminate vulnerabilities in organizational systems.	Υ	Y	
3.12.3 Monitor security controls on an ongoing basis to ensure the continued effectiveness of the controls.	Y	Y	
3.12.4 Develop, document, and periodically update system security plans that describe system boundaries, system environments of operation, how security require-	N	Y	Like any documentation this security documentation can get out of date.
ments are implemented, and the relationships with or connections to other systems. 3.13 SYSTEM AND COMMUNICATIONS PROTECTION			
3.13.1 Monitor, control, and protect communications (i.e., information transmitted or received by organizational systems) at the external boundaries and key internal boundaries of organizational systems.	Y	Y	
3.13.2 Employ architectural designs, software development techniques, and systems engineering principles that promote effective information security within organiza- tional systems.	Y	Y	We can do more here.
3.13.3 Separate user functionality from system management functionality.	N	Y	This is difficult in development and commissioning but should be ok in operations.
3.13.4 Prevent unauthorized and unintended information transfer via shared system resources.	N	Y	This will require training the operators and scientist who have access to the CUI data to not put it on their devices.



3.13.5 Implement subnetworks for publicly accessible system components that are	Υ	Υ	
physically or logically separated from internal networks.			
3.13.6 Deny network communications traffic by default and allow network communi-	Υ	Y	We may need to bring up iptables on each host
cations traffic by exception (i.e., deny all, permit by exception).			
3.13.7 Prevent remote devices from simultaneously establishing non-remote connec-	Υ	Υ	
tions with organizational systems and communicating via some other connection to			
resources in external networks (i.e., split tunneling).			
3.13.8 Implement cryptographic mechanisms to prevent unauthorized disclosure of	N	Υ	IPSec and encryption coming
CUI during transmission unless otherwise protected by alternative physical safe-			
guards.			
3.13.9 Terminate network connections associated with communications sessions at	Υ	Υ	
the end of the sessions or after a defined period of inactivity.			
3.13.10 Establish and manage cryptographic keys for cryptography employed in or-	Υ	Υ	
ganizational systems.			
3.13.11 Employ FIPS-validated cryptography when used to protect the confidentiality	N	Υ	
of CUI.			
3.13.12 Prohibit remote activation of collaborative computing devices and provide	Υ	Y	We should take care with the new roaming camera.
indication of devices in use to users present at the device.			
3.13.13 Control and monitor the use of mobile code.	Υ	Υ	Currently we have no mobile code
3.13.14 Control and monitor the use of Voice over Internet Protocol (VoIP) technolo-	N	Υ	Chile dont monitor voip callls
gies.			
3.13.15 Protect the authenticity of communications sessions.	Υ	Υ	
3.13.16 Protect the confidentiality of CUI at rest.	N	Υ	
3.14 SYSTEM AND INFORMATION INTEGRITY			
3.14.1 Identify, report, and correct system flaws in a timely manner.	Υ	Υ	
3.14.2 Provide protection from malicious code at designated locations within organi-	Υ	Υ	
zational systems.			
3.14.3 Monitor system security alerts and advisories and take action in response.	Υ	Υ	
3.14.4 Update malicious code protection mechanisms when new releases are avail-	Υ	Υ	
able.			
3.14.5 Perform periodic scans of organizational systems and real-time scans of files	Υ	Υ	
from external sources as files are downloaded, opened, or executed.			
3.14.6 Monitor organizational systems, including inbound and outbound communi-	Υ	Y	
cations traffic, to detect attacks and indicators of potential attacks.			
Total requirements		108	
Total Rubin Intends to comply with		108	
Total Rubin Complies with in 2021		72	



B References

[SQR-037], Allbery, R., 2020, SQuaRE security risk assessment, SQR-037, URL https://sqr-037.lsst.io/,

Vera C. Rubin Observatory SQuaRE Technical Note

[SQR-041], Allbery, R., 2021, *Science Platform security risk assessment*, SQR-041, URL https://sqr-041.lsst.io/,

Vera C. Rubin Observatory SQuaRE Technical Note

[LSE-30], Claver, C.F., The LSST Systems Engineering Integrated Project Team, 2018, *Observatory System Specifications (OSS)*, LSE-30, URL https://ls.st/LSE-30

[NIST.FIPS.200], Division, C.S., 2006, Publication 200, minimum security requirements for federal information and information systems, URL https://doi.org/10.6028/NIST.FIPS.200

[ITTN-014], Gonzalez, I., 2022, *Computing Infrastructure*, ITTN-014, URL https://ittn-014.lsst.io/,

Vera C. Rubin Observatory

[LDM-324], Kantor, J., 2016, *Data Management Information Security Plan*, LDM-324, URL https://ls.st/LDM-324

[DMTN-108], O'Mullane, W., 2021, Security of Rubin Observatory data, DMTN-108, URL https://dmtn-108.lsst.io/,

Vera C. Rubin Observatory Data Management Technical Note

[DMTN-135], O'Mullane, W., Dubois, R., Butler, M., Lim, K.T., 2021, *DM sizing model and cost plan for construction and operations.*, DMTN-135, URL https://dmtn-135.1sst.io/, Vera C. Rubin Observatory Data Management Technical Note

[NIST.SP.800-171], ROSS, R., VISCUSO, P., GUISSANIE, G., DEMPSEY, K., RIDDLE, M., 2020, Special publication 800-171, protecting controlled unclassified information in nonfederal systems and organizations, URL https://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-171r2.pdf

[NIST.800-114], Souppaya, M., Scarfone, K., 2016, COMPUTER SECURITY, URL https://doi.org/10.6028/NIST.SP.800-114r1



[NIST.800-46], Souppaya, M., Scarfone, K., 2016, COMPUTER SECURITY, URL https://doi.org/ 10.6028/NIST.SP.800-46r2

C Acronyms