

Social Embedding Image Distance Learning

Anonymous for ACM Multimedia 2014

ABSTRACT

Image distance (similarity) is a fundamental and important problem in image processing. However, traditional visual features based image distance metrics are usually failed to capture human cognition. This paper presents a novel Social-sensed Image Distance Learning (*SIDL*) approach to embed the similarity of collective social and behavioral information into visual space. The social similarity is estimated according to multiple social factors. Then a metric learning method is especially designed to learn the distance of visual features from the estimated social similarity. In this manner, we can evaluate the cognitive image distance based on the visual content of images. Comprehensive experiments are designed to investigate the effectiveness of our learning method, as well as the performance in the image recommendation and reranking tasks. The experimental results show that the proposed approach makes a marked improvement compared to the state-of-the-art image distance metrics. An interesting observation is given to show that the social-sensed image distance can better reflect our cognition.

Categories and Subject Descriptors

H.4 [Information Systems Applications]: Miscellaneous;
D.2.8 [Software Engineering]: Metrics—*complexity measures, performance measures*

General Terms

Theory

Keywords

ACM proceedings, L^AT_EX, text tagging

1. INTRODUCTION

With the fast development of Internet, image search and recommendation play an important role in delivering information in our daily life. In these applications, measuring

the distance (or similarity) of pair-wise images is a fundamental and important issue. *If an effective image distance metric is obtained, we can easily employ existing technologies to achieve good performance in image search and recommendation.* For example, in image recommendation, we can employ content-based filtering method to find images that are closest to the historical viewing logs of the user[21]; in image search, PageRank model can be applied to rerank the images that are filtered by text-based search engines[13].

However, to date, existing image distance metrics do not perform well to achieve this goal, due to that they usually focus on measuring similarity of visual features but are not mature to capture human cognition, which is one of the most important factors in image search and recommendation. Here human cognition includes many aspects, such as semantic, attributes, user intention, image emotion, etc. Although the problem of capturing human cognition has received increasing attention in recent years, how to identify users' cognition is still a great challenge because we can hardly obtain the knowledge.

With the development of social network, a huge amount of users share their beautiful pictures and view others' in the social media platforms, such as Flickr and Twitter. Within these platforms, we can obtain not only vast amounts of images but also a series of collective social and behavioral information, such as annotated tags, favorite images and interest groups of users. In social psychology, it has been proved that human cognition and user behavior influence to each other [2]. Therefore, social behavioral information in social media platform can be regarded as the reflection of their cognition to images. Given the user behavior information in the social media platform, we can embed the social behavioral information to the original visual space to better evaluate the image similarity. However, this idea faces the following challenges:

(1) **The lack of social information in Web image.** Although behavioral information does help to estimate user cognition, most of the Web images do not have user behavior information due to they are not produced by social media platforms. If the image distance relies on both social behavioral information and visual features, our method will be extremely circumscribed in social images. Therefore, how to make our distance metric universal in common Web images is a great challenge in our problem.

(2) **The unreliability of social media data.** In social network, collective social and behavioral information is usually uncertain and unreliable. If the amount of user behavior information is not enough, the social similarity may

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

Copyright 20XX ACM X-XXXXX-XX-X/XX/XX ...\$15.00.

have contingency. For example, although two images are both favored by a user, they may be still dissimilar because the user might have more than one interest. Thus, we also need to consider the reliability of social similarity.

(3) **The sparsity of user behavior.** In traditional image distance learning task, the knowledge of similarity graph is very dense: in most cases, the similarity of any two images is fixed. However, in social network, most of pair-wise images are not social related. i.e., they do not have any relation in user behavior. Thus, we cannot determine whether these two images are similar or not. In this case, the visual similarity should be maintained to avoid a random result.

To address the above problems, we propose a Social Embedding image Distance Learning (*SEDL*) approach to learn image distance from user behavior information in social media platforms, which is shown in Figure 1. In the approach, we use metric learning technique to learn an image distance function of visual features. Different from traditional metric learning work, our distance function aims at making image distance consistent to their social distance in user behavior. Thus, although the distance function is learned from social images (i.e., the images in social media platforms), it can measure the distance of ordinary Web images because it learns the weight and correlation of visual features. We call this idea “learn from social image, work beyond social image”. In our method, we first estimate the social similarity among social images. Next, we conduct our metric learning method to reduce the distance of socially similar images and enlarge the distance of socially dissimilar images. Finally, the learned image distance function is used to evaluate the distance of Web images based on their visual features. The image distance can be applied to a lot of applications, such as image recommendation and reranking. We not only conduct comprehensive experiments to show the effectiveness of our approach, but also give an interesting observation about the relationship between the learned distance and our intuitive cognition.

The contributions of our proposed approach are summarized as follows: (1) We propose a novel image distance learning approach, which aims at using user behavior information in social media to capture human cognition in Web image distance measuring. To the best of our knowledge, we are the first who use the idea of “learn from social media, work beyond social media” to solve this problem.

(2) In this paper, we propose a Social Embedding Image Distance Learning approach, where an image distance metric function based on visual features is learned to make image distance consistent to social distance defined from user behavior. In our approach, social distance is well estimated in multimodal social factors. The metric learning method is especially designed to learn the similarity of visual features from social distance. Furthermore, we design two basic application scenarios based on the proposed *SEDL* method, including image recommendation and image reranking.

(3) To evaluate the performance of our approach, comprehensive experiments are conducted based on real social media and image reranking datasets. The experimental results have shown the effectiveness of the learning method. In addition, compared to the state-of-the-art image distance metrics the superiority of our image distance metric in the applications of image recommendation and reranking is also proved.

(4) More than quantitative evaluation, an interesting ob-

servation of the relationship between the learned distance and our intuitive cognition is also given to show our results subjectively. We can observe that the key points of images, such as eyes, salient objects, are more important in measuring image similarity.

The rest of the paper is organized as follows: Section 2 gives a brief overview and comparison of related work. Section 3 introduces the evaluation of image social similarity. In Section 4, we introduce optimization of the proposed *SEDL* method and present two applications including image reranking and recommendation based on our distance learning method. Then we introduce our experiments and report the results in Section 5. Finally, Section 6 summarizes the paper.

2. RELATED WORK

Aiming at improving the performance of image search, a series of methods have been proposed to capture human cognition in intention level and attribute level, including query log based method [12, 4, 11], query analysis based method [19, 25], relevance feedback based method [22, 29], etc. In the query log based methods, user click data in image search engines are used as the dataset. These methods relies on the dataset very much: if a query contains less training images, the performance will not be very good. Besides, they face the recall problem: if an image is ranked very low in the original search engine, fewer users will click it because they may not see it. Query analysis based methods usually use the techniques in IR, such as query suggestion and query expansion to capture the different aspects of user intention. Zha *et al.* proposed a visual query suggestion approach [28] to suggest more detailed queries for ambiguous queries. In these methods, an important assumption is that visually similar images should have similar user intentions. But this hypothesis is not usually tendable. Relevance feedback is another effective way to collect the cognition information by collecting users’ feedback. The results will be reranked based on the feedbacks. However, the complex operation of feedback may sometimes reduce the user experience.

With the development of social media, a series of social-sensed image search and recommendation approaches have been proposed. The social factors, such as image tags, users, interest groups are considered to replace the original manually labeled data. Image tagging methods [15, 24] by user annotation show their significant improvements in bridging the semantic gap. Liu *et al.* proposed an image reranking method [16] that considers both visual factor and social factor. In this work, interest group in Flickr is utilized to evaluate the image similarity in user intention level. The research indicates that the interest groups can help understanding user intention in image reranking. However, this work is based on the images in Flickr, which cannot be well generalized to the ordinary Web images without social information such as interest groups.

Image distance metric plays an important role in many machine learning problems. Traditional metric learning researches usually aim at learning metric from labeled examples. The methods can be categorized into supervised [27, 10] ones and semi-supervised ones [9]. In supervised metric learning, the labels of images are complete, such as the categories of the images. Kilian *et al.* proposed a method named LMNN [26], which aims at reducing the margin of nearest neighbors. In semi-supervised metric learning, we

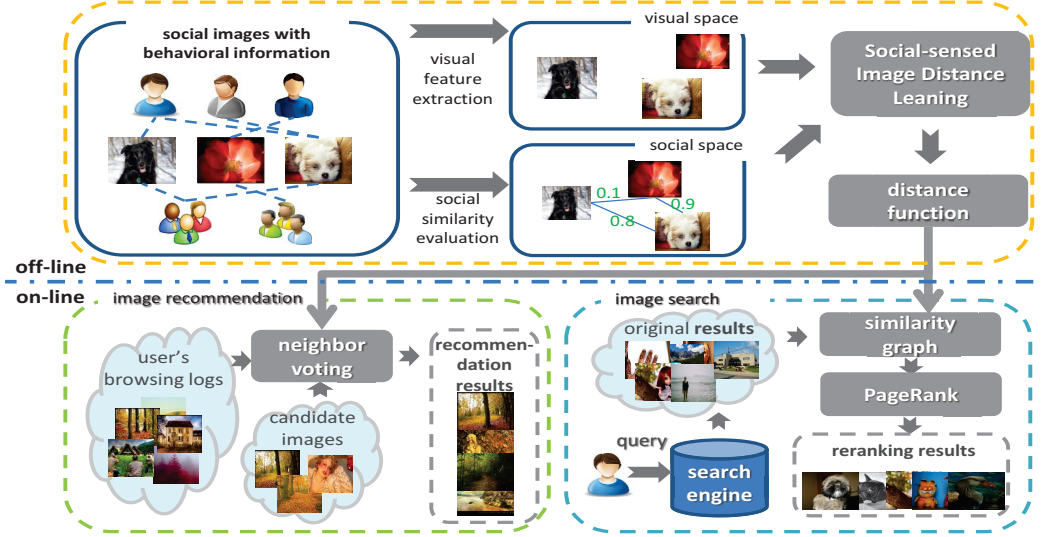


Figure 1: Illustration of the proposed Social-sensed Image Distance Learning (SIDL) approach and the image search and recommendation system developed on SEDL.

do not have all the labels but only know some pairs of images are similar and some pairs are dissimilar. The target turned to reduce the distance among the similar set and enlarge the distance among the dissimilar set. In our work, we do not have any labeled images but the images with social behavioral information. Although the social similarity can be evaluated by the social information, its reliability is not guaranteed because the social data are very noisy and uncertain. In addition, social similarity is a wholly new dimension to evaluate image similarity and it is very sparse. Thus visual distance needs to be maintained when an image does not have a socially similar neighbor.

3. SOCIAL SIMILARITY

Given the training social images with both visual features and social factors, our aim is to learn a distance function of visual features, which is consistent to the social similarity. Therefore, we first need to explore how to evaluate social similarity of images according to their social behavioral information.

3.1 Image Presentation

In this paper, we aim at embedding social behavioral information into visual space. Thus it is very important to present the complex and unstructured social behavioral information in a structured feature space. Here we call each dimension of social behavioral information as a social factor. Similar to the “Bag of Visual Words” model in visual descriptor presentation, each social factor is presented in a “Bag of social entity” way. For example, in Flickr, the typical social factors we can obtain include user favoring, group sharing, and user tagging, etc. Thus an image can be presented by a set of users who favor it, groups that share it and tags that belongs to it, which are defined as social entities. Therefore, a social image can be presented in visual and social dimensions, i.e., $\mathcal{I}_i = \{x_i, \mathcal{S}_i\}$, where x_i is the vector of visual features, and $\mathcal{S}_i = \cup_{k=1}^m \mathcal{V}_i^k$ is a set that includes m social

factors. \mathcal{V}_i^k is the k^{th} social factor of image \mathcal{I}_i . Each social factor \mathcal{V}_i^k can be represented as a bag of social entities. To make our formulation more general, we use the symbol V_i to represent a social factor, and v_i to denote a social entity. For example, in our problem, we can use \mathcal{V}^1 to denote the social factor of user favoring. Therefore, $\mathcal{V}_i^1 = \{v_{t_1}, \dots, v_{t_n}\}$ denotes that there are n users v_{t_1}, \dots, v_{t_n} that favor the image \mathcal{I}_i .

Given the training social images with both visual features and social factors, our aim is to learn a distance function $d(x_i, x_j)$ of visual features, which is consistent to the social similarity $sim(\mathcal{I}_i, \mathcal{I}_j)$. In this section, we will show some analysis of social factors and introduce how to evaluate the social similarity in our approach.

3.2 Preliminary Study of Social Factors

In our problem, the first question is whether the social similarity, i.e., the similarity of social factors are helpful in understanding image similarity in user behavioral aspect. To demonstrate this, we collect a social image dataset from Flickr, which includes 19,888 images, 6,843 users, 1,490 groups and 17,922 tags. For each user, we hope that all images that he/she favors should have low variance in feature space because they confirm to his interests. Therefore, for the images that are favored by a given user, we extract visual features and social features and calculate the variance. Here the visual features are presented in a “Bag of Visual Word” model. For each social factor, social feature is presented as the distribution vector of social entities. For example, if user j favors image i , the j^{th} element of the image i ’s user feature is 1, otherwise it is 0. So are the group feature and tag feature. Each feature vector is normalized for scale unification. For each user, the variances of the images in different feature spaces are illustrated in Figure 2. From Figure 2, we can observe that variance of visual feature is the the largest among four features. Thus if we want to recommend images to a user according to his/her browsing logs, social similarity is more reliable than visual similarity.




Figure 2: The variance of the visual features and social factors of the images that are favored by a user. The results of the 6,843 users are sorted in a descending order.

Among three social factors, we can find that the user favoring factor obtains the smallest variance. In other words, using others’ favoring information to recommend images will obtain a good performance. This result is consistent with the idea of Collaborative Filtering (CF). In addition, we can see that most of the variance values are relatively large. It indicates that the images favored by a user are usually very diverse.

3.3 Reliability of Social Entities

In preliminary study, we found that a social entity may belong to diverse images. In this case, the similarity of social factors sometimes cannot accurately reflect the similarity of the images. Therefore, it is very important to judge how specific a social entity is. Intuitively, images in the group named “iphone club” should be similar but the images in the groups named “beautiful world” may be very diverse. The entity with high specificity should have high weight in evaluating the social similarity of the images.

Take users as an example, if an image is favored by two users, we can assume that the interests of these two users are partially similar. Based on this assumption, we can build the similarity graphs of user interests. The nodes are users. The weight of an edge denotes the similarity of the users. We use $Im(v_i)$ to denote the images that are favored by v_i , i.e.,

$$Im(v_i) = \{I_t | v_i \in V_t\}. \quad (1)$$

In this equation, V_t denotes the all entities that belong to image I_t . Then the similarity of the social entities can be defined as the Jaccard distance of the images:

$$sim(v_i, v_j) = \frac{|Im(v_i) \cap Im(v_j)|}{|Im(v_i) \cup Im(v_j)|}. \quad (2)$$

Based on this similarity graph, we can utilize clustering method to divide users into c clusters. For a given entity v_i , if all of its neighbors belong to the same cluster with it, we can think v_i is a specific social factor. The images belong to user v_i should have high probability to be similar. Thus, the specificity score of v_i is defined as follows,

$$sp(v_i) = \frac{1}{|c(v_i) \cup_{v_j \in N(v_i)} c(v_j)|}, \quad (3)$$

where $N(v_i)$ is the set of neighbor nodes of v_i ; $c(v_i)$ is the label of v_i ’s cluster. If all of v_i ’s neighbors belong to the same cluster with him, the specificity score $sp(v_i)$ is defined

as 1. On the contrary, if his neighbors cover all of c clusters, $sp(v_i)$ is defined as $1/c$.

This method is also suitable for the cases of using group or tag as social entity. For any entity v_i , the pair-wise similarity can be similarly calculated by Equation 2 and specificity score can be calculated by Equation 3.

3.4 Evaluation of Social Similarity

After the specificity scores of social entities are calculated, we explore to evaluate the social similarity of pair-wise images based on the scores. For two images I_i and I_j , we analyze their similarity in their social factors V_i and V_j . If $V_i \cap V_j$ is empty, i.e., they share no common entities, we define the social similarity as 0. Otherwise, the social similarity is determined by the overlap of the entities and their specificity. Taking users as an example, intuitively, when the users have the same specificity, the images that are jointly favored by more users should have high similarity. If the images are both favored by a fixed number of users, the images that are favored by more specific users should have higher similarity. Based on the above two considerations, the social similarity of image in the social factor V_i and V_j are defined as follows,

$$sim(V_i, V_j) = \begin{cases} 0, & V_i \cap V_j = \phi \\ \frac{\sum_{v_t \in V_i \cap V_j} sp(v_t)}{\sum_{v_t \in V_i \cup V_j} sp(v_t)}, & \text{otherwise} \end{cases} \quad (4)$$

In Equation 4, the similarity is defined as the weighted Jaccard similarity of V_i and V_j . Obviously, this definition of similarity satisfies the previous heuristics. For a social image has multiple social factors, the final similarity of images I_i and I_j is defined as the average of all the social factors’ similarity:

$$sim(I_i, I_j) = \frac{1}{m} \sum_{k=1}^m sim(V_i^k, V_j^k). \quad (5)$$

In this equation, we use average because different social factors reflect different aspects of image similarity. The final social similarity values from 0 to 1. When the similarity is close to 1, the images are judged as very similar in social dimension. In the other hand, when the similarity is near to 0, we are not very certain that the image are very dissimilar because similar images may also have no social relation. This problem can be solved by multiple sampling. Because of the diversity of the images, for a given image, if we randomly select many socially similar images, the vast majority of them will be truly dissimilar to it.

4. SOCIAL-SENSED IMAGE DISTANCE LEARNING

When social similarity of images is estimated, our target is to learn an image distance function to reduce the distance of socially similar image and enlarge the distance of socially dissimilar images. In this section, we first introduce our proposed image distance learning method. Next, we give the algorithm of our approach and analyze the complexity. Finally, we design two applications based on the proposed image distance metric, including image recommendation and text-based image reranking.

4.1 Mahalanobis Distance Function

In traditional metric learning researches, *Mahalanobis* Distance is a widely used metric function because it is very ef-

ficient in optimization and calculation, as well as effective enough in most problems. Although some kernel functions are proposed to improve the performance. We do not consider them because the metric function is not the main contribution of this work and may make our method not scalable. Therefore, we use *Mahalanobis* Distance to evaluate the image distance, which is defined as follows,

$$d_M(x_i, x_j) = \sqrt{(x_i - x_j)^T M (x_i - x_j)}, \quad (6)$$

where M is the *Mahalanobis* matrix, which needs to be learned in our problem; x_i is the visual feature vector of image I_i . To guarantee d to be a distance function, M must be positive semidefinite, which is noted as $M \succeq 0$. For $M \in R^{n \times n}$, there exists $L \in R^{n \times n}$, which makes $M = L^T L$. Thus, Equation 6 can be written as:

$$d_M(x_i, x_j) = \sqrt{(y_i - y_j)^T (y_i - y_j)}, \quad (7)$$

where $y_i = L \cdot x_i$. From Equation 7, we can easily observe that *Mahalanobis* distance actually linearly maps original visual space to a new space.

4.2 Distance Learning with Social Constraints

In our metric learning approach, our goal is to learn the *Mahalanobis* matrix M from the social images, which makes the image distance $d_M(x_i, x_j)$ consistent to social similarity. i.e., the distance between socially similar images is close and the distance between socially dissimilar images is far.

In metric learning, “triple” is a widely used concept for optimization. In our approach, a “triple” $\langle i, j, k \rangle$ is defined as three images I_i, I_j and I_k , where I_i and I_j are socially similar and I_i and I_k are socially dissimilar. Thus, we can train our metric function by reducing $d_M(x_i, x_j)$ and enlarging $d_M(x_i, x_k)$. In our method, the training set of triples \mathcal{T} based on social similarities is defined as:

$$\mathcal{T} = \{ \langle i, j, k \rangle \mid \text{sim}(I_i, I_j) > \delta, \text{sim}(I_i, I_k) < \epsilon \}, \quad (8)$$

where δ and ϵ are the thresholds to specify socially similar images and socially dissimilar images. In social media, there are a lot of socially dissimilar images and a few socially similar images. For a given $\langle x_i, x_j \rangle$, there are a lot of x_k that satisfies the equation 8. In our approach we just randomly select m images to avoid explosion of scale and reduce the redundancy. After the set of triples \mathcal{T} is selected, we need to find the optimal Mahalanobis matrix M that fulfills the following constraints:

$$d_M^2(x_i, x_k) - d_M^2(x_i, x_j) > 1, \forall \langle i, j, k \rangle \in \mathcal{T} \quad (9)$$

Following the traditional margin-based metric learning methods[26, 23], the margin between two distances is defined as there square error because it is very easy to optimize and have a good performance. In Equation 9, the matrix M that fulfills all the constraints is typically not unique. In this case, we aim to select the M that close to the original unweighted Euclidean Distance, which represents the original visual similarity in our problem. This leads to the following optimization problem:

$$\begin{aligned} \min_M & \|M - I\|_F^2 \\ \text{s.t.} \quad & d_M^2(x_i, x_k) - d_M^2(x_i, x_j) > 1, \forall \langle i, j, k \rangle \in \mathcal{T} \\ & M \succeq 0 \end{aligned} \quad (10)$$

As in other margin-based methods, we add slack variables to slack variables[5] to account for the constraints that cannot be fulfilled. Thus our problem can be written as follows,

$$\begin{aligned} \min_M & \|M - I\|_F^2 + C \sum_{i,j,k} \text{sim}(I_i, I_j) \epsilon_{ijk} \\ \text{s.t.} \quad & d_M^2(x_i, x_k) - d_M^2(x_i, x_j) > 1 - \epsilon_{ijk}, \forall \langle i, j, k \rangle \in \mathcal{T} \\ & M \succeq 0 \\ & \epsilon_{ijk} \geq 0, \forall \langle i, j, k \rangle \in \mathcal{T} \end{aligned} \quad (11)$$

where ϵ_{ijk} is the slack variable and $\text{sim}(I_i, I_j)$ is the social similarity defined in Equation 5. C is a parameter that denotes the stringency of the slack variables. Different from traditional methods, we use social similarity as the coefficient of the slack variables because we have different confidence for different training triples. When the images I_i and I_j are very socially similar, i.e. $\text{sim}(I_i, I_j)$ is close to 1, we hope the corresponding constraint to be fulfilled as far as possible. On the contrary, when $\text{sim}(I_i, I_j)$ is very small, the value of slack variable can be relatively greater. This problem is a Semi-Definite Programming (SDP) problem. It can be solved by the existing solvers, such as SeDuMi[7].

4.3 Algorithm and Complexity

We summarize the procedure of the whole Social-sensed Image Distance Learning approach as described in Algorithm 1.

There are four main steps in our approach: entity specificity evaluation step, social similarity computation step, triple selection step, and optimization step. In entity specificity evaluation step, the time complexity is $\mathcal{O}(\sum_{i=1}^m f_i^2)$, m is the number of social factors and f_i is the size of the i^{th} social factor. In social similarity computation step, the social similarity of each pair of images is computed by Equation 5, whose complexity is $\mathcal{O}(n^2 m)$. In the triple selection step, the time complexity is $\mathcal{O}(r \cdot \sum_{i=1}^n |S_i|)$, where n is the total number of the training images, $|S_i|$ is the number of the images that socially similar to the i^{th} image and r is a constant that denotes the number of socially dissimilar images sampled. Usually, we have $|S_i| \ll n$, thus the complexity of this step usually much less than $\mathcal{O}(n^2 r)$. In the last optimization step, the complexity of SDP is $\mathcal{O}(c|T|)$, where c is a constant that are determined by the number of iteration and the length of visual features, as well as $|T|$ denotes the number of selected triples. At the same time, we have $|T| \leq n^2 r$. Finally, the total complexity is $\mathcal{O}(n \sum_{i=1}^m f_i^2 + r \cdot \sum_{i=1}^n |S_i| + c|T|)$. Based on the above analysis, the complexity is no more than $\mathcal{O}(c r n^2)$. Therefore, the time complexity of our algorithm is square with respect to the number of training images.

4.4 Applications

Our approach is meaningful in these image search and recommendation because human cognition plays an important role in them. In some traditional problems, such as content-based image retrieval (CBIR) and image classification, visually similar may be useful than cognitively similar. In this section, we introduce how and why our image distance metric can be used in the corresponding application scenarios.

4.4.1 Image recommendation

Algorithm 1 Social-sensed Image Distance Learning

Require: the visual features x_i and social factors $\mathcal{S}_i = \cup_{k=1}^n \mathcal{V}_i^k$ for each training image \mathcal{I}_i
Ensure: the Mahalanobis matrix M for the distance metric in Equation 6.

```
1: for  $(i = 1 : m)$  do
2:   for  $j = 1 : f_i - 1$  do
3:     for  $k = k + 1 : f_i$  do
4:       Compute the pair-wise similarity of social entity
          $sim(v_i^j, v_i^k)$  using Equation 2.
5:     end for
6:   end for
7:   Conduct spectral clustering on the similarity graph.
8:   Compute the specificity score of the social entity  $v_i^k$ 
       using Equation 3.
9: end for
10: for  $(i = 1 : n - 1)$  do
11:   for  $j = i + 1 : n$  do
12:     Compute the social similarity of the training images
        $sim(I_i, I_j)$  using Equation 5.
13:   end for
14: end for
15:  $\mathcal{T} = \Phi$ 
16: for  $i = 1 : n$  do
17:   for  $j \in \{j | sim(I_i, I_j) > \delta\}$  do
18:     for  $t=1:r$  do
19:       Randomly generate  $k \in \{1, 2, \dots, n\}$ ,
          $sim(I_i, I_j) < \epsilon$ 
20:       Add  $\langle i, j, k \rangle$  to  $\mathcal{T}$ 
21:     end for
22:   end for
23: end for
24: Formulate the Problem in Equation 11
25: Optimize the SDP problem by standard solvers.
```

In image recommendation task, the users have viewed a set of images before and our target is to recommend new images based on his historical log. In our approach, we learn the image distance function from the users in social platforms. Then for the general Web images, we can judge whether two images will have similar favored users according to their visual contents. Given a set of images $Train = \{I_1, I_2, \dots, I_m\}$ that have been viewed by the current user, our target is to recommend the top k images in the candidate set $Test = \{J_1, J_2, \dots, J_n\}$. Intuitively, the image that are similar to the images in $Train$ should be recommended. In our distance learning method, when the optimal Mahalanobis matrix M is obtained, the pair-wise image distance $d_M(I_i, I_j)$ can be calculated accordingly. Thus, the next question is how to select the images that are similar to the training set based on the distance function. Here we provide the Borda Fusion model to solve the problem.

Borda Count has been widely used in meta-search and recommendation [3]. It simulates a democratic voting process: each voter gives a preference rank to d candidates; the top ranked candidate gets d points, the second ranked one gets $d - 1$ points and so on so forth. Then for each candidate, the total points from all voters are used for ranking. The top- k results are returned for recommendation. In this model, each image in the training data are regarded as a voter. For each training image, we calculate the distance from it to the testing images J_q in $Test$. Then the distance $d_M(I_p, J_q)$ are

ranked in ascending order. The top- d testing images obtain their points. Finally, after all the training images in $Train$ are traversed, we rank the testing images in $Test$ with respect to their total points. We return the top- k images as the recommendation result.

4.4.2 Image reranking

When people search a query in the image search website, the search engine will return a lot of images that are judged as relevant to the query. Reranking the images to better meet the demands of users is an important problem. Jing et al. [13] proposed a VisualRank method for image reranking. In this method, the similarity of two images are evaluated by their visual features. Then a PageRank [20] based iterative calculation is conducted to give the images rank scores. This method selects the images that are visually similar to most of the other images. It has been proven that VisualRank performs well in product search. However, in general image search task, the performance is not very desirable because it ignores human cognition factor. Our approach learns the social similarity, which can better estimate human cognition. In our approach, the pair-wise image similarity is evaluated by the learned distance function $d_M(I_i, I_j)$. The PageRank model is used to select the images that are interesting to most of the users.

In this method, we first generate the image similarity matrix P , whose elements are calculated as:

$$P_{ij} = \frac{e^{-d_M(x_i, x_j)}}{\sum_{k=1}^n e^{-d_M(x_k, x_j)}} \quad (12)$$

where $d_M(x_i, x_j)$ is the learned Mahalanobis distance in Equation 6, n is the number of candidate images. Here we use negative exponent function to convert the distance from 0 to infinite to the similarity from 0 to 1. The denominator aims at normalizing the sum of each column to 1. Then, the PageRank process is conducted:

$$r = d \cdot P \cdot r + (1 - d)e \quad (13)$$

where r denotes the rank score vector, d is the damping factor to guarantee the connectivity of the similarity graph, and e is a normalized n -dimension vector whose elements are all $1/n$. In PageRank, the empirical value of d is about 0.8. After the PageRank process, each image has a rank score in r . Finally we can rerank images by their rank scores.

5. EXPERIMENTS

In this section, we first introduce our experimental settings. Then we evaluate the proposed approach in three aspects: the effectiveness of our learning method, as well as the performance of the learned distance function in recommendation task and image reranking task. Finally, we show some learning results and give some interesting insights of our distance learning method.

5.1 Experimental Setup

5.1.1 Datasets

In our experiments, we have prepared three datasets for our experiments: 1) a Flickr dataset including images and their social factors for training and testing the effectiveness; 2) a Flickr dataset for image recommendation; 3) Bing Image Retrieval Grand Challenge (MSR) dataset for image reranking. The first two datasets are both crawled from Flickr by

ourselves. It is because our methods of these two problems rely on the personalized data in social media platforms. However, to the best of our knowledge, there is no public benchmark that can be applied to our methods. In our image reranking method, we do not need any personalized information, thus the dataset in Multimedia Grand Challenge 2013 is utilized to make our approach comparable to others.

Training dataset and testing dataset. To train the distance function and test the effectiveness of our distance learning method, we crawl the images and their social contextual information in Flickr through Flickr API, including the content of images, the users that favor the images, the groups that the images belong to and the tags of the images. This dataset includes 101,496 images, 54,173 users, 6,439 groups and 35,844 tags in total. We crawl the data by the following criteria: first, we search for 500 hot queries, such as sunset, portrait, etc. to obtain the seed images. Then the images that have the same author or belong to the same group with the seed images are expanded. We crawl the contextual information of the images, including: the users who favor them, the groups that the images belong to, as well as the tags annotated to the images. In our dataset, some images may have no favored users or interest groups. We divide this dataset into two parts: 80% for training and 20% for testing. We call these two datasets training dataset and testing dataset.

Recommendation dataset. We also prepare a recommendation dataset for the application scenario of image recommendation. We select 1,793 users' favorite images in Flickr. The users selected must have at least 40 favorite images. For each user, we randomly select 20 images for training and 20 as ground truth for testing. Then our task is to predict whether the user will favor the 20 ground truth images. To achieve this goal, we sample 80 images from the whole image dataset as candidates. Each candidate image must have at least one tag that is the same as one of the ground truth images. Finally, in the recommendation dataset, there are 120 images for each user, including 20 training images, as well as 100 testing images in which 20 should be recommended as ground truth.

MSR dataset. We utilize the use the Bing Image Retrieval Grand Challenge (MSR) dataset [11] to prove that our distance learning method can improve the performance of image reranking. MSR dataset is published by Microsoft in ACM Multimedia 2013 Grand Challenge. The traditional image search benchmarks usually focus on the relevance between the image contents and the current query, which is only a semantic-level matching. Different from these datasets, MSR dataset is based on user click data, which can capture not only semantic relevance but also human cognition. The images that can attract most of users will obtain high click number and thus obtain a high score in evaluation.

5.1.2 Visual Features

Visual feature is an important setting in our method because it determines the performance of transfer learning. If there is no relationship between the used visual feature and the social similarity of the images, our method will not work. Although using multiple features may improve the performance, it will bring higher complexity in the same time. The key point of this paper is distance learning but not feature selection. Therefore, we only use a simple and effective

visual feature in our experiments. In our approach, local features are better than global features because local features are extracted in object level, which can better denote the user interests. Intuitively, we can easily imagine that human's eyes and noses have strong correlation but we can hardly explain whether red and blue will have correlation or not. Among the various local features, we utilize a Bag-of-Words (BoW) histogram based on SIFT descriptors [30, 17] in our experiments, which is one of the most widely used presentation of images. The SIFT descriptors are extracted by a VLFeat implementation [1]. Then a hierarchical k-means visual vocabulary tree is constructed with 4 layers and 10 branches for each layer. After clustering, each leaf node in the vocabulary tree is defined as a visual word. An image is presented as the histogram of the visual words occurred. In our datasets, all images are rescaled to the normal size in Flickr for uniformity: the length of the longest edge is rescaled to 400 pixels.

5.1.3 Baselines

To demonstrate the advantages of our proposed distance learning approach *SIDL*, we implement the following baseline methods for comparison.

(1) Euclidean distance. When the BoW features are extracted, the Euclidean distance is commonly used to evaluate the image distance, i.e.:

$$d(x_i, x_j) = \sqrt{(x_i - x_j)^T (x_i - x_j)}.$$

(2) Jaccard similarity. If we regard an image as a document, when it is presented as a bag of words, the Jaccard distance [18], which is a set similarity function for documents can also be utilized:

$$\text{sim}(I_i, I_j) = \frac{|I_i \cap I_j|}{|I_i \cup I_j|},$$

where I_i denotes the i^{th} image that is presented as a set of visual words.

(3) TagProp. Guillaumin *et al.* proposed a method named TagProp [8] for image annotation. This method use metric learning technology to learn the image distance with respect to their tags. Although the final output of this method is the tag relevance, it evaluates the pair-wise image similarity in the optimization process. Therefore, in our experiments, we only use the results image distance.

(4) LMNN [26]. Weinberger *et al.* proposed a metric learning method named Large Margin Nearest Neighbor (LMNN). LMNN uses metric learning to reduce the margins of the nearest neighbors. The original LMNN method is designed for image classification, which relies on the pre-labeled data. For our training data do not contain the label of classification, we use the image classification benchmark Caltech101 [6] as the training dataset, which includes 101 categories, and 40 to 800 images per category. We select 30 images per category for training. The vocabulary tree for BoW feature extraction is the same as the one in our approach. Then, the trained *Mahalanobis* distance function is compared to our method.

(5) social+LMNN. In this baseline, we use the social similarity estimation in Equation 5 to select the nearest neighbor of an image, and then use LMNN for optimization. Here we use this as a baseline to compare the metric learning optimization step in the same condition of social similarity estimation.

In the above baseline methods, Jaccard similarity evaluates the image similarity rather than image distance. In our distance learning method and image recommendation method, the image distance is used for ranking the images. In these cases, the ascending order of similarity and the descending order of distance are equivalent. In our image reranking method, we convert distance to similarity by a negative exponential function for PageRank model. Similarly, we conduct these process on the (1), (3) and (4) in the baselines.

In the area of image processing, there are a variety of methods for image search and recommendation. However, in this paper, we only want to prove that our cognition-based image distance performs better than the traditional image distance metrics. Thus we focus the Borda Fusion model in recommendation and PageRank model in reranking and use the above distance metrics as baselines.

The code of our algorithm is realized in MATLAB 2010b. The toolbox of vlfeat [1] is used for SIFT feature extraction and hierarchical k-means clustering of visual words. We use SeDuMi [7] toolbox as the solver of the proposed optimization problem. All the experiments were conducted on a server with Intel(R) Xeon(R) CPU X5645 at 2.40 GHz on 24 cores, 192GB RAM and 64-bit Windows Server 2008 operating system.

5.2 Effectiveness of *SIDL*

The goal of our approach is to learn the social similarity from visual features. Thus, we first need to prove the feasibility of this idea. When we have learned a distance function from the training set, can this function reflect the social similarity in the testing data? Here we evaluate the effectiveness in the ranking point of view because the relation of image distance is much more important than the absolute value. For a given image in the testing dataset, we calculate the social similarity to the other images by Equation 5 and then can obtain a rank of similar images. On the other hand, we can calculate the image distance by Equation 6 and get another rank of similar images. Therefore, the consistency of these two ranks can reflect the effectiveness of our method. We use *Kendall* - τ rank correlation [14] as the evaluation measure. Define two ranking sequence X and Y . The *Kendall* - τ is defined as:

$$\tau = \frac{n_c - n_d}{\frac{1}{2}n(n-1)},$$

where n is the total number of images, n_c is the number of concordant pairs and n_d is the number of discordant pairs.

In the training process, we fix the value of δ and ϵ in Equation 8 as $\delta = 0.7$, $\epsilon = 0.1$. In this setting, an image in the training dataset has 179 socially similar images and about 70,000 socially dissimilar images in average. We can observe that different with traditional tasks, social similarity is very sparse in our training data. To reduce the complexity of our optimization process, for each image, we randomly select 200 socially dissimilar images in the triple selection step in Equation 8. Next, we use a 5-folds cross validation to tune the parameter C in the Equation 11. The best performance of τ is obtained when $C = 0.15$. After the parameters are determined, we conduct SDP optimization to learn the optimal *Mahalanobis* matrix M . Finally, we test the effectiveness of our method on the testing dataset.

In the social similarity estimation step, there is a very

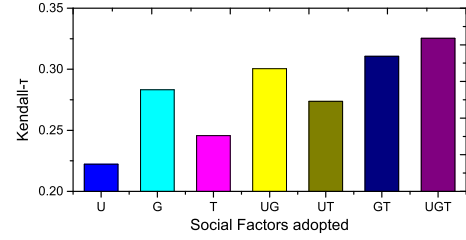


Figure 3: The Performance on the testing dataset in *Kendall* - τ using different social factors. “U” denotes users, “G” denotes groups and “T” denotes tags.

important question: what social factors can be used to estimate the social similarity? As mentioned, in Flickr, there are three common social factors we can easily obtain: users, groups and tags. However, we do not sure whether these three factors are all helpful in evaluating the social similarity. Therefore, before comparing our methods to the baselines, we first use different social factors to demonstrate their effects on the final performance. Figure 3 illustrates the results.

Figure 3 is generated by using different social factors to calculate the social similarity in Equation 5. In the figure, “U” denotes users, “G” denotes groups, “T” denotes tags and multiple symbols denotes using multiple factors. When we use different factors, the value of δ and ϵ are adjusted in the same time to guarantee that the number of socially similar images is about 200 and the number of socially dissimilar images is about 70,000. When testing, we calculate the rank order of the trained image distance and compare the order to the ground truth of social similarity for all the images in the testing dataset. In the figure, we can observed that our algorithm obtain the best performance when using all the three factors. It proves that all the these factors are helpful to improve the performance. If we only use one factor, group is better than tag than user. This is because for the images in the same group, the user interests are relatively concentrated and the images with the same tag are usually in semantic. However, we are not very certain whether the images that favored by the same user are similar. Meanwhile, we find that in our dataset, most of the images in the same group share at least one tag. This is why group performs better than tag. If we use two social factors, the best performance is obtained when using groups and tags. It indicates that although group includes some semantic information, the tag is still a good supplement. It is interesting that using group and user also has a not bad performance. It reflects that the knowledge of group and user has less overlap than group and tag. The fact that using both user and tag is worse than only using group indicates the importance of group in estimating social similarity.

After proving that all the three social factors are positive to our distance learning method, we compare our method to the baselines to evaluate the effectiveness. The results are illustrated in Figure 4.

It can be observed that the proposed *SIDL* method achieves the best performance. In the baselines methods, Euclidean distance and Jaccard similarity do not need any training. The result of Euclidean distance is near to 0, which means the rank order has the similar performance to a random or-

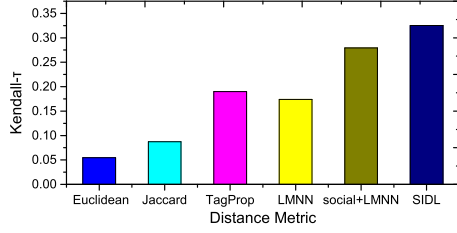


Figure 4: The performance on the testing dataset in $Kendall - \tau$ of different image distance metrics.

der. The performance of Jaccard distance is a little better. It shows that if we have no prior knowledge, the Jaccard distance is more suitable to our problem when we use the BoW presentation of images. LMNN performs better than the previous unsupervised methods but it is the worst among the four supervised methods. It is mainly because the difference in the training datasets. In Flickr, most of the images are generated by common users and usually informal. However, the images in the Caltech101 dataset is well structured and have obvious object. Besides, the amount of the images in Caltech101 is only about 1/10 of our Flickr training dataset. Therefore, there are a lot of visual words in the testing data that do not occur in the training data. Although the TagProp method only uses the tag information, it still performs better than LMNN because its training data are more close to the testing data. Social+LMNN obtains higher τ value shows that the tag similarity in the training data cannot represent the social similarity in the testing data. In other words, the similarity in semantic level is not consistent to the similarity in user behavior. Compared to social+LMNN, the proposed *SIDL* performs better. The difference between these two methods is the optimization part. In the training dataset, each image usually only has less than 200 socially similar images. Compared to the total 80,000 images, the socially similar relationship is very sparse. Thus if two visual words A and B do not occur in any pair of socially similar images, we can learn nothing in the metric learning process. In *SIDL*, we initialize the distance function as the Euclidean distance, for the images whose distance cannot be learned, their visual similarity is maintained. Besides, unlike to the well labeled data, the social similarity is just a estimated value. In Equation 11, we add coefficients to the relax variables, which can make the constraints of highly similar pairs more strict.

In this experiment, all the training knowledge and testing ground truth is based on the social similarity defined in this paper because we only want to prove that it is effective to learn image distance of visual features from social similarity. However, up to now, we do not know whether the learned image distance is effective in real applications. Thus we will prove it in the next section.

5.3 Performance in Image Recommendation and Image Reranking

Here we first show the performance of our method in the image recommendation task. In the image recommendation dataset, each user has 20 images for training and 100 for testing. In the 100 testing images, 20 should be recommended. For each image distance metric, we use the Borda

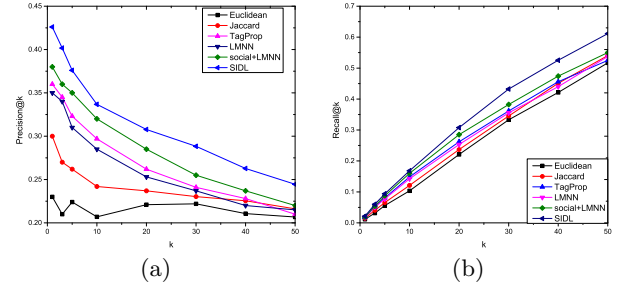


Figure 5: The performance on the recommendation dataset in (a) Precision@k and (b) Recall@k with different number of top k images using different image distance metric in our Borda-fashion based image recommendation model.

Fusion model in Section 4 to calculate the voting points of the testing images according to their distance to the training images. The top k images are returned as the recommendation results. Here we use *Precision@k* and *Recall@k* as the measures. The results are illustrated in Figure 5.3.

In the figure, it can be seen that our distance metric *SIDL* performs the best in both Precision and Recall for all k values. If we recommend images randomly, the precision will be 0.2. Similar to the last experiment, the result of Euclidean is near to random, which indicates the Euclidean distance of BoW features can hardly reflect the image similarity in the user browsing data. The relative performance of the base-lines is similar to the previous experiment except for LMNN and TagProp. In the recommendation dataset, LMNN performs better than TagProp, which indicates the general category information might be effective than the specific tag information in the recommendation task. The results prove that the image distance learned from the estimated social similarity can well evaluate the image similarity in the users' favorite images.

To show the performance in the image reranking task, we use different distance metrics in the PageRank model in Section 4. For each query in the dev dataset, the similarity graph is constructed for each metric. Then the PageRank score can be calculated by Equation 13. Following the measurements in the grand challenge, we use Discounted Cumulated Gain of the top 25 images (*DCG@25*) to evaluate the performance. When the rank order is given, the DCG for each query is calculated as:

$$DCG@25 = 0.01757 \sum_{i=1}^{25} \frac{2^{rel_i} - 1}{\log_2^{i+1}},$$

where rel_i is the relevance score of the i^{th} ranked image (Excellent=3, Good=1, Bad=0), 0.01757 is to normalize the value of *DCG@25* up to 1. Note that for the queries with less than 25 images, we simply supply some "Bad" images after the original ranking list. Figure 6 shows the results.

From the figure, we can observe that the Euclidean distance already has a not bad performance in *DCG@25*, which is different with the previous results. It is mainly because for a given query, most of the images are usually similar. The visual words occurred are relatively concentrated. In this case, the Euclidean distance can measure the image similarity more accurate than the general images. Similar to

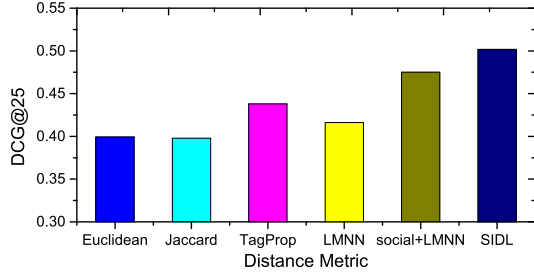


Figure 6: The performance on the MSR dataset in terms of DCG@25 with using different image distance metrics in the PageRank model.

the first experiment, TagProp performs worse than LMNN, which may also lead by imbalanced training data. Our approach performs the best, which verifies the effectiveness of our approach in image reranking.

5.4 Show Case and Insights

In our approach, it is very interesting to discover what do we learning from the user behavioral information. In the *Mahalanobis* matrix M , the meaning of the i^{th} diagonal element denotes the difference brought when we only add/delete the i^{th} visual word in an image. Therefore, the value of the diagonal elements can be regarded as the weight of the corresponding visual words. Figure 7 illustrates four typical visual words with high weights in our M matrix. Some representative images are presented at the same time. Among a huge amount of the images that include the visual word, we select the images that where the visual word have similar meaning in semantic as the representative images. From Figure 7, we can observe that the visual words that can represent characteristics of objects will obtain high weights in our distance learning approach, such as fruits of plants, petals, eyes of animals, branches of trees. Figure 8 reflects another interesting phenomenon. In each row in Figure 8, The first image and the second image are socially similar, as well as the first and the third are socially dissimilar. After learning, the visual words with high weights are labeled with red rectangle and the ones with low weights are labeled with green rectangle. For the three images including flowers in the first row, the first image and the second image have a common visual word on the butterfly with a high weight; the first image and the third images have a common visual word on the flower with a low weight. In our cognition, it is natural that the first and the second are similar because the butterflies is the focus and the flower is not very important. The weight of visual word can reflect this well. In the second row, three images are all about dogs. The first and the second have both eyes; the first and the third have similar furs. In emotion level, the first two images give us a feeling of “lovely” but the third image make us fell “lonely”. Eyes of the dogs indeed play an important role in the emotion of these images, which is consistent to the weight of the visual word, too. Of course, the final image distance is not determined by these several visual words. Besides, due to the semantic gap, most of visual words do not correspond to an object. Here we just try to catch a glance of the relationship between the learning results and our cognition.

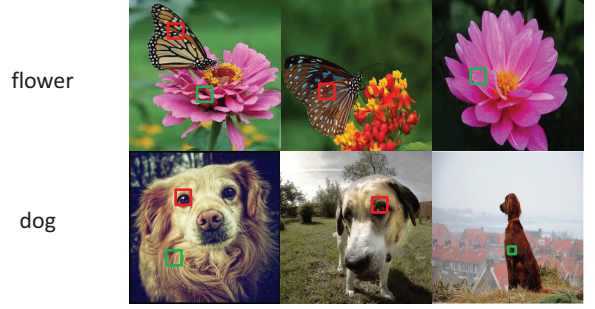


Figure 8: The observations of the weight of visual words learned in our approach. In each row, The first image and the second image are similar in user behavior, as well as the first and the third are dissimilar. The visual features with high weight are labeled with red rectangle and the ones with low weight are labeled with green rectangle.

6. CONCLUSION

In this paper, we tackled evaluating image distance in the angle of human cognition for image search and recommendation. An Social Embedding image Distance Learning (*SEDL*) approach was proposed to embed collective social behavioral information into visual space. *SEDL* first evaluated the social similarity, where the reliability of social entities were estimated to reduce the noise and unreliability of the social data. Then a margin based metric learning algorithm was designed to learn the social similarity in visual space. In addition, we designed two application scenarios including image recommendation and image reranking where our cognitive distance can be used to reduce the cognition gap. The experiment results demonstrated that the cognitive image distance learning method was effective to learn the social similarity from BoW features. As well as the superiority of the learned image distance in image recommendation and reranking tasks had been proved.

This work is a trial to bridge the visual features and social factors to learn a “different” cognitive image distance. Thus we only use relatively simple methods to combine the multi-dimensions of information. In the future, the power of the method can be further increased if we employ more complex features and models, for example, using deep learning on multimodal visual features.

7. REFERENCES

- [1] <http://www.vlfeat.org>.
- [2] D. Albarracin and R. S. Wyer Jr. The cognitive impact of past behavior: influences on beliefs, attitudes, and future behavioral decisions. *Journal of personality and social psychology*, 79(1):5, 2000.
- [3] J. A. Aslam and M. Montague. Models for metasearch. In *ACM SIGIR*, pages 276–284. ACM, 2001.
- [4] T. Bracamonte and B. Poblete. Automatic image tagging through information propagation in a query log based graph structure. In *ACM Multimedia*, pages 1201–1204, 2011.
- [5] C. Cortes and V. Vapnik. Support-vector networks. *Machine learning*, 20(3):273–297, 1995.
- [6] L. Fei-Fei, R. Fergus, and P. Perona. Learning generative visual models from few training examples: An incremental bayesian approach tested on 101 object categories. *Computer Vision and Image Understanding*, 106(1):59–70, 2007.

VWid

Representative images

5371



743



6980



3141



Figure 7: The illustration of the visual words with high weights in our approach. The first column is the id of the visual word, and the second column includes some representative images. The location of the visual word is marked in a red rectangle in each image.

- [7] M. Grant and S. Boyd. CVX: Matlab software for disciplined convex programming, version 2.0 beta. <http://cvxr.com/cvx>, 2013.
- [8] M. Guillaumin, T. Mensink, J. Verbeek, and C. Schmid. Tagprop: Discriminative metric learning in nearest neighbor models for image auto-annotation. In *ICCV*, pages 309–316. IEEE, 2009.
- [9] S. C. Hoi, W. Liu, and S.-F. Chang. Semi-supervised distance metric learning for collaborative image retrieval. In *CVPR*, pages 1–7. IEEE, 2008.
- [10] S. C. Hoi, W. Liu, M. R. Lyu, and W.-Y. Ma. Learning distance metrics with contextual constraints for image retrieval. In *CVPR*, volume 2, pages 2072–2078. IEEE, 2006.
- [11] X.-S. Hua, L. Yang, J. Wang, J. Wang, M. Ye, K. Wang, Y. Rui, and J. Li. Clickage: towards bridging semantic and intent gaps via mining click logs of search engines. In *ACM Multimedia*, pages 243–252, 2013.
- [12] B. J. Jansen. Search log analysis: What it is, what’s been done, how to do it. *Library & information science research*, 28(3):407–432, 2006.
- [13] Y. Jing and S. Baluja. Visualrank: Applying pagerank to large-scale image search. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 30(11):1877–1890, 2008.
- [14] M. G. Kendall. A new measure of rank correlation. *Biometrika*, 1938.
- [15] X. Li, C. G. Snoek, and M. Worring. Learning social tag relevance by neighbor voting. *Multimedia, IEEE Transactions on*, 11(7):1310–1322, 2009.
- [16] S. Liu, P. Cui, H. Luan, W. Zhu, S. Yang, and Q. Tian. Social visual image ranking for web image search. In *Advances in Multimedia Modeling*, pages 239–249. Springer, 2013.
- [17] D. G. Lowe. Object recognition from local scale-invariant features. In *ICCV*, volume 2, pages 1150–1157. Ieee, 1999.
- [18] M. Nei. Genetic distance between populations. *American naturalist*, pages 283–292, 1972.
- [19] L. Nie, S. Yan, M. Wang, R. Hong, and T.-S. Chua. Harvesting visual concepts for image search with complex queries. In *ACM Multimedia*, pages 59–68, 2012.
- [20] L. Page, S. Brin, R. Motwani, and T. Winograd. The pagerank citation ranking: Bringing order to the web. 1999.
- [21] M. J. Pazzani. A framework for collaborative, content-based and demographic filtering. *Artificial Intelligence Review*, 13(5-6):393–408, 1999.
- [22] Y. Rui, T. S. Huang, M. Ortega, and S. Mehrotra. Relevance feedback: a power tool for interactive content-based image retrieval. *Circuits and Systems for Video Technology, IEEE Transactions on*, 8(5):644–655, 1998.
- [23] M. Schultz and T. Joachims. Learning a distance metric from relative comparisons. In *NIPS*, 2003.
- [24] B. Sigurbjörnsson and R. Van Zwol. Flickr tag recommendation based on collective knowledge. In *Proceedings of the 17th international conference on World Wide Web*, pages 327–336. ACM, 2008.
- [25] X. Tian, D. Tao, X.-S. Hua, and X. Wu. Active reranking for web image search. *Image Processing, IEEE Transactions on*, 19(3):805–820, 2010.
- [26] K. Q. Weinberger and L. K. Saul. Distance metric learning for large margin nearest neighbor classification. *The Journal of Machine Learning Research*, 10:207–244, 2009.
- [27] L. Yang and R. Jin. Distance metric learning: A comprehensive survey. *Michigan State University*, 2, 2006.
- [28] Z.-J. Zha, L. Yang, T. Mei, M. Wang, and Z. Wang. Visual query suggestion. In *ACM Multimedia*, pages 15–24, 2009.
- [29] H. Zhang, Z.-J. Zha, S. Yan, J. Bian, and T.-S. Chua. Attribute feedback. In *ACM Multimedia*, pages 79–88. ACM, 2012.
- [30] S. Zhang, Q. Tian, G. Hua, Q. Huang, and S. Li. Descriptive visual words and visual phrases for image applications. In *ACM Multimedia*, pages 75–84. ACM, 2009.