Documentation HAProxy – SrvWeb 2

Configuration IP /etc/network/interfaces :

```
# The primary network interface
auto ens33
iface ens33 inet static
address 192.168.108.2/24
gateway 192.168.108.10
```

On fait un : **apt update** ensuite un **apt install apache2 php php-mysql** (mettre une carte en bridged pour pouvoir installé et l'enlever par la suite).

Nous allons récupérer .Q:\Documents en consultation\B2-SISR-Alves\Ch07 – Le HAProxy_Annexe.zip\SrvWeb1 via winscp et le mettre sur le SrvWeb1 dans /var/www/html

Installation et configuration lsyncd/rsync/openssh-server :

```
apt update
apt install lsyncd rsync openssh-server -y
systemctl enable ssh
systemctl start ssh
```

Configuration openssh-server :

Garder la version actuellement installée

Ok

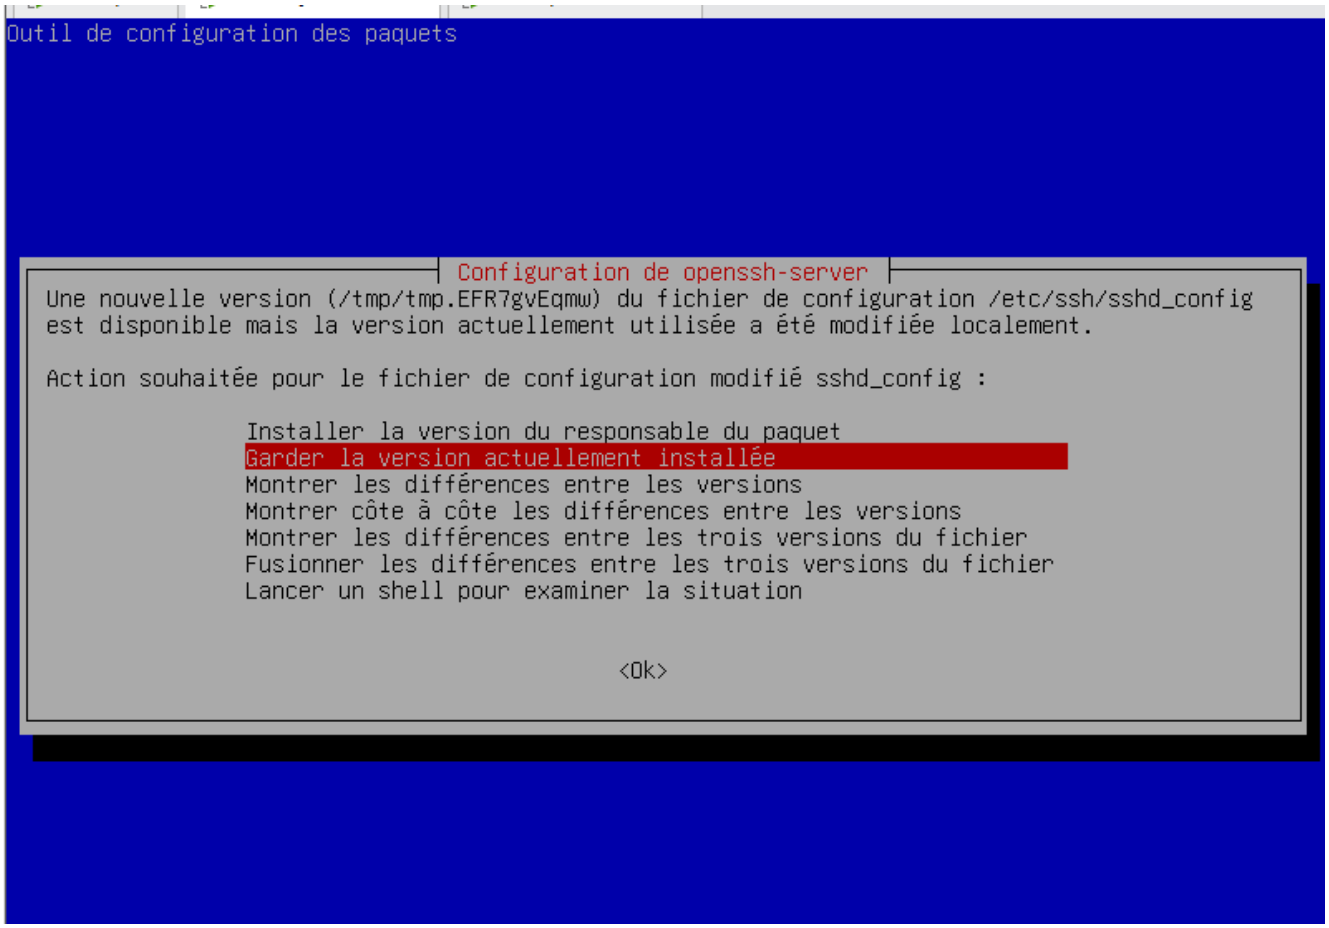

Installation et configuration lsyncd/rsync/openssh-server :

```
apt update
apt install lsyncd rsync openssh-server -y
systemctl enable ssh
systemctl start ssh
```

Ensuite

```
ssh-keygen -t rsa -N "" -f /root/.ssh/id_rsa
ssh-copy-id root@192.168.108.2 (mettre mdp root)
```

Créer le dossier lsyncd :

mkdir /etc/lysncd

Dans ce dossier créer le fichier lsyncd.conf.lua :

nano /etc/lsyncd/lsyncd.conf.lua

Le fichier config doit ressembler à ca :

```
  GNU nano 7.2                    /etc/lsyncd/lsyncd.conf.lua
settings {
        logfile = "/var/log/lsyncd/lsyncd.log",
        statusFile = "/var/log/lsyncd/lsyncd.status",
        statusInterval = 1
}

sync {
        default.rsyncssh,
        source = "/var/www/html",
        host = "192.168.108.1",
        targetdir = "/var/www/html",
        rsync = {
                archive = true,
                compress = true,
                verbose = true
        }
}

                                [ Lecture de 17 lignes ]
^G Aide      ^O Écrire    ^W Chercher  ^K Couper    ^T Exécuter  ^C Emplacement M-U Annuler
^X Quitter   ^R Lire fich. ^\ Remplacer ^U Coller    ^J Justifier ^- Aller ligne M-E Refaire
```

On redémarre lsyncd :

systemctl restart lsyncd

on cree son fichier log :

mkdir –p /var/log/lsyncd

on redemarre encore une fois :

systemctl restart lsyncd

systemctl enable lsyncd

systemctl status lsyncd

```
root@debian:/var/www/html# systemctl status lsyncd
● lsyncd.service - LSB: lsyncd daemon init script
     Loaded: loaded (/etc/init.d/lsyncd; generated)
     Active: active (running) since Thu 2026-04-02 09:46:11 CEST; 1h 4min ago
       Docs: man:systemd-sysv-generator(8)
    Process: 1272 ExecStart=/etc/init.d/lsyncd start (code=exited, status=0/SUCCESS)
      Tasks: 1 (limit: 1057)
     Memory: 1004.0K
        CPU: 228ms
     CGroup: /system.slice/lsyncd.service
             └─1277 /usr/bin/lsyncd -pidfile /var/run/lsyncd.pid /etc/lsyncd/lsyncd.conf.lua

avril 02 09:46:11 debian systemd[1]: Starting lsyncd.service - LSB: lsyncd daemon init script...
avril 02 09:46:11 debian lsyncd[1272]: Starting synchronization daemon: lsyncd
avril 02 09:46:11 debian lsyncd[1276]: 09:46:11 Normal: --- Startup, daemonizing ---
avril 02 09:46:11 debian lsyncd[1272]: .
avril 02 09:46:11 debian systemd[1]: Started lsyncd.service - LSB: lsyncd daemon init script.
```