



## 1 - Corrija o arquivo de rotas nomeando as rotas exemplo:

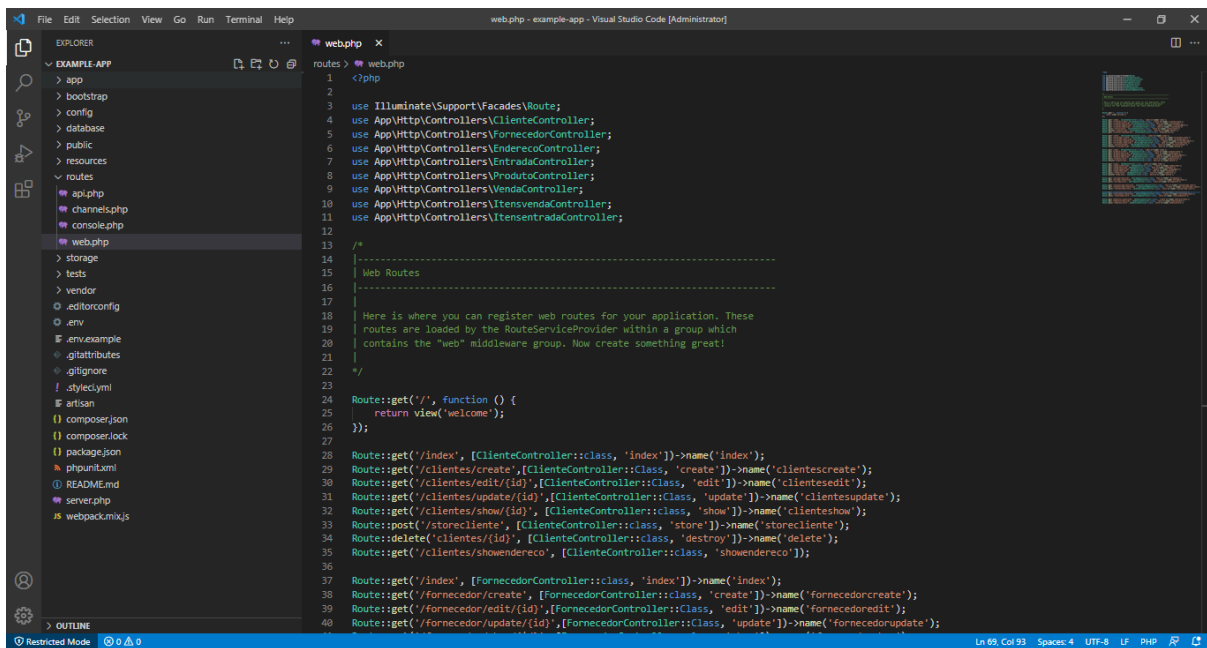

```
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers\ClienteController;
5 use App\Http\Controllers\FornecedorController;
6 use App\Http\Controllers\EnderecoController;
7 use App\Http\Controllers\EntradaController;
8 use App\Http\Controllers\ProdutoController;
9 use App\Http\Controllers\VendaController;
10 use App\Http\Controllers\ItensvendaController;
11 use App\Http\Controllers\ItensentradaController;
12
13 /*
14 |-----
15 | Web Routes
16 |-----
17 |
18 | Here is where you can register web routes for your application. These
19 | routes are loaded by the RouteServiceProvider within a group which
20 | contains the "web" middleware group. Now create something great!
21 |
22 */
23
24 Route::get('/', function () {
25     return view('welcome');
26 });
27
28 Route::get('/index', [ClienteController::class, 'index'])->name('index');
29 Route::get('/clientes/create', [ClienteController::class, 'create'])->name('clientescreate');
30 Route::get('/clientes/edit/{id}', [ClienteController::class, 'edit'])->name('clientesedit');
31 Route::get('/clientes/update/{id}', [ClienteController::class, 'update'])->name('clientesupdate');
32 Route::get('/clientes/show/{id}', [ClienteController::class, 'show'])->name('clientesshow');
33 Route::post('/storecliente', [ClienteController::class, 'store'])->name('storecliente');
34 Route::delete('/clientes/{id}', [ClienteController::class, 'destroy'])->name('delete');
35 Route::get('/clientes/showendereco', [ClienteController::class, 'showendereco']);
36
37 Route::get('/index', [FornecedorController::class, 'index'])->name('index');
38 Route::get('/fornecedor/create', [FornecedorController::class, 'create'])->name('fornecedorcreate');
39 Route::get('/fornecedor/edit/{id}', [FornecedorController::class, 'edit'])->name('fornecedoredit');
40 Route::get('/fornecedor/update/{id}', [FornecedorController::class, 'update'])->name('fornecedorupdate');
```

## 2 - Nas Views modifique as Actions substituído:

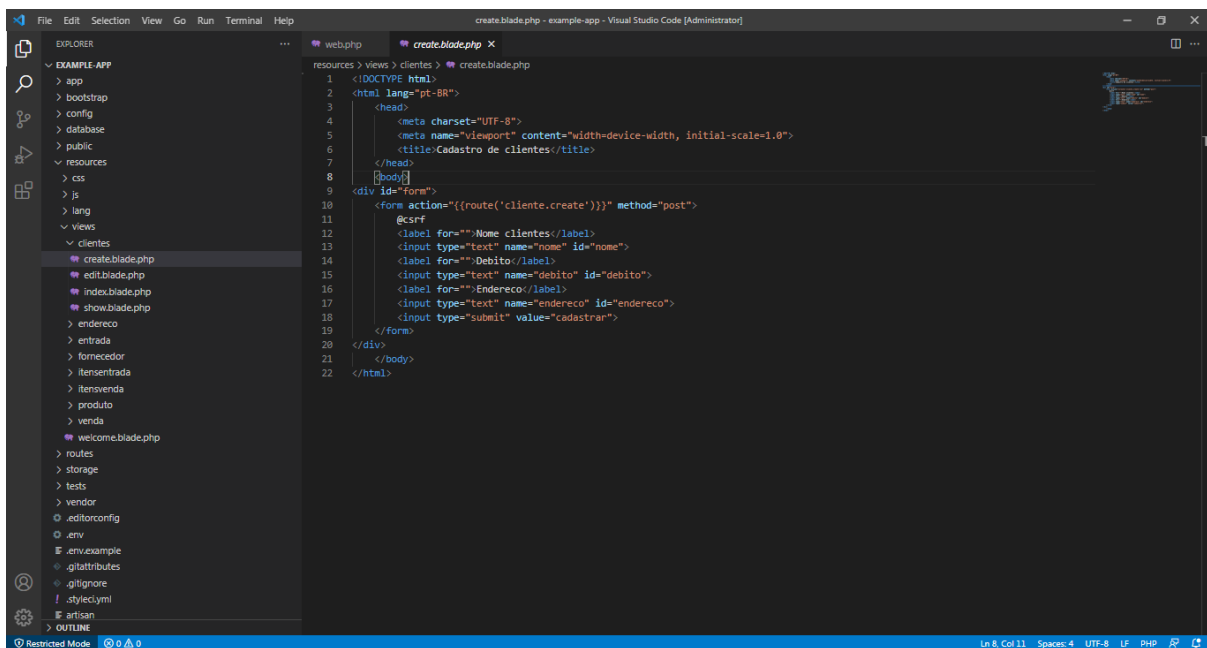

```
1 <?DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>Cadastro de clientes</title>
7 </head>
8 <body>
9     <div id="form">
10         <form action="{{route('cliente.create')}}" method="post">
11             @csrf
12             <label for="">Nome clientes</label>
13             <input type="text" name="nome" id="nome">
14             <label for="">Debito</label>
15             <input type="text" name="debito" id="debito">
16             <label for="">Endereco</label>
17             <input type="text" name="endereco" id="endereco">
18             <input type="submit" value="cadastran">
19         </form>
20     </div>
21 </body>
22 </html>
```

create.blade.php - example-app - Visual Studio Code [Administrator]

```
1 <!DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>Endereco</title>
7 </head>
8 <body>
9 <div>
10 <form action="{{route('endereco.store')}}" method="post">
11 @csrf
12 <label for="logradouro">Logradouro</label>
13 <input type="text" name="logradouro" id="logradouro">
14 <label for="bairro">Bairro</label>
15 <input type="text" name="bairro" id="bairro">
16 <label for="cidade">Cidade</label>
17 <input type="text" name="cidade" id="cidade">
18 <label for="uf">UF</label>
19 <input type="text" name="uf" id="uf">
20 <input type="hidden" name="idcliente" value="{{idcliente}}>
21 <input type="submit" value="Cadastrar">
22 </form>
23 </div>
24 </body>
25 </html>
```

create.blade.php - example-app - Visual Studio Code [Administrator]

```
1 <!DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>Entrada</title>
7 </head>
8 <body>
9 <div>
10 <form action="{{route('entradas.store')}}" method="post">
11 @csrf
12 <label for="valortotal">Valor total</label>
13 <input type="text" name="valortotal" id="valortotal">
14 <input type="hidden" name="idfornecedor" value="{{idfornecedor}}>
15 <input type="submit" value="Cadastrar">
16 </form>
17 </div>
18 </body>
19 </html>
```

create.blade.php - example-app - Visual Studio Code [Administrator]

```
1 <!DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>Cadastro de fornecedores</title>
7 </head>
8 <body>
9 <div>
10 <form action="{{route('fornecedores.create')}}" method="post">
11 @csrf
12 <label for="nome_fornecedor">Nome fornecedor</label>
13 <input type="text" name="nome" id="nome">
14 <label for="email">E-mail</label>
15 <input type="text" name="email" id="email">
16 <input type="submit" value="Cadastrar">
17 </form>
18 </div>
19 </body>
20 </html>
```

```
1 <!DOCTYPE html>
2 <html lang="pt-BR">
3   <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>Intensentrada</title>
7   </head>
8   <body>
9     <div id="form">
10      <form action="{{route('itensentrada.store')}}" method="post">
11        @csrf
12        <label form=""> Nota fiscal </label>
13        <input type="text" name="notafiscal" id="notafiscal">
14        <label for="precocompra">Preço </label>
15        <input type="text" name="precocompra" id="precocompra">
16        <input type="hidden" name="identrada" value="{{ $identrada }}">
17        <input type="hidden" name="idproduto" value="{{ $idproduto }}">
18        <input type="submit" value="Cadastrar">
19      </form>
20    </div>
21  </html>
```

```
1 <!DOCTYPE html>
2 <html lang="pt-BR">
3   <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>Intensvenda</title>
7   </head>
8   <body>
9     <div id="form">
10      <form action="{{route('itensvenda.store')}}" method="post">
11        @csrf
12        <label form=""> Nota fiscal </label>
13        <input type="text" name="notafiscal" id="notafiscal">
14        <label for="valorvenda">Valor </label>
15        <input type="text" name="valorvenda" id="valorvenda">
16        <input type="hidden" name="idproduto" value="{{ $idproduto }}">
17        <input type="hidden" name="idvenda" value="{{ $idvenda }}">
18        <input type="submit" value="Cadastrar">
19      </form>
20    </div>
21  </html>
```

```

1 <!DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>Produto</title>
7 </head>
8 <body>
9     <div id="form">
10         <form action="{{route('produto.store')}}" method="post">
11             @csrf
12             <label for="nome">Nome</label>
13             <input type="text" name="nome" id="nome">
14             <label for="valordecompra">Valor de compra</label>
15             <input type="number" name="valordecompra" id="valordecompra">
16             <label for="quantidade">quantidade</label>
17             <input type="number" name="quantidade" id="quantidade">
18             <label for="valordevenda">Valor</label>
19             <input type="number" name="valordevenda" id="valordevenda">
20             <input type="hidden" name="idproduto" value="{{idproduto}}>
21             <input type="submit" value="Cadastrar">
22         </form>
23     </div>
24 </html>
25


```

```


1 <!DOCTYPE html>
2 <html lang="pt-BR">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>venda</title>
7 </head>
8 <body>
9     <div id="form">
10         <form action="{{route('venda.store')}}" method="post">
11             @csrf
12             <label for="valor">Valor</label>
13             <input type="text" name="valor" id="valor">
14             <input type="hidden" name="idcliente" value="{{idcliente}}>
15             <input type="submit" value="Cadastrar">
16         </form>
17     </div>
18 </body>
19 </html>

```

3 - Na pasta Model corrija as relações das models (venda, itens venda, entrada, itens entrada, fornecedor, produto) conforme relação apresentada entre o model cliente e endereço

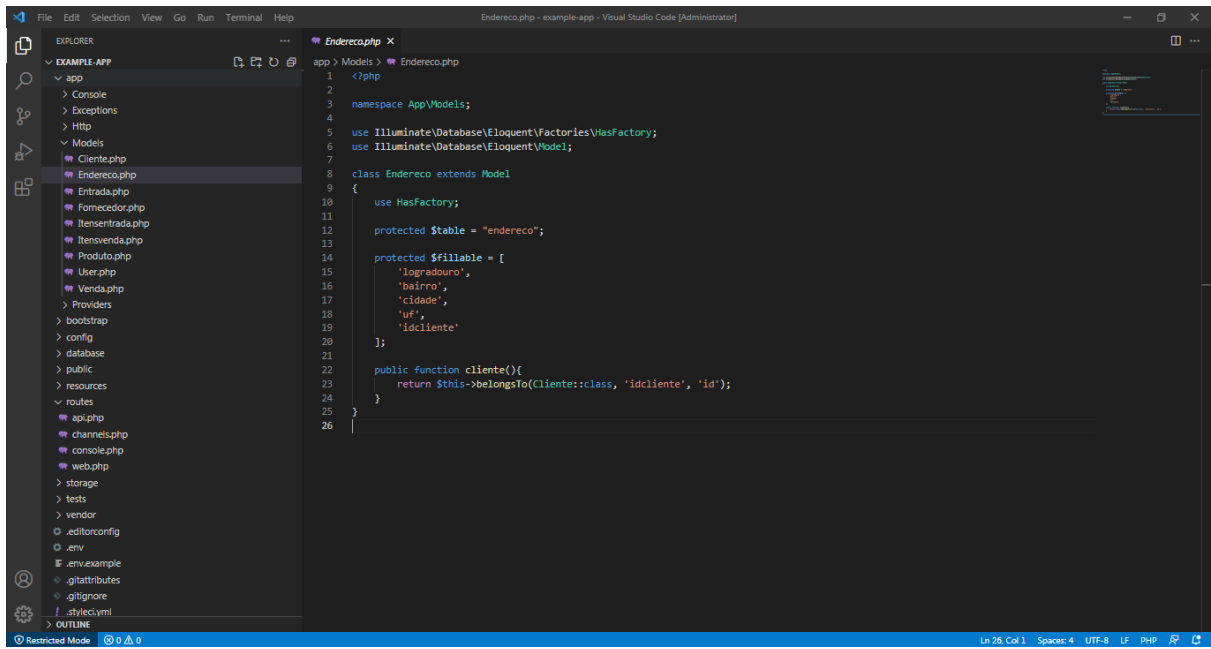

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Endereco extends Model
9 {
10     use HasFactory;
11
12     protected $table = "endereco";
13
14     protected $fillable = [
15         'logradouro',
16         'bairro',
17         'cidade',
18         'uf',
19         'idcliente'
20     ];
21
22     public function cliente(){
23         return $this->belongsTo(Client::class, 'idcliente', 'id');
24     }
25 }
26
```

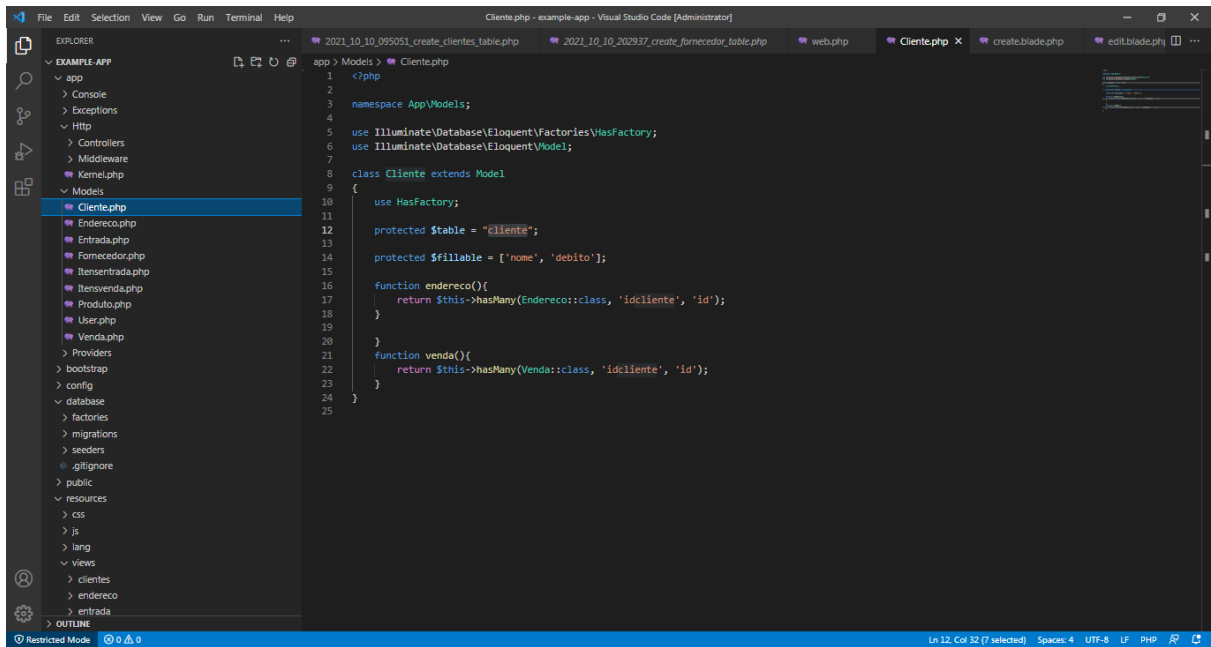

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Cliente extends Model
9 {
10     use HasFactory;
11
12     protected $table = "cliente";
13
14     protected $fillable = ['nome', 'debito'];
15
16     function endereco(){
17         return $this->hasMany(Endereco::class, 'idcliente', 'id');
18     }
19
20     function venda(){
21         return $this->hasMany(Venda::class, 'idcliente', 'id');
22     }
23 }
24
25
```

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Entrada extends Model
9 {
10     use HasFactory;
11
12     protected $table = "entrada";
13
14     protected $fillable = ['valortotal', 'idfornecedor'];
15
16     public function fornecedor(){
17         return $this->belongsTo(Fornecedor::class, 'idfornecedor', 'id');
18     }
19
20     function itensentrada(){
21         return $this->hasMany(Itensentrada::class, 'identrada', 'id');
22     }
23 }
24
```

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Itensentrada extends Model
9 {
10     use HasFactory;
11
12     protected $table = "itensentrada";
13
14     protected $fillable = ['preco compra', 'notafiscal', 'idproduto', 'identrada'];
15
16     public function produto(){
17         return $this->belongsTo(Produto::class, 'idproduto', 'id');
18     }
19     public function entrada(){
20         return $this->belongsTo(Entrada::class, 'identrada', 'id');
21     }
22 }
23
```

