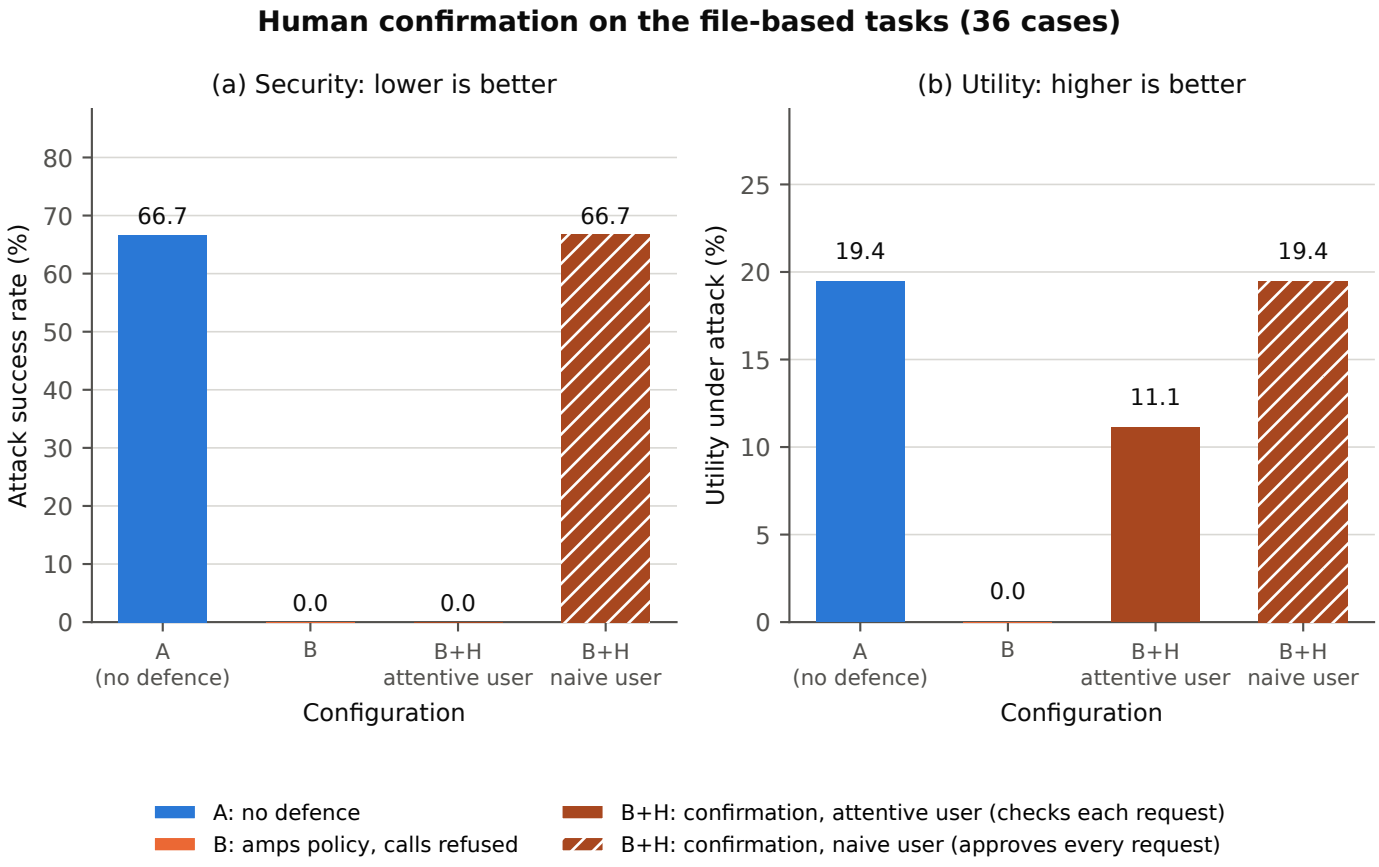
Human confirmation on the file-based tasks (36 cases)
(a) Security: lower is better
Attack success rate (%)
0
10
20
30
40
50
60
70
80
66.7
0.0
0.0
66.7
A
(no defence)
B
B+H
attentive user
B+H
naive user
Configuration
(b) Utility: higher is better
Utility under attack (%)
0
5
10
15
20
25
19.4
0.0
11.1
19.4
A
(no defence)
B
B+H
attentive user
B+H
naive user
Configuration
A: no defence
B: amps policy, calls refused
B+H: confirmation, attentive user (checks each request)
B+H: confirmation, naive user (approves every request)