


Material Composition Declaration Multilayer Tantalum Capacitors

May 2026

YAGEO GROUP
Built into Tomorrow

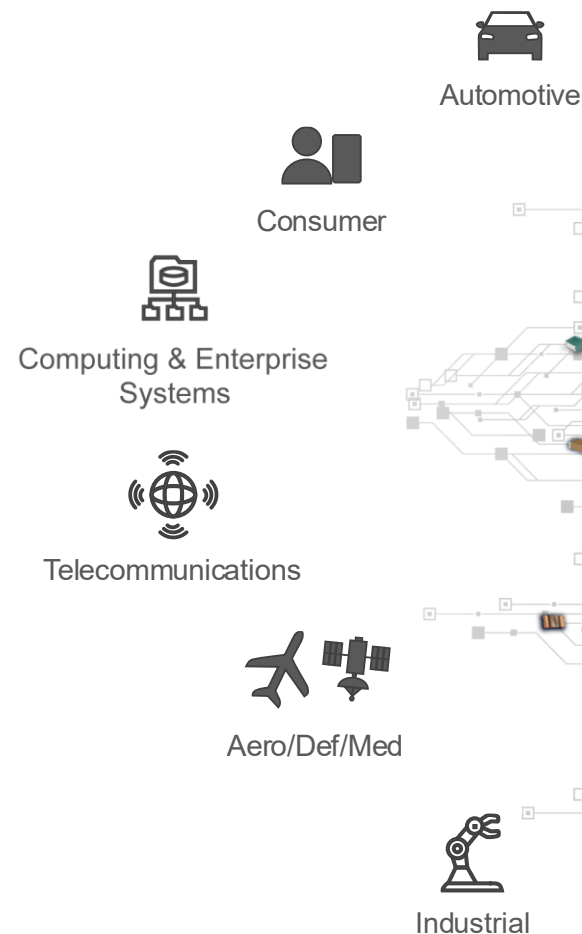

Material Composition Declaration

Multilayer Tantalum Capacitors

Remarks:

- KEMET Electronics Corporation Material Composition Declarations are based on raw material data and manufacturing processes in use at the time and date of declaration. The information provided is business confidential prepared exclusively for business purposes and must not be printed, copied, distributed or disclosed without prior written consent and authorization from KEMET Electronics Corporation.
- All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.
- KEMET ACCEPTS NO DUTY TO NOTIFY USERS ABOUT CHANGES TO A MATERIAL DECLARATION. KEMET IS NOT LIABLE FOR ANY DAMAGES, DIRECT OR INDIRECT, CONSEQUENTIAL OR OTHERWISE, THAT THE READER MIGHT INCUR AS A RESULT OF IGNORING THIS WARNING, OR THAT ANY THIRD PARTY MIGHT SUFFER AS A RESULT OF THE READER'S IGNORING THIS WARNING.
- Miscellaneous refers to substances that are below 0.1% by weight and are not restricted and/or banned substances based on IMDS reportable substance/ban list.
- Values (%) are based on engineering calculations and do not represent exact amount contained in product.
- All statements herein are based in our present knowledge. If products are used properly, there are no risks to humans and/or the environment.
- KEMET reserves the right to change and/or update this information without notification.
- KEMET's web site will be maintained updated to show the most current data <https://yageogroup.com/About/Sustainability/Environment/KemetFocus>

Material Declaration
Tantalum MnO2 Surface Mount Capacitor (T49x series)

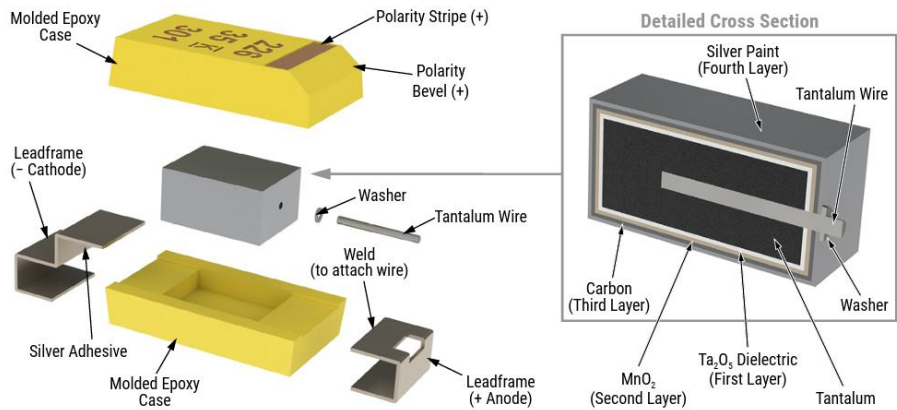


Table with 2 columns: Compliance Category and Status. Rows include Environmental Compliance, Pb Free (YES), RoHS Compliant (YES), and Halogen Free (YES).

Table with 7 columns: Homogeneous Level, Construction Element, Substance, Weight, Common Name, CAS #, and SGS Report No. It details the materials used in the capacitor, including Tantalum, Manganese dioxide, Carbon, Silver, and various alloys.

Annex 1

Material Declaration

Tantalum MnO2 Surface Mount Capacitor (T49x series)

Series				T49x					
Case code				A(3216-18)	B(3528-21)	C(6032-28)	D(7343-31)	X(7343-43)	V(7343-20)
Homogeneous Level	Material	Substance	CAS No.	weight [mg]	weight [mg]	weight [mg]	weight [mg]	weight [mg]	weight [mg]
Anode	Tantalum	Ta	7440-25-7	9.17	22.02	56.00	109.01	180.24	61.38
	Manganese dioxide	MnO2	1313-13-9	7.81	14.45	28.23	44.64	65.89	36.80
	Carbon	C	7440-44-0	0.10	0.07	0.14	0.29	0.48	0.19
	Silver	Ag	7440-22-4	1.41	2.60	5.07	8.00	11.90	6.61
	Fluorine	F	7782-41-4	0.23	0.06	0.11	0.38	0.20	0.15
	Miscellaneous		-	0.01	0.02	0.05	0.07	0.30	0.04
Homogeneous Level Weight				18.73	39.22	89.60	162.39	259.01	105.17
Leadframe	Base metal	Cu	7440-50-8	7.85	7.85	7.85	19.32	19.32	19.32
		Fe	7439-89-6	0.03	0.03	0.03	0.08	0.08	0.08
		Zn	7440-66-6	2.09	2.09	2.09	5.13	5.13	5.13
		Miscellaneous	-	0.09	0.09	0.09	0.23	0.24	0.23
	Under layer	Ni	7440-02-0	2.33	2.33	2.33	5.74	5.74	5.74
	Finish plating	Sn	7440-31-5	1.22	1.22	1.22	3.01	3.01	3.01
	Conductive Adhesive*	Ag	7440-22-4	4.90	4.90	4.90	12.05	12.05	12.05
		C	7440-44-0	1.21	1.21	1.21	2.97	2.97	2.97
Homogeneous Level Weight				19.72	19.72	19.72	48.53	48.54	48.53
Molding Epoxy	Molding Epoxy	SiO ₂	7631-86-9	15.58	32.92	87.23	152.93	211.06	93.82
		Carbon	7440-44-0	4.10	8.67	22.98	40.28	55.59	24.71
		Iron	7439-89-6	0.15	0.33	0.86	1.51	2.08	0.93
		Miscellaneous	-	0.69	1.44	3.81	6.69	9.22	4.10
Homogeneous Level Weight				20.52	43.36	114.88	201.41	277.95	123.56
Total Weight				58.97	102.30	224.20	412.33	585.50	277.26

* This was tested as part of the Leadframe Finish Plating.

Material Declaration
Tantalum MnO2 Surface Mount Capacitor (T51x series)

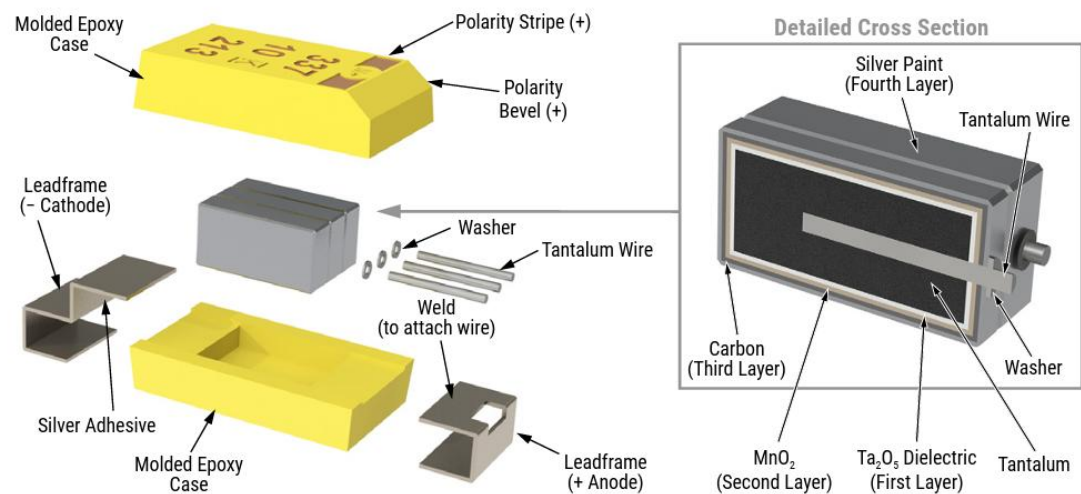


Table with 2 columns: Compliance Category and Status. Rows include Pb Free (YES), RoHS Compliant (YES), and Halogen Free (YES).

Table with 7 columns: Homogeneous Level, Construction Element, Substance, Weight, Common Name, CAS #, and SGS Report No. It details the materials used in the capacitor, including Tantalum, Manganese dioxide, Carbon, Silver, Leadframe (Alloy), and Molding Epoxy.

Annex 2

Material Declaration

Tantalum MnO2 Surface Mount Capacitor (T51x series)

Series				T51x	
Case code				E (7360–38)	X (7343-43)
Homogeneous Level	Material	Substance	CAS No.	weight [mg]	weight [mg]
Anode	Tantalum	Ta	7440-25-7	67.66	67.66
	Manganese dioxide	MnO2	1313-13-9	39.21	39.21
	Carbon	C	7440-44-0	0.22	0.20
	Silver	Ag	7440-22-4	7.05	7.05
	Miscellaneous		-	0.29	0.21
Homogeneous Level Weight				114.43	114.33
Leadframe	Base metal	Cu	7440-50-8	19.32	19.32
		Zn	7440-66-6	5.13	5.12
		Miscellaneous	-	0.31	0.28
	Under layer	Ni	7440-02-0	5.74	5.74
	Finish plating	Sn	7440-31-5	3.01	3.01
	Conductive Adhesive*	Ag	7440-22-4	12.05	3.14
		C	7440-44-0	2.97	0.77
Homogeneous Level Weight				48.53	37.38
Molding Epoxy	Molding Epoxy	SiO ₂	7631-86-9	256.48	211.35
		Carbon	7440-44-0	67.56	55.67
		Iron	7439-89-6	2.53	2.09
		Miscellaneous	-	11.21	9.23
Homogeneous Level Weight				337.78	278.34
Total Weight				500.74	430.05

* This was tested as part of the Leadframe Finish Plating

Material Declaration
Tantalum Polymer Surface Mount Capacitor (T52x series)

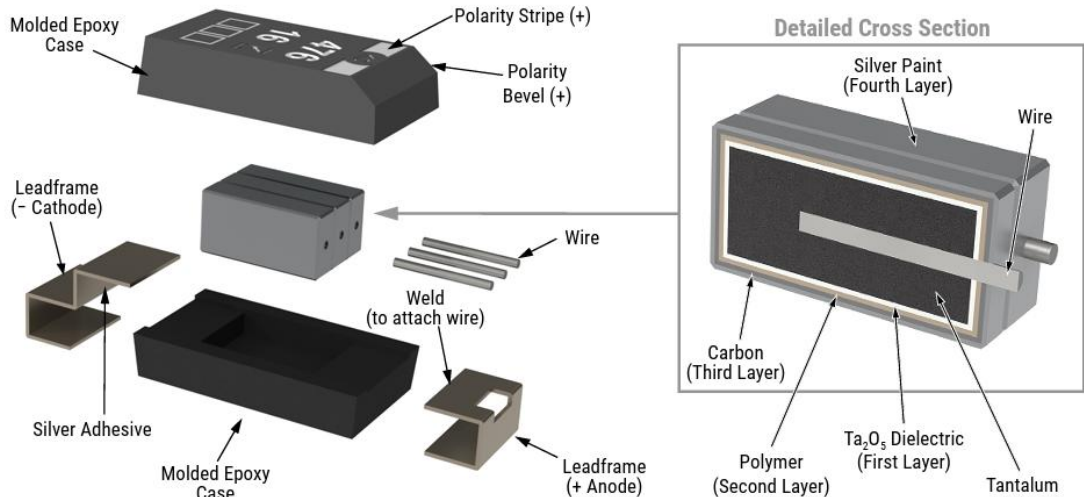


Table with 2 columns: Compliance Category and Status. Rows include Pb Free (YES), RoHS Compliant (YES), and Halogen Free (YES).

Table with 7 columns: Homogeneous Level, Construction Element, Substance, Weight, Common Name, CAS #, and SGS Report No. It details the materials used in the capacitor, including Tantalum Anode, Polymer, Carbon, Silver, Leadframe, and Molding Epoxy.

Annex 3

Material Declaration

Tantalum Polymer Surface Mount Capacitor (T52x series)

Series				T52x								
Case code				A (3216-18)	B (3528-21)	C (6032-28)	D (7343-31)	U (6032-15)	V (7343-19)	W (7343-15)	X (7343-43)	Y (7343-40)
Homogeneous Level	Material	Substance	CAS No.	weight [mg]	weight [mg]	weight [mg]	weight [mg]	weight [mg]	weight [mg]	weight [mg]	Weight [mg]	Weight [mg]
Anode	Tantalum	Ta ₂ O ₅	1314-61-0	9.50	25.99	39.99	129.75	28.19	69.27	61.48	203.01	153.44
	Polymer	-	-	0.47	0.92	1.46	3.08	1.24	2.43	2.46	3.82	3.08
	Carbon	C	7440-44-0	0.44	0.85	1.36	5.59	2.39	4.41	4.76	3.54	5.59
	Silver	Ag	7440-22-4	1.45	2.81	4.47	10.71	3.79	8.45	7.55	11.69	10.71
	Fluorine	F	7782-41-4	0.61	1.20	1.90	0.00	0.38	0.00	0.75	4.99	0.00
	Miscellaneous		-	0.01	0.01	0.02	0.06	0.01	0.04	0.03	0.09	0.06
Homogenous Level Weight				12.48	31.78	49.20	149.19	36.00	84.60	77.03	227.14	172.88
Leadframe	Base metal	Cu	7440-50-8	11.92	11.92	11.92	29.34	11.92	29.34	29.34	29.34	29.34
		Zn	7440-66-6	0.02	0.02	0.02	0.05	0.02	0.05	0.05	0.05	0.05
		Fe	7439-89-6	0.29	0.29	0.29	0.71	0.29	0.71	0.71	0.71	0.71
		Miscellaneous	-	0.03	0.03	0.03	0.06	0.03	0.06	0.06	0.06	0.06
	Under layer	Cu	7440-50-8	0.12	0.12	0.12	0.30	0.12	0.30	0.30	0.30	0.30
	Finish plating	Sn	7440-31-5	1.23	1.23	1.23	3.01	1.23	3.01	3.01	3.01	3.01
	Conductive Adhesive*	Ag	7440-22-4	4.90	4.90	4.90	12.05	4.90	12.05	12.05	12.05	12.05
		C	7440-44-0	1.21	1.21	1.21	2.97	1.21	2.97	2.97	2.97	2.97
Homogenous Level Weight				19.72	19.72	19.72	48.49	19.72	48.49	48.49	48.49	48.49
Molding Epoxy	Molding Epoxy	SiO ₂	7631-86-9	15.97	33.73	89.68	156.45	47.98	96.06	75.81	216.63	202.49
		C	7440-44-0	2.22	4.69	12.47	21.75	6.67	13.35	10.54	30.11	28.15
		Magnesium	7439-95-4	1.86	3.92	10.42	18.17	5.57	11.16	8.80	25.16	23.52
		Miscellaneous	-	0.47	1.00	2.65	4.62	1.42	2.84	2.24	6.40	5.98
Homogenous Level Weight				20.52	43.34	115.22	200.99	61.64	123.41	97.39	278.30	260.14
Total				52.72	94.84	184.14	398.67	117.36	256.50	222.91	553.93	481.51

* This was tested as part of the Leadframe Finish Plating

Material Declaration
Tantalum Polymer Surface Mount Capacitor (T53x series)

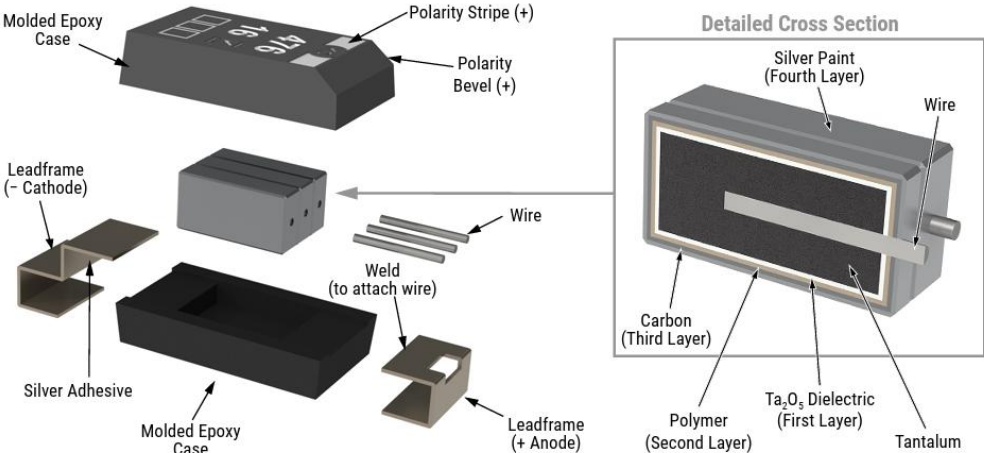


Table with 2 columns: Compliance Category and Status. Rows include Pb Free (YES), RoHS Compliant (YES), and Halogen Free (YES).

Table with 7 columns: Homogeneous Level, Construction Element, Substance, Weight, Common Name, CAS #, and SGS Report No. It details the materials used in the capacitor, including Tantalum Anode, Polymer, Carbon, Silver, Leadframe, and Molding Epoxy.

Annex 4

Material Declaration

Tantalum Polymer Surface Mount Capacitor (T53x series)

Series				T53x		
Case code				D (7343-31)	X (7343-43)	Y (7343-40)
Homogeneous Level	Material	Substance	CAS No.	Weight [mg]	Weight [mg]	Weight [mg]
Anode	Tantalum	Ta ₂ O ₅	7440-25-7	59.28	78.77	66.87
	Polymer	-	-	1.77	2.41	2.41
	Carbon	C	7440-44-0	1.64	2.23	2.23
	Silver	Ag	7440-22-4	5.41	7.37	7.37
	Fluorine	F	7782-41-4	2.30	3.15	3.15
	Miscellaneous		-	0.03	0.03	0.03
Homogenous Level Weight				70.43	93.96	82.06
Leadframe	Base Metal	Cu	7440-50-8	29.34	29.34	29.34
		Fe	7439-89-6	0.71	0.71	0.71
		Zn	7440-66-6	0.05	0.05	0.05
		Miscellaneous	-	0.04	0.06	0.06
	Under layer	Pd	7440-05-3	0.30	0.30	0.30
	Finish plating	Sn	7440-31-5	3.02	3.01	3.01
	Conductive Adhesive*	Ag	7440-22-4	1.66	3.14	3.14
		C	7440-44-0	0.41	0.77	0.77
Homogenous Level Weight				35.53	37.38	37.38
Molding Epoxy	Molding Epoxy	SiO ₂	7631-86-9	156.88	216.66	201.31
		C	7440-44-0	21.81	30.12	27.98
		Magnesium	7439-95-4	18.22	25.16	23.38
		Miscellaneous	-	4.64	6.40	5.95
Homogenous Level Weight				201.55	278.34	258.62
Total				307.51	409.68	378.06

* This was tested as part of the Leadframe Finish Plating