


Progetto di Modelli e Architetture Avanzate di DataBase (MAADB)


Bortolotti Simone  
De Cenzo Davide  
Marignati Luca

# PROJECT SCHEMA



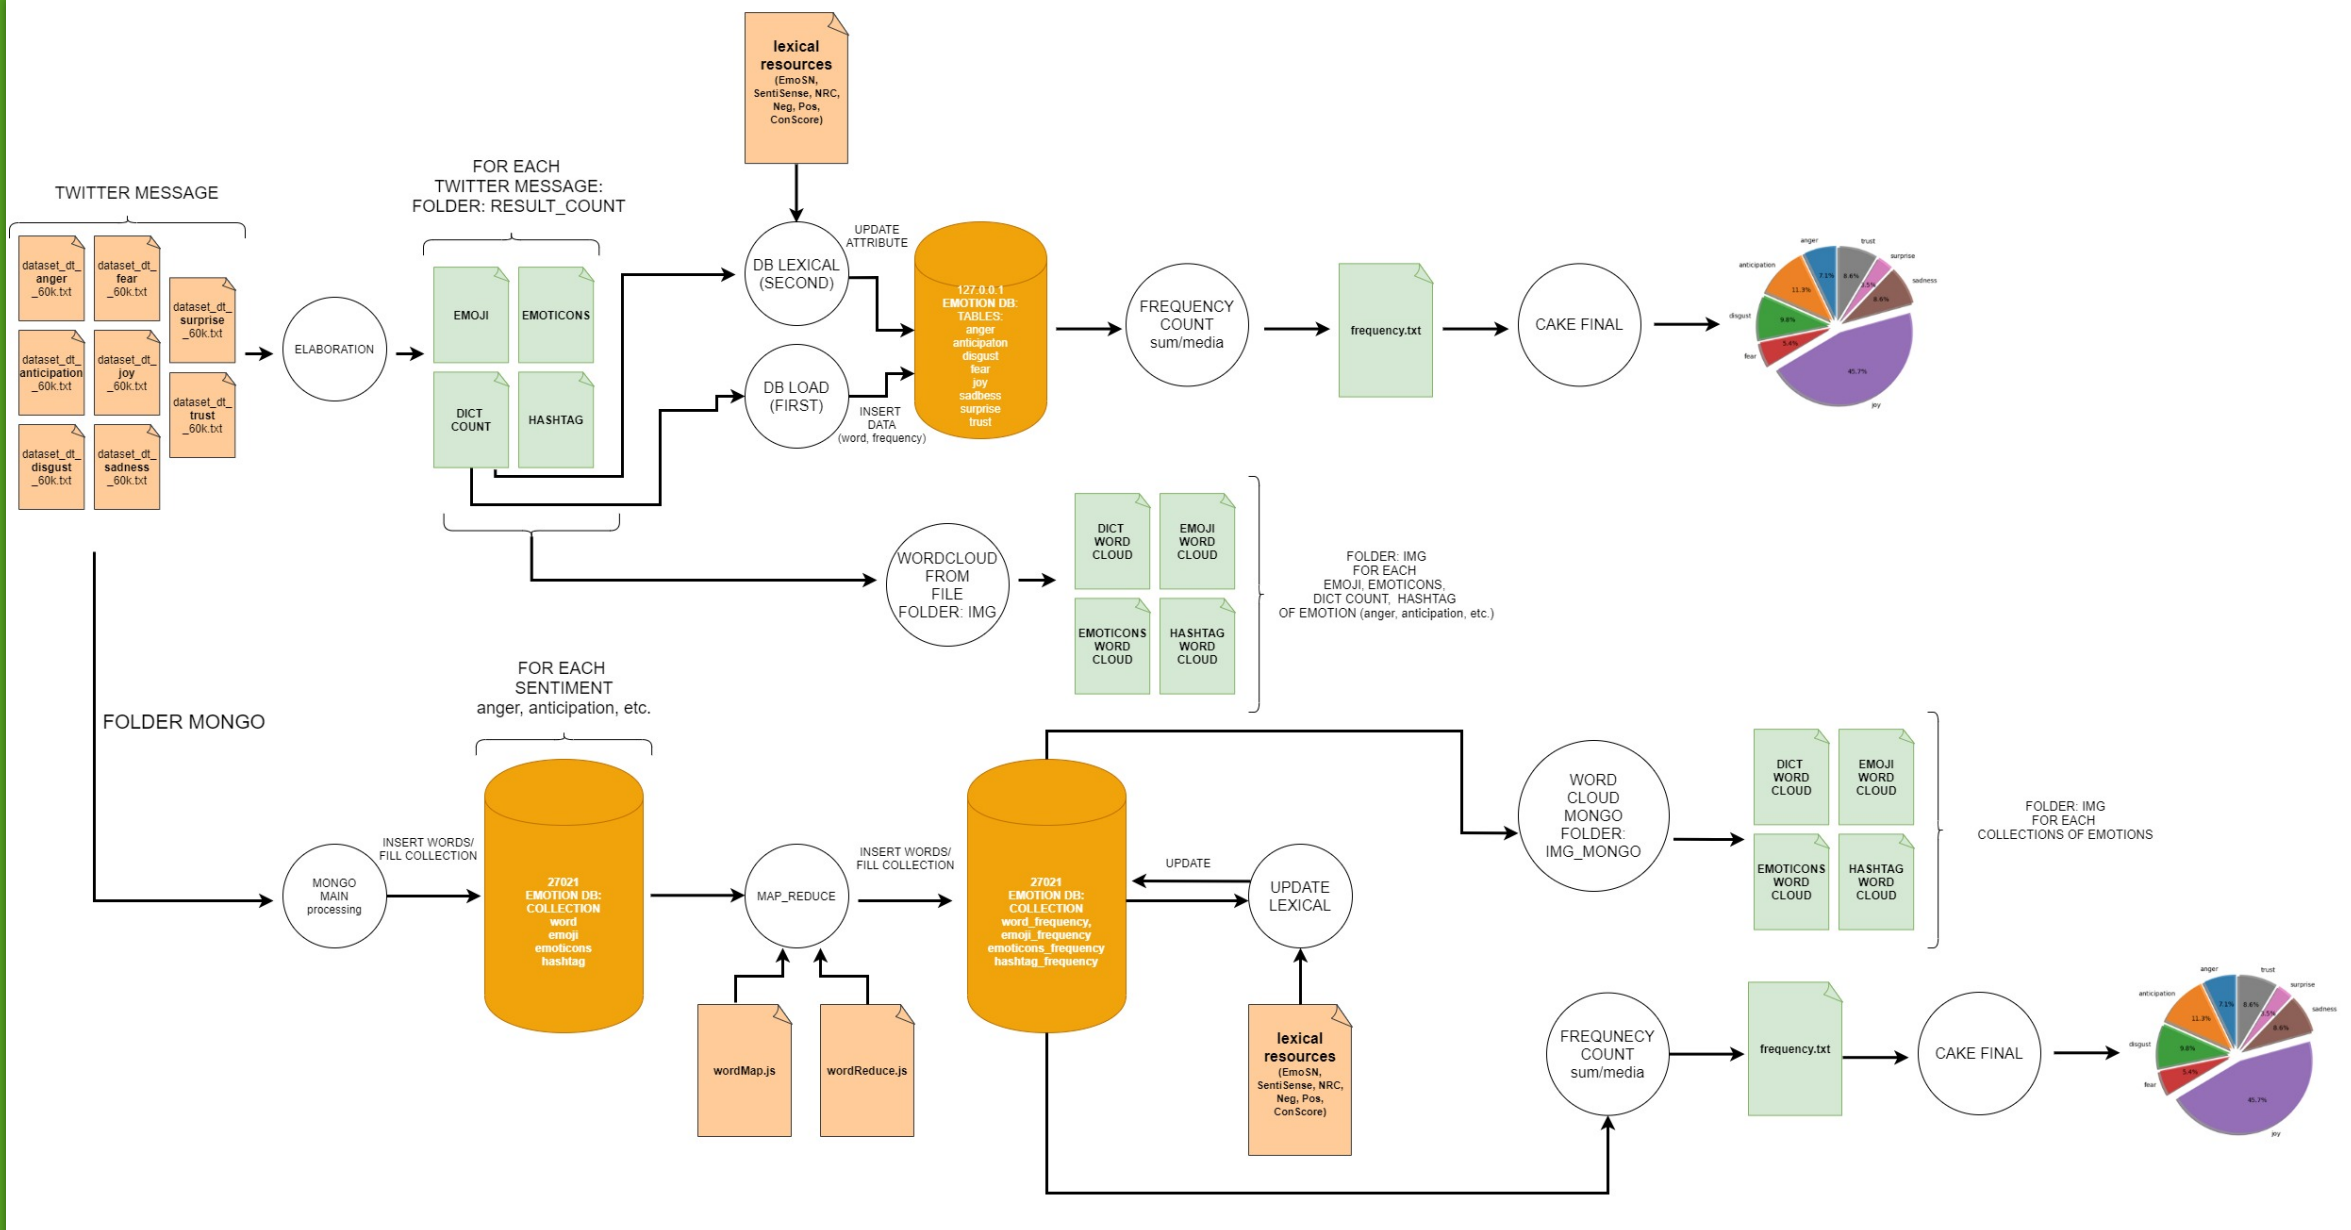

## TWITTER MESSAGE

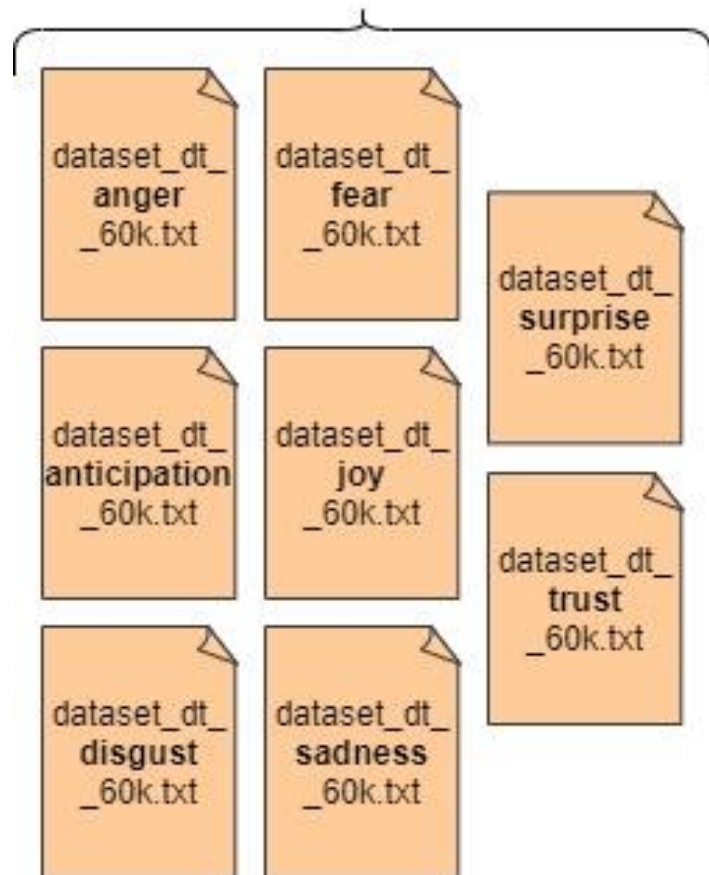


PROCESS  
FOR MySQL




PROCESS  
FOR Mongo

# Process for MySQL

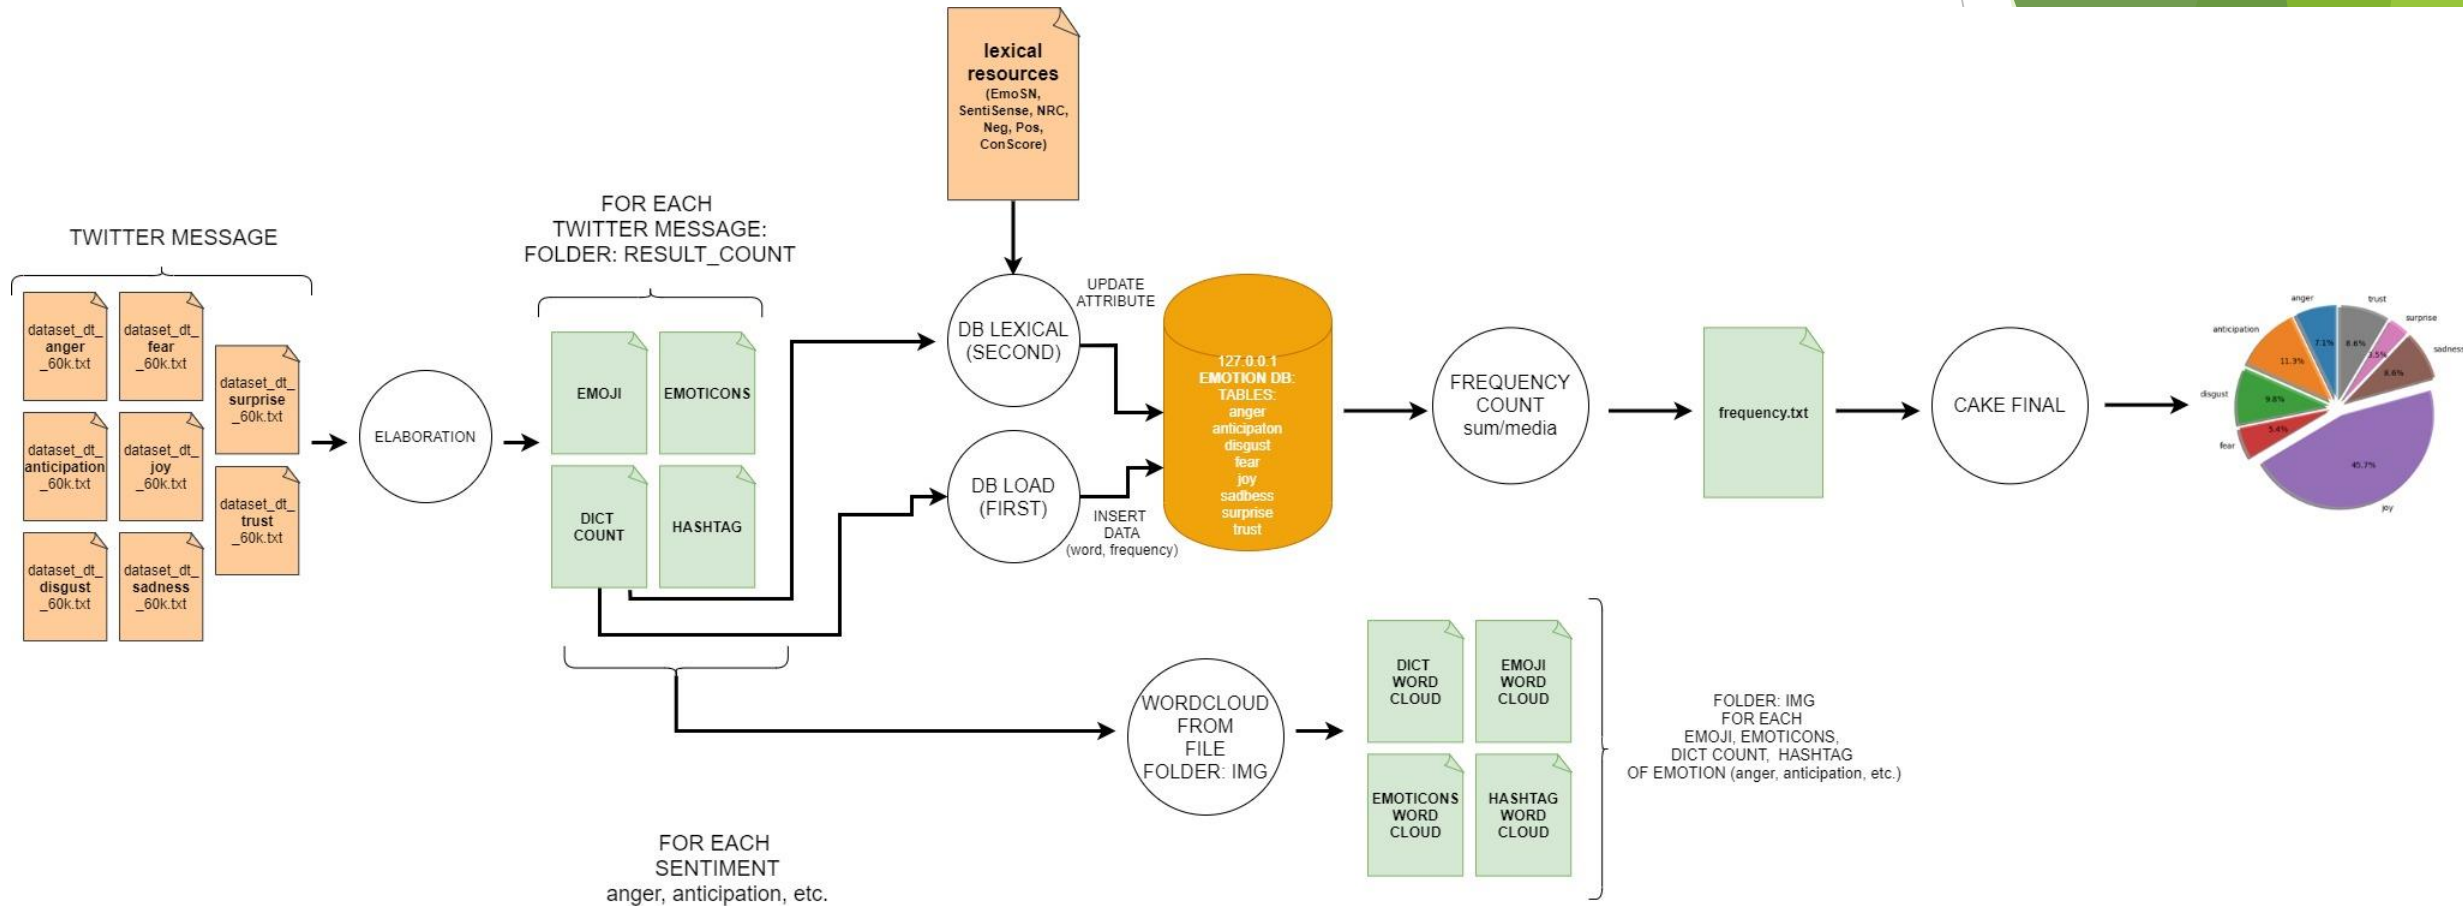

# Process for Mongo

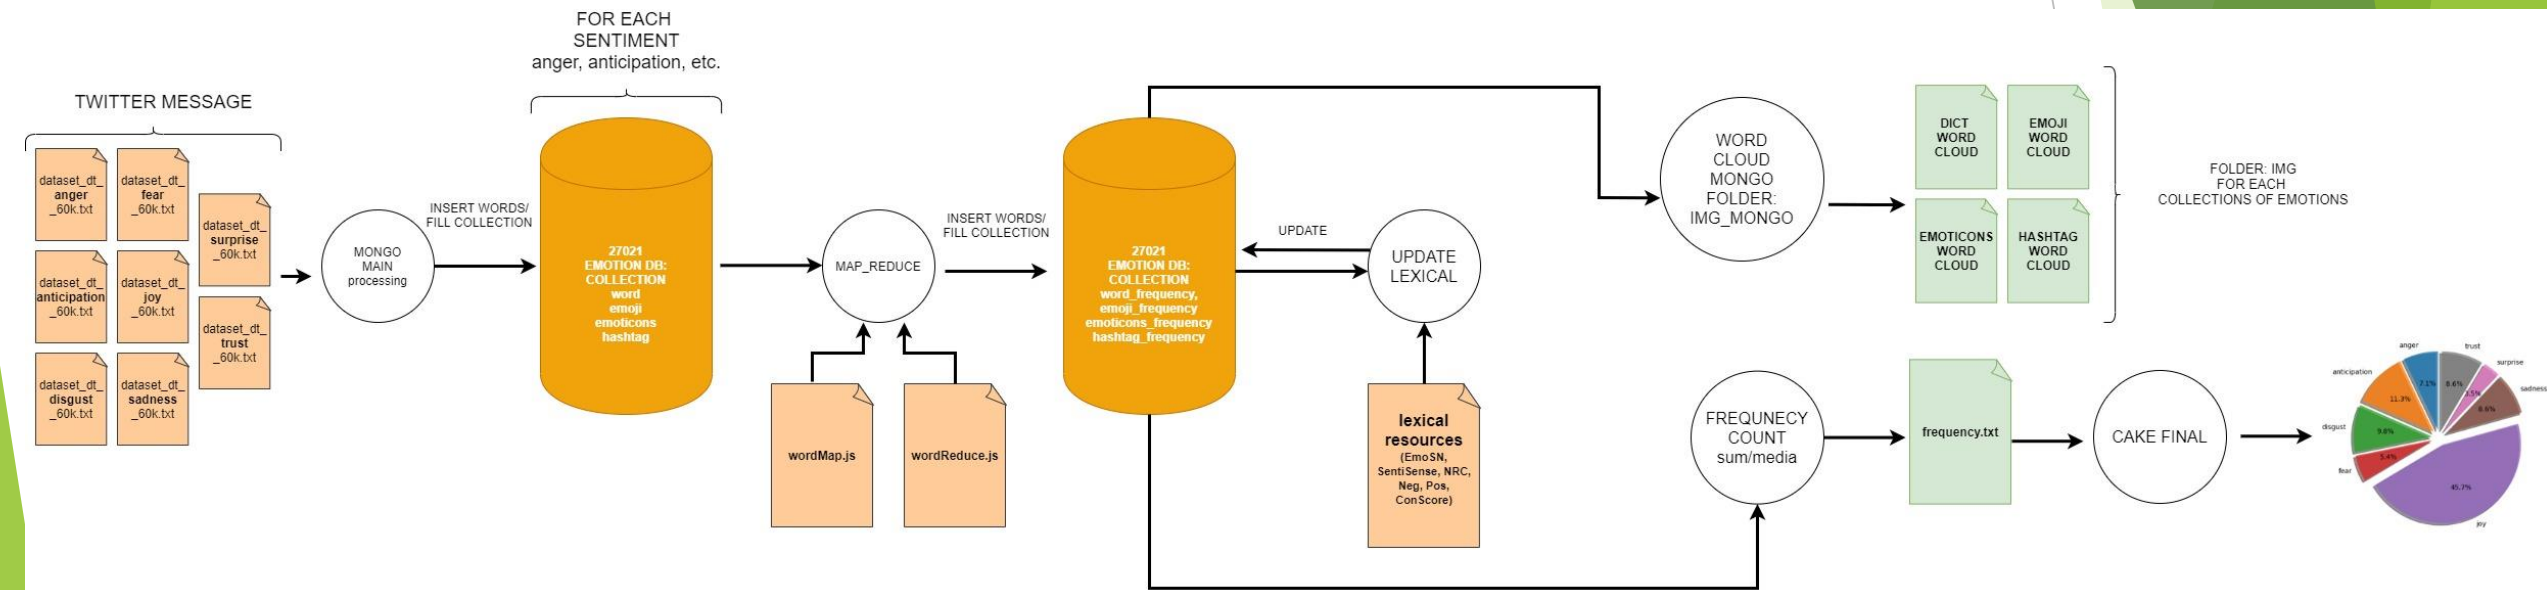



# FILE SYSTEM



# Main folder

archivi\_risorse\_lessicali

- E.g. Anger, Anticipation, conScore, etc.

twitter\_message

- Initial DATASET (e.g. dataset\_dt\_anger\_60k.txt, etc.)

img

- Wordcloud (MySQL)
- 4 for each emotion: word + hashtag + emoji + emoticons

img\_mongo

- wordcloud (Mongo collection)
- 4 for each emotion: word + hashtag + emoji + emoticons

result\_count

- PRE-LOAD DB: results of ELABORATION.PY (NTLK)
- 4 for each emotion: word + hashtag + emoji + emoticons

Mongo

- Mongo elaboration



# Main file (1 / 2) - MySQL

## ELABORATION.PY

- INPUT: twitter message
- processing twitter message (string + nltk operation) + frequency count
- save to local array/dictionary (emoji, emotions, hashtag, word)
- OUTPUT: save local array/dictionary to file into folder «result\_count»

## DB\_LOAD.PY

- INPUT: read file from folder «result\_count»
- OUTPUT: insert data to db («emotion»)
  - Table = "anger", "anticipation", "disgust", etc.

## DB\_LEXICAL.PY

- INPUT: read file from folder «lexical resources»
- OUTPUT: Update table ("anger", "anticipation", "disgust", etc.)
- boolean values (emo\_sn, ...) + conScore (afinn, ...) + Neg/Pos (gi\_neg, ...)

# Main file (2/2) - MySQL

## FREQUENCY\_COUNT.PY


- INPUT: «select sum from DB»
- average calculation
- OUTPUT: save to file «frequency.txt»

## WORDCLOUD\_FROM\_FILE.PY

- INPUT: read result count (e.g anger\_emoji.txt, etc.)
- Create wordcloud IMG
- OUTPUT: save file to folder «wordcloud»
- 4 for each emotion: word + hashtag + emoji + emoticons

# Elaboration.py (1/3) - example

## Processing twitter message

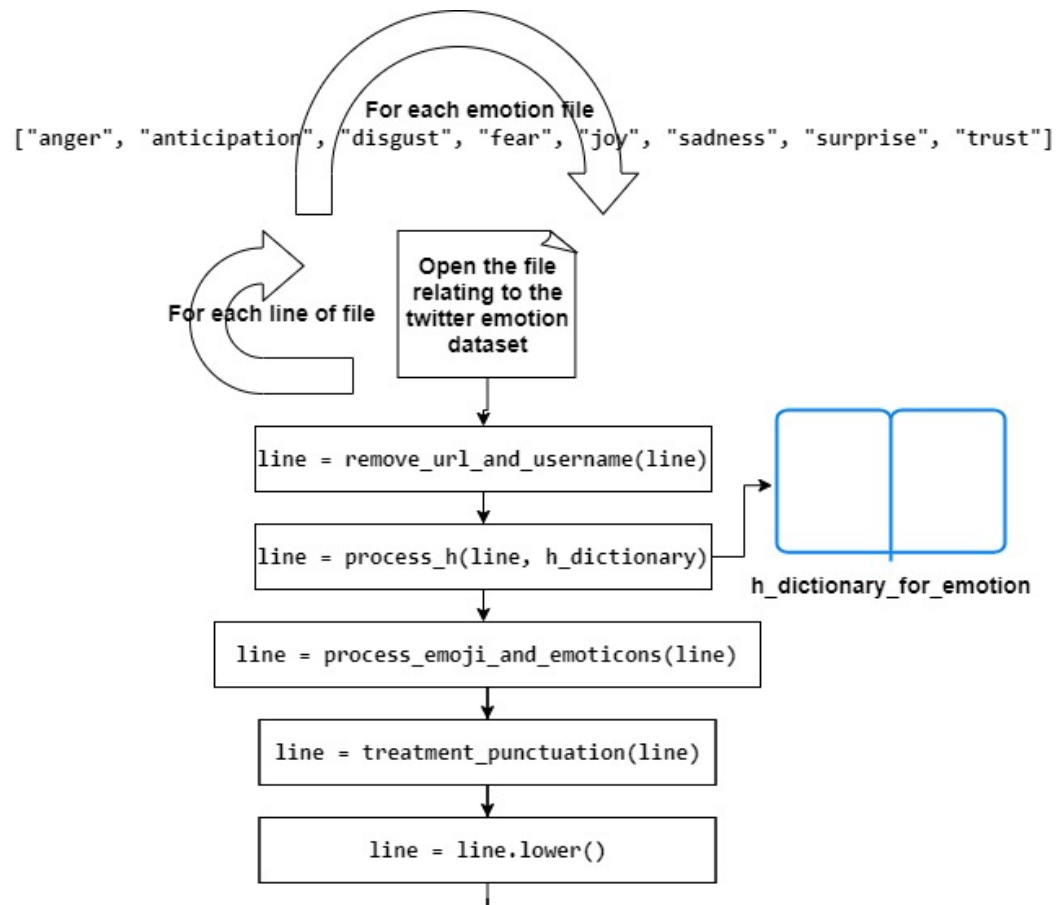

Example (step by step):

(pretty legit) 🙌 ❤️ 😍 :) @ atm the DISNEY gallery URL #nofilter

(pretty legit) 🙌 ❤️ 😍 :) @ atm the DISNEY gallery #nofilter

(pretty legit) 🙌 ❤️ 😍 :) @ atm the DISNEY gallery


(pretty legit) @ atm the DISNEY gallery

pretty legit @ atm the DISNEY gallery

pretty legit @ atm the disney gallery

# Elaboration.py (2/3) - example

## Processing twitter message

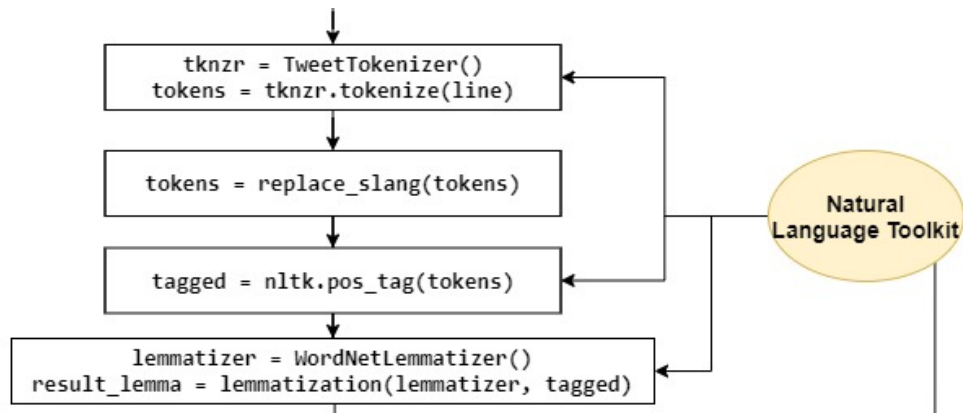

pretty legit @ atm the disney gallery

['pretty', 'legit', '@', 'atm', 'the', 'disney', 'galleries']

['pretty', 'legit', '@', 'at the moment', 'the', 'disney', 'galleries']

[('pretty', 'RB'), ('legit', 'JJ'), ('@', 'NNP'),  
('at the moment', 'VBD'), ('the', 'DT'),  
('disney', 'NN'), ('galleries', 'NNS')]

['pretty', 'legit', '@', 'at the moment', 'the', 'disney', 'gallery']


| TAG | PART OF SPEECH (POS)  |
|-----|-----------------------|
| JJ  | adjective             |
| NNP | proper noun           |
| VBD | verb, past tense took |
| DT  | determiner            |
| NNS | noun, plural          |
| RB  | adverbvery, silently  |

| Tag   | Description          | Example               | Tag  | Description          | Example              |
|-------|----------------------|-----------------------|------|----------------------|----------------------|
| CC    | coordin. conjunction | <i>and, but, or</i>   | SYM  | symbol               | <i>+, %, &amp;</i>   |
| CD    | cardinal number      | <i>one, two</i>       | TO   | "to"                 | <i>to</i>            |
| DT    | determiner           | <i>a, the</i>         | UH   | interjection         | <i>ah, oops</i>      |
| EX    | existential 'there'  | <i>there</i>          | VB   | verb base form       | <i>eat</i>           |
| FW    | foreign word         | <i>mea culpa</i>      | VBD  | verb past tense      | <i>ate</i>           |
| IN    | preposition/sub-conj | <i>of, in, by</i>     | VBG  | verb gerund          | <i>eating</i>        |
| JJ    | adjective            | <i>yellow</i>         | VCN  | verb past participle | <i>eaten</i>         |
| JJR   | adj., comparative    | <i>bigger</i>         | VBP  | verb non-3sg pres    | <i>eat</i>           |
| JJS   | adj., superlative    | <i>wildest</i>        | VBZ  | verb 3sg pres        | <i>eats</i>          |
| LS    | list item marker     | <i>I, 2, One</i>      | WDT  | wh-determiner        | <i>which, that</i>   |
| MD    | modal                | <i>can, should</i>    | WP   | wh-pronoun           | <i>what, who</i>     |
| NN    | noun, sing. or mass  | <i>llama</i>          | WP\$ | possessive wh-       | <i>whose</i>         |
| NNS   | noun, plural         | <i>llamas</i>         | WRB  | wh-adverb            | <i>how, where</i>    |
| NNP   | proper noun, sing.   | <i>IBM</i>            | \$   | dollar sign          | <i>\$</i>            |
| NNPS  | proper noun, plural  | <i>Carolinas</i>      | #    | pound sign           | <i>#</i>             |
| PDT   | predeterminer        | <i>all, both</i>      | "    | left quote           | <i>' or "</i>        |
| POS   | possessive ending    | <i>'s</i>             | "    | right quote          | <i>' or "</i>        |
| PRP   | personal pronoun     | <i>I, you, he</i>     | (    | left parenthesis     | <i>[, (, {, &lt;</i> |
| PRP\$ | possessive pronoun   | <i>your, one's</i>    | )    | right parenthesis    | <i>], ), }, &gt;</i> |
| RB    | adverb               | <i>quickly, never</i> | ,    | comma                | <i>,</i>             |
| RBR   | adverb, comparative  | <i>faster</i>         | .    | sentence-final punc  | <i>. ! ?</i>         |
| RBS   | adverb, superlative  | <i>fastest</i>        | :    | mid-sentence punc    | <i>: ; ... --</i>    |
| RP    | particle             | <i>up, off</i>        |      |                      |                      |

# POS TAGGING

# Elaboration.py (3/3) - example

## Processing twitter message

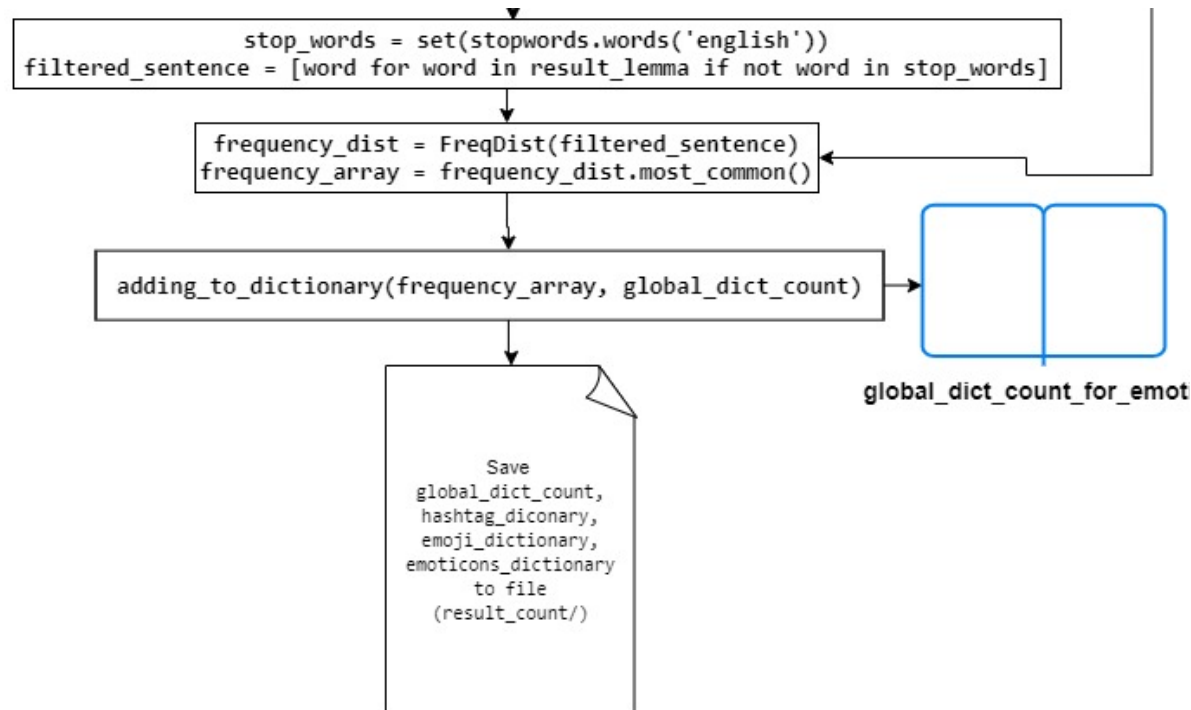

['pretty', 'legit', '@', 'at the moment', 'the', 'disney', 'gallery']

['pretty', 'legit', '@', 'at the moment', 'disney', 'gallery']

[('pretty', 1), ('legit', 1), ('at the moment', 1),  
('disney', 1), ('gallery', 1)]

ADD TO GLOBAL\_DICT\_COUNT (SUM)

SAVE TO FILE

words, hashtag, emoji, emoticons  
for each emotion





# Data structure

```
mirror_mod = modifier_ob.  
#set mirror object to mirror  
mirror_mod.mirror_object  
operation == "MIRROR_X":  
mirror_mod.use_x = True  
mirror_mod.use_y = False  
mirror_mod.use_z = False  
operation == "MIRROR_Y":  
mirror_mod.use_x = False  
mirror_mod.use_y = True  
mirror_mod.use_z = False  
operation == "MIRROR_Z":  
mirror_mod.use_x = False  
mirror_mod.use_y = False  
mirror_mod.use_z = True  
#selection at the end -add  
mirror_ob.select= 1  
modifier_ob.select=1  
context.scene.objects.active  
("Selected" + str(modifier_ob.  
mirror_ob.select = 0  
= bpy.context.selected_object  
data.objects[one.name].select  
print("please select exactly  
-- OPERATOR CLASSES -----  
types.Operator):  
on X mirror to the selected  
object.mirror_mirror_x"  
mirror X"  
context):  
context.active_object is not
```

# MySQL

| Nome       | Tipo        | Codifica caratteri |
|------------|-------------|--------------------|
| id 🗝️      | int(11)     |                    |
| word       | varchar(99) | utf8_general_ci    |
| emo_sn     | tinyint(4)  |                    |
| nrc        | tinyint(4)  |                    |
| sentisense | tinyint(4)  |                    |
| afinn      | int(11)     |                    |
| anew_aro   | float       |                    |
| anew_dom   | float       |                    |
| anew_pleas | float       |                    |
| dal_activ  | float       |                    |
| dal_imag   | float       |                    |
| dal_pleas  | float       |                    |
| gi_neg     | tinyint(4)  |                    |
| hl_neg     | tinyint(4)  |                    |
| list_neg   | tinyint(4)  |                    |
| liwc_neg   | tinyint(4)  |                    |
| gi_pos     | tinyint(4)  |                    |
| hl_pos     | tinyint(4)  |                    |
| list_pos   | tinyint(4)  |                    |
| liwc_pos   | tinyint(4)  |                    |
| frequency  | int(11)     |                    |

→ ID AUTO INCREMENT  
→ WORD

Basic resources  
(emo\_sn, nrc, sentisense)

Resources with score  
(conScore)

Negative resources  
(Neg)

Negative resources  
(Pos)

→ FREQUENCY

For each emotion:  
8 table


The background features a series of overlapping, semi-transparent green triangles and polygons that create a dynamic, layered effect. The colors range from a light, pale green to a deep, forest green. The shapes are oriented diagonally, with some pointing towards the top right and others towards the bottom left. The overall composition is modern and minimalist.

# MongoDB

# CLUSTER ARCHITECTURE (1/3)

## MONGOS ROUTER


- ▶ Router/balancer;
- ▶ Interfaccia alle applicazioni client;
- ▶ Le applicazioni esterne non devono preoccuparsi dell'architettura del sistema, ma possono solamente connettersi a questo nodo come se fosse un semplice database MongoDB;
- ▶ Tutte le query e le operazioni di scrittura vengono quindi inviate ai nodi router, che le smistano al cluster.

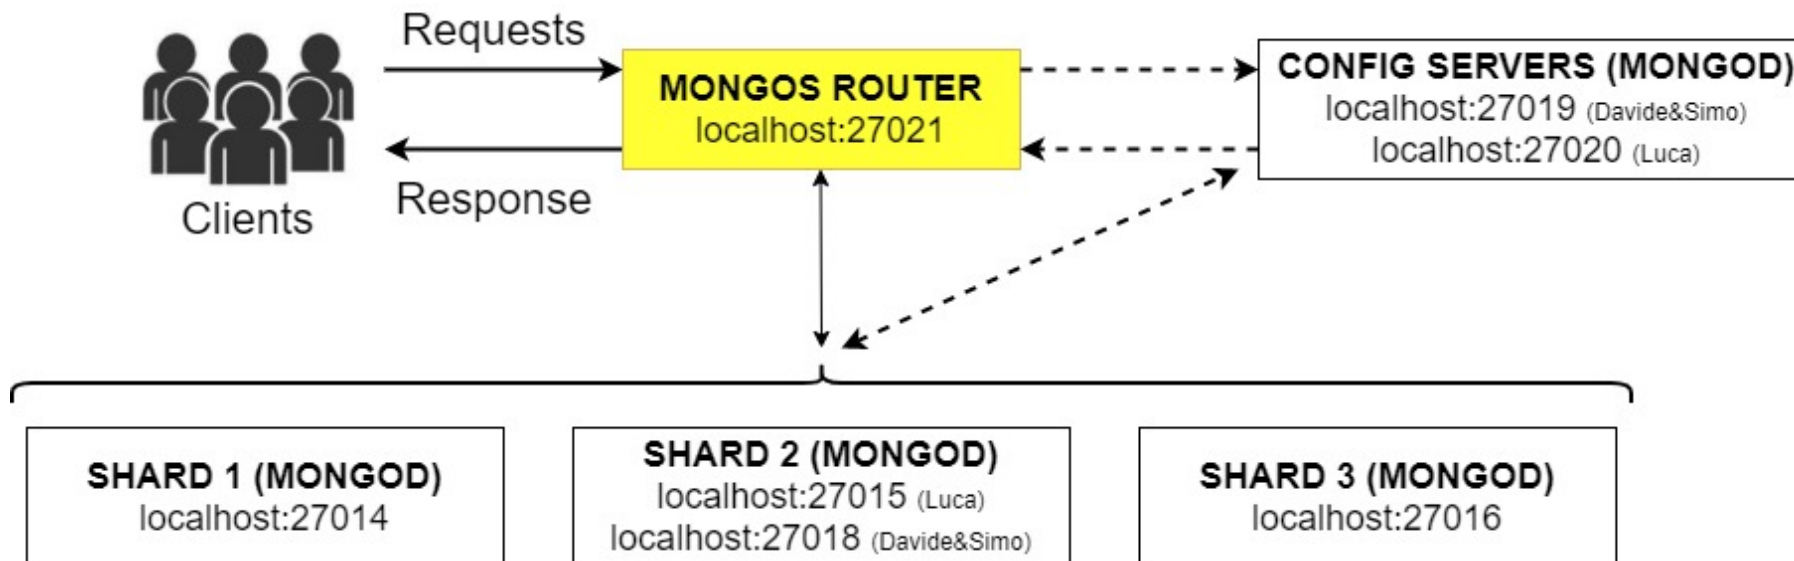

# CLUSTER ARCHITECTURE (2/3)

## CONFIG SERVERS (MONGOD)

- ▶ Contiene informazioni sull'architettura del cluster;
- ▶ Si occupa della distribuzione, del reperimento dei dati e dello smistamento delle operazioni (a quale nodo inviare le richieste di lettura e di scrittura)
- ▶ Nota: per le architetture di produzione, si raccomanda di utilizzarne almeno tre nodi di tipo config servers. Utilizzarne uno solo è infatti un pericolo, perché in caso di guasto tutto il cluster diventa inutilizzabile.


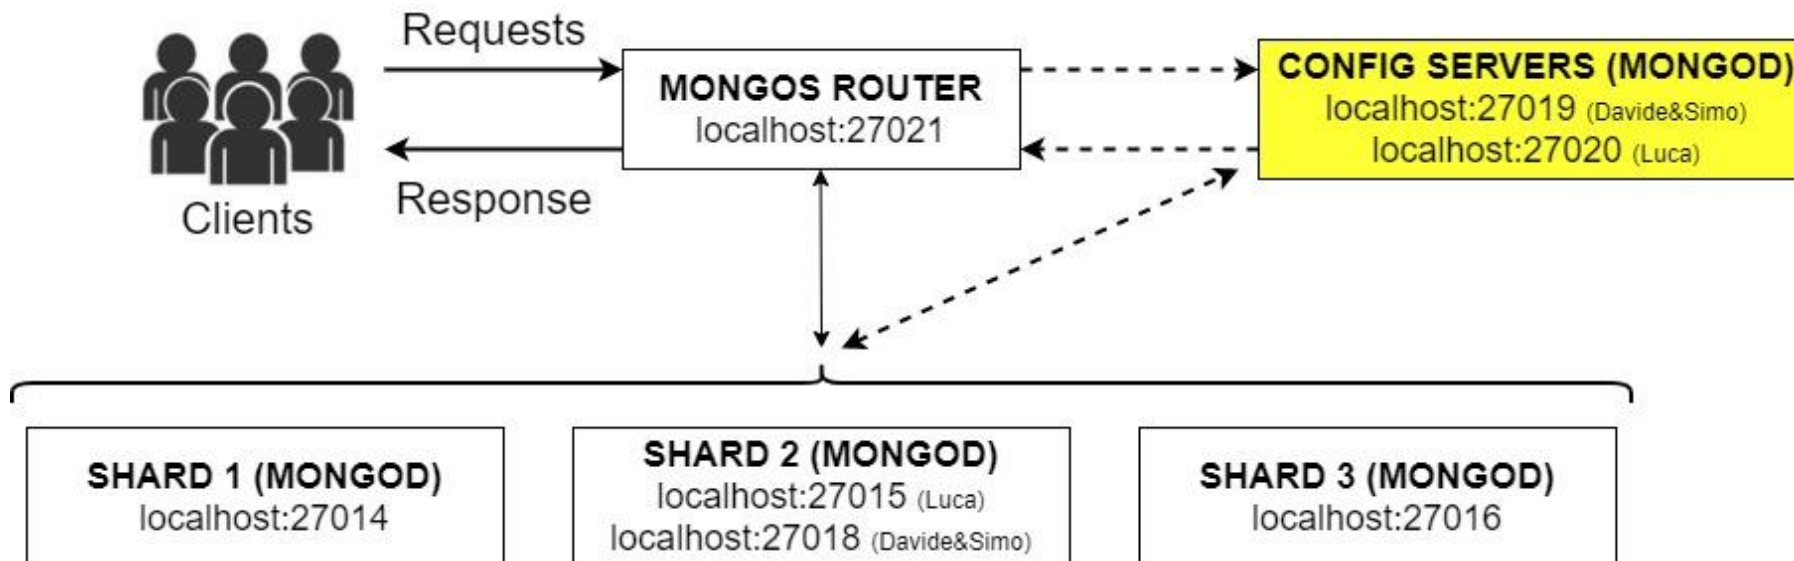




# CLUSTER ARCHITECTURE (3/3)

## SHARD (MONGOD)

- ▶ nodo di un cluster
- ▶ può essere un singolo mongod oppure un Replica Set

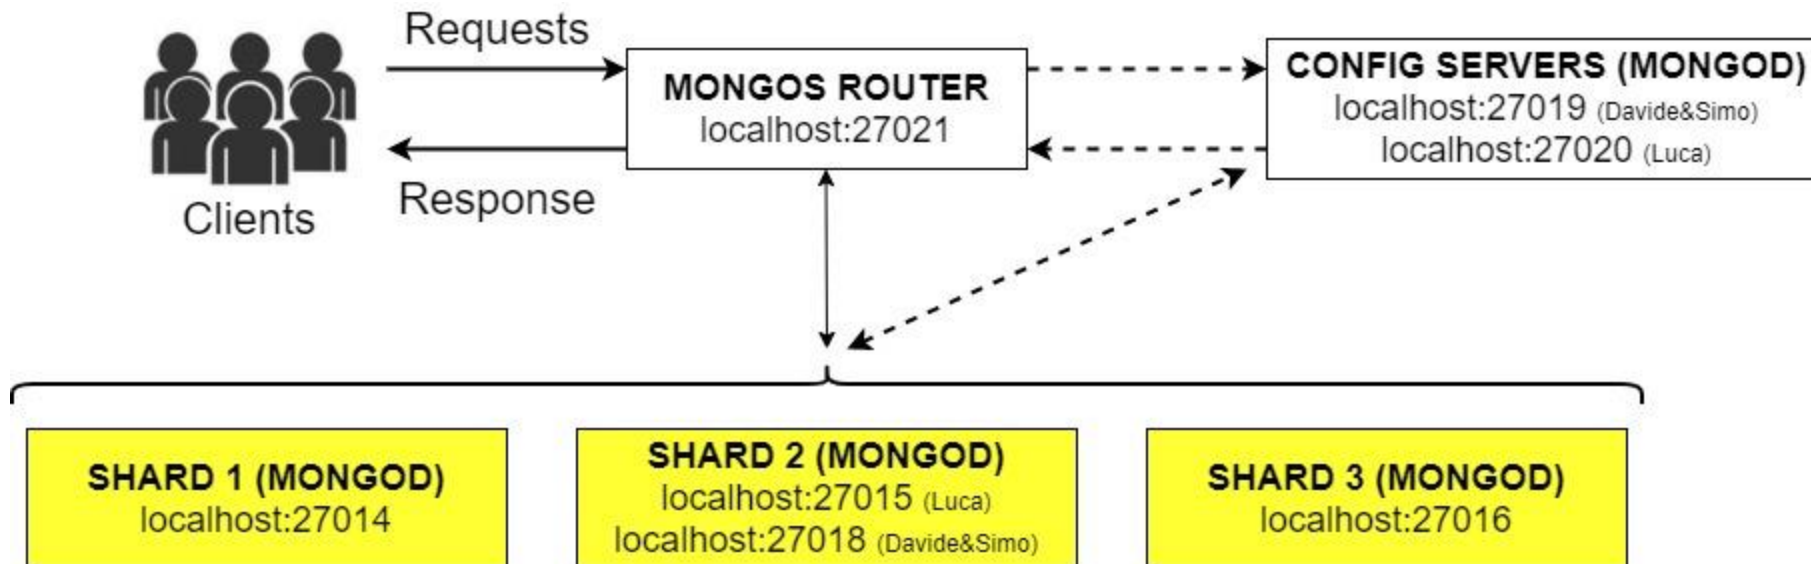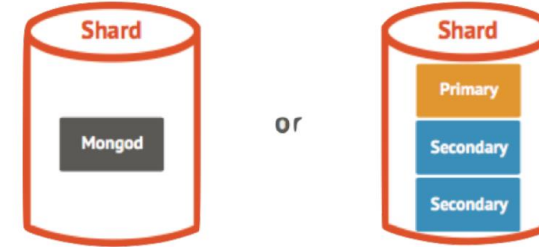

# Sharding Data

## Example

### Collection: trust\_word

```
mongos> db.trust_word.getShardDistribution()
```

```
Shard shard0001 at localhost:27015  
data : 5.55MiB docs : 153289 chunks : 2  
estimated data per chunk : 2.77MiB  
estimated docs per chunk : 76644
```

```
Shard shard0002 at localhost:27016  
data : 2.1MiB docs : 57980 chunks : 1  
estimated data per chunk : 2.1MiB  
estimated docs per chunk : 57980
```


```
Shard shard0000 at localhost:27014  
data : 5.55MiB docs : 152474 chunks : 2  
estimated data per chunk : 2.77MiB  
estimated docs per chunk : 76237
```

```
Totals
```

```
data : 13.2MiB docs : 363743 chunks : 5  
Shard shard0001 contains 42.07% data, 42.14% docs in cluster, avg obj size on shard : 38B  
Shard shard0002 contains 15.9% data, 15.93% docs in cluster, avg obj size on shard : 38B  
Shard shard0000 contains 42.02% data, 41.91% docs in cluster, avg obj size on shard : 38B
```

# COLLECTIONS

For each  
emotion:  
8 collection

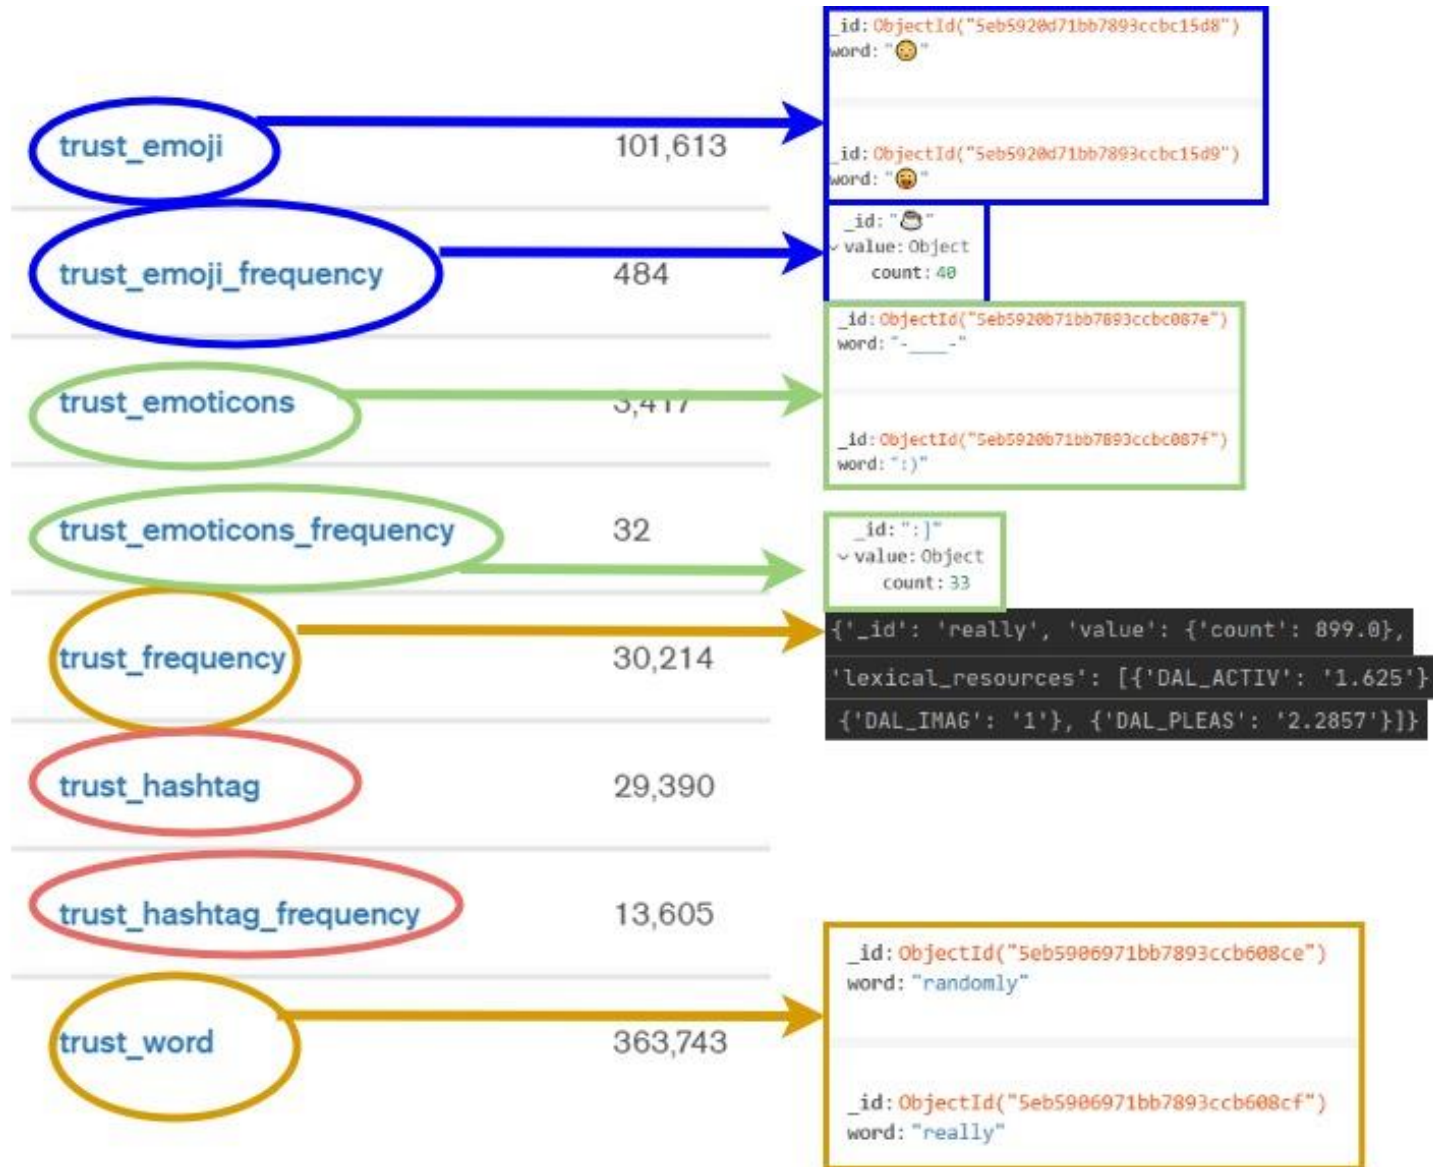

# Document example - word: “Love”

```
{  
  '_id': 'love',  
  'value': {'count': 10677.0},  
  'lexical_resources': [  
    {'GI_POS': 1}, {'HL_POS': 1}, {'LIST_POS': 1}, {'LIWC_POS': 1},  
    {'AFINN': '3'}, {'ANEW_ARO': '6.44'}, {'ANEW_DOM': '7.11'}, {'ANEW_PLEAS': '8.72'},  
    {'DAL_ACTIV': '2.6364'}, {'DAL_IMAG': '1.4'}, {'DAL_PLEAS': '3'}  
  ]  
}
```

# MAP REDUCE



# map\_reduce (1/5)

```
1 import pymongo
2 from bson import Code
3
4 client = pymongo.MongoClient("mongodb://localhost:27021/?readPreference=primary&appname=MongoDB%20Compass%20Community"
5                               "&ssl=false&retryWrites=false&w=majority")
6 db = client['emotion']
7
8 dataset_sentiment = ["anger", "anticipation", "disgust", "fear", "joy", "sadness", "surprise", "trust"]
9
10 for emotion in dataset_sentiment:
11
12     emotion_word = db[emotion + '_word']
13     emotion_emoji = db[emotion + '_emoji']
14     emotion_emoticons = db[emotion + '_emoticons']
15     emotion_hashtag = db[emotion + '_hashtag']
16
17     # Load map and reduce functions
18     map = Code(open('wordMap.js', 'r').read())
19     reduce = Code(open('wordReduce.js', 'r').read())
20
21     results = emotion_word.map_reduce(map, reduce, emotion + "_frequency")
22     emotion_emoji.map_reduce(map, reduce, emotion + "_emoji_frequency")
23     emotion_emoticons.map_reduce(map, reduce, emotion + "_emoticons_frequency")
24     emotion_hashtag.map_reduce(map, reduce, emotion + "_hashtag_frequency")
```



# map\_reduce (2/5)

## wordMap.js


```
1 function wordMap(){
2
3     var words = this.word.match(/^\s*\S+(\s?\S)*\s*$/g);
4
5     if(words == null) {
6         return;
7     }
8
9     for (var i = 0; i < words.length; i++){
10         emit(words[i], {count: 1});
11     }
12 }
```

# map\_reduce (3/5)

## wordReduce.js


```
1 function wordReduce(key, values){  
2     var total = 0;  
3     for (var i = 0; i < values.length; i++){  
4         total += values[i].count;  
5     }  
6     return {count: total};  
7 }
```

# map\_reduce (4/5)

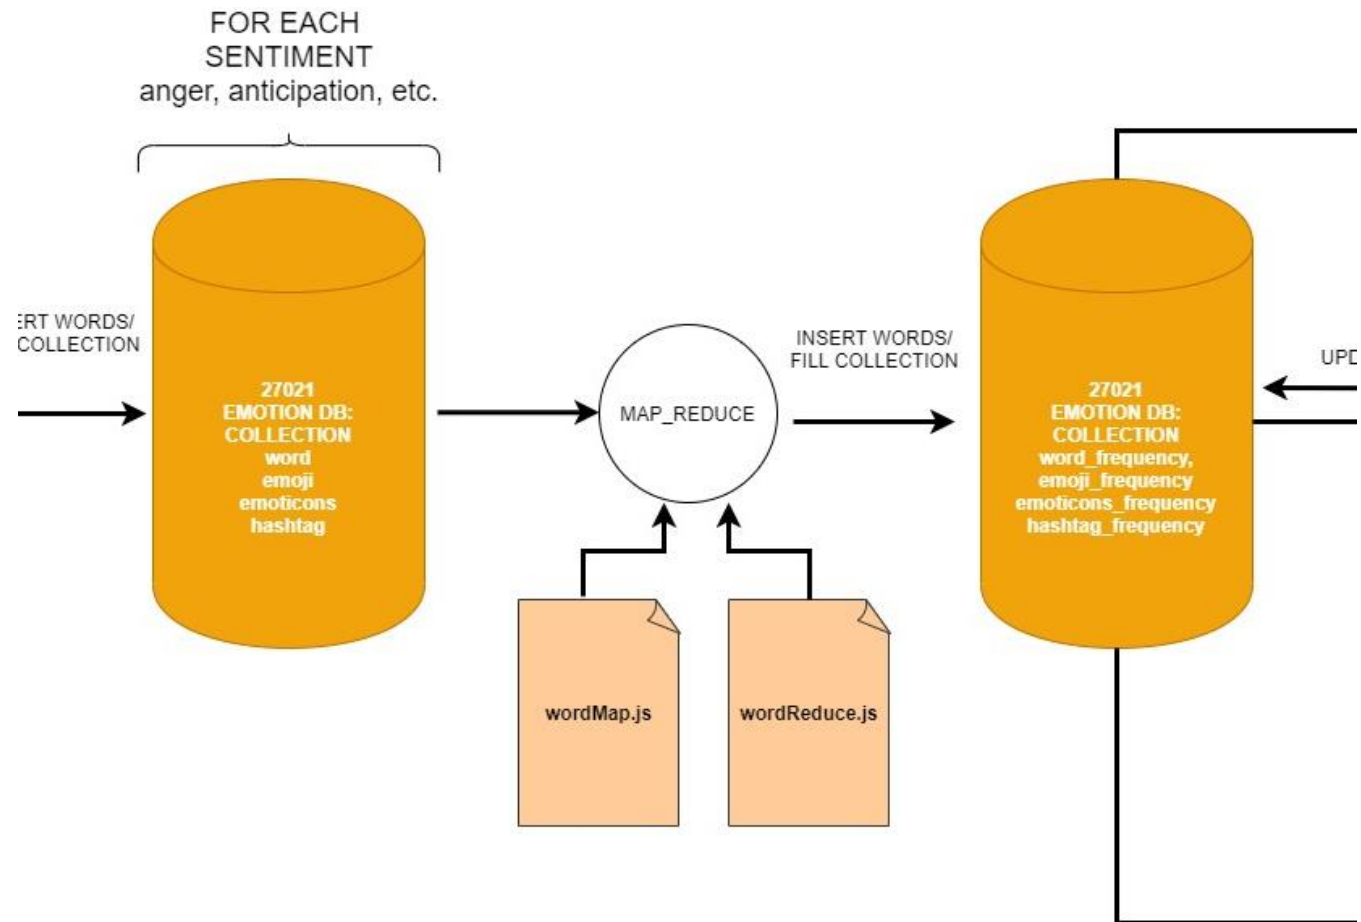

# map\_reduce (5/5)


## The Overall MapReduce Word Count Process

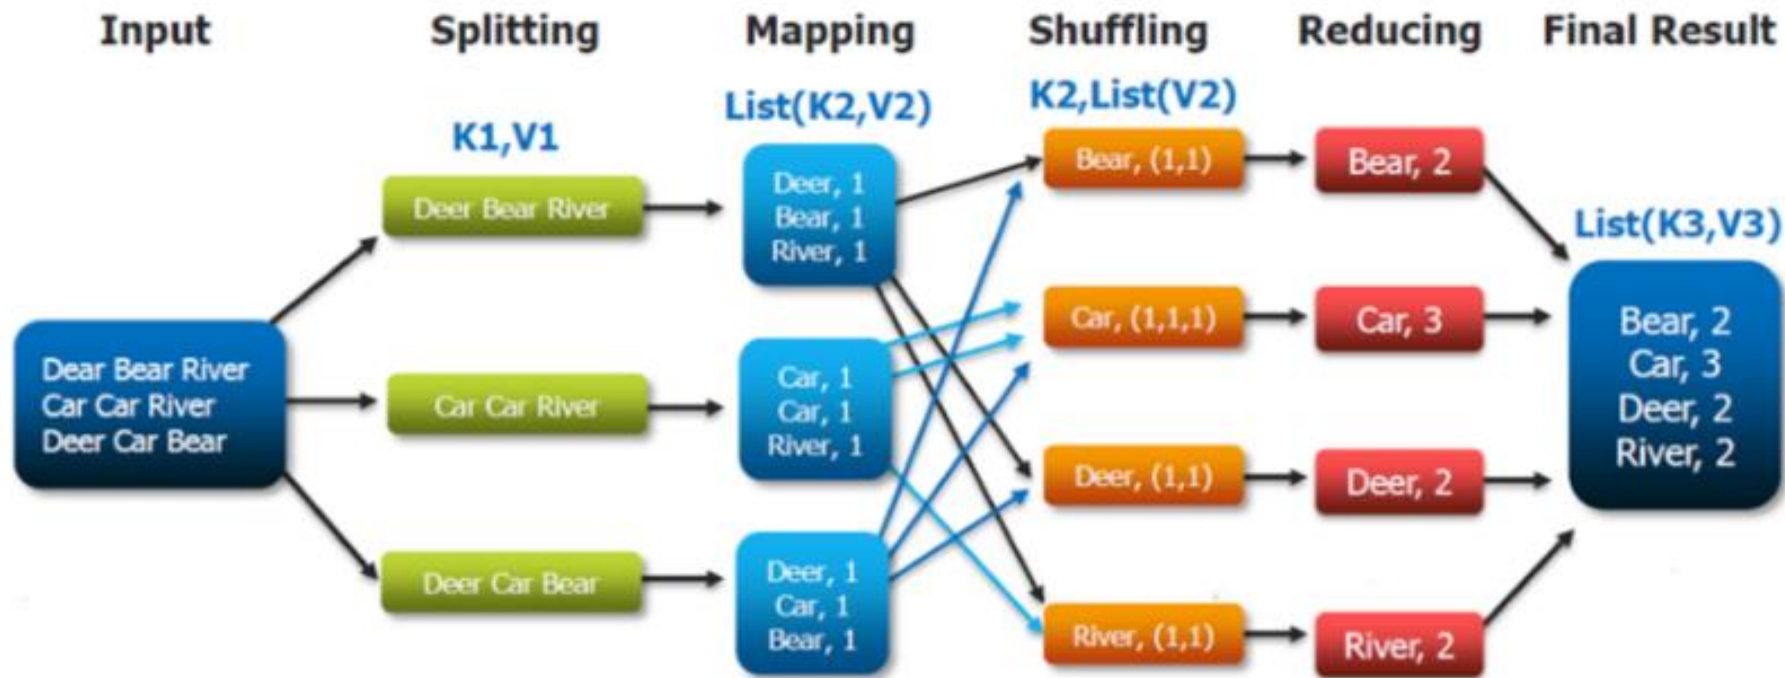




# Results

# Statistics of use of lexical resources (MySQL/Mongo) (1 / 2)

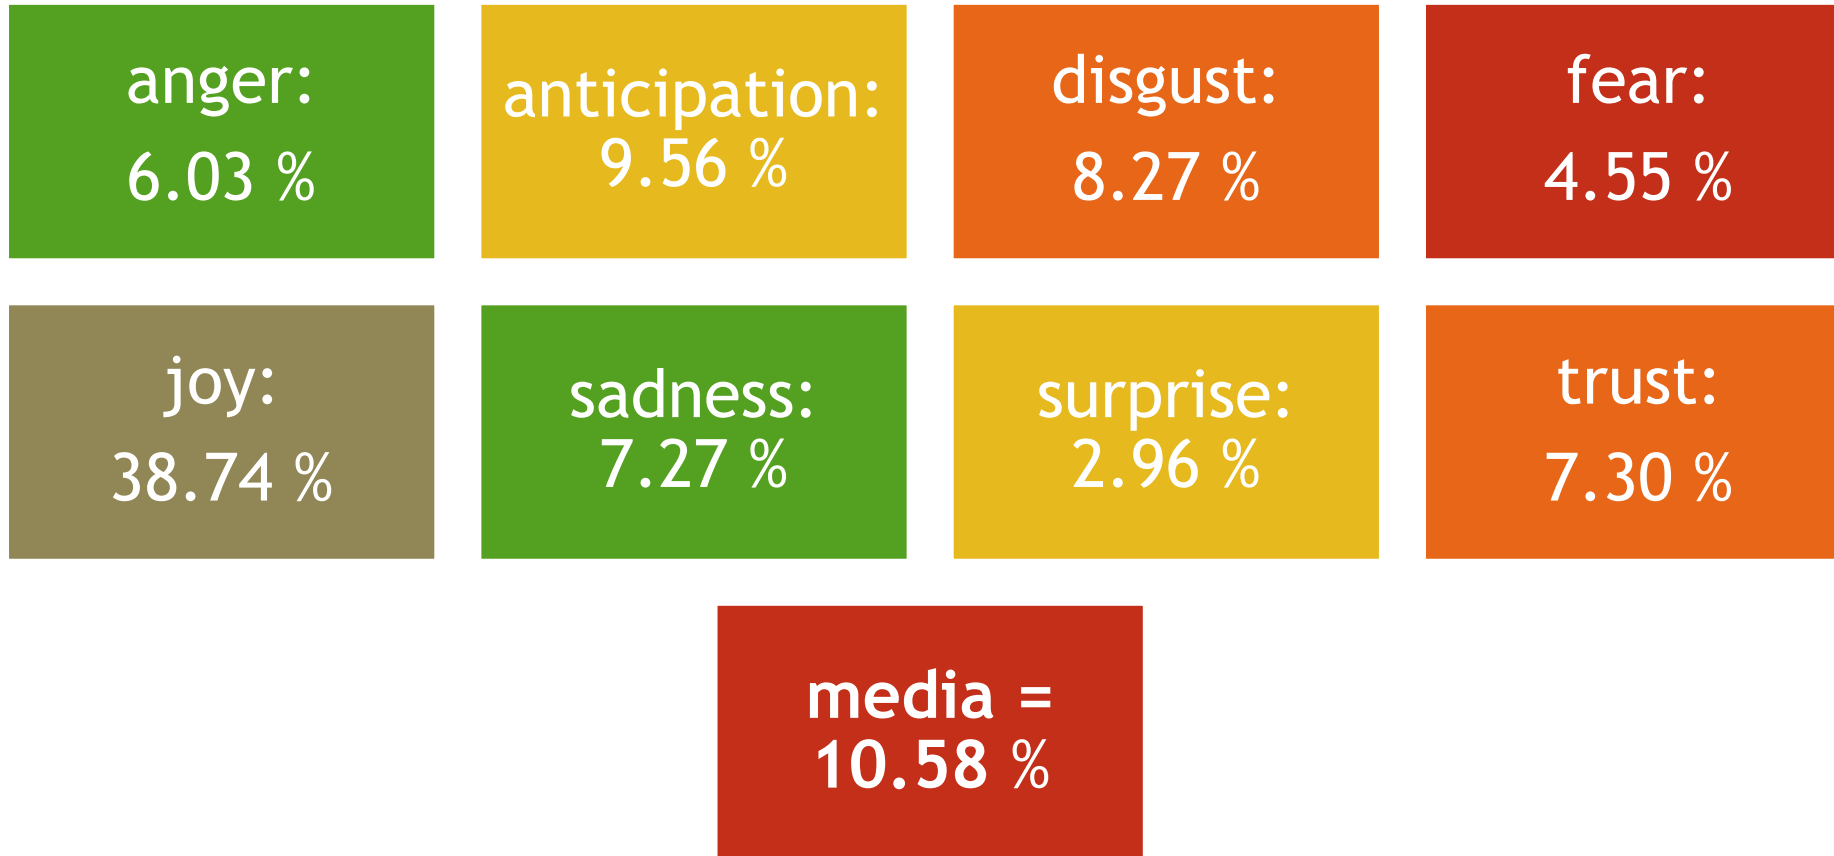




# Statistics of use of lexical resources (MySQL/Mongo) (2/2)

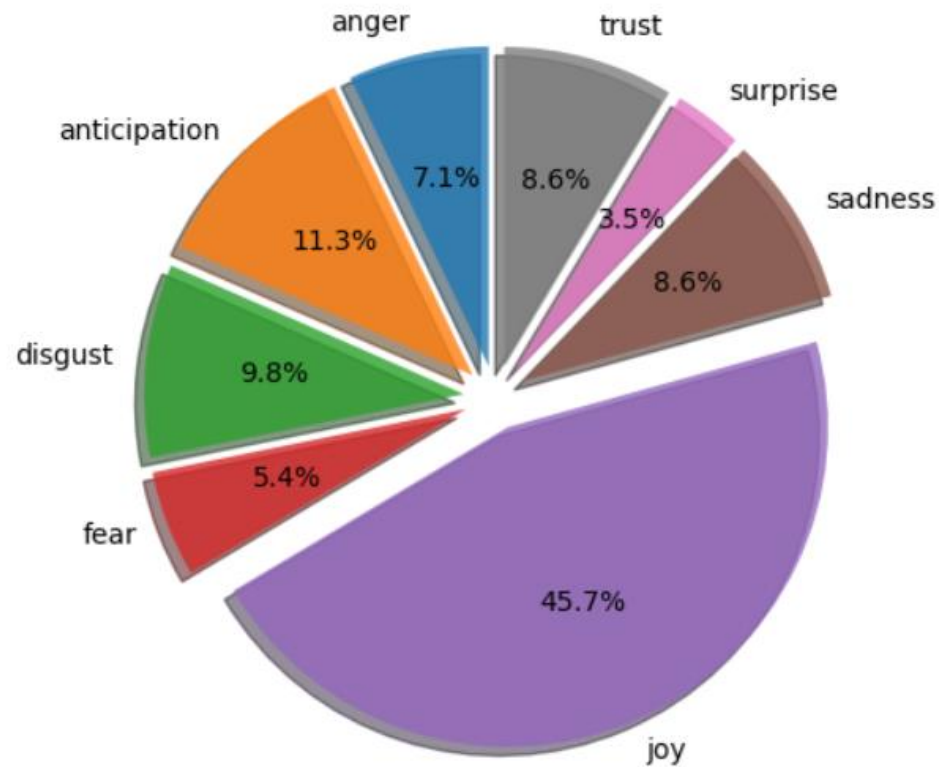


WORDCLOUD

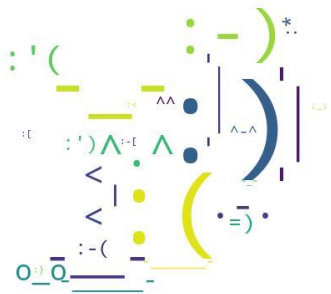

# Anger


- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS



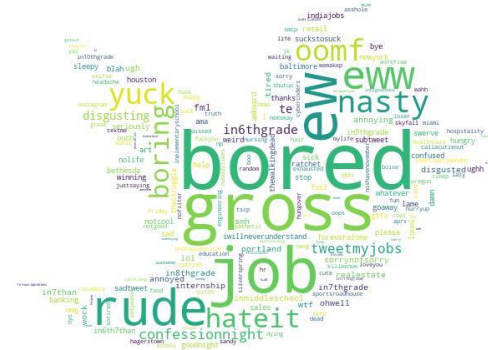


- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

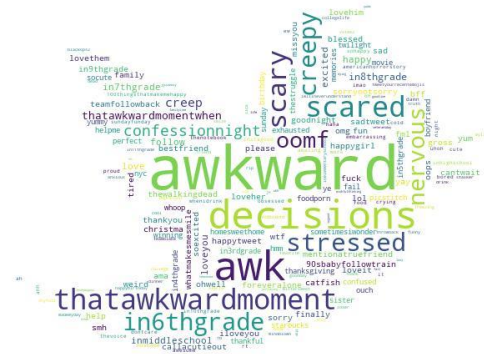

- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS



- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

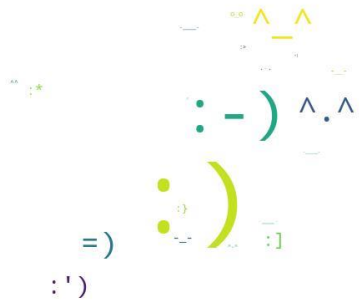

# Joy



- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS



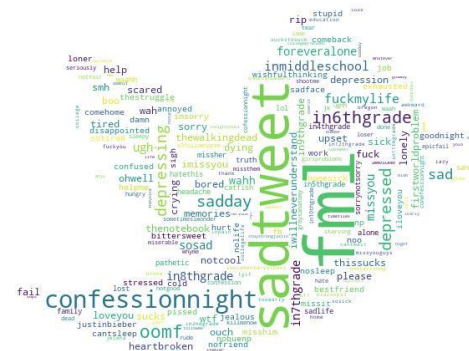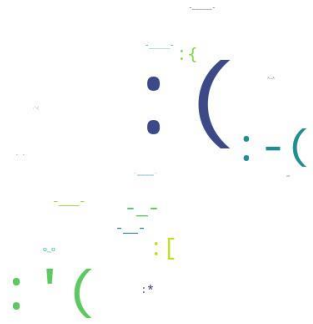



# Sadness

- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

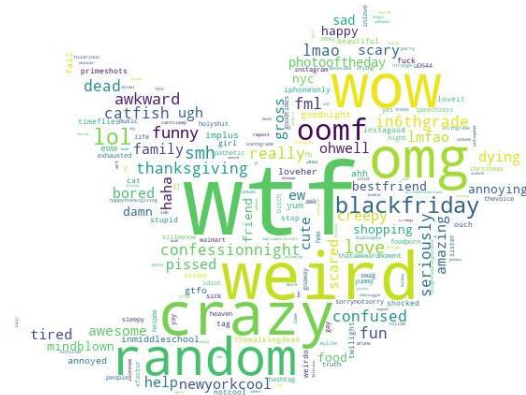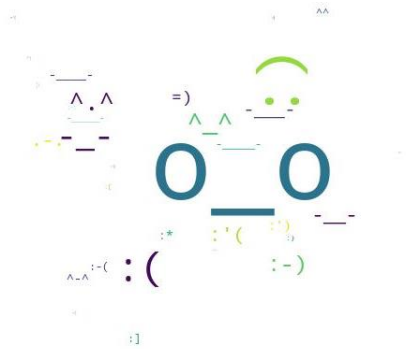

# Surprise

- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

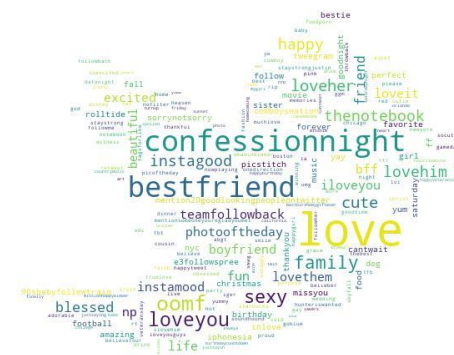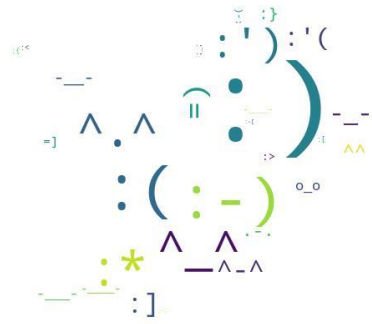

# Trust

- ▶ EMOTICONS
- ▶ EMOJI
- ▶ HASHTAG
- ▶ WORDS

# Conclusions

# Conclusions (1/2)

| PROPERTY         | MySQL   | MongoDB   |
|------------------|---|---|
| Modello dei dati | <ul style="list-style-type: none"><li>• Struttura dati fissa;</li><li>• Adatto per una struttura di dati che non cambierà nel tempo;</li><li>• Si creano le tabelle richieste, le colonne e si specifica il tipo di dati per ogni colonna;</li><li>• Lo schema fisso comporta la presenza di valori NULL;</li><li>• Prima di poter memorizzare i dati, è necessario definire tabelle e colonne.</li></ul> | <ul style="list-style-type: none"><li>• Flessibilità e dinamicità dello schema;</li><li>• Struttura KEY-VALUE;</li><li>• Possibilità di annidamenti (nested);</li><li>• I singoli documenti hanno una propria struttura, che può essere diversa dagli altri → in ogni momento è possibile creare nuovi campi con un valore qualsiasi.</li></ul> |
| Ricerca dei dati | <ul style="list-style-type: none"><li>• Utilizzo dell'operatore JOIN che permette di combinare dati da più tabelle;</li><li>• Le FOREIGN KEY consentono di creare relazioni tra tabelle;</li><li>• Una ricerca efficace richiede una conoscenza approfondita del modello dei dati di riferimento.</li></ul>   | <ul style="list-style-type: none"><li>• Grazie all'annidamento (nested) tutti i dati necessari sono presenti in un solo documento.</li><li>• L'assenza di operazioni di JOIN tra i documenti comporta performance più alte per i tempi di risposta.</li></ul>   |

# Conclusions (2/2)

| PROPERTY                     | MySQL  | MongoDB   |
|------------------------------|--|---|
| Vincoli e integrità dei dati | <ul style="list-style-type: none"><li>Non accetta alcun tipo di dato che non rispetti la struttura imposta dal programmatore.</li></ul>  | <ul style="list-style-type: none"><li>Non esiste un vincolo sul tipo di dato.</li><li>Svantaggio: non essendoci dei controlli sull'integrità dei dati, il compito ricade totalmente sull'applicativo che dialoga col database.</li></ul>  |
| Scalabilità                  | <ul style="list-style-type: none"><li>Scalabilità verticale;</li><li>A fronte di un maggiore carico di lavoro si procede a incrementare l'hardware sulle macchine server;</li><li>La replica e il clustering sono disponibili, ma comportano complessità implementativa.</li></ul> | <ul style="list-style-type: none"><li>Scalabilità orizzontale → caratteristica importante per i Big Data;</li><li>Consente di distribuire i dati e le operazioni su macchine differenti al fine di parallelizzare le operazioni;</li><li>È possibile configurare più nodi che si replicano automaticamente senza un singolo punto di errore, così da evitare che il crash di un server porti all'interruzione del servizio;</li><li>Elevata scalabilità e disponibilità dei dati.</li></ul> |



GRAZIE PER  
L'ATTENZIONE

The background features a series of overlapping, semi-transparent green triangles and polygons. These shapes are arranged in a way that creates a sense of depth and movement, with some areas appearing darker due to the layering. The overall color palette is various shades of green, ranging from light lime to deep forest green. The composition is modern and minimalist.