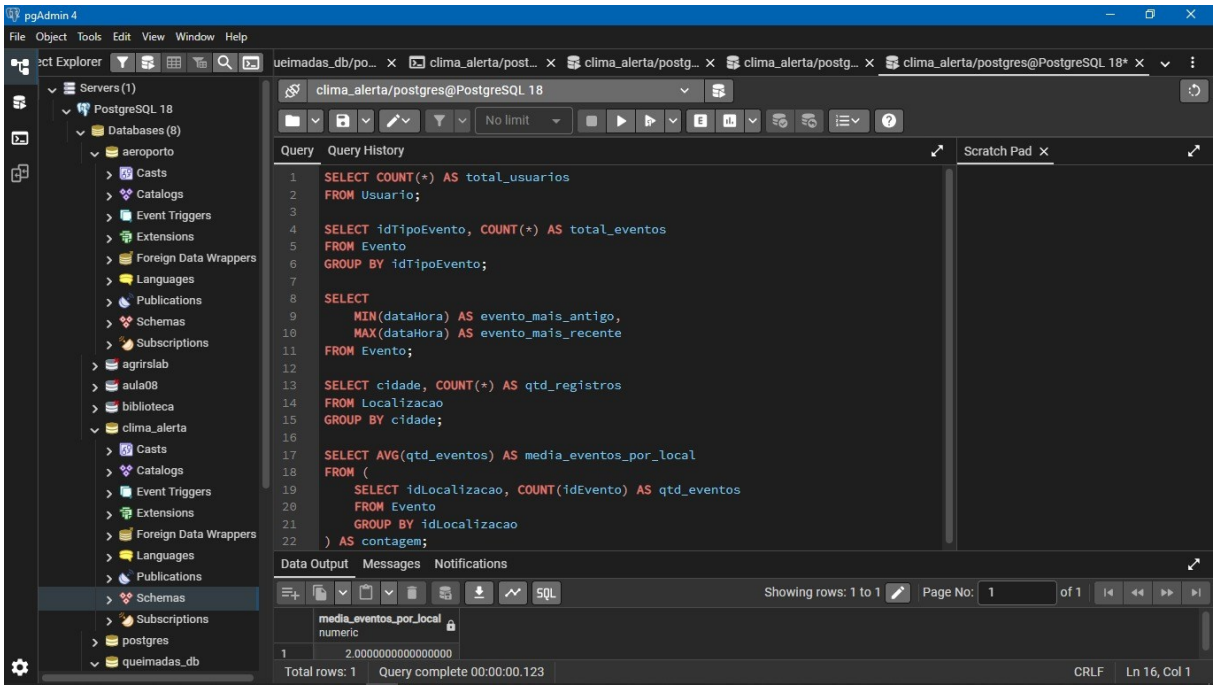```
SELECT COUNT(*) AS total_usuarios
FROM Usuario;

SELECT idTipoEvento, COUNT(*) AS total_eventos
FROM Evento
GROUP BY idTipoEvento;

SELECT
    MIN(dataHora) AS evento_mais_antigo,
    MAX(dataHora) AS evento_mais_recente
FROM Evento;

SELECT cidade, COUNT(*) AS qtd_registros
FROM Localizacao
GROUP BY cidade;

SELECT AVG(qtd_eventos) AS media_eventos_por_local
FROM (
    SELECT idLocalizacao, COUNT(idEvento) AS qtd_eventos
    FROM Evento
    GROUP BY idLocalizacao
) AS contagem;
```