Handoff 36: Two cosmetic fixes (master run WE5, UI-01)

Date: 2026-11-02 (America/Toronto)
Written by: Claude Code (implementer), in a separate git worktree
For: the human maintainer, and ChatGPT or Claude chat (reviewer) without repository access
Status: **in_review**: one pull request (#41), not merged, not deployed. CSS and one class name only.

> **How to use this file:** the pull request diff is the source of truth (`build.md` section 14).

Starter prompt for the chat assistant

```
You are reviewing two small visual fixes to Python Academy's course card and
parent view. Check the picture and the diff. Say if anything looks worse.
```

Run plan details

Field	Value
Stage	WE5, first part (UI-01). UI-02 to UI-04 and UI-06 are not in this PR
Base	`main`, at `ac167e3`. No other PR needs to merge first
Part 2 boxes relied on	**None**
Stages passed over	WD3, WD6 to WD12: depend on unmerged or blocked stages. **WD5 (ENG-10): stopped, its spec contradicts itself** (section 7). WE1 to WE4: B-W1 is empty

1. Step 0

`git fetch --all`, `gh pr list --state all`: #39 and #40 open. Worktree `../python-academy-ui01`; the main folder was not switched.

2. Handoff record (build.md template)


Field	Value
Task	UI-01: stacked chips on the Python course card; small "Goal:" text in the parent view

Field	Value
Human goal	The two look tidy, and a parent can read a learner's goal easily
Non-goals	Anything else on these pages
Data and compatibility	None. No API change
Deployment status	Not requested

Files changed

`frontend/app/style.css`, `frontend/app/academy.tsx`, `frontend/tests/academy.spec.ts` (4 new tests), `docs/run-log.md`, this handoff, its PDF and one picture.

3. What changed

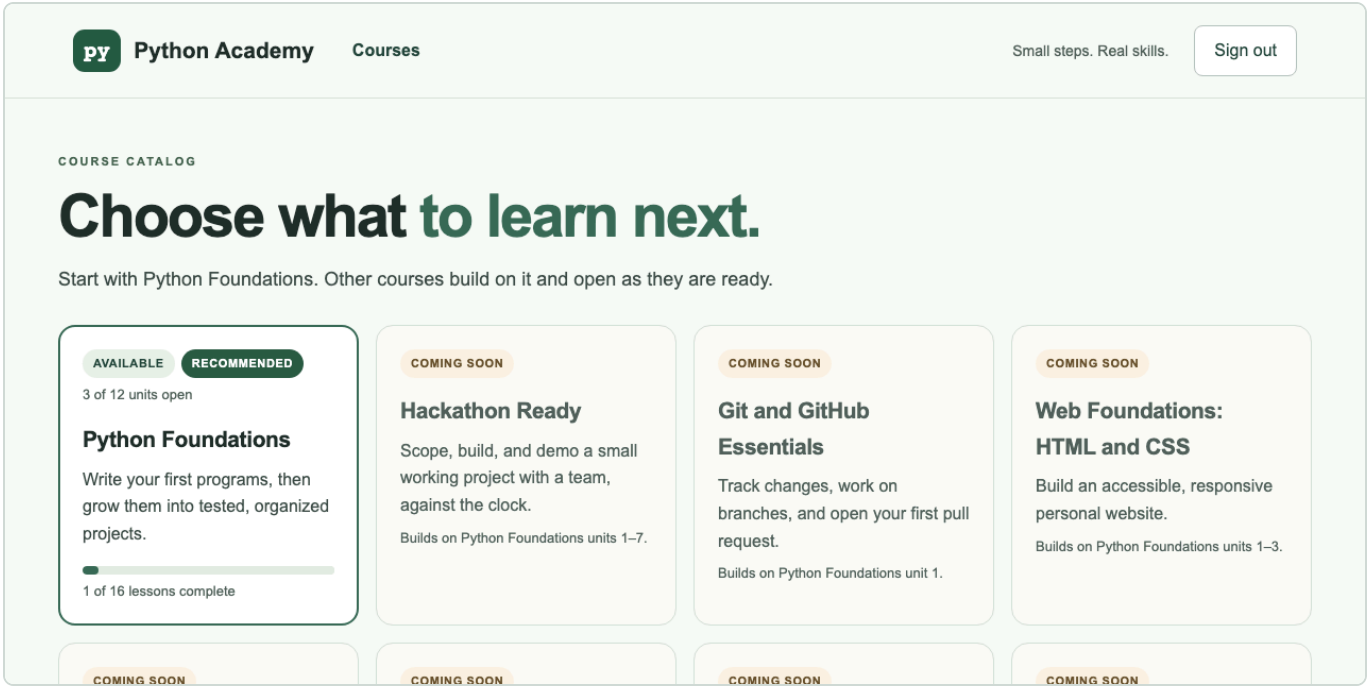

Where	Before	After
Course card	"Available" and "Recommended" stacked, with "3 of 12 units open" wrapped beside them	The chips share a line. The count moves below when there is no room
Parent view	"Goal: …" at 12 px, in the muted style	15 px, in the dark green used for chips

4. Decisions and why

Decision	Options considered	Reason	Who decided
Let the row wrap	Drop the count; shrink the chips	Nothing is lost, and it works at any width	Implementer
15 px for the goal	14 px	Close to body text, for something a parent reads on purpose	Implementer (**assumption 1**)

5. Bugs found and how they were fixed

My first version added `white-space:nowrap` to the count, which caused sideways scrolling at 375 px. The new phone test caught it. A deliberate-break run then showed the line wasn't needed, so I removed it.

6. How it was tested

Command	Result
Backend, SQLite and PostgreSQL	**785 passed, 11 skipped; 796 passed**
`npx tsc --noEmit && npm run build`	OK
`CI=1 npx playwright test`	**259 passed**

New tests measure the page: the chips have the same top at 1280, 1024 and 375 px, the count is one line, nothing scrolls sideways, and the goal is at least 14 px.

Deliberate break (each undone)	Tests that failed
B1. The row no longer wraps	**3**, one per width (also run with the `nowrap` line present)
B2. The goal goes back to the muted style	**1**: the new goal test. The run showed 2 because the `nowrap` line of B3 was still in the code at the time
B3. The `nowrap` line added back	**1**, at 375 px

Mocks: recorded-style API answers, as in `academy.spec.ts`. **Not checked:** real phones, or a screen reader; no text changed.

7. Stopped: WD5, ENG-10

Plan Part 9 says "references stay server-side; tests run in the worker with limits". Those can't both hold. To run a learner's tests against a reference program, both must be in one place. The server may never run learner code, so the references would have to reach the browser. For a lesson like `py.refactor`, the correct reference is the answer. No code was written.

8. Live checks for you

- [ ] `/courses` as a student: the Python card's two chips share a line.
- [ ] The same page on a phone: nothing scrolls sideways.
- [ ] The parent view: "Goal: …" reads easily.

9. Questions for you

1. **Assumption 1, 15 px.** *Recommended, not yet confirmed: keep.*
2. **ENG-10: may reference programs reach the browser?** *Recommended, not yet confirmed: broken references yes, because finding their bug is the point and they give nothing away. The correct reference only as a program that the lesson doesn't treat as a secret. Decide with the same hidden-data rule as handoffs 29, 30 and 35.*

10. For the docs sync

Where	What
Backlog UI-01	proposed → in_review (#41, handoff 36)
Backlog ENG-10	Note the contradiction and question 2
Stage table	"36. UI-01 | Cosmetic fixes | in_review (#41, handoff 36)"

11. Next concrete action

Review and merge.

12. Removing the worktree safely

From the **main** folder, after this PR is merged:

```
cd /Users/DEV/Projects/python-academy
git -C ../python-academy-ui01 status --short   # expect nothing, or only ??
frontend/AGENTS.md
rm -f ../python-academy-ui01/frontend/AGENTS.md   # generated by Next.js, not part of the
project
git worktree remove ../python-academy-ui01     # deletes only that folder; refuses if
anything is uncommitted
git worktree prune
git branch -d ui/cosmetic-fixes                # refuses if the branch is not merged
```

Don't delete the folder in the Finder or with `rm -rf`; Git would keep a stale record of it (`git worktree prune` fixes that).