



Testes postman


Login:

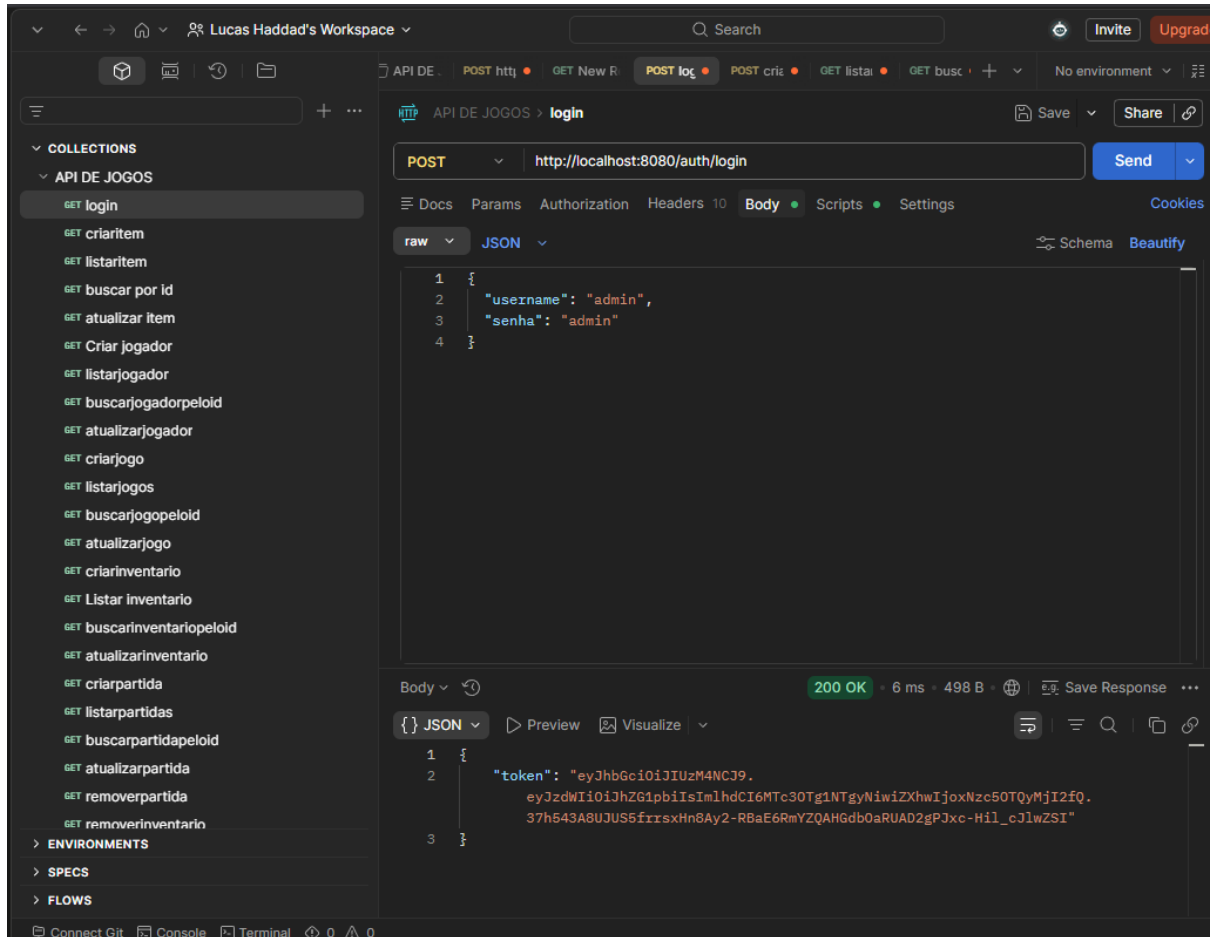


Configurando token:

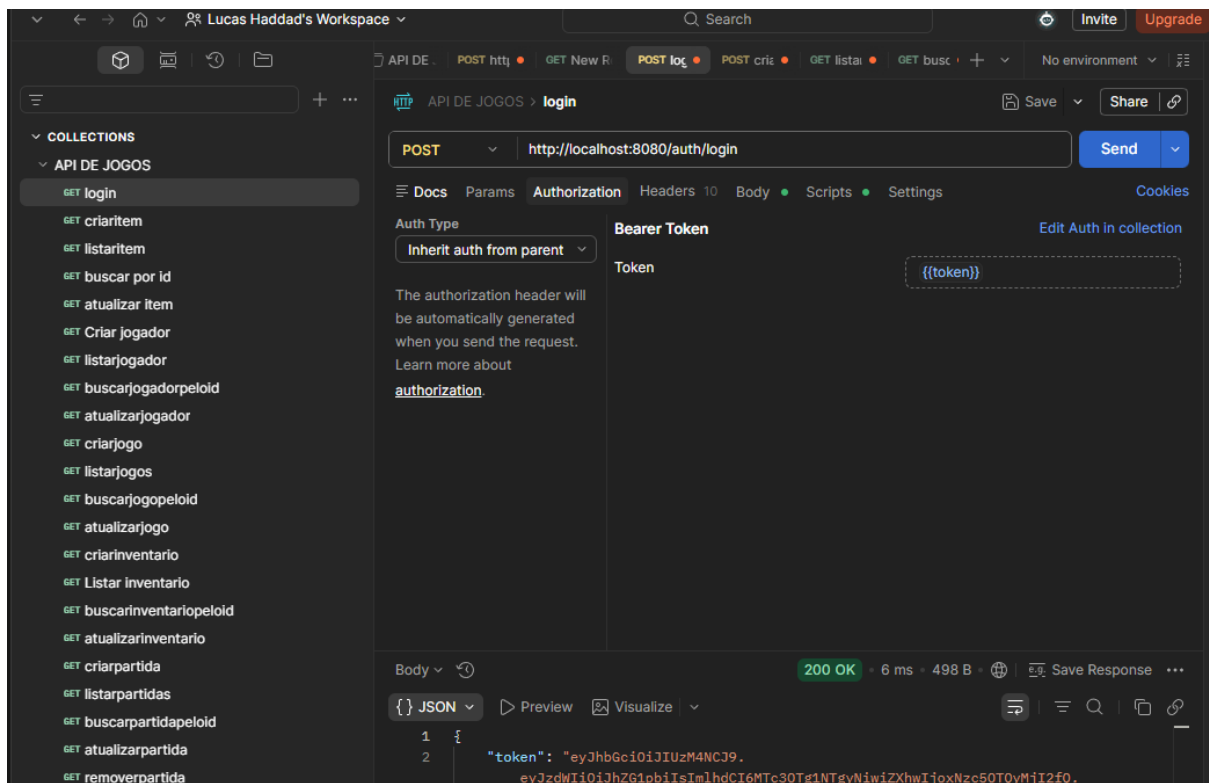


1º criar item

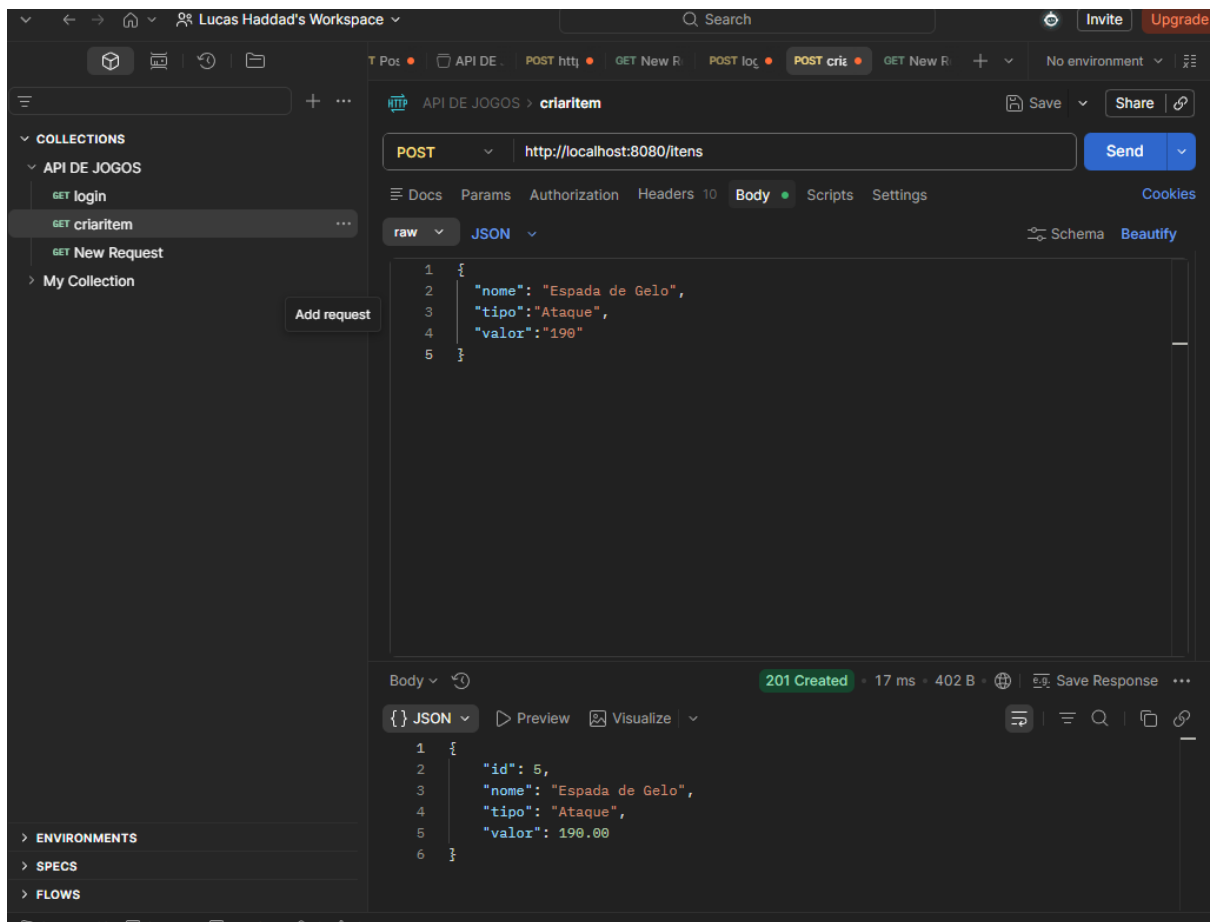


2º Listar Itens

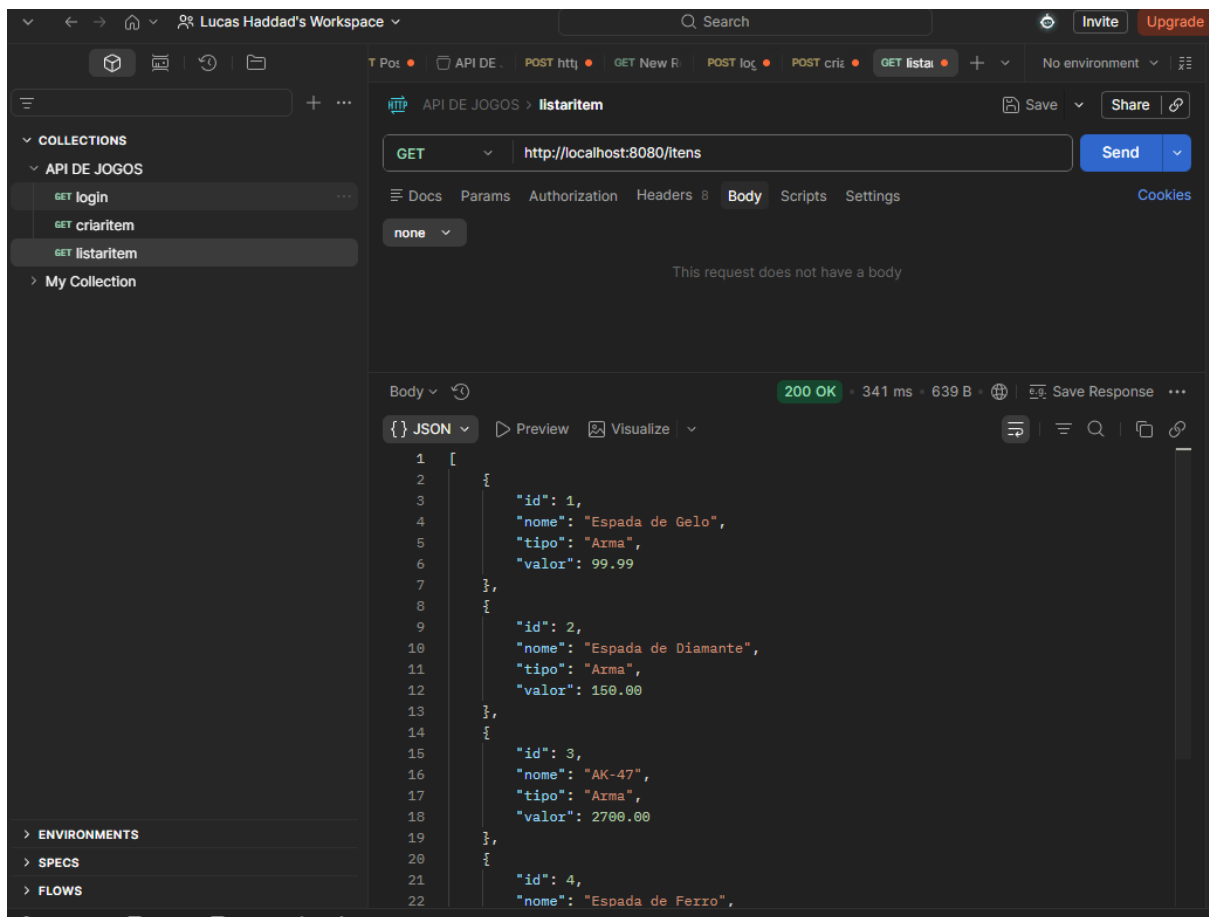


3º buscar por id

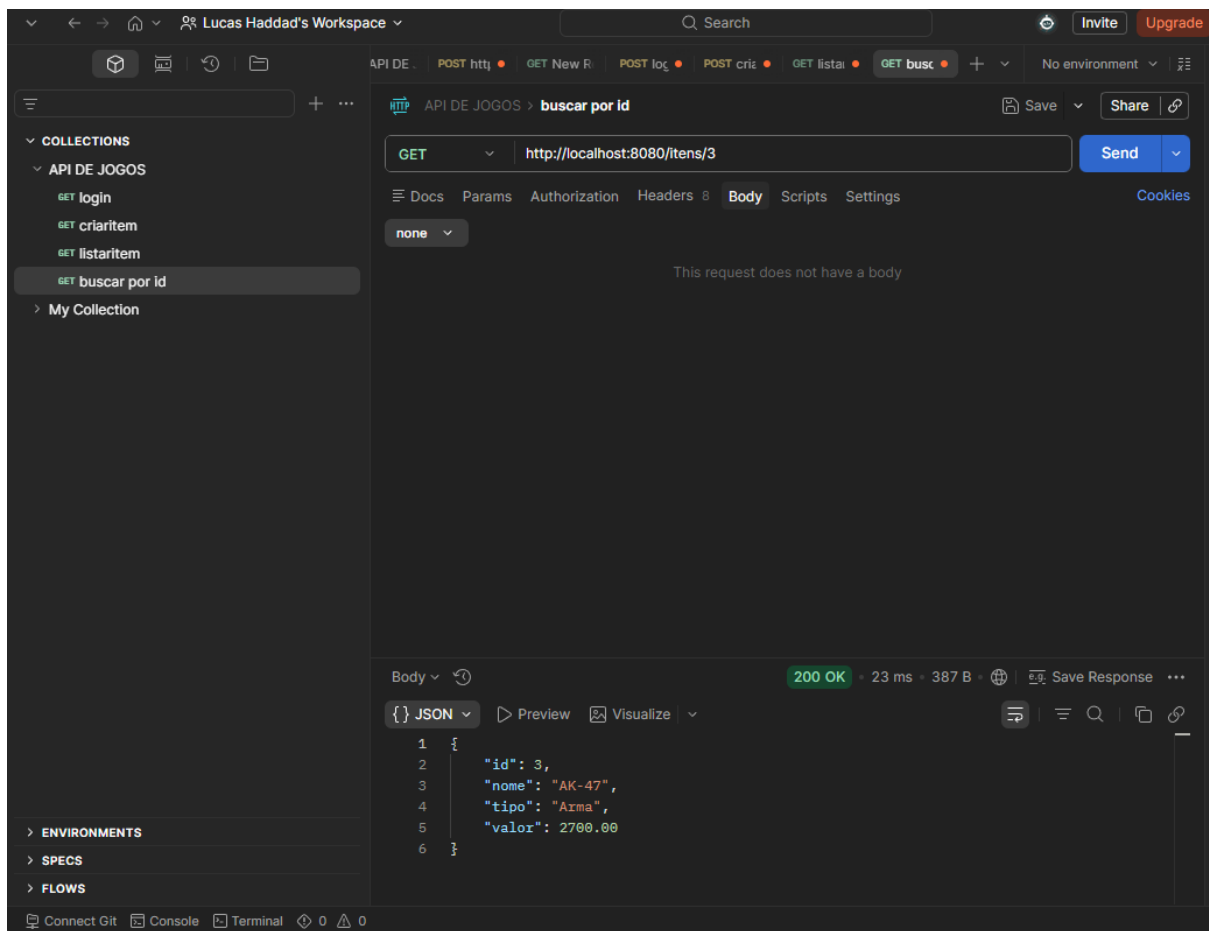


4º Atualizar item

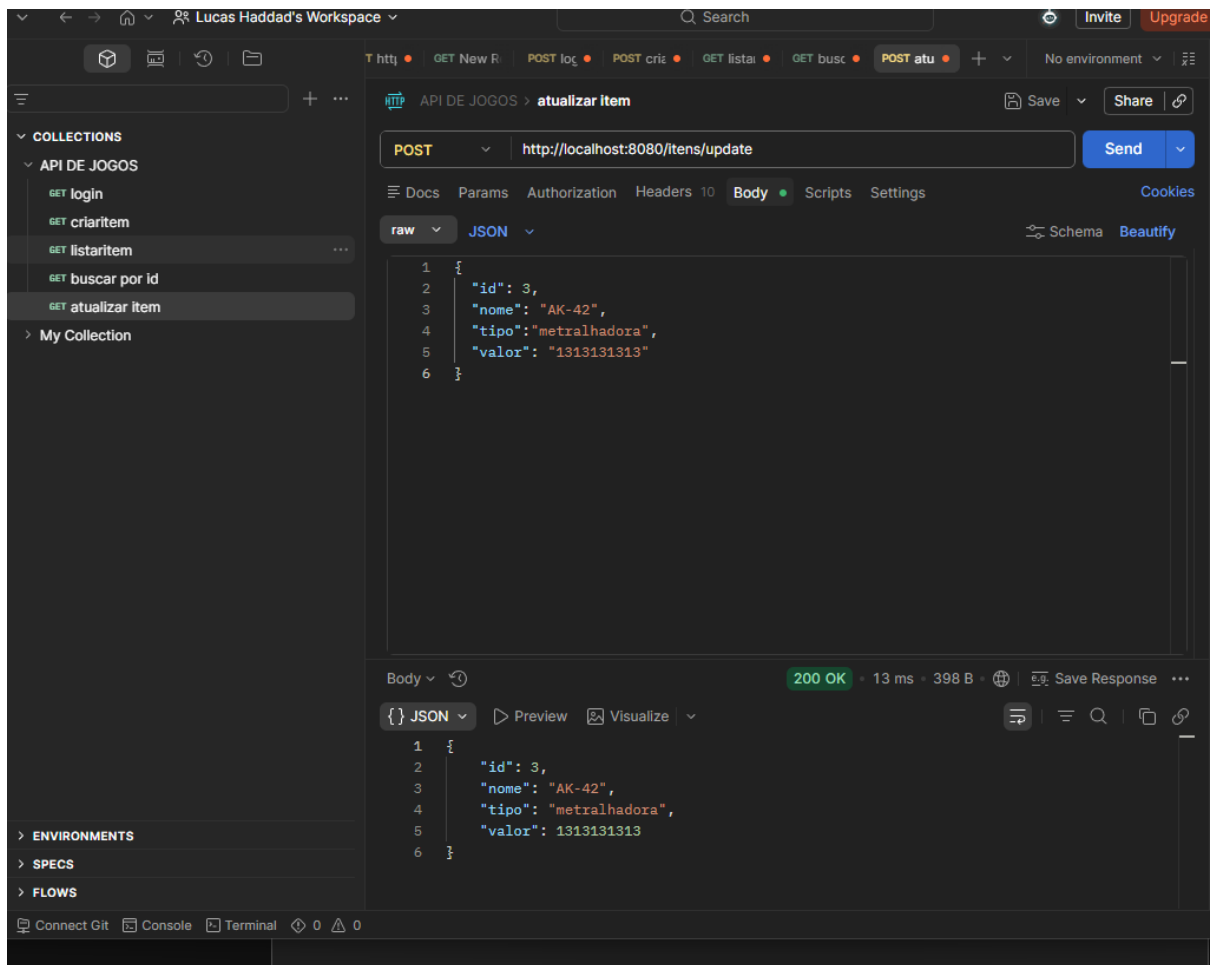

5°Criar jogador

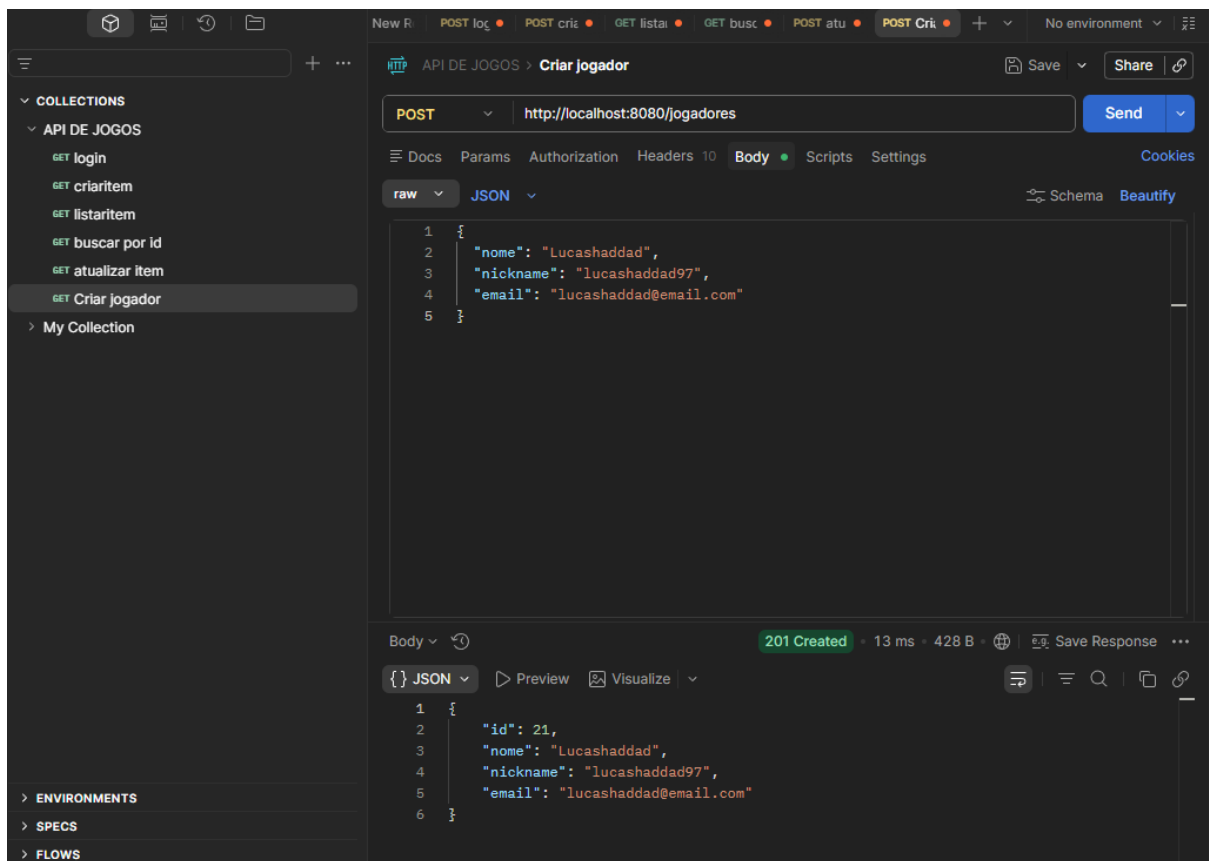

6º listar jogador

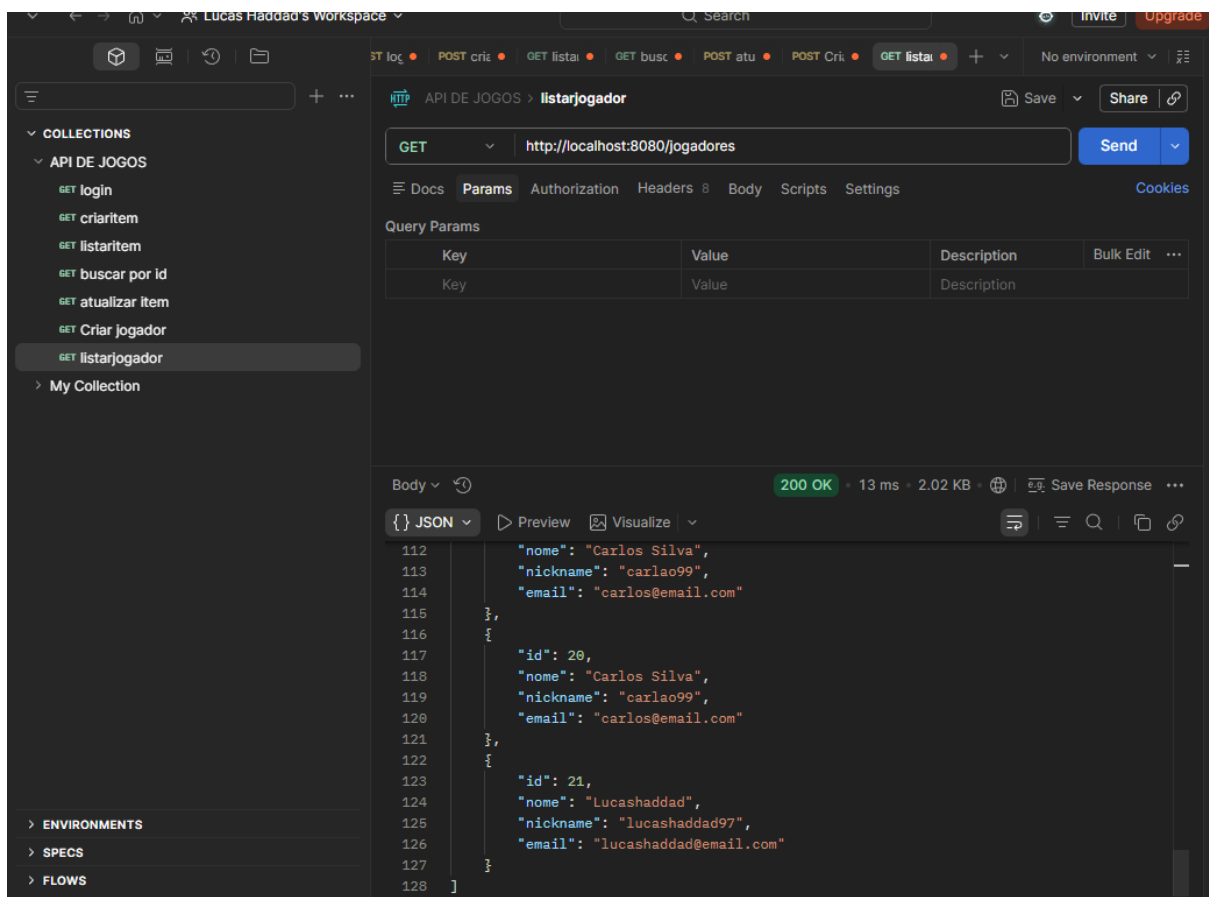


7º Buscar jogador pelo id


The screenshot shows the Postman interface for a workspace named "Lucas Haddad's Workspace". The left sidebar lists a collection of API endpoints under "API DE JOGOS", with "GET buscarjogadorpeloid" selected. The main panel displays the details of the selected request, which is a GET request to "http://localhost:8080/jogadores/21". The response is a 200 OK status with a response time of 8 ms and a body size of 423 B. The response body is shown in JSON format, containing the following data:

```
{  "id": 21,  "nome": "Lucashaddad",  "nickname": "lucashaddad97",  "email": "lucashaddad@email.com"}
```

8º Atualizar jogador

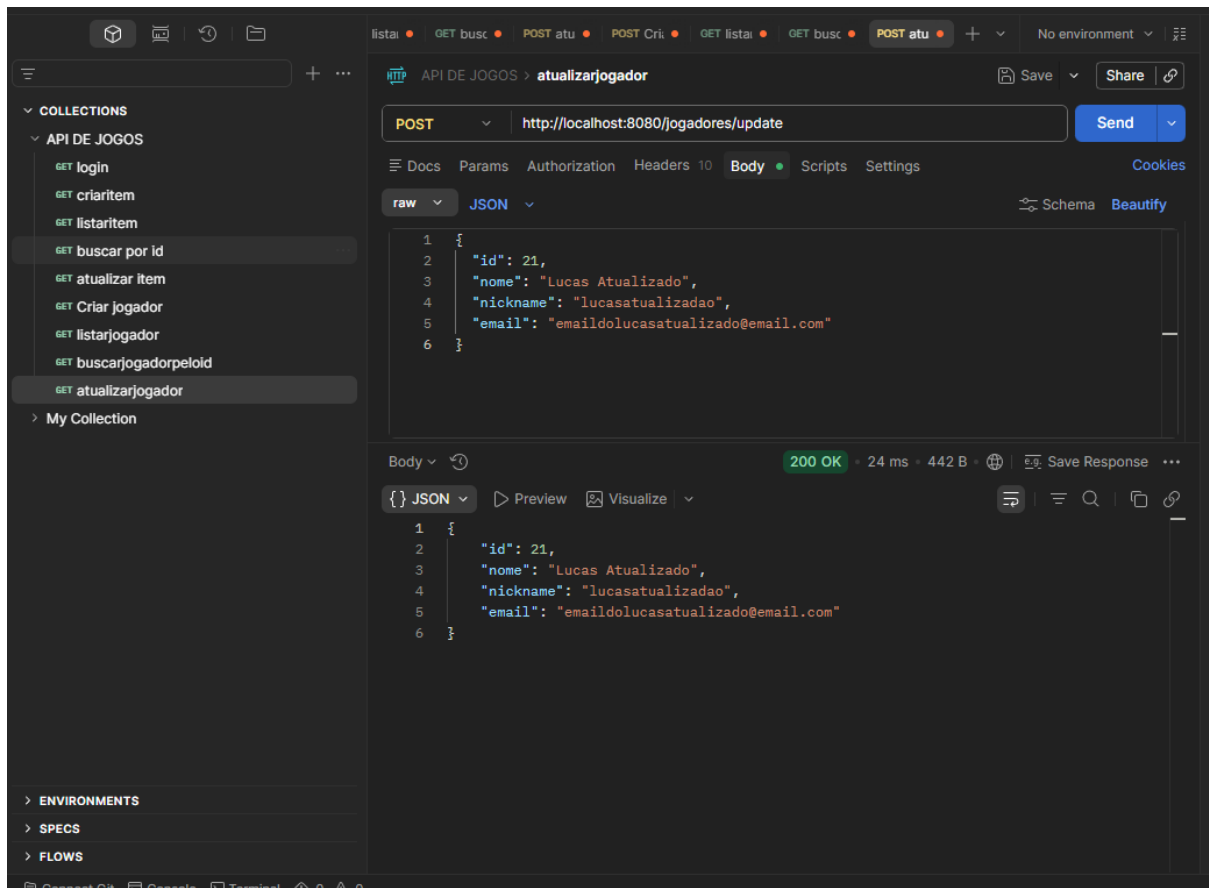

9º Criar jogo

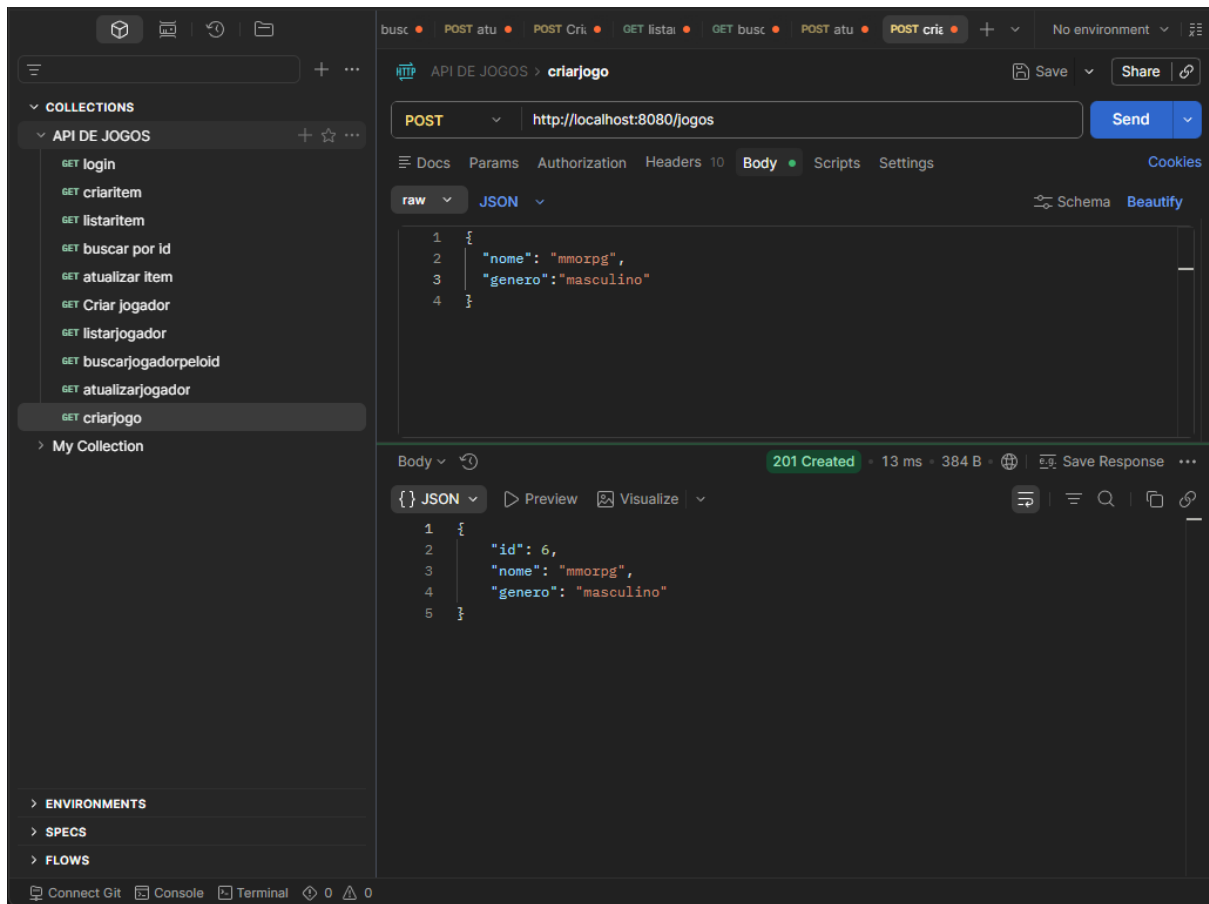

10ºListar jogos

API DE JOGOS > listarjogos

GET http://localhost:8080/jogos

Send

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body

200 OK · 9 ms · 643 B · Save Response

JSON

```
8 {
9   "id": 2,
10  "nome": "The Legend of Zelda",
11  "genero": "Aventura"
12 },
13 {
14   "id": 3,
15   "nome": "Minecraft",
16   "genero": "Sobrevivencia"
17 },
18 {
19   "id": 4,
20   "nome": "Counter Strike 2",
21   "genero": "Shooter"
22 },
23 {
24   "id": 5,
25   "nome": "mmorpg"
```

11º buscar jogo pelo id

API DE JOGOS > buscarjogopeloid

GET http://localhost:8080/jogos/1

Send

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		


Body

200 OK · 12 ms · 391 B · Save Response


JSON

```
1 {
2   "id": 1,
3   "nome": "The Legend of Tibia",
4   "genero": "Aventura"
5 }
```

12º atualizar jogo

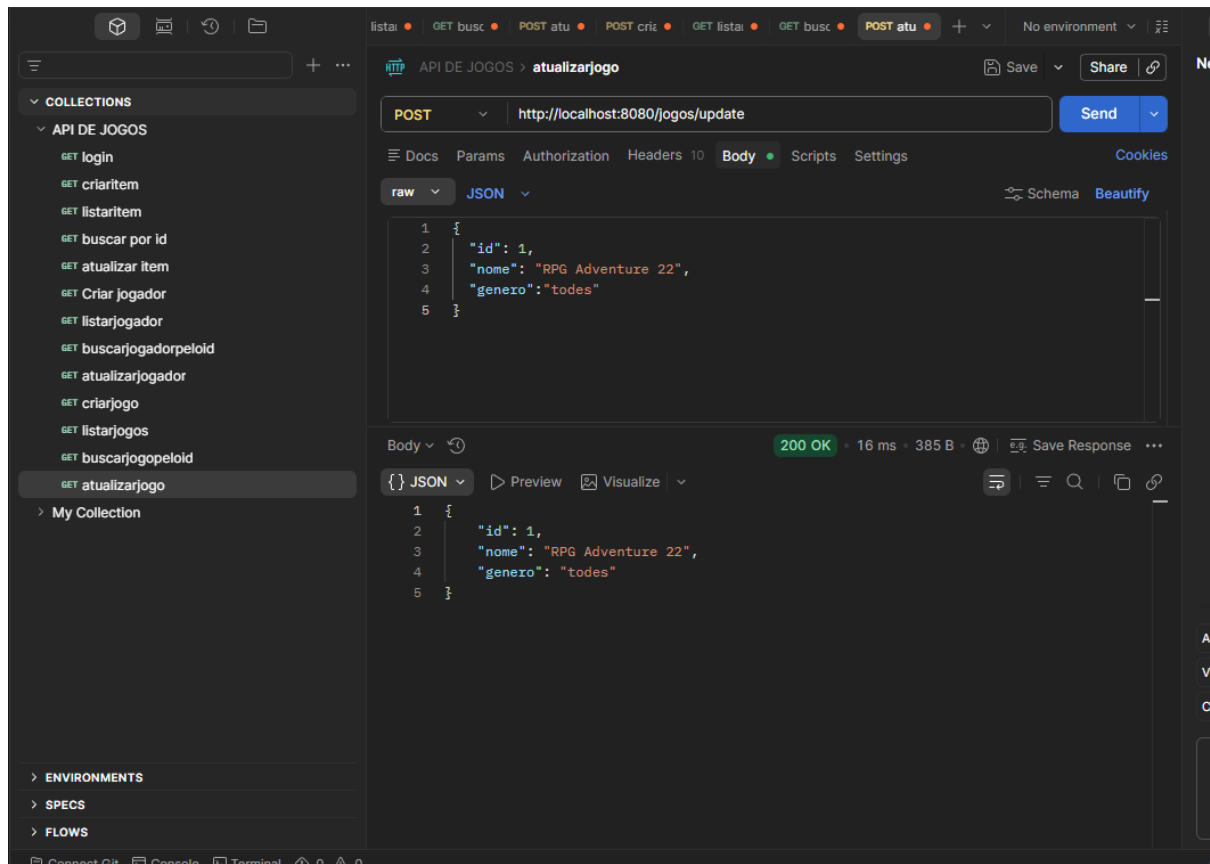

13º Criar inventario

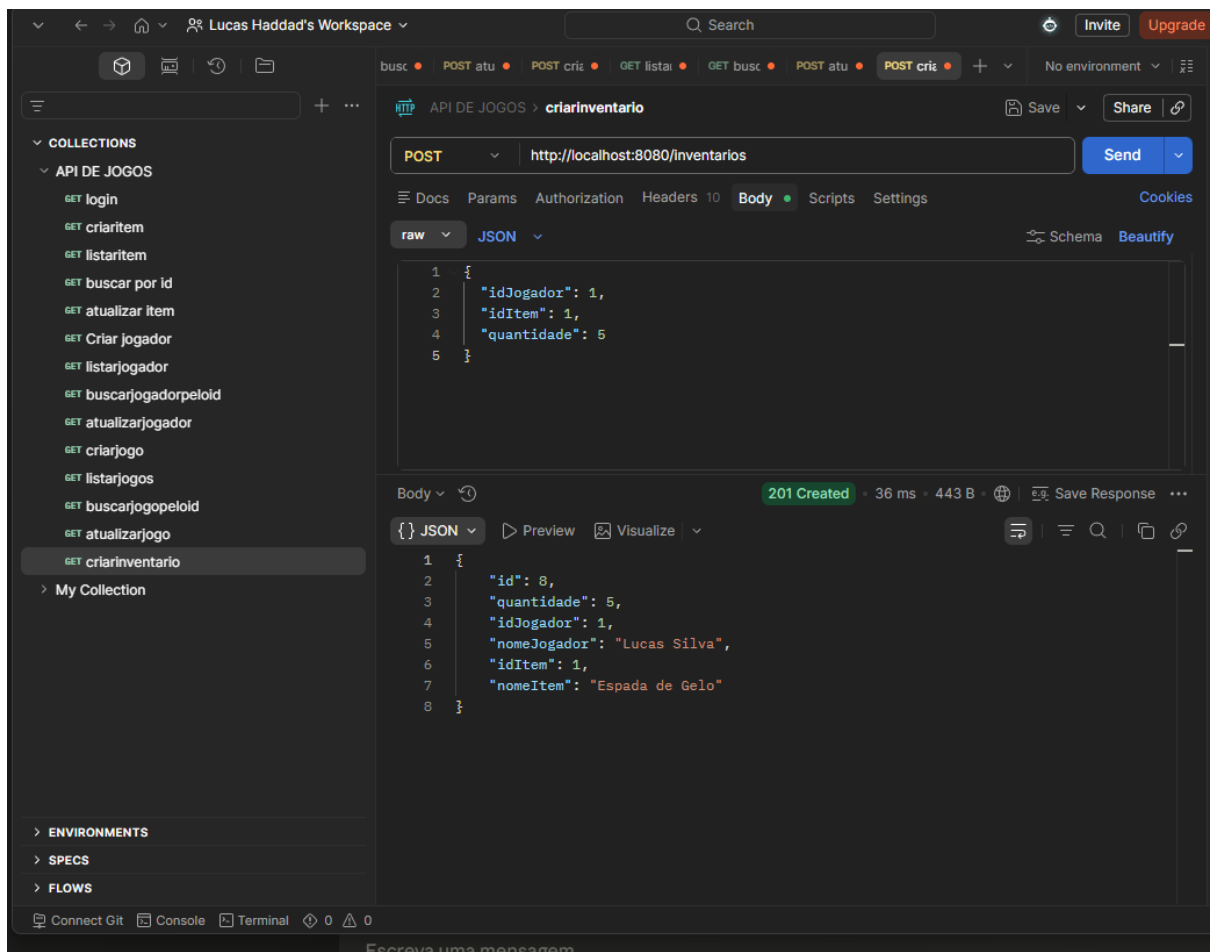

14ºListar inventario

Lucas Haddad's Workspace

API DE JOGOS > Listar inventario

GET http://localhost:8080/inventarios

Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Query Params


Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body 200 OK 21 ms 1.04 KB Save Response


JSON Preview Visualize

```
9    },
10   {
11     "id": 2,
12     "quantidade": 5,
13     "idJogador": 1,
14     "nomeJogador": "Lucas Silva",
15     "idItem": 1,
16     "nomeItem": "Espada de Gelo"
17   },
18   {
19     "id": 3,
20     "quantidade": 3,
21     "idJogador": 1,
22     "nomeJogador": "Lucas Silva",
23     "idItem": 1,
24     "nomeItem": "Espada de Gelo"
25   }
26 }
```


15° Buscar inventario pelo id

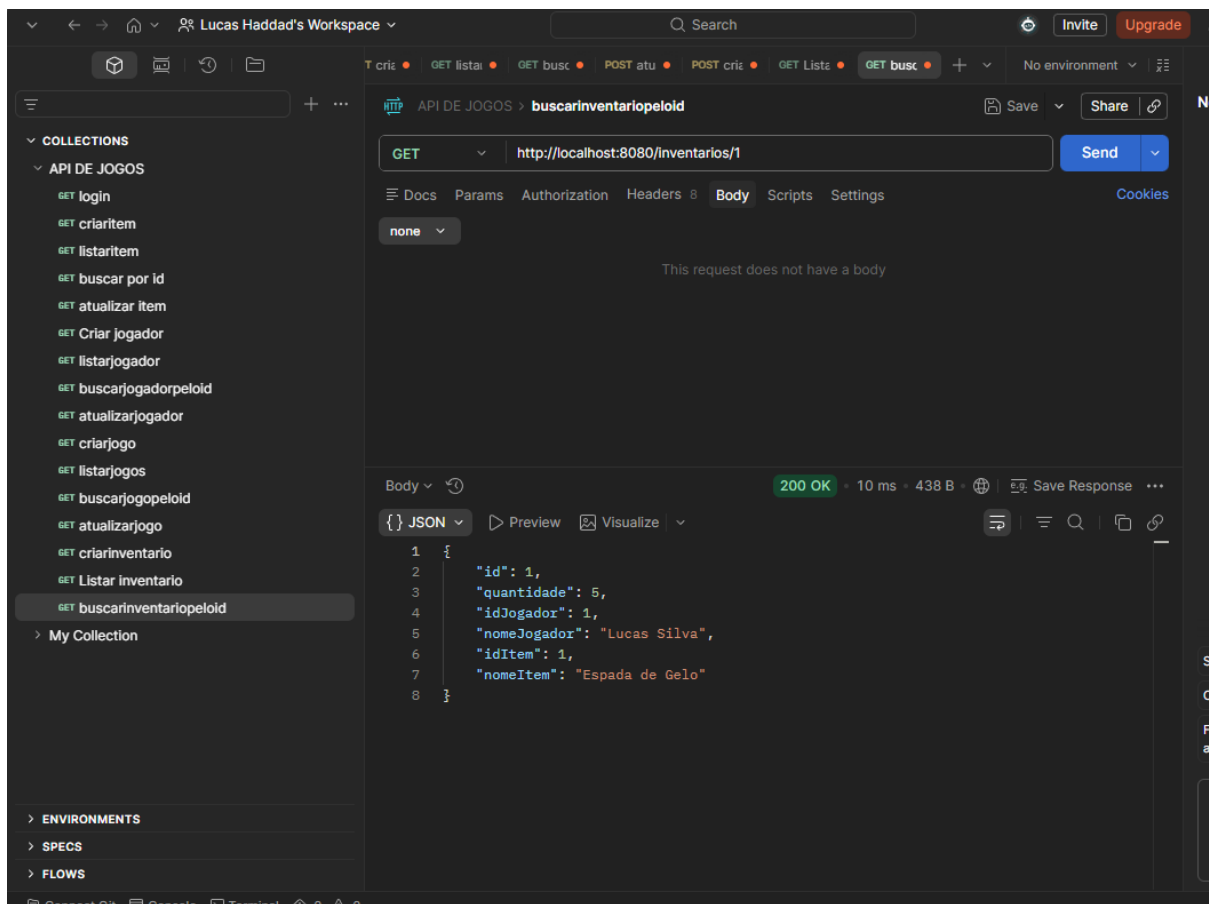

16°Atualizar inventario

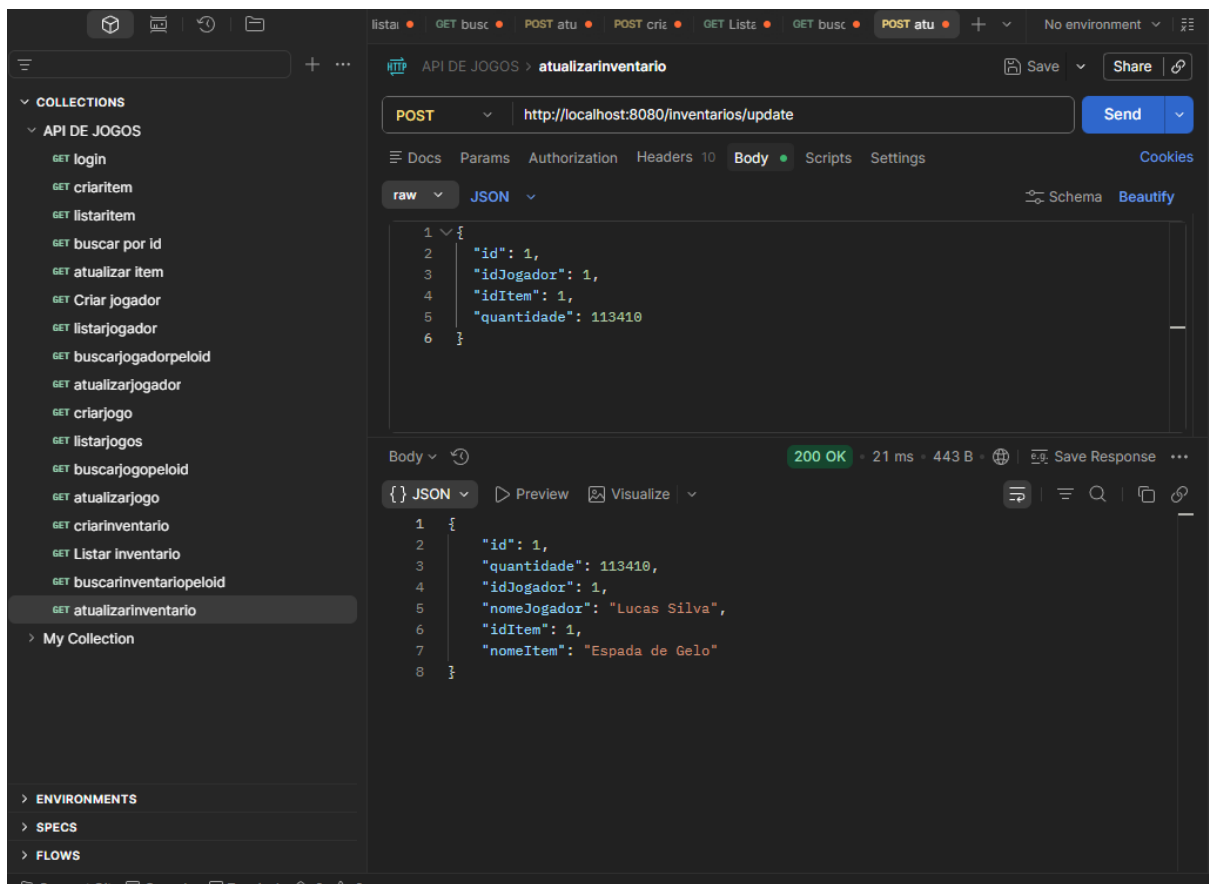

17º Criar partida

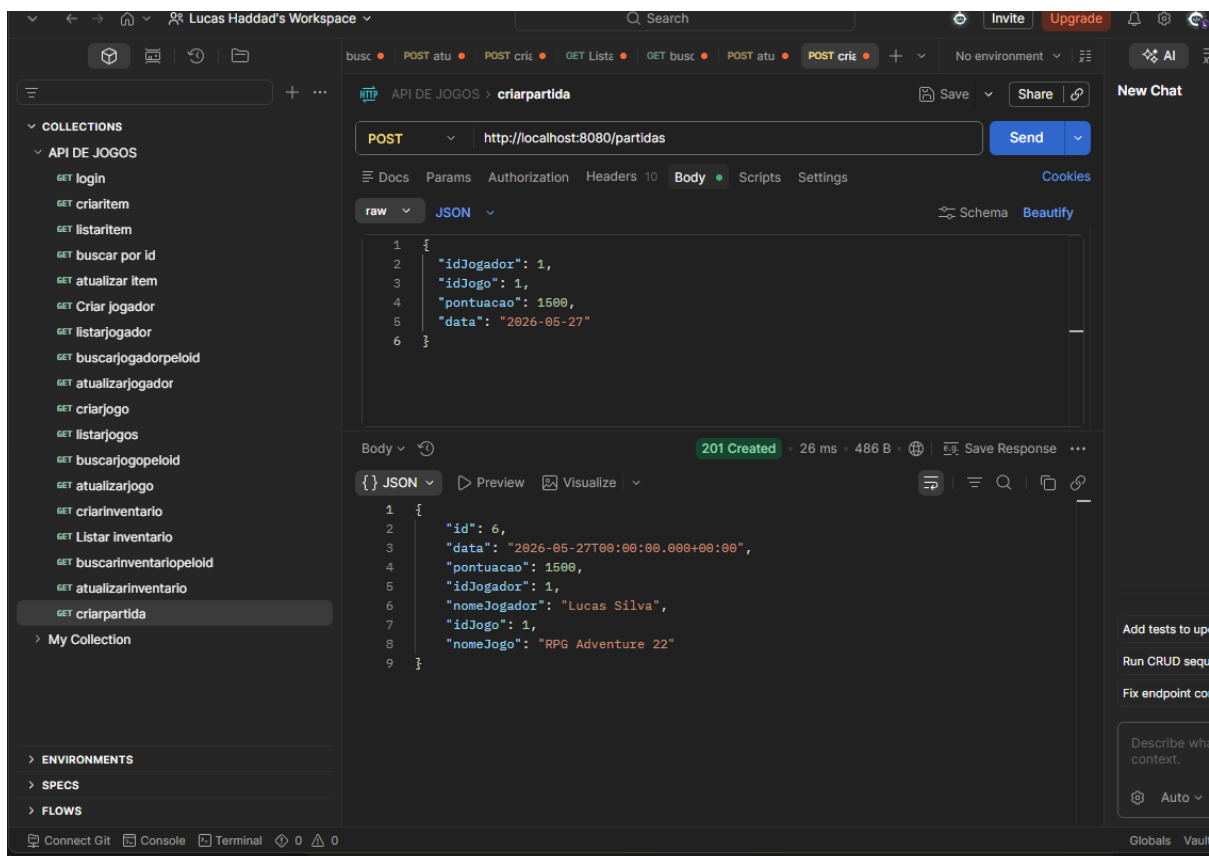

18º Listar partidas

The screenshot shows a REST client interface with a sidebar on the left containing a list of API endpoints under the 'API DE JOGOS' collection. The 'listarpartidas' endpoint is selected. The main panel shows a GET request to 'http://localhost:8080/partidas' with a status of '200 OK' and a response body containing a JSON array of game records.

API DE JOGOS > listarpartidas

GET http://localhost:8080/partidas

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		


Body

200 OK · 15 ms · 1.2 KB


JSON

```
{
  "nomeJogador": "Lucas Silva",
  "idJogo": 1,
  "nomeJogo": "RPG Adventure 22"
},
{
  "id": 5,
  "data": "2026-05-27T00:00:00.000+00:00",
  "pontuacao": 4800,
  "idJogador": 7,
  "nomeJogador": "Rafael Souza",
  "idJogo": 4,
  "nomeJogo": "Counter Strike 2"
},
{
  "id": 6,
  "data": "2026-05-27T00:00:00.000+00:00",
  "pontuacao": 1500,
  "idJogador": 7,
  "nomeJogador": "Rafael Souza",
  "idJogo": 4,
  "nomeJogo": "Counter Strike 2"
}
```

19º Buscar partida pelo id

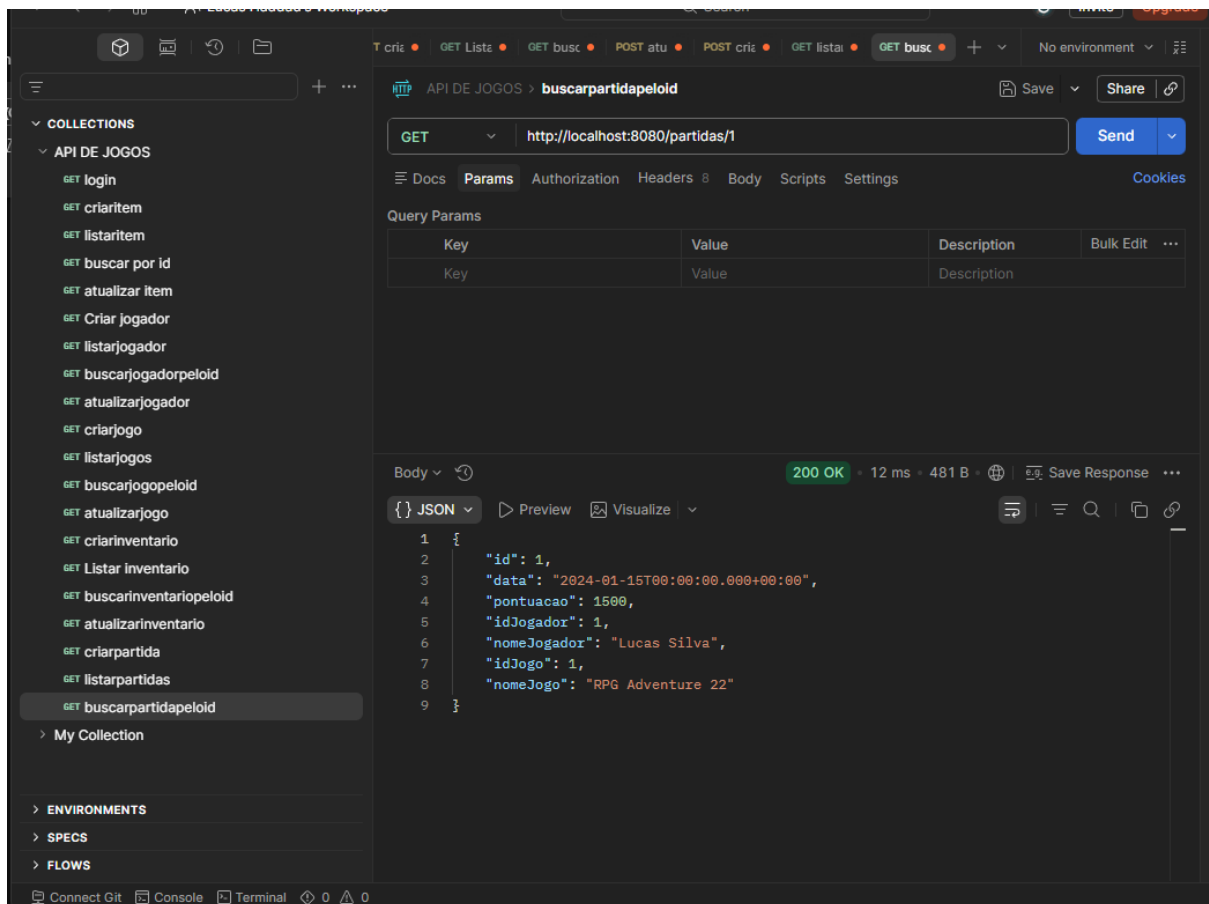

20º Atualizar partida

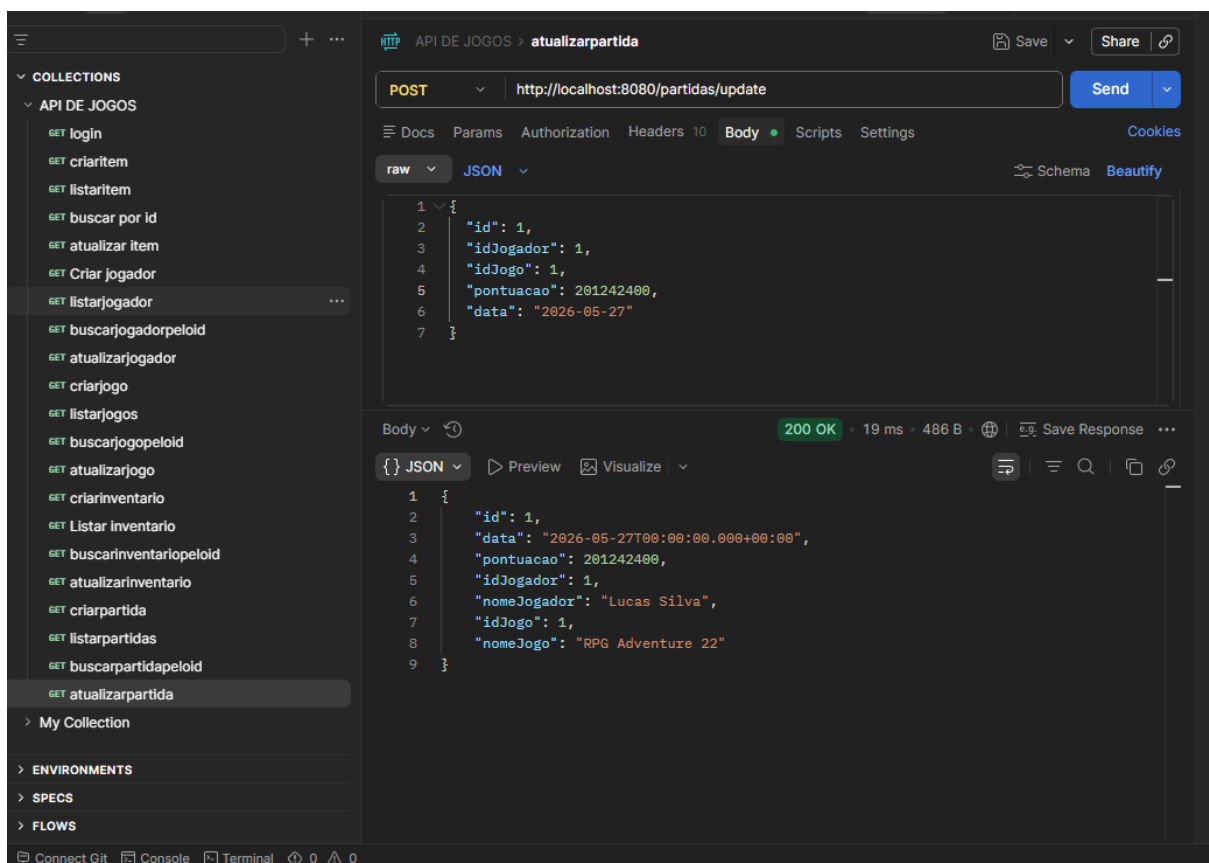

21ºremover partida

The screenshot shows the Postman interface with a collection named 'API DE JOGOS'. The selected endpoint is 'removerpartida' with a method of 'POST' (though the URL indicates a DELETE operation). The URL is 'http://localhost:8080/partidas/4/delete'. The response is '204 No Content', indicating a successful deletion.

API DE JOGOS > removerpartida

POST http://localhost:8080/partidas/4/delete

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		


Body

204 No Content · 12 ms · 282 B


Raw

```
1
```


22ºRemover inventario

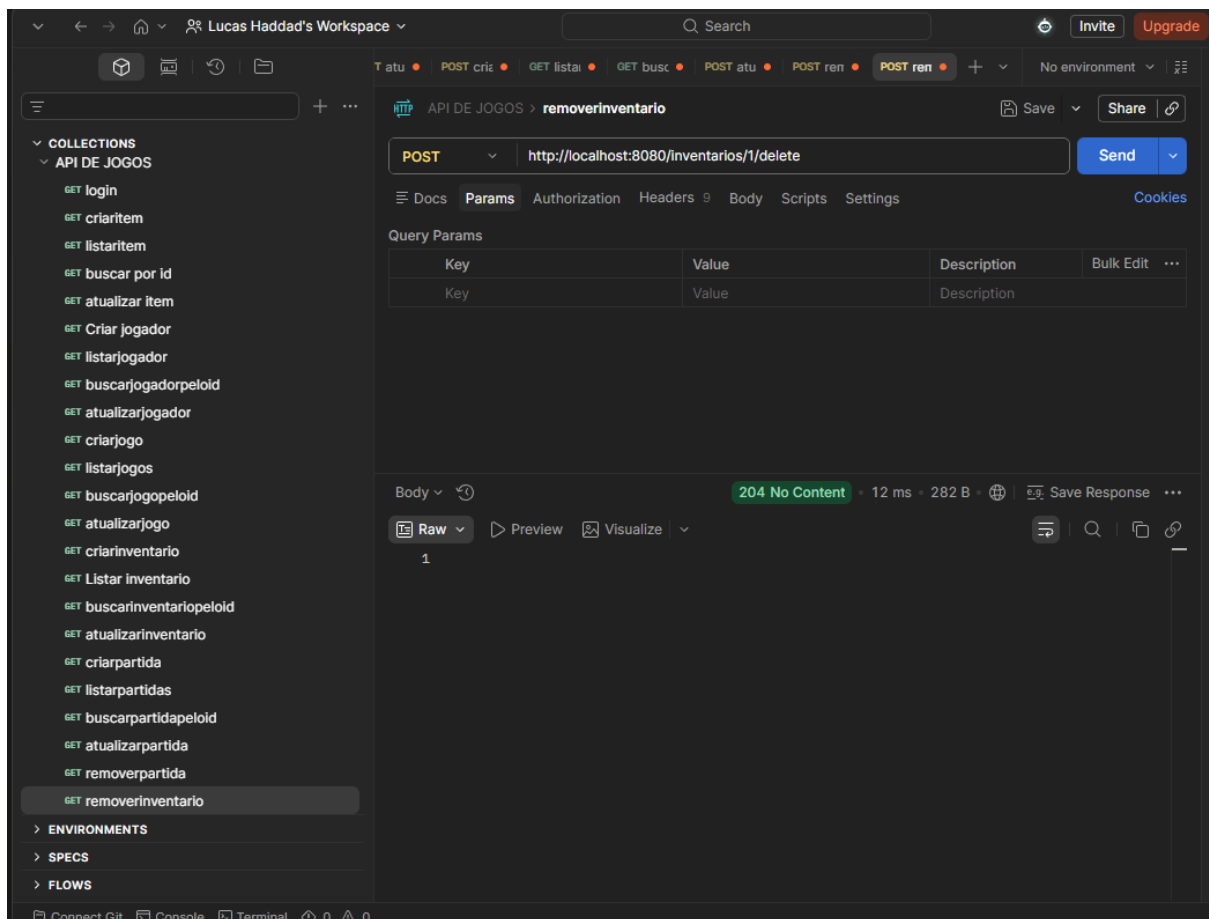

23ºremover jogo

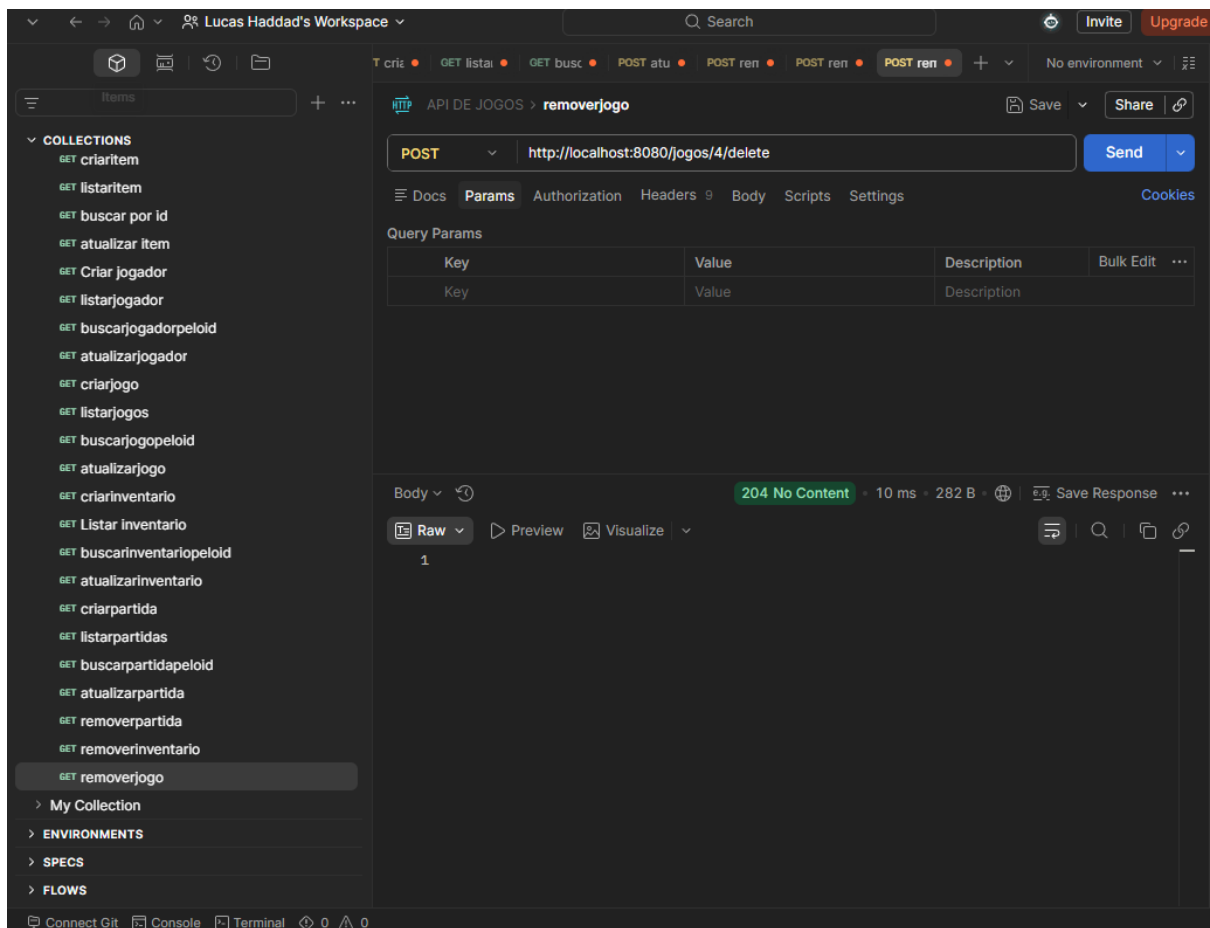

24ºremover jogador

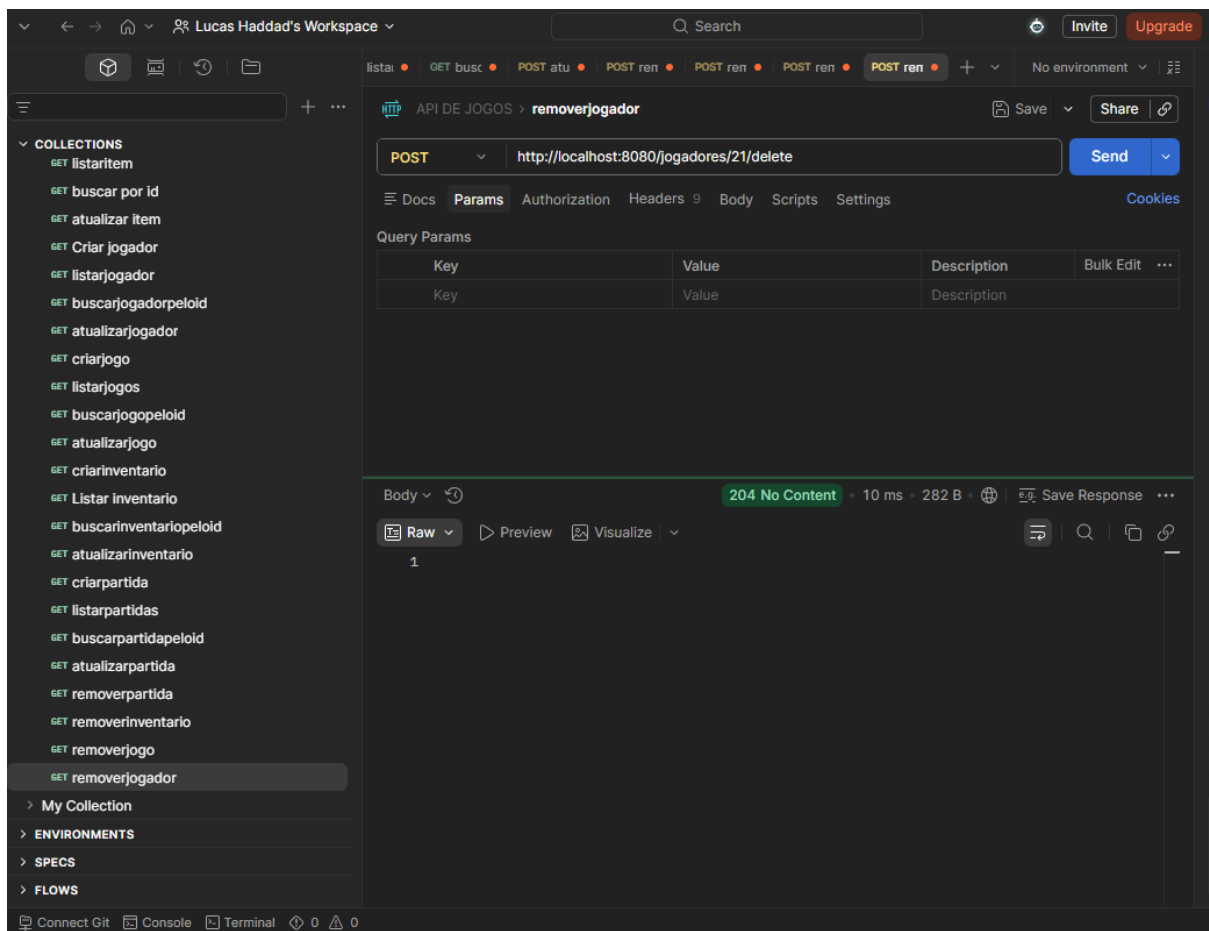

25ºremover item

Lucas Haddad's Workspace

Search

InviteUpgrade

API DE JOGOS > removeritem

SaveShare

POSThttp://localhost:8080/itens/5/deleteSend

DocsParamsAuthorizationHeadersBodyScriptsSettingsCookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body204 No Content9 ms282 BSave Response

RawPreviewVisualize

1

COLLECTIONS

GET buscar por id

GET atualizar item

GET Criar jogador

GET listarjogador

GET buscarjogadorpeloid

GET atualizarjogador

GET criarjogo

GET listarjogos

GET buscarjogopeloid

GET atualizarjogo

GET criarinventario

GET Listar inventario

GET buscarinventariopeloid

GET atualizarinventario

GET criarpartida

GET listarpartidas

GET buscarpartidapeloid

GET atualizarpartida

GET removerpartida

GET removerinventario

GET removerjogo

GET removerjogador

GET removeritem

> My Collection

> ENVIRONMENTS

> SPECS

> FLOWS

Connect Git

Console

Terminal

00