

```
$ java InputLab --mode demo
```

Scanner String[] args

// 0000000000000000

args

00000000

Scanner

00000000



NO DEBUG

NO DEBUG

NO DEBUG

NO DEBUG

NO DEBUG

□□□□□□

--debug



NO DEBUG

NO DEBUG

NO DEBUG

NO DEBUG

NO DEBUG

□□□□□□

□□□□□□□□

□□□□□□□□□□□□□□□□□□



Shell

❏❏ java A --debug



JVM ❏❏

❏❏ args[]



main()

❏❏❏❏❏



nextLine()

❏❏❏❏❏

args❏❏❏❏❏❏❏

Scanner❏❏❏❏❏❏❏❏❏

String args

□□□□

```
1 public static void main(String[] args) {  
2     if (args.length == 0) {  
3         System.out.println("□□□□");  
4         return;  
5     }  
6     System.out.println("Hello " + args[0]);  
7 }
```

```
$ java A Lucas  
Hello Lucas
```

args.length

args.length □□□□□



```
1 String name = args.length > 0 ? args[0] : "guest";  
2 System.out.println("Hello " + name);
```


Magic Move

Scanner

NO GRAPH



```
1 import java.util.Scanner;
2
3 public static void main(String[] args) {
4     Scanner in = new Scanner(System.in);
5     System.out.print("???");
6     String name = in.nextLine();
7     System.out.println("Hello " + name);
8 }
```

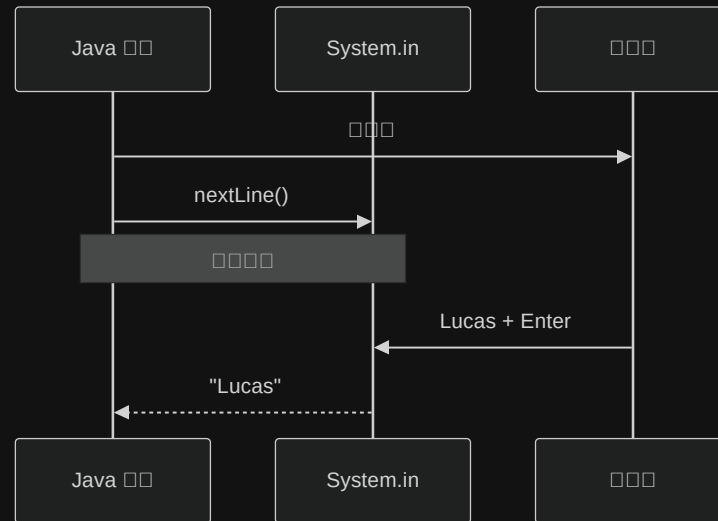

nextInt() + nextLine()

```
1 System.out.print("aaa");  
2 int age = Integer.parseInt(in.nextLine());  
3 System.out.print("aaa");  
4 String name = in.nextLine(); // 000000
```

0000000000 **nextLine()** 0000000000



```
import java.util.Scanner;
```

```
class InputLab {  
    public static void main(String[] args) {  
        Scanner in = new Scanner(System.in);  
        int age = Integer.parseInt(in.nextLine());  
        System.out.println(age + 1);  
    }  
}
```

Monaco

-
-
- Java runtime



args

Scanner

```
$ java Ahello world  
args[0] = "hello"  
args[1] = "world"  
Hello hello
```

hello world



Enter

□ □ □ □ □ □ □ □ □ □



□ □ □ □

□ □ □ □ □ □ □ □

args

□ □ □ □

□ □ □ □ □ □

Scanner

□ □ □ □

--safe / --verbose

args

□ □ □ □

□ □ □ □ □ □

Scanner

□ □ □ □ □ □ □ □ □ □ args □ □ □ □ □ Scanner □ □ □ □ □



```
1 String mode = args.length > 0
2     ? args[0]
3     : "normal";
4
5 Scanner in = new Scanner(System.in);
6 System.out.print("00000");
7 String name = in.nextLine();
8
9 if (name.isBlank()) {
10     System.err.println("000000");
11     return;
12 }
13 System.out.printf("[%s] Hello %s%n", mode, name);
```



args  Scanner   

  args  main     

nextInt    Enter 

Monaco  Run   

 deck          Java   


Scanner      

   Scanner     



args Scanner

API

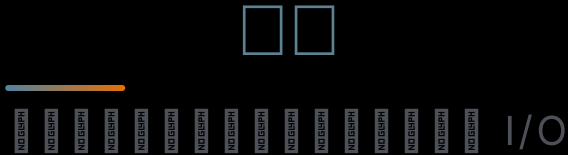

```
$ java InputLab --practice
```