

```
$ python3 day01.py
```

# Python Day01

```
# 0000000000
```

```
>>> print("00000000000000")
```

```
00000000000000
```



```
$ cat agenda.md
```



1. Python Day01 — □□□□□□□□□□

2. □□□□

3. □□□□□□□□□□

4. □□□□□□□□

5. □□□□□□□□□□□□

6. □□

7. □□□□

8. □□□□□□

9. □□□□□□□□

10. Output

11. □□□□□□□□□□□□

12. □□□□□□□

13. f-string □□□□□□



```
int
  □□
```


float  
□□□


```
str
[]
```

bool

☐ ☐

NoneType

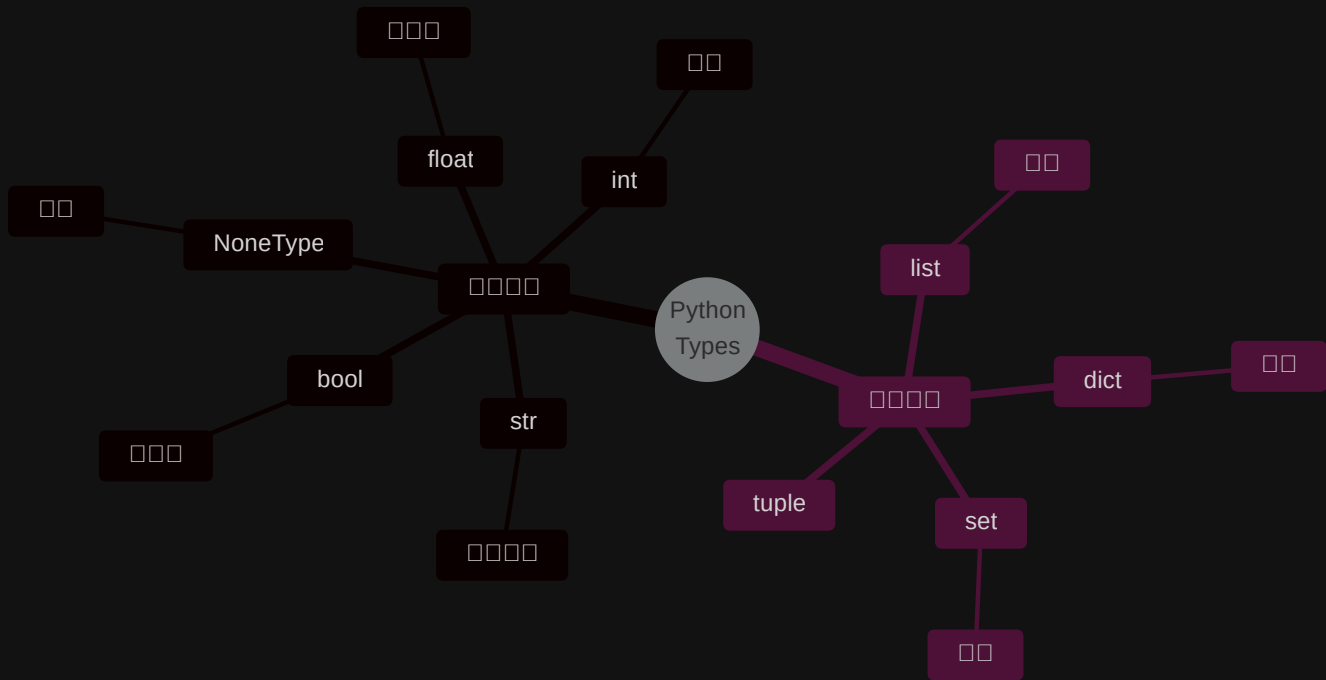



```
# [] [] [] [] []  
'123' ~ [] []  
123 ~ [] []  
'123' == 123 → False
```

'123'



123



```
>>> '123' == 123  
False # [] [] [] [] [] [] [] []
```

 [] [] [] [] []     input() [] [] [] []






[N1C \(2019\)](#)
[N1C \(2020\)](#)
[N1C \(2021\)](#)
[N1C \(2022\)](#)
[N1C \(2023\)](#)
[N1C \(2024\)](#)
[N1C \(2025\)](#)
[N1C \(2026\)](#)
[N1C \(2027\)](#)
[N1C \(2028\)](#)
[N1C \(2029\)](#)
[N1C \(2030\)](#)
[N1C \(2031\)](#)
[N1C \(2032\)](#)
[N1C \(2033\)](#)
[N1C \(2034\)](#)
[N1C \(2035\)](#)
[N1C \(2036\)](#)
[N1C \(2037\)](#)
[N1C \(2038\)](#)
[N1C \(2039\)](#)
[N1C \(2040\)](#)






□ □ □ □ □ □ □ □ □ □ □ □



□ □ □ □ □ □ □ □ □ □


if, for, while

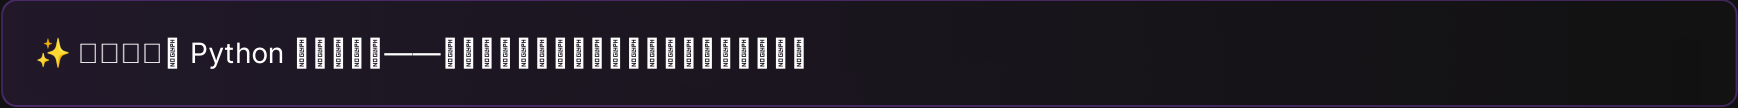

PART 03

# Output

```
❯ print() [] [] [] [] []
```



```
1 print('hi')
2 print('hi')      # 00000000 hi 000
```

00000

```
1 hi
2 hi
```



```
1 # 😞 000 - 000
2 name = 'Lucas'
3 age = 18
4 print('Hello,', name, 'you are', age, 'years old')
```

```
1 # 😊 0 f-string - 0000
2 name = 'Lucas'
3 age = 18
4 print(f'Hello, {name}! You are {age} years old.')
```

```
1 # 🌟 f-string 0000000
2 name = 'Lucas'
3 age = 18
4 print(f'Hello, {name}! Next year you will be {age + 1}')
```



print()



□□□□    □□□□    □□□□    □□□□

```
1 print('hi')
2 print('hi')
3 # :
4 # hi
5 # hi
```

🔑 end — '\n' · sep — ' ' □

# f-string □□□□□

f-string □□□□□□□□□□□□□□□□

```
1  # 0000
2  print(f'{{}}')
3
4  # 0000000000000000
5  pi = 3.14159265
6  print(f'π ≈ {pi:.2f}')    # π ≈ 3.14
7  print(f'π ≈ {pi:.4f}')    # π ≈ 3.1416
8
9  # 0000
10 print(f'{{42:05d}}')      # 00042
```

□□□□

```
{{:00}}
:.2f  - 0000
:05d  - 0000
```

 0000


□□□□□□□□□□□□

```
1  pi = 3.14159265
2  print(f'π ≈ {pi:.2f}')
3  print(f'π ≈ {pi:.4f}')
4  print(f'{{42:05d}}')
```

PART 04

# Input

□□□□□□□□□□



```
sequenceDiagram
    participant A as [User]
    participant B as [Laptop]
    participant C as [Monitor]
    A->>B: input() — □□□□
    B->>B: 
    B->>C: print() — □□□□
    C-->>A: 
    style A fill:#f9f9f9,stroke:#333,stroke-width:1px
    style B fill:#f9f9f9,stroke:#333,stroke-width:1px
    style C fill:#f9f9f9,stroke:#333,stroke-width:1px
```





`input()` □□□□□□□□□□□□

```
1 n = input()
2 nn = input('□□□□□□□□')
```

⚠ `input()` □□□□□□□□□□□□□□□□  
! '123' != 123



```
1 # □□□□□□□□□□
2 name = input('□□□□□ ')
3 print(f'Hello, {name}!')
4
5 # input() □□□□□□□□
6 age_str = input('□□□ ')
7 print(type(age_str)) # <class 'str'>
8
9 age = int(age_str) # □□□□
10 print(f'□□□□ {age + 1} □□')
```



□□□□□□□□□□□□□□□□

sys.stdin    while + try    □□□□

```
1  import sys
2
3  for line in sys.stdin:
4      line = line.strip()
5      print(line)
```

 sys.stdin

□□□  
□□□□□□

 while+try

□□□□  
□□□□□□

 □□□□

□□□  
□□□□□□



a.py ☐

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

□ □ □ □ □

in.txt ☐

```
1 Everything will get better 12345
```



□□□□□□□□

  in.txt □□□□□□□□□□□□□□□□

```
1 import sys
2
3 # UTF-8
4 sys.stdin.reconfigure(encoding='utf-8')
5
6 for line in sys.stdin:
7     line = line.strip()
8     print(line)
```


□□□□□□□□

```
1 python a.py < in.txt > out.txt
```

 UTF-8 Windows□□□□□□



[illegible]



```
1  n = 10
```

```
n + 2 → 12
```

```
n - 2 → 8
```

```
n * 2 → 20
```

```
n / 2 → 5.0 ← float
```

```
n // 2 → 5
```

```
n ** 6 → 1000000
```

```
n % 6 → 4 ← 10 ÷ 6 商
```

💡 / `float` // `float`

□ □ □ □ □ □ □

□ □ □ □ □ □ □ □ □ □

□ □ □ □    □ □    □ □ □ □ □

```
1  x = 10
2  x = x + 5    # x  15
3  x = x * 2    # x  30
4  print(x)
```

⚡ `x += 1`    `10` `11` `12` `13` `14` `15` `16` `17` `18` `19` `20` `21` `22` `23` `24` `25` `26` `27` `28` `29` `30` `31` `32` `33` `34` `35` `36` `37` `38` `39` `40` `41` `42` `43` `44` `45` `46` `47` `48` `49` `50` `51` `52` `53` `54` `55` `56` `57` `58` `59` `60` `61` `62` `63` `64` `65` `66` `67` `68` `69` `70` `71` `72` `73` `74` `75` `76` `77` `78` `79` `80` `81` `82` `83` `84` `85` `86` `87` `88` `89` `90` `91` `92` `93` `94` `95` `96` `97` `98` `99` `100`





□□□□□□□□

□□□□□□□□□□

■ ✓ True □□□

■ ✗ False □□□

| □□□ | □□   |
|-----|------|
| <   | □□   |
| <=  | □□□□ |
| >   | □□   |
| >=  | □□□□ |
| ==  | □□   |
| !=  | □□□  |

□ □

```
1  10 <= 60      # True
2  123 == 123    # True
3  20 == 40      # False
4  '123' == 123  # False ⚠
```

⚠ '123' 123  
False

# Logical Operators

Python Logical Operators

| Operator         | Description                               |
|------------------|-------------------------------------------|
| <code>and</code> | Both operands must be true                |
| <code>or</code>  | At least one operand must be true         |
| <code>not</code> | Reverses the logical state of its operand |

```
1 age = 18
2 has_id = True
3
4 age >= 18 and has_id    # True
5 age < 18 or has_id     # True
6 not has_id              # False
```

🧠 `and` = Both operands must be true · `or` = At least one operand must be true · `not` = Reverses the logical state of its operand

# Truthy / Falsy □□□□□□

Python True / False □□□□□□

```
1 bool(0)           # False
2 bool(1)           # True
3 bool("")           # False
4 bool("hi")         # True
5 bool(None)         # False
6 bool([])           # False
```

Falsy False

- 0
- " "
- None
- []
- {}

Truthy True

- 0
- 
-

if □□□□

□□□□□□□□

```
1 age = 18
2
3 if age >= 18:
4     print("□□□□")
```

⚠ Python □□□□□□□□□□□□□□□□


# if / elif / else

□□□□□□

```
1  score = 85
2
3  if score >= 90:
4      print("A")
5  elif score >= 80:
6      print("B")
7  elif score >= 70:
8      print("C")
9  else:
10     print("F")
```




if score >= 90: print("A")  
elif score >= 80: print("B")  
elif score >= 70: print("C")  
else: print("F")



```
1 username = input("000")
2 password = input("000")
3
4 if username == "admin" and password == "1234":
5     print("0000")
6 else:
7     print("0000")
```

🔑 000000input + 00 + and 0000



```
1  n = int(input("00000000"))
2
3  if n % 2 == 0:
4      print("00")
5  else:
6      print("00")
```







- Python □□□□□int / float / str / bool / None

- `input()` □□□□□□□□ □□

- `print()` □□□□□□□□ f-string □□□

- `/` □ `//` □ `%` □□□□□□□□

- □□□□□□□□ + □□□□□□□□

- `if` / `elif` / `else` □□□□

