

abntly

Academic works in the ABNT standards, in Typst

v0.1.1 October 1, 2026

<https://github.com/lucaslrodri/abntly>

Lucas Lima Rodrigues

abntly is a [Typst](#) template for academic works that comply with the standards of the Associação Brasileira de Normas Técnicas (ABNT), especially ABNT NBR 14724:2024, Trabalhos acadêmicos — Apresentação. The full list of the standards the package implements is in [Section 1.3](#).

Contents

1 Quick start	2	3.1 Format and margins	43
1.1 Scope	2	3.2 Font	44
1.2 About the package	2	3.3 Spacing	45
1.3 Standards implemented	2	3.4 Pagination	46
1.4 Installation	3	3.5 Sections	47
1.5 Dependencies	3	3.6 Items and subitems	48
1.6 Main function	4	3.7 Direct citations	49
1.7 Conventions of the manual	7	3.8 Footnotes	50
2 Structure of the academic work	9	3.9 Illustrations	50
2.1 Data of the work	9	3.10 Tables	54
2.2 Cover (required)	12	3.11 Equations	58
2.3 Title page (required)	14	3.12 Cross-references	59
2.4 Catalog card (required)	16	3.13 Acronyms	61
2.5 Errata (optional)	18	4 Elements beyond the standard	62
2.6 Approval sheet (required)	19	4.1 Algorithms	62
2.7 Dedication (optional)	22	4.2 Subfigures	63
2.8 Acknowledgements (optional)	24	4.3 Parts	65
2.9 Epigraph (optional)	25	4.4 Sideways figures and tables	66
2.10 Abstracts (required)	26	4.5 Stamps	67
2.11 Lists of illustrations and of tables (optional) .	29	5 Citations and references	69
2.12 Lists of abbreviations and acronyms and of		5.1 Citation systems	69
symbols (optional)	32	5.2 Citations in the text	72
2.13 Table of contents (required)	34	5.3 Citation of a citation	73
2.14 Textual elements	35	5.4 List of references	75
2.15 References (required)	37	5.5 References file	75
2.16 Glossary (optional)	37	6 Index of functions	81
2.17 Appendices and annexes (optional)	39	References	82
2.18 Index (optional)	40		
3 General presentation rules	43		

1 Quick start

1.1 Scope

This manual describes the **abntly** package, which formats academic works written in [Typst](#) according to the ABNT standards. The package is intended for final course works, dissertations and theses. Other types of document, such as articles, technical reports and research projects, are outside its scope.

The manual is based on ABNT NBR 14724:2024, which defines the structure and the general presentation rules of academic works and refers to the other standards ([Section 1.3](#)). For each element of the work, the manual presents:

- what the standard requires, in summary;
- the function of the package that meets this requirement;
- an example of use, with the result.

The manual does not replace the text of the standards, which must be consulted in case of doubt.

1.2 About the package

`abntly` applies the ABNT formatting to the whole document through its main function, `abntly` ([Section 1.6](#)), called only once at the top of the file. From that call on, the package sets up automatically:

- the page format and the margins;
- the fonts and the spacing;
- the numbering of the pages and of the sections;
- the formatting of illustrations, tables and equations;
- the citations and the list of references.

The elements of the structure of the work, such as the cover, the title page and the abstracts, are created by functions of their own, described in [Chapter 2](#).

Every function has an English name and a Portuguese name (for example, `cover` and `capa`), with the parameters and the documentation in the respective language. This manual uses the English names; the Portuguese version of the manual uses the Portuguese ones. The two sets can be combined in the same document.

The language of the work does not depend on the names used. It is set in the `lang` parameter of the main function ([Section 1.6](#)): a work written with the English names comes out in Portuguese, unless `lang: "en"` is given.

1.3 Standards implemented

The package implements the requirements of the standards listed below.

Table 1 — Standards implemented by the package

(continued)	
Standard	Purpose

Table 1 — Standards implemented by the package

(concluded)

Standard	Purpose
ABNT NBR 14724:2024 Trabalhos acadêmicos — Apresentação	Defines the structure of the academic work and the general presentation rules: format, margins, spacing, pagination, illustrations and tables. It is the main standard; the others are cited by it. The package follows the corrected version of 2025.
ABNT NBR 6024:2012 Numeração progressiva das seções de um documento — Apresentação	Defines the numbering of the sections, the items and the subitems.
ABNT NBR 6027:2012 Sumário — Apresentação	Defines the presentation of the table of contents.
ABNT NBR 6028:2021 Resumo, resenha e resensão — Apresentação	Defines the writing and the presentation of the abstract and of the keywords.
ABNT NBR 10520:2023 Citações em documentos — Apresentação	Defines the presentation of the citations: the author-date and numeric citation systems, the direct and indirect citations and the notes.
ABNT NBR 6023:2025 Referências — Elaboração	Defines the elements of the references, their order and their form of presentation.
ABNT NBR 6034:2004 Índice — Apresentação	Defines the presentation of the index.
ABNT NBR 6033:1989 Ordem alfabética	Defines the criteria of alphabetical ordering, used in the lists, in the glossary and in the index.
IBGE (1993) Normas de apresentação tabular	Defines the presentation of the tables, as indicated by NBR 14724.

1.4 Installation

The package requires Typst 0.15.0 or later. To use it, add the following line at the top of the file:

```
1 #import "@preview/abntly:0.1.1": *
```

Typst downloads the package automatically on the first compilation.

To create a new work from the template of the package, which has every element of the structure with comments, use the command:

```
1 typst init @preview/abntly:0.1.1
```

1.5 Dependencies

abntly depends on other Typst packages and on the fonts of the **New Computer Modern** family. The packages are downloaded automatically along with abntly. Some of the fonts come with Typst; the others must be installed.

Table 2 — Dependencies of the package

(continued)

Dependency	Type	Use
equate 0.3.3	Package	Numbering of the equations and of the lines of an equation.
glossarium 0.5.10	Package	Acronyms, symbols and glossary terms cited in the text by a key.

Table 2 — Dependencies of the package

(concluded)		
Dependency	Type	Use
linguify 0.5.0	Package	Terms generated by the package, in the language of the text.
subpar 0.2.2	Package	Subfigures.
New Computer Modern	Font	Text. Comes with Typst.
New Computer Modern Math	Font	Equations. Comes with Typst.
New Computer Modern Sans	Font	Headings. Must be installed.
New Computer Modern Mono	Font	Code. Must be installed.
New Computer Modern 08	Font	Superscripts and subscripts. Must be installed.

To install the fonts that do not come with Typst:

- download the package [newcomputermodern](#) from CTAN;
- in the `otf` folder, install the files `NewCM10-*`, `NewCM08-*`, `NewCMSans10-*`, `NewCMSans08-*`, `NewCMMono10-*` and `NewCMMath-*` (the files with `Book` in their name are not used);
- on [typst.app](#), upload these files to the project instead of installing them.

Remark

Without these fonts, the document is compiled with fallback fonts, and Typst issues a warning for each missing family, such as `unknown font family: new computer modern sans`.


1.6 Main function

The function `abntly` is the main function of the package. It applies the ABNT formatting to the whole document and must be used with a `show` rule, right after the import. The data of the work are given in the `info` parameter ([Section 2.1](#)).

The following example creates a work with a cover, a title page, a table of contents and one chapter:

```

1  #show: abntly.with(
2    lang: "en",
3    info: config-info(
4      title: [Title of the work],
5      author: "Name of the Author",
6      advisor: "Prof. Dr. Name Surname",
7      institution: [University of Brazil],
8      location: [Rio Branco],
9      year: 2026,
10   ),
11 )
12
13 #cover()
14 #title-page[Dissertation presented to the
15   University of Brazil, as a partial
16   requirement for the degree of Master.]
17 #outline()
```

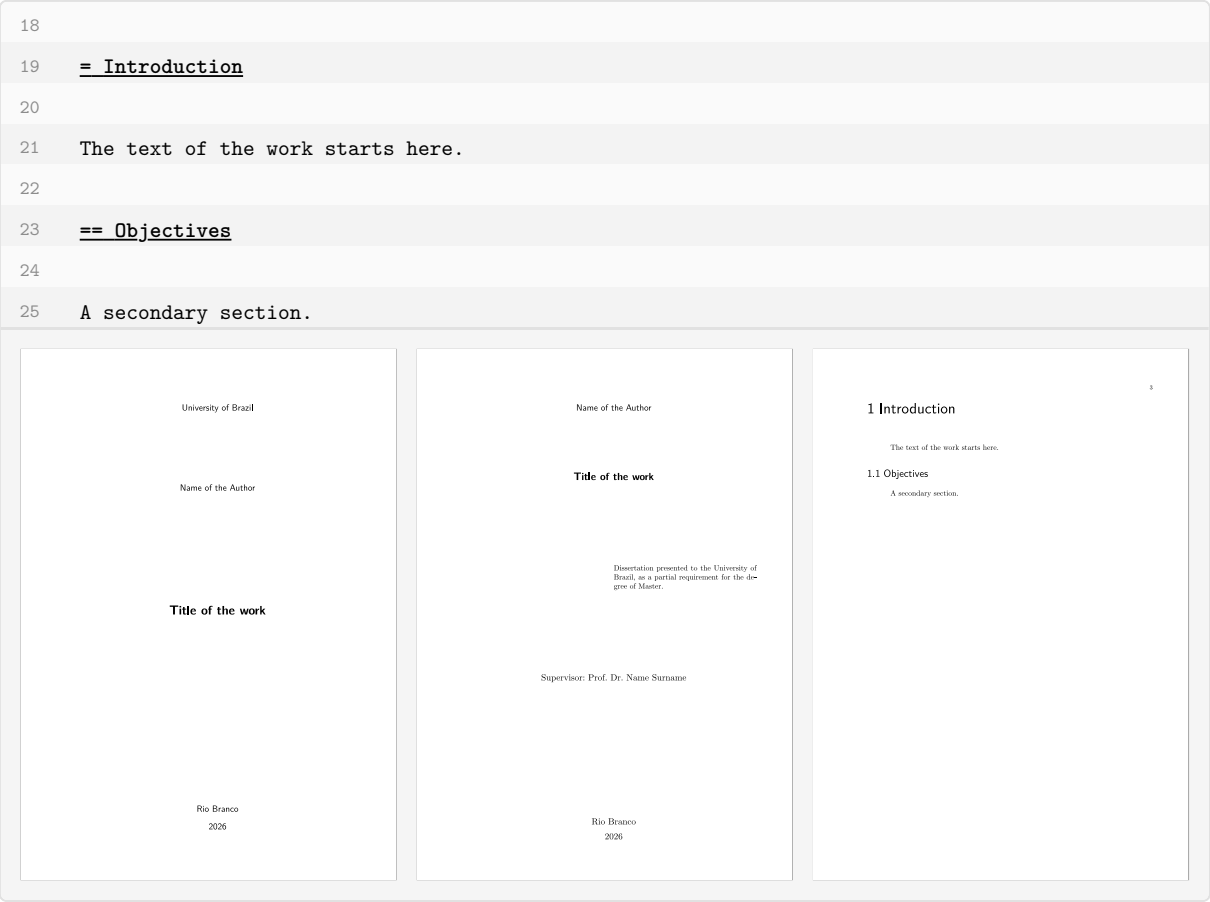

The other parameters set the language, two-sided printing, the colour of the links, the font size of the tables, the numbering of the equations and the citation system. The default language is Portuguese; the examples of this manual are works in English, so they pass `lang: "en"`.

Settings that are not parameters of the function can be changed with Typst `set` rules after the call. For example, `#set text(size: 11pt)` changes the font size, and the other sizes scale with it.

abntly()

```
abntly(  
  body content  
  info: (:) dictionary  
  lang: "pt" str  
  names: (:) dictionary  
  two-sided: false bool  
  hyperlink: dark-indigo color none  
  table-font-size: 10em / 12 length  
  equation-numbering: "(1.1)" str function  
  equation-number-mode: "label" str  
  citation-system: "alf" str  
) -> content
```

Argument

body
Content of the work.

content

Argument

`info: (:)`

dictionary

Data of the work, created with `config-info`. They are used on the cover, the title page, the approval sheet and the catalog card, and written to the metadata of the PDF. Can be left out in a work without those pages.

Argument

`lang: "pt"`

str

Language of the work: "pt" or "en". Sets the hyphenation and the terms generated by the package ("Capítulo", "Fonte", "Sumário"). For another language, give the terms in `names` and use `#set text(lang: "es")` after the call.

Argument

`names: (:)`

dictionary

Terms of the package to replace, created with `config-names`.

Argument

`two-sided: false`

bool

If `true`, formats the work for printing on both sides of the sheet: mirrored margins, page number on the outer side and primary sections starting on an odd page. In this mode, the draft stamps of the catalog card and of the approval sheet are not shown.

Argument

`hyperlink: dark-indigo`

color | none

Colour of the links (addresses, cross-references, citations, summary and note marks). Use `black` for printing or `none` to remove the links.

Argument

`table-font-size: 10em / 12`

length

Size of the text of the tables, in `em` of the body. The default, `10em / 12`, is 10 pt in a body of 12 pt. Use `1em` to keep the size of the body. A quadro always uses the size of the body.

Argument

`equation-numbering: "(1.1)"`

str | function

Format of the numbering of the equations. `"(1.1)"` numbers by chapter and `"(1)"` numbers through the work. With a letter at the end, as in `"(1.1a)"` or `"(1a)"`, the lines of one equation share its number and take letters. Also accepts a function.

Argument

`equation-number-mode: "label"`

str

Which equations are numbered. `"label"` numbers only the equations (or lines) that have a label. `"line"` numbers every line; `#<equate:revoke>` at the end of a line removes its number.

Argument

`citation-system: "alf"`

str

Citation system (NBR 10520:2023): `"alf"`, author-date, as in "(Silva, 2020, p. 4)"; `"num"`, numeric between parentheses, as in "(1, p. 30)"; `"overcite"`, numeric as a superscript; `"ieee"`, numeric between brackets, as in "[1, p. 30]". The list of references follows NBR 6023:2025 in every system.

dark-indigo

Default colour of the links: a dark indigo (`#372aac`). It is the default value of the `hyperlink` parameter of `abntly`.

config-names()

```
config-names(
  ..args arguments
) -> dictionary
```

Defines the terms of the package to replace, for the **names** parameter of **abntly**. Example: `config-names(chapter: "Unidad", source: "Fuente")`.

The keys are those of the file `src/lang.toml`: chapter, part, algorithm, frame, source, legend, note, own-work, continues, continuation, conclusion, contents, references. The names used by **auto-ref** can be replaced too: section, subsection, subsubsection, appendix-name, annex-name, equation, page.

Argument

`..args`

arguments

Terms to replace, by key. They accept text or content.

1.7 Conventions of the manual

Each element is presented in up to four blocks. The first one summarises what the standard requires:

What the standard asks for NBR 14724:2024, 5.1

Required

Implemented

The text must be presented in black; other colours may be used only in the illustrations. If printed, the work must use white or recycled paper, in A4 format.

The pills show the status of the element in the standard (**Required**, **Optional** or **Recommended**) and in the package (**Implemented** or **Partly implemented**). The pill **Design decision** marks a point that the standard does not define and that was decided by the package, such as the font or the position of an element on the page.

The second block is an example, with the code and the result, like the one that follows. The examples of whole pages show the pages generated.

```
1 #figure(caption: [Distribution by region])[
2   #rect(width: 6cm, height: 2cm)
3   #source()
4 ]
```

Figure 1 — Distribution by region



Source: Prepared by the author.

Remarks appear in boxes like this one:

Remark

A remark points out a caution of use, a limitation of the package or a choice that depends on the institution.

The last block is the reference of the function, with the signature, the type and the default value of each parameter and the description of each one.

2 Structure of the academic work

ABNT NBR 14724:2024 (section 4) divides the academic work into an external part and an internal part. The internal part is made up of pre-textual, textual and post-textual elements. [Table 3](#) lists the elements in the order in which they must appear, shows whether they are required and gives the corresponding function of the package.

In the document, the functions must be called in the same order as in the table. The sections of this chapter describe each element.

Table 3 — Elements of the academic work

Element	Standard	Package
External part		
Cover	Required	cover
Pre-textual elements		
Title page	Required	title-page
Cataloguing data (verso of the title page)	Required	catalog-card
Errata	Optional	errata
Approval sheet	Required	approval-page
Dedication	Optional	dedication
Acknowledgements	Optional	acknowledgments
Epigraph	Optional	epigraph
Abstract in the vernacular language	Required	abstract, keywords
Abstract in a foreign language	Required	abstract(lang: "pt")
List of illustrations	Optional	list-of-figures, list-of-frames, list-of
List of tables	Optional	list-of-tables
List of abbreviations and acronyms	Optional	list-of-acronyms
List of symbols	Optional	list-of-symbols
Table of contents	Required	outline (Typst function)
Textual elements		
Introduction, development and conclusion	Required	text of the author, with headings in =
Post-textual elements		
References	Required	bibliography (Typst function)
Glossary	Optional	glossary
Appendix	Optional	appendix
Annex	Optional	annex
Index	Optional	index

2.1 Data of the work

The data of the work (title, author, advisor, institution, location and year) are given only once, with the function `config-info`, in the `info` parameter of the main function. The cover, the title page, the approval sheet and the catalog card use these data automatically. They are also written to the metadata of the PDF. The following example gives the data of a thesis.

```

1  #show: abntly.with(
2    lang: "en",
3    info: config-info(
4      title: [Title of the work],
5      subtitle: [subtitle],
6      author: "Name of the Author",
7      advisor: (
8        name: "Prof. Dr. Name of the Advisor",
9        gender: "f",
10     ),
11     institution: [University of Brazil],
12     program: [Graduate Programme],
13     location: [Rio Branco],
14     year: 2026,
15     work-type: "thesis",
16   ),
17 )

```

Fields that are not given are left out of the pages. The author and the advisors can be given as text or as a dictionary, which makes it possible to separate the given name from the surname, to state the gender (for the label “Orientadora”, in a work in Portuguese) or to set a custom label.

The page examples of the next sections use these data. To highlight the element described, the call of the main function is left out of the code from [Section 2.4](#) on.

config-info()

```

config-info(
  title: none str content
  subtitle: none str content none
  author: none str content dictionary
  advisor: none str content dictionary none
  co-advisor: none str content dictionary none
  institution: none str content none
  program: none str content none
  area: none str content none
  year: auto auto int str content
  location: none str content none
  version: none str content none
  volume: none int str content none
  work-type: none str content none
  logo: none content none
  ..args
) -> dictionary

```

Argument

```

title: none str content
Title of the work.

```

Argument

subtitle: `none``str` | `content` | `none`

Subtitle. It is printed after the title, separated by a colon.

Argument

author: `none``str` | `content` | `dictionary`

Author. It can be the full name or a dictionary with the given name and the surname apart, as in (`name`: "Lucas Lima", `surname`: "Rodrigues"). The surname is used on the catalog card ("Rodrigues, Lucas Lima"). When the author is given as text, the last word is taken as the surname.

Argument

advisor: `none``str` | `content` | `dictionary` | `none`

Advisor, in the same format as the author, with the academic title in the name ("Prof. Dr. Nome do Orientador"). In the dictionary, `gender`: "f" gives the label "Orientadora" and `label` sets a custom label.

Argument

co-advisor: `none``str` | `content` | `dictionary` | `none`

Co-advisor, in the same format as the advisor.

Argument

institution: `none``str` | `content` | `none`

Name of the institution.

Argument

program: `none``str` | `content` | `none`

Course, graduate programme or department.

Argument

area: `none``str` | `content` | `none`

Area of concentration. It is printed under the nature of the work.

Argument

year: `auto``auto` | `int` | `str` | `content`

Year of deposit. With `auto`, the current year.

Argument

location: `none``str` | `content` | `none`

Location (city) of the institution.

Argument

version: `none``str` | `content` | `none`

Version of the work, as in "Versão corrigida". It is printed under the title.

Argument

volume: `none``int` | `str` | `content` | `none`

Number of the volume, printed beside the year ("2026, v. 2"). Use it when the work has more than one volume.

Argument

work-type: `none``str` | `content` | `none`

Type of the work, used on the catalog card: "tcc", "dissertation", "thesis", "master-qualification" or "doctorate-qualification". For another type, give the text as content.

Argument

logo: none

content | none

Mark (logo) of the institution, shown at the top of the cover. Example: `image("logo.svg", width: 2cm)`.

2.2 Cover (required)

What the standard asks for NBR 14724:2024, 4.1.1

Required Implemented

The cover must contain, in this order: name of the institution (optional); name of the author; title; subtitle, if any, preceded by a colon; number of the volume, if there is more than one; location (city) of the institution; year of deposit (delivery).

The function `cover` creates the cover from the data given in `config-info`. The institution and the programme appear at the top, followed by the author. If the `version` field is given, the version of the work appears below the title. The cover is not counted in the page numbering. The following example shows the code and the cover generated.

```
1 #show: abntly.with(  
2   lang: "en",  
3   info: config-info(  
4     title: [Title of the work],  
5     subtitle: [subtitle],  
6     author: "Name of the Author",  
7     institution: [University of Brazil],  
8     program: [Graduate Programme],  
9     location: [Rio Branco],  
10    year: 2026,  
11  ),  
12 )  
13  
14 #cover()
```

University of Brazil
Graduate Programme

Name of the Author

Title of the work: subtitle

Rio Branco
2026

Remark

The standard defines only the elements of the cover and their order. The font, the emphasis of the title and the vertical position of the elements are decisions of the package [Design decision](#).

2.2.1 Customisation

To customise the cover, use the parameters `top`, `middle` and `bottom`, which replace the corresponding part of the page with custom content. The function `with-info` gives access to the data of the

work inside that content. The parameter `middle-height` controls the vertical position of the title: larger values move the title up.

In the example below, the institution is written in capital letters and the title is moved up.

```
1 #cover(  
2   top: with-info(d => [  
3     #upper(d.institution) \  
4     #d.program  
5     #v(3cm)  
6     #d.author  
7   ]),  
8   middle-height: 60%,  
9 )
```

UNIVERSITY OF BRAZIL
Graduate Programme

Name of the Author

Title of the work: subtitle

Rio Branco
2026

cover()

```
cover(  
  top: auto auto content  
  middle: auto auto content  
  bottom: auto auto content  
  middle-height: 55% ratio length relative  
) -> content
```

Argument

`top: auto` auto content

Content of the top part, in the place of the institution and the author.

Argument

`middle: auto` auto content

Content of the middle part, in the place of the title and the version.

Argument

`bottom: auto` auto content

Content of the bottom part, in the place of the location and the year.

Argument

`middle-height: 55%``ratio` | `length` | `relative`

Height of the area that goes from the title to the end of the text block. Larger values move the title up. The default, 55%, places the title in the middle of the page.

`with-info()`

```
with-info(
  fn function
) -> content
```

Gives access to the data of the work to build custom content. The function given is called in a context of its own (`context`), with a dictionary `d`, and the content it returns is inserted in the page. It is used in the parameters `top`, `middle` and `bottom` of the cover, the title page and the approval sheet, and in the parameter `card` of the catalog card.

```
1 #cover(top: with-info(d => [#upper(d.institution) \ #d.author]))
```

Fields available in `d`. A field that was not given is `none`.

- `title`, `subtitle`, `full-title`: title, subtitle and full title (“Título: subtítulo”);
- `author`, `author-inverted`, `author-reference`: name of the author in direct order, inverted (“Autor, Nome do”) and in the format of a reference (“AUTOR, Nome do”);
- `advisor`, `co-advisor`: names of the advisor and of the co-advisor;
- `advisor-label`, `co-advisor-label`: their labels (“Orientador”, “Orientadora” or the custom label);
- `institution`, `program`, `area`, `location`, `year`, `volume`, `version`, `logo`: fields of `config-info`;
- `area-label`: the term “Área de concentração”;
- `year-volume`: year with the volume (“2026, v. 2”);
- `work-type`: type of the work in full (“Tese (Doutorado)”);
- `preamble`: nature of the work given on the title page (`none` before it);
- `keywords`: keywords of the abstract in the language of the work;
- `pages`: number of pages, counted from the title page;
- `data`: original dictionary of `config-info`.

Argument

`fn``function`

Function that receives the data and returns the content.

2.3 Title page (required)

What the standard asks for NBR 14724:2024, 4.2.1.1.1

Required

Implemented

The recto of the title page must contain, in this order: name of the author; title; subtitle, if any; number of the volume, if there is more than one; nature of the work (type of the work, aim, institution to which it is submitted and area of concentration); name of the advisor and, if any, of the co-advisor; location; year of deposit.

The function `title-page` creates the title page. The text of the nature of the work is passed as the content of the function; the other elements come from `config-info`. If the `area` field is given, the area of concentration appears in a paragraph of its own, below the nature. The label of the advisor is

“Supervisor”; in a work in Portuguese, it depends on the gender given (“Orientador” or “Orientadora”). The following example shows the title page of a thesis.

```
1 #show: abntly.with(  
2   lang: "en",  
3   info: config-info(  
4     title: [Title of the work],  
5     subtitle: [subtitle],  
6     author: "Name of the Author",  
7     advisor: (  
8       name: "Prof. Dr. Name Surname",  
9       gender: "f",  
10    ),  
11    co-advisor: "Prof. Dr. Another Name",  
12    area: [Power systems],  
13    location: [Rio Branco],  
14    year: 2026,  
15  ),  
16 )  
17  
18 #title-page[Thesis presented to the  
19 Graduate Programme of the University of  
20 Brazil, as a partial requirement for the  
21 degree of Doctor.]
```

Name of the Author

Title of the work: subtitle

Thesis presented to the Graduate Programme of the University of Brazil, as a partial requirement for the degree of Doctor.
Concentration area: Power systems

Supervisor: Prof. Dr. Name Surname
Co-supervisor: Prof. Dr. Another Name

Rio Branco
2026

What the standard asks for NBR 14724:2024, 5.2

On the title page and on the approval sheet, the nature of the work must be typed in single spacing and aligned from the middle of the text block to the right margin.

Required

Implemented

The page count of the work starts on the title page. The text of the nature is reused automatically on the approval sheet.

Like the cover, the title page accepts the parameters `top`, `middle`, `bottom` and `middle-height`. To build a page of your own with the block of the nature, use the function `preamble`.

title-page()

```
title-page(  
  body content  
  top: auto auto content  
  middle: auto auto content  
  bottom: auto auto content  
  middle-height: 85% ratio length relative  
) -> content
```

Argument

body content

Text of the nature of the work: type of the work, aim and institution it is submitted to.

Argument	
<code>top: auto</code>	auto content
Content of the top part, in the place of the author.	
Argument	
<code>middle: auto</code>	auto content
Content of the middle part, in the place of the title, the version, the nature and the advisors.	
Argument	
<code>bottom: auto</code>	auto content
Content of the bottom part, in the place of the location and the year.	
Argument	
<code>middle-height: 85%</code>	ratio length relative
Height of the area that goes from the title to the end of the text block, as on the cover. The default, 85%, places the title in the upper part of the page.	

preamble()

<code>preamble(</code>	
<code>body content</code>	
<code>) -> content</code>	
Argument	
<code>body</code>	content
Text of the nature of the work.	

2.4 Catalog card (required)

What the standard asks for NBR 14724:2024, 4.2.1.1.2 and 5.3

Required

Partly implemented

The verso of the title page must contain the international cataloguing-in-publication data, according to the cataloguing code in force. In electronic format, these data must come immediately after the title page. The verso of the title page is neither counted nor numbered.

The function `catalog-card` creates the page with the catalog card, at the bottom of the page. It must be called right after the title page. The card is built from the data of `config-info`. The subjects are the keywords of the abstract in the language of the work, and the number of pages is computed automatically. The following example shows the lower part of the page generated.

```

1  #catalog-card()
2
3  #abstract[
4      Text of the abstract.
5
6      #keywords[typesetting][academic works][ABNT]
7  ]

```

PROV
The final c

Author, Name of the
Title of the work: subtitle / Name of the Author. – Rio Branco, 2026-
3 p. : il. ; 30 cm.

Supervisor: Prof. Dr. Name of the Advisor

Thesis (Doctorate) – University of Brazil
Graduate Programme, 2026.

1. typesetting. 2. academic works. 3. ABNT. I. Advisor, Name of the. II.
University of Brazil. III. Graduate Programme. IV. Title

The card created by the package is provisional and, for that reason, takes the stamp “PROVISIONAL CARD”. The final card is issued by the library of the institution, with the call number and the classification. To use it, give the file received from the library in the `card` parameter:

```

1  #catalog-card(card: image("card.pdf", width: 13.5cm))

```

Remark

The page of the card is counted among the pages of the work. The standard states that the verso of the title page is not counted Partly implemented.

catalog-card()

```

catalog-card(
  card: auto auto content
  draft: auto auto bool
) -> content

```

Argument

`card: auto`

auto | content

Card issued by the library, in the place of the card created by the package.

Argument

draft: auto

auto | bool

If `true`, shows the stamp “FICHA PROVISÓRIA” in the background of the page. With `auto`, the stamp is shown on the card created by the package and left out on the card given in `card`. The stamp is never shown with `two-sided: true`.

2.5 Errata (optional)

What the standard asks for NBR 14724:2024, 4.2.1.2

Optional | Implemented

The errata must be inserted right after the title page and consists of the reference of the work and the text of the errata. It is presented on a loose or inserted sheet, added to the work after it is printed.

The function `errata` creates the title “Errata sheet” and inserts the content given. The reference of the work and the table of the corrections are written by the author, as in the example below.

```
1 #errata[
2   AUTHOR, Name of the. *Title of the work*: subtitle. 2026. 120 f. Thesis (Doctorate) --
3   University of Brazil, Rio Branco, 2026.
4
5   #align(center, table(columns: 4, align: left, stroke: 0.4pt,
6     table.header([*Sheet*], [*Line*], [*Reads*], [*Should read*]),
7     [16], [10], [auto-claved], [autoclaved],
8     [23], [4], [analysys], [analysis],
9   ))
10 ]
```

Errata sheet

AUTHOR, Name of the. **Title of the work**: subtitle. 2026. 120 f. Thesis (Doctorate) – University of Brazil, Rio Branco, 2026.

Sheet	Line	Reads	Should read
16	10	auto-claved	autoclaved
23	4	analysys	analysis

errata()

```
errata(  
  body content  
) -> content
```

Argument

body

content

Reference of the work and table of the corrections.

2.6 Approval sheet (required)

What the standard asks for

NBR 14724:2024, 4.2.1.3

Required

Implemented

The approval sheet must be inserted after the title page and contain: name of the author; title and subtitle, if any; nature of the work; date of approval; name, academic title and signature of the members of the examining board and the institutions they belong to. The date of approval and the signatures are added after the work is approved.

The function `approval-page` creates the approval sheet. The members of the board are given as dictionaries, with the keys `name`, `title` and `institution` (required) and `role` (optional). The author, the title and the nature of the work come from `config-info` and from the title page.

Before the defence, the sheet is provisional: the date is left blank, to be filled in, and the page takes the stamp “PROVISIONAL SHEET”, as in the example below.

```
1 #approval-page(  
2   (title: [Prof. Dr.],  
3     name: [Name of the Advisor],  
4     role: [Advisor],  
5     institution: [University of Brazil]),  
6   (title: [Prof. Dr.],  
7     name: [Name of Examiner 1],  
8     role: [Examiner 1],  
9     institution: [Another University]),  
10  (title: [Prof. Dr.],  
11    name: [Name of Examiner 2],  
12    role: [Examiner 2],  
13    institution: [Research Institute]),  
14 )
```

Name of the Author

Title of the work: subtitle

Thesis presented to the Graduate Programme of the University of Brazil, as a partial requirement for the degree of Doctor.


Approved. Rio Branco, _____:

Prof. Dr. Name of the Advisor
Advisor
University of Brazil

Prof. Dr. Name of Examiner 1
Examiner 1
Another University

Prof. Dr. Name of Examiner 2
Examiner 2
Research Institute

Rio Branco
2026



After the approval, give the date in the `date` parameter and remove the stamp with `draft: false`. In the example below, the members of the board are in variables (`advisor`, `first-examiner` and `second-examiner`), with the same dictionaries as in the previous example.

```

1 #approval-page(
2   advisor,
3   first-examiner,
4   second-examiner,
5   date: [September 30, 2026],
6   draft: false,
7 )

```

Name of the Author

Title of the work: subtitle

Thesis presented to the Graduate Programme of the University of Brazil, as a partial requirement for the degree of Doctor.

Approved. Rio Branco, September 30, 2026:

Prof. Dr. Name of the Advisor
Advisor
University of Brazil

Prof. Dr. Name of Examiner 1
Examiner 1
Another University

Prof. Dr. Name of Examiner 2
Examiner 2
Research Institute

Rio Branco
2026

Remark

The standard does not include the location and the year among the elements of the approval sheet. The package shows them at the bottom of the page [Design decision](#).

When the institution provides the signed and scanned approval sheet, it can be inserted as an image, on a page without margins:

```
1 #page(margin: 0pt, header: none, image("approval-sheet.pdf", width: 100%))
```

2.6.1 Customisation

The approval sheet accepts the parameters `top`, `middle`, `bottom` and `middle-height`, like the cover. The function `signature` creates the signature lines in custom content. In the example below, the lower part of the page is replaced, and two signatures are placed side by side.

```
1 #approval-page(bottom: with-info(d => {
2   align(left)[Approved on:
3   #box(width: 3cm, repeat[\_])
4   v(1cm)
5   grid(columns: 2,
6     signature(advisor),
7     signature(examiner))
8   v(1cm)
9   [#d.location \ #d.year]
10  })
```

Name of the Author

Title of the work: subtitle

Thesis presented to the Graduate Programme of the University of Brazil, as a partial requirement for the degree of Doctor.

Approved on: _____

Prof. Dr. Name of the Advisor Advisor University of Brazil	Prof. Dr. Name of the Examiner Examiner Institution of the examiner
--	---

Rio Branco
2026

approval-page()

```
approval-page(
  date: none str content none
  top: auto auto content
  middle: auto auto content
  bottom: auto auto content
  middle-height: auto auto ratio length relative
  draft: true bool
  ..members dictionary content
) -> content
```

Argument

date: none str content none

Date of the approval, as in “30 de setembro de 2026”. With none, a blank line is shown, to be filled in.

Argument

top: auto auto content

Content of the top part, in the place of the author.

Argument

middle: auto auto content

Content of the middle part, in the place of the title and the nature.

Argument

bottom: auto auto content

Content of the bottom part, in the place of the approval line, the signatures, the location and the year.

Argument

`middle-height: auto` `auto` | `ratio` | `length` | `relative`

Height of the area that goes from the title to the end of the text block, as on the cover. With `auto`, the free space of the page is shared between the author, the title and the nature.

Argument

`draft: true` `bool`

If `true`, shows the stamp “FOLHA PROVISÓRIA” in the background of the page. Use `false` in the final version. The stamp is never shown with `two-sided: true`.

Argument

`..members` `dictionary` | `content`

Members of the board, in the format `signature` takes.

signature()

```
signature(  
  ..members dictionary content  
) -> content
```

Argument

`..members` `dictionary` | `content`


Members of the board, one in each argument. Each member is a dictionary with the keys `name`, `title` and `institution` (required) and `role` (optional). It also takes `content`, with the text that goes under the rule.

2.7 Dedication (optional)

What the standard asks for NBR 14724:2024, 4.2.1.4 and 5.2.4 `Optional` `Implemented`

The dedication must be inserted after the approval sheet. The page has neither a title nor a section number. It is recommended that the text be aligned from the middle of the text block to the right margin, at the bottom of the page.

The function `dedication` creates the page of the dedication, without a title. By default, the text is set in italics, centred, in the middle of the page, as in the example below.

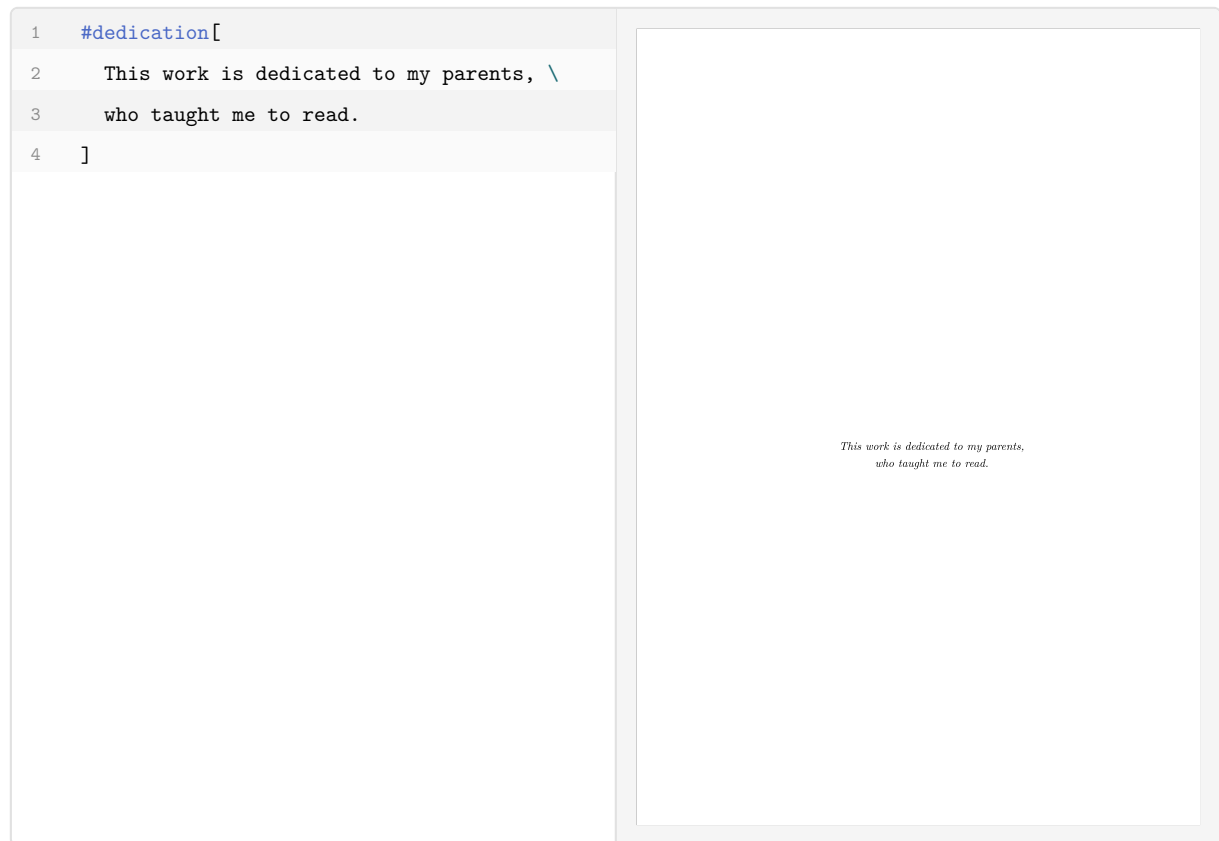**Remark**

The default position of the text is a decision of the package [Design decision](#). To follow the recommendation of the standard, position the text with Typst's `place` function, as in the example below.

1 #dedication[

2 #place(bottom + right, block(width: 50%,

3 align(left)[

4 This work is dedicated to my

5 parents, who taught me to read.

6]}}

7]

This work is dedicated to my parents, who taught me to read.

dedication()

dedication(
 body content
) -> content

Argument

body

Text of the dedication.

content

2.8 Acknowledgements (optional)

What the standard asks for NBR 14724:2024, 4.2.1.5 and 5.2.3

Optional Implemented

The acknowledgements must be inserted after the dedication. The title, without a section number, is centred.

The function `acknowledgments` creates the title “Acknowledgements” and inserts the text given, as in the example below.

1

#acknowledgments[

2

I thank my advisor for her careful reading of every version of this work.

3

4

I thank my laboratory colleagues for the discussions, and my family for their support.

5

]

Acknowledgements

I thank my advisor for her careful reading of every version of this work.

I thank my laboratory colleagues for the discussions, and my family for their support.

acknowledgments()

acknowledgments(
 body content
) -> content

Argument
bodycontent
Text of the acknowledgments.

2.9 Epigraph (optional)

What the standard asks for

NBR 14724:2024, 4.2.1.6 and 5.2.4

Optional

Implemented

The epigraph must be inserted after the acknowledgements. The page has neither a title nor a section number. It is recommended that the text be aligned from the middle of the text block to the right margin, at the bottom of the page. Epigraphs may also appear on the opening pages of the primary sections; these follow the rules of the citations.

The function `epigraph` creates the page of the epigraph, without a title. The text is aligned to the right, at the bottom of the page. The line breaks (`\`) and the italics are set by the author, as in the example below.

```
1 #epigraph[
2   _"Form is the content that rises \
3   to the surface."_ \
4   (Unknown author)
5 ]
```

"Form is the content that rises
to the surface."
(Unknown author)

Remark

The alignment of each line to the right is a decision of the package [Design decision](#). To follow the recommendation of the standard, put the text in a block with half the width of the text block, aligned to the left:

```
#epigraph(block(width: 50%, align(left)[...])).
```

epigraph()

```
epigraph(
  body content
) -> content
```

Argument

body content

Text of the epigraph, with its source.

2.10 Abstracts (required)

What the standard asks for NBR 14724:2024, 4.2.1.7 and 4.2.1.8; NBR 6028:2021, 4.1

[Required](#) [Implemented](#)

The abstract in the vernacular language and the abstract in a foreign language are required. The abstract is made up of concise sentences, in a single paragraph, and should have from 150 to 500 words in academic works. The keywords come right below the abstract, preceded by the expression “Palavras-chave” (Keywords), followed by a colon, separated from each other by semicolons and ended by a period. They are written with lowercase initials, except for proper nouns and scientific names.

Remark

The standard does not set the number of keywords: NBR 6028:2021 only says how to write them, and its example has five. The “three to five” limit often asked for is a rule of the institution or of the journal. The function `keywords` takes any number of them.

The function `abstract` creates the title and the text of the abstract. The keywords are given at the end of the text, with the function `keywords`, one per argument. The `lang` parameter sets the language of the abstract in a foreign language: the title, the label of the keywords and the hyphenation become those of that language. The following example creates the two abstracts, each on a page.

```

1  #abstract[
2      This work presents a method for typesetting academic works. The method is evaluated in
3      three case studies, and the results show a reduction in formatting time.
4
5      #keywords[typesetting][academic works][ABNT]
6  ]
7
8  #abstract(lang: "pt")[
9      Este trabalho apresenta um método para a composição de trabalhos acadêmicos. O método é
10     avaliado em três estudos de caso, e os resultados indicam redução do tempo de formatação.
11
12     #keywords[composição tipográfica][trabalhos acadêmicos][ABNT]
13 ]

```

Abstract

This work presents a method for typesetting academic works. The method is evaluated in three case studies, and the results show a reduction in formatting time.

Keywords: typesetting; academic works; ABNT.

Resumo

Este trabalho apresenta um método para a composição de trabalhos acadêmicos. O método é avaliado em três estudos de caso, e os resultados indicam redução do tempo de formatação.

Palavras-chave: composição tipográfica; trabalhos acadêmicos; ABNT.

The package has the terms “Abstract” and “Keywords” in Portuguese, English, Spanish and French. For another language, give the title and the label:

```
1 #abstract(lang: "de", title: [Zusammenfassung])[
2   Text der Zusammenfassung.
3
4 #keywords(label: [Schlüsselwörter])[Schriftsatz] [ABNT]
5 ]
```

abstract()

```
abstract(
  body content
  lang: auto auto str
  title: auto auto content
) -> content
```

Argument

body

content

Text of the abstract, with the keywords.

Argument

lang: auto

auto | str

Language of the abstract, as in "en", "es" or "fr". With auto, it is the language of the work.

Argument

title: auto

auto | content

Title of the abstract. Give it for a language whose term the package does not have.

keywords()

```
keywords(
  sep: "; " str content
  end: "." str content
  label: auto auto content
  ..words str content
) -> content
```

Argument

sep: "; "

str | content

Separator between the keywords.

Argument

end: "."

str | content

Punctuation after the last keyword.

Argument

label: auto

auto | content

Label shown before the colon. Give it for a language whose term the package does not have.

Argument

```
..words
```

Keywords, one in each argument.

str

content

2.11 Lists of illustrations and of tables (optional)

What the standard asks for

NBR 14724:2024, 4.2.1.9 and 4.2.1.10

Optional

Implemented

The lists are drawn up in the order in which the items appear in the text. Each item is designated by its specific name and number, a dash, the title and the page number. When necessary, a list of its own is recommended for each type of illustration (frames (quadros), charts, maps and others).

The functions `list-of-figures`, `list-of-frames` and `list-of-tables` create the lists of the figures, of the frames and of the tables of the work. Each list starts on a new page, with its title centred. The following example shows the top of each of the three pages generated.

1 `#list-of-figures()`

2 `#list-of-frames()`

3 `#list-of-tables()`

4

5 `= Introduction`

6

7 `#figure(caption: [Structure of the academic work], rect(width: 6cm, height: 2cm))`

8

9 `#frame(caption: [Types of academic work],`

10 `table(columns: 2, [Thesis], [Doctorate], [Dissertation], [Master's]))`

11

12 `#fitted(caption: [Works defended per year])[`

13 `#table(columns: (4cm, 3cm),`

14 `table.header([Year], [Works]), [2024], [120], [2025], [135])`

15 `]`

List of Figures

Figure 1 — Structure of the academic work 4

List of Frames

Frame 1 — Types of academic work 4

List of Tables

Table 1 — Works defended per year 4

For another type of illustration, such as charts or maps, create the figures with the `kind` and `supplement` parameters of the `figure` function and create the list with `list-of`, giving the kind and the title, as in the example below.

```

1 #list-of("chart", title: [List of Charts])
2
3 = Results
4
5 #figure(kind: "chart", supplement: [Chart], caption: [Works defended per year],
6   rect(width: 6cm, height: 3cm))

```

List of Charts

Chart 1 — Works defended per year 2

list-of()

```

list-of(
  target  str  function  selector
  title:  auto  auto    content
) ->  content

```

Argument

target str | function | selector

Kind of the figures to list (image, table, "quadro", raw or the kind of a kind of your own) or a selector.

Argument

title: auto auto | content

Title of the list. With auto, it is the term of the package for the kind ("Lista de ilustrações", "Lista de tabelas", "Lista de quadros"). It is required for the other kinds.

list-of-figures()

```

list-of-figures(
) ->  content

```

list-of-frames()

```

list-of-frames(
) ->  content

```

list-of-tables()

```

list-of-tables(
) ->  content

```

2.12 Lists of abbreviations and acronyms and of symbols (optional)

What the standard asks for NBR 14724:2024, 4.2.1.11 and 4.2.1.12

Optional

Implemented

The list of abbreviations and acronyms is the alphabetical list of the abbreviations and acronyms used in the text, followed by the corresponding expressions written in full. A list of its own is recommended for each type. The list of symbols is drawn up in the order in which the symbols appear in the text, with the meaning of each one.

The functions `list-of-acronyms` and `list-of-symbols` create the two lists. The acronyms are sorted alphabetically by the package; the symbols are shown in the order given. The entries can be written in two ways:

- as pairs, ("ABNT", [Associação Brasileira de Normas Técnicas]): the list is only printed;
- as dictionaries, with the keys `key`, `short` and `long`: the acronym can also be cited in the text by the key (`@abnt`). The first mention shows the expression in full, followed by the acronym in parentheses, and the following ones show only the acronym, as NBR 14724:2024 (section 5.6) asks.

The following example uses dictionaries for the acronyms and pairs for the symbols and shows the top of the three pages generated.

1 #list-of-acronyms(
2 (key: "abnt", short: "ABNT", long: [Associação Brasileira de Normas Técnicas]),
3 (key: "ibge", short: "IBGE", long: [Instituto Brasileiro de Geografia e Estatística]),
4)
5
6 #list-of-symbols(
7 (\$d_(a b)\$, [Euclidean distance]),
8 (\$O(n)\$, [Order of an algorithm]),
9)
10
11 = Introduction
12
13 The standards of the @abnt define the structure of the work, and the tables follow the
14 standards of the @ibge. On the second mention, only the acronym is shown: @abnt.

List of abbreviations and acronyms

ABNT	Associação Brasileira de Normas Técnicas
------	--

List of symbols

d_{ab}	Euclidean distance
----------	--------------------

1 Introduction

The standards of the Associação Brasileira de Normas Técnicas (ABNT) define

3

list-of-acronyms()

```
list-of-acronyms(
  ..entries array dictionary
) -> content
```

Argument

`..entries`

array | dictionary

Acronyms, all as pairs or all as dictionaries.

list-of-symbols()

```
list-of-symbols(
  ..entries array dictionary
) -> content
```

Argument

`..entries`

array | dictionary

Symbols, all as pairs or all as dictionaries.

2.13 Table of contents (required)

What the standard asks for NBR 14724:2024, 4.2.1.13; NBR 6027:2012

Required

Implemented

The table of contents is the last pre-textual element. The section numbers are aligned to the left, and it is recommended that the titles be aligned by the margin of the title of the longest section number, including those of the post-textual elements. The page numbers are presented at the right margin. The pre-textual elements are not included in the table of contents. It is recommended that the items have the same typographic presentation as the sections in the text.

The table of contents is created by Typst's `outline` function; the package sets the title and the presentation of the entries. The titles of the pre-textual elements created by the package do not enter the table of contents. The titles of the post-textual elements enter without a section number, aligned with the titles of the sections, as in the example below.

```
1  #outline()
2
3  = Introduction
4
5  == Objectives
6
7  = Development
8
9  == Materials and methods
10
11 === Data collection
12
13 ==== Instruments
```

14

= Conclusion

16

#bibliography("refs.bib", full: true)

18

#glossary(("Typst", [typesetting system]))

20

#show: appendix.with(divider: false)

22

= Interview script

Contents

1

INTRODUCTION

2

1.1

Objectives

2

2

DEVELOPMENT

3

2.1

Materials and methods

3

2.1.1

Data collection

3

2.1.1.1

Instruments

3

3

CONCLUSION

4

REFERENCES

5

GLOSSARY

7

APPENDIX A — INTERVIEW SCRIPT

8

Remark

In the table of contents, the titles of the primary sections are shown in capital letters; in the text, in upper and lower case ([Design decision](#)). To use the same form in both, add the rule `#show heading.where(level: 1): upper` after the call of the main function.

2.14 Textual elements

What the standard asks for

NBR 14724:2024, 4.2.2

Required

Implemented

The text is made up of an introductory part, with the objectives and the reasons of the work; the development, which details the research or the study carried out; and a concluding part. The work is not divided into chapters: it is organised in sections. The naming of the titles is up to the author.

The textual elements are written directly in the document, with Typst headings: = for the primary sections, == for the secondary ones, and so on. The presentation of the sections is described in [Section 3.5](#).

The package identifies the parts of the work automatically:

- the pre-textual part goes from the start of the document to the first numbered primary section. The pages are counted, but show no number;
- the textual part starts at the first numbered primary section. From there on, the pages show the number and the running header;
- the post-textual part starts at the list of references.

The functions `front-matter`, `main-matter` and `back-matter` mark the start of each part by hand. They are needed only when the work writes the pre-textual or post-textual titles as plain headings, or when the text starts without a numbered heading, as in the example below.

1 `#show: front-matter`

2

3 `= Presentation`

4

5 A pre-textual title written as a plain heading: without a number.

6

7 `#show: main-matter`

8

9 `= Introduction`

10

11 The first numbered heading. The page numbers are shown from here on.

12

13 `#show: back-matter`

14

15 `= References`

16

17 AUTHOR, Name of the. *Title*. Rio Branco: Publisher, 2026.

Presentation

A pre-textual title written as a plain heading: without a number.

1 Introduction

The first numbered heading. The page numbers are shown from here on.

References

AUTHOR, Name of the. **Title**. Rio Branco: Publisher, 2026.

front-matter()

```
front-matter(  
  body content  
) -> content
```

Argument

body

content

Rest of the work.

main-matter()

```
main-matter(  
  body content  
) -> content
```

Argument

body

content

Rest of the work.

back-matter()

```
back-matter(  
  body content  
) -> content
```

Argument

body

content

Rest of the work.

2.15 References (required)

What the standard asks for

NBR 14724:2024, 4.2.3.1; NBR 6023:2025

Required

Implemented

The references are drawn up according to NBR 6023.

The list of references is created by Typst’s `bibliography` function, from a `.bib` file with the works cited. The package sets the title and the presentation of the list:

```
1 #bibliography("refs.bib")
```

Chapter 5 describes the citations, the list of references and the `.bib` file.

2.16 Glossary (optional)

What the standard asks for

NBR 14724:2024, 4.2.3.2

Optional

Implemented

The glossary is drawn up in alphabetical order.

The function `glossary` creates the glossary, with the terms sorted alphabetically by the package. As in the lists of acronyms, the entries can be pairs or dictionaries. With dictionaries, which have the keys `key`, `short` and `description`, the terms can be cited in the text by the key, as in the example below.

```

1  = Introduction
2
3  The document was typeset in @typst, and the text stays inside the @text-block.
4
5  #glossary(
6    (key: "typst", short: "Typst",
7      description: [markup-based typesetting system]),
8    (key: "text-block", short: "text block",
9      description: [area of the page bounded by the margins, where the text is printed]),
10 )

```

1 Introduction

The document was typeset in Typst, and the text stays inside the text block.

Glossary

text block area of the page bounded by the margins, where the text is printed.

glossary()

```

glossary(
  ..entries array dictionary
) -> content

```

Argument

`..entries`

array | dictionary

Terms and definitions, all as pairs or all as dictionaries.

2.17 Appendices and annexes (optional)

What the standard asks for

NBR 14724:2024, 4.2.3.3, 4.2.3.4 and 5.3

Optional

Implemented

The title of each appendix is preceded by the word “APÊNDICE” (APPENDIX), a consecutive capital letter and a dash. When the letters of the alphabet run out, doubled letters are used. The typographic emphasis is the same as that of the primary sections. The same applies to the annexes, with the word “ANEXO” (ANNEX). The pages of the appendices and of the annexes continue the numbering of the text.

The functions `appendix` and `annex` are used with a `show` rule. From the rule on, each primary heading (=) is an appendix or an annex, identified by the word, the letter and the dash. The sections of an appendix are numbered with its letter, as in “A.1”. The following example shows the three pages generated.

1

#show: appendix

2

3

= Interview script

4

5

== Opening questions

6

7

#lorem(30)

8

9

#show: annex.with(divider: false)

10

11

= Opinion of the ethics committee

12

13

#lorem(30)

Appendices

APPENDIX A — Interview script

A.1 Opening questions

>Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quamquam quatrer volutpatem, Ut enim acceper doloremque animus, cum corpore doloremque fieri.

ANNEX A — Opinion of the ethics committee

>Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quamquam quatrer volutpatem, Ut enim acceper doloremque animus, cum corpore doloremque fieri.

Remark

The page with the title “Appendices” (or “Annexes”), inserted before the first appendix, is not required by the standard [Design decision](#). To leave it out, use `divider: false`, as in the rule of the annex in the example.

appendix()

```
appendix(  
  body content  
  divider: true bool  
) -> content
```

Argument

body

Rest of the work.

Argument

divider: true

If true, puts the page “Apêndices” before the first appendix. The standard does not ask for this page. Use #show: appendix.with(divider: false) to leave it out.

annex()

```
annex(  
  body content  
  divider: true bool  
) -> content
```

Argument

body

Rest of the work.

Argument

divider: true

If true, puts the page “Anexos” before the first annex. The standard does not ask for this page. Use #show: annex.with(divider: false) to leave it out.

2.18 Index (optional)

What the standard asks for NBR 14724:2024, 4.2.3.5; NBR 6034:2004, 6

The index is the last element of the work. The entries are presented on separate lines, with progressive indents for the subheadings. Consecutive pages are indicated by the first and the last numbers, joined by a hyphen, and non-consecutive ones are separated by commas. The cross-references “ver” (see) and “ver também” (see also) are typographically emphasised.

Optional

Implemented

The function `index` creates the index from the entries given by the author. Each entry is a dictionary with the keys `term` (the heading), `pages` (a number, a range such as "2-3" or a list of them), `sub` (the subheadings, which are entries too), `see` and `see-also` (the cross-references). A simple entry can be written as a pair, ("Term", 3). The package sorts the entries alphabetically, according to NBR 6033:1989, and turns each page into a link, as in the example below.

```

1  #index(
2      (term: "Aeronautics", pages: (1, "2-3")),
3      (term: "Aviation", see: "Aeronautics"),
4      (term: "Scabies", pages: 2, sub: (
5          (term: "diagnosis", pages: 2),
6          (term: "treatment", pages: "2-3"),
7      )),
8      (term: "Holidays", pages: (1, 3), see-also: "Leave"),
9      ("Leave", 3),
10 )

```

3

Index

Aeronautics, 1, 2-3
 Aviation, *see* Aeronautics
 Holidays, 1, 3, *see also* Leave
 Leave, 3

Remark

The package does not collect the terms in the text: the pages of each entry are given by the author. For that reason, check the index at the end, when the pagination of the work is settled.

index()

```

index(
  columns: 2 int
  sort: true bool
  ..entries dictionary array
) -> content

```

Argument

`columns: 2`

int

Number of columns.

Argument

`sort: true`

bool

If `true`, sorts the entries alphabetically, by NBR 6033:1989. Use `false` to keep the order given, in a systematic or chronological index.

Argument

`..entries`

dictionary | array

Entries of the index.

3 General presentation rules

Section 5 of ABNT NBR 14724:2024 defines the general presentation rules of the work: format, spacing, pagination, numbering of the sections, citations, acronyms, equations, illustrations and tables. The main function applies these rules to the whole document (Section 1.6). This chapter describes each rule, what the package does and what is left for the author to write.

3.1 Format and margins

What the standard asks for NBR 14724:2024, 5.1

Required

Implemented

The text must be presented in black; other colours may be used only in the illustrations. If printed, the work must use white or recycled paper, in A4 format. The margins of the recto are 3 cm (left and top) and 2 cm (right and bottom); on the verso, 3 cm (right and top) and 2 cm (left and bottom). The pre-textual elements start on the recto of the sheet, except for the catalog card. It is recommended that the textual and post-textual elements be presented on the recto and on the verso of the sheets.

The main function sets the A4 format and the margins of the standard. By default, the work is formatted for reading on screen or for printing on the recto only: every page has the margins of the recto.

With `two-sided: true`, the work is formatted for printing on both sides of the sheet. The margins of the verso are mirrored, the primary sections and the pre-textual elements start on an odd page, and the page number goes on the outer side. The following example shows an even page (verso) and an odd page (recto).

1	<code>#show: abntly.with(lang: "en", two-sided: true)</code>
2	
3	<code>= Introduction</code>
4	
5	<code>#lorem(420)</code>
6	
7	<code>== Objectives</code>
8	
9	<code>#lorem(500)</code>

2

Chapter 1. Introduction

1.1 Objectives

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quamquam accusamus id nisl ut aliquam sit sed velit. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3

1.1. Objectives

optime scripserit Electram, tamen male conversam Atilii mihi legendam putem, de quo Lucilius: 'ferreum scriptorem', verum, opinor, scriptorem tamen, ut legendus sit. Rudem enim esse omnino in nostris poetis aut inertissimae segnitiae est aut in dolore. Omnis autem privatione doloris putat Epicurus terminari summam voluptatem.

Remark

By default, the links (cross-references, citations, table of contents and addresses) are shown in the colour **dark-indigo**, which makes reading on screen easier. In the printed version, in which all the text must be black, use `hyperlink: black` in the main function.

3.2 Font

What the standard asks for NBR 14724:2024, 5.1

Recommended **Implemented**

Font size 12 is recommended for the whole text, including the cover. The citations of more than three lines, the footnotes, the page numbers, the catalog card and the sources and legends of the illustrations and of the tables must have a smaller and uniform size.

The text is set in size 12. The elements that the standard says to reduce are set in size 10. The text of the tables also uses size 10, which can be changed in the `table-font-size` parameter of the main function.

All the sizes are proportional to the size of the text. To change it, use a `set` rule after the call of the main function, as in `#set text(size: 11pt)`.

Remark

The standard does not define the typeface. The package uses New Computer Modern, with serifs in the text and without serifs in the headings [Design decision](#). On the cover, on the title page and on the approval sheet, the title and the other elements use sizes larger than 12 [Design decision](#).

3.3 Spacing

What the standard asks for NBR 14724:2024, 5.2

Required

Implemented

All the text must be typed with a spacing of 1.5 between the lines. The following are typed in single spacing: the citations of more than three lines, the footnotes, the references, the titles of the illustrations and of the tables, the sources and the legends, and the nature of the work. The references are separated from each other by one blank single space.

The package applies the spacing of 1.5 to the text and single spacing to the elements listed by the standard. No setting is needed.

Remark

The standard defines neither the indent nor the space between paragraphs. The package uses an indent of 1.3 cm on the first line and adds 0.2 cm between paragraphs [Design decision](#). To change them, use a `set par` rule after the call of the main function.

The paragraph that goes on after a displayed equation, a long quote or a list belongs to the one before it and starts without the indent: write it with `no-indent`.

```
1 The power is given by
2 $ P = V I $
3
4 #no-indent[where $V$ is the voltage and $I$ the current.]
```

The power is given by

$$P = VI$$

where V is the voltage and I the current.

`no-indent()`

```
no-indent(
  body content
) -> content
```

Argument

body

content

Text of the paragraph.

3.4 Pagination

What the standard asks for NBR 14724:2024, 5.3

Required

Implemented

The pre-textual pages are counted from the title page on, but are not numbered. The numbering appears from the first page of the textual part on, in Arabic numerals, in the top right corner, 2 cm from the top edge, with the last digit 2 cm from the right edge. In two-sided works, the number goes in the top right corner of the recto and in the top left corner of the verso. The pages of the appendices and of the annexes continue the numbering of the text.

The package counts the pages from the title page on and shows the number from the first numbered primary section on, in the position defined by the standard. The cover is not counted. The following example shows the top of two pages of the two-sided work of [Section 3.1](#).

```
1 #show: abntly.with(lang: "en", two-sided: true)
```

```
2
```

```
3 = Introduction
```

```
4
```

```
5 #lorem(420)
```

```
6
```

```
7 == Objectives
```

```
8
```

```
9 #lorem(500)
```

2 *Chapter 1. Introduction*

1.1 Objectives

1.1. Objectives 3

optime scripserit Electram, tamen male conversam Atilii mihi legendam putem, de quo

Remark

Beside the number, the package shows a running header with the title of the primary section, in italics, over a rule. In a two-sided work, the odd page shows the title of the secondary section. The page that opens a primary section shows only the number. The standard does not provide for this header [Design decision](#).

The running header identifies the primary section by the word “Chapter”. Since the standard organises the work in sections, and not in chapters, the word can be replaced in the `names` parameter of the main function:

```
1 #show: abntly.with(
2   lang: "en",
3   names: config-names(chapter: "Section"),
4 )
```

3.5 Sections

What the standard asks for

NBR 14724:2024, 5.2.2, 5.2.3 and 5.4; NBR 6024:2012, 4.1


Required

Implemented

The number of a section, in Arabic numerals, comes before the title, aligned to the left and separated by one space, without a period, a hyphen or another sign. The progressive numbering goes down to the quinary section. The titles of the primary sections start on a new page (on an odd page, in two-sided works). In a title of more than one line, the following lines are aligned under the first letter of the title. The titles are emphasised typographically, in a hierarchy, in the text and in the table of contents. The titles without a section number, such as those of the errata, the abstracts, the lists, the table of contents and the references, are centred.

The sections are written with Typst headings, from = (primary section) to ===== (quinary section). The package numbers the headings, opens a new page at each primary section and distinguishes the levels by the font size, as in the example below.

1	<u>= Primary section</u>
2	
3	Text of the primary section.
4	
5	<u>== Secondary section</u>
6	
7	Text of the secondary section.
8	
9	<u>=== Tertiary section</u>
10	
11	Text of the tertiary section.
12	
13	<u>==== Quaternary section</u>
14	
15	Text of the quaternary section.
16	
17	<u>===== Quinary section</u>
18	
19	Text of the quinary section.
20	
21	<u>== Secondary section with a long title, which takes more than one line of the text block</u>
22	
23	Text of the section.

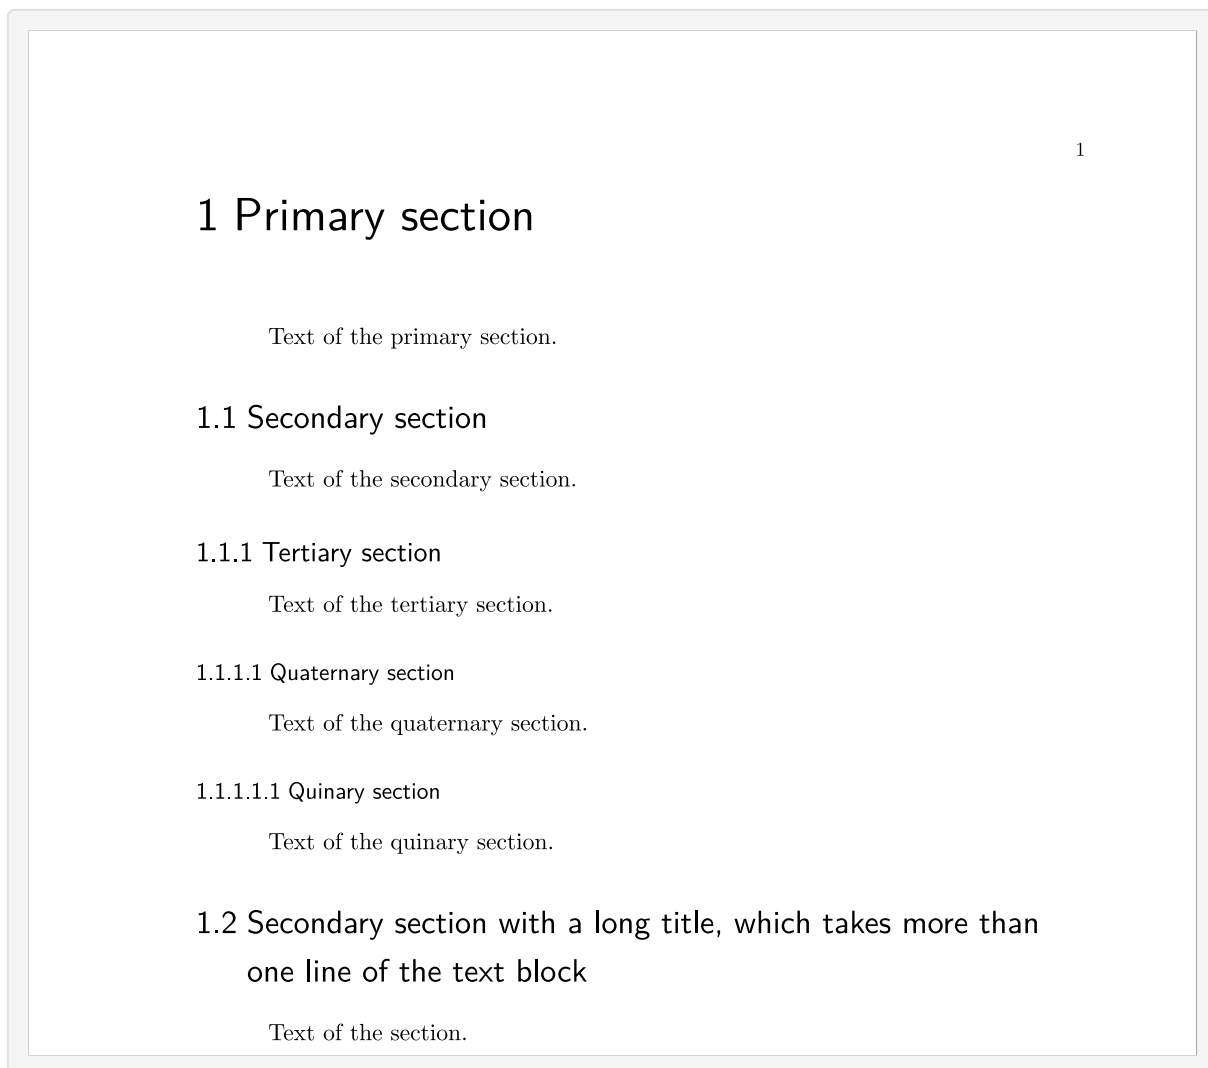

For a heading without a section number, use `#heading(numbering: none)[Title]`. A primary heading without a number is centred.

Remark

The standard asks that the titles be separated from the text by one space of 1.5 between the lines. The package uses distances of its own, larger before the title than after it, to tie the title to the text that follows it [Design decision](#).

3.6 Items and subitems

What the standard asks for NBR 6024:2012, 4.2 and 4.3

Required

Implemented

The subjects of a section that have no title of their own are subdivided into items. The text that comes before the items ends with a colon. Each item is marked by a lowercase letter followed by a parenthesis, indented from the left margin. The text of the item starts with a lowercase letter and ends with a semicolon; the last one ends with a period. The following lines of the text start under the first letter of the text of the item. The subitems start with a dash followed by a space, indented from the item, and the text of the item that comes before them ends with a colon.

The items are written with Typst's numbered list (+), and the subitems, with a list (–) inside an item. The package creates the letters, the dashes and the indents. The punctuation of the text is written by the author, as in the example below.

```

1 The package sets up automatically:
2 + the page format and the margins;
3 + the elements of the text:
4   - the illustrations and the tables;
5   - the equations;
6 + the citations and the list of references.

```

The package sets up automatically:

- a) the page format and the margins;
- b) the elements of the text:
 - the illustrations and the tables;
 - the equations;
- c) the citations and the list of references.

3.7 Direct citations

What the standard asks for NBR 14724:2024, 5.5; NBR 10520:2023, 7.1

Required

Implemented

Direct citations of up to three lines stay in the text, between double quotation marks. Direct citations of more than three lines are set off with a standard indent from the left margin (4 cm is recommended), in a smaller font than that of the text, in single spacing and without quotation marks.

A short direct citation is written in the paragraph itself, between quotation marks. A direct citation of more than three lines is written with Typst's `quote` function, with `block: true`. The package applies the indent of 4 cm, size 10 and single spacing, as in the example below. The indication of the source is described in [Chapter 5](#).

```

1 The paragraph before the citation ends with a colon:
2
3 #quote(block: true)[
4   Text of a direct citation of more than three lines. The
5   citation is set off from the paragraph, with an indent of
6   4 cm from the left margin, in a smaller size than that of
7   the text, in single spacing and without quotation marks
8   @autor2026[p. 10].
9 ]

```

The paragraph before the citation ends with a colon:

Text of a direct citation of more than three lines. The citation is set off from the paragraph, with an indent of 4 cm from the left margin, in a smaller size than that of the text, in single spacing and without quotation marks ([Autor, 2026, p. 10](#)).

3.8 Footnotes

What the standard asks for NBR 14724:2024, 5.2.1; NBR 10520:2023, 8

Required

Implemented

The footnotes stay within the margins, separated from the text by a single space and by a rule of 5 cm, starting at the left margin. They are typed in single spacing and in a smaller font. From the second line on, the text of the note is aligned under the first letter of the first word, so as to set off the superscript. The notes are marked by sequential Arabic numerals; it is recommended to restart the numbering at each chapter or part, and not at each page.

The notes are written with Typst's `footnote` function. The package sets the rule, the size, the spacing and the alignment of the notes, and restarts the numbering at each primary section. The following example shows the lower part of a page with two notes.

```
1 Typesetting defines the form of the text.#footnote[A short explanatory note.]
2 The notes are numbered within each primary section.#footnote[A longer note, with enough
3 text to take more than one line and to show the alignment of the following lines under
4 the first letter of the text of the note.]
```

Typesetting defines the form of the text.¹ The notes are numbered within each primary section.²

¹ A short explanatory note.

² A longer note, with enough text to take more than one line and to show the alignment of the following lines under the first letter of the text of the note.

Remark

NBR 10520:2023 (section 6.2.2) does not allow the numeric citation system in a work with notes. If the work has footnotes, use the author-date system (Section 5.1).

3.9 Illustrations

What the standard asks for NBR 14724:2024, 5.8

Required

Implemented

Any illustration is preceded by its designative word (figure, chart, map, frame (quadro), photograph, among others), followed by its order number in the text, in Arabic numerals, a dash and the title. Right after the illustration come the source consulted, the legend, the notes and other necessary information. An illustration produced by the author also gives this information in the source. The illustration is cited in the text and inserted as close as possible to the passage it refers to. The title, the source, the legend and the notes stay within the margins of the illustration.

The illustrations are written with Typst's `figure` function. The package places the title above the illustration, with the designative word, the number and the dash. The source, the legend and the notes are written inside the figure, after the illustration, with the functions `source`, `legend` and `note`,

as in the example below. Without an argument, `source` states that the illustration was prepared by the author.

```

1 #figure(caption: [Works defended by region])[
2   #rect(width: 8cm, height: 2.5cm, fill: luma(200))
3   #source[IBGE (2025).]
4   #legend[Bars: number of works.]
5   #note[Data collected in 2024.]
6 ]

```

Figure 1 — Works defended by region



Source: IBGE (2025).

Legend: Bars: number of works.

Note: Data collected in 2024.

The `figure` function centres the title and the source on the width of the text block. To keep the title, the source, the legend and the notes within the width of the illustration, as the standard asks, use the function `fitted`, which takes the same arguments. The following example shows a figure with a title wider than the illustration.

```

1 #fitted(caption: [Distribution of the academic works
2   by region of the country, from 2020 to 2024])[
3   #rect(width: 8cm, height: 2.5cm, fill: luma(200))
4   #source()
5 ]

```

Figure 1 — Distribution of the academic
works by region of the
country, from 2020 to 2024



Source: Prepared by the author.

The designative word of the figures is “Figure”. For another type of illustration, such as a chart or a map, give the `kind` and `supplement` parameters of the `figure` function. Each type has its own numbering and can have its own list ([Section 2.11](#)):

```
1 #figure(kind: "chart", supplement: [Chart], caption: [Works per year])[
2   #image("chart.svg")
3   #source()
4 ]
```

3.9.1 Frames

A frame is an illustration with textual information, arranged in rows and columns. The function `frame` creates the figure with the word “Frame” and its own numbering. A table inside the frame takes closed lines, and the text keeps the size of the body, as in the example below.

```
1 #frame(caption: [Types of academic work])[
2   #table(columns: 2,
3     [*Type*], [*Degree*],
4     [Thesis], [Doctorate],
5     [Dissertation], [Master's])
6   #source()
7 ]
```

Frame 1 — Types of academic work

Type	Degree
Thesis	Doctorate
Dissertation	Master's

Source: Prepared by the author.

source()

```
source(
  ..body content
) -> content
```

Argument

..body

content

Source consulted, with the final period.

legend()

```
legend(
  body content
) -> content
```

Argument	
body	content
Text of the legend.	

note()

<pre> note(body content word: auto auto content call: none none int str) -> content </pre>	
---	--

Argument	
body	content
Text of the note.	

Argument	
word: auto	auto content
Word shown before the colon. The default is “Nota”, in the language of the text. Example: [Notas].	

Argument	
call: none	none int str
Number of the call of a specific note. With 1, the note starts with “1” and shows no word.	

frame()

<pre> frame(..args arguments) -> content </pre>	
--	--

Argument	
..args	arguments
Arguments of figure: the content and caption, among others.	

fitted()

<pre> fitted(width: auto auto length ratio label: none none label ..args arguments) -> content </pre>	
--	--

Argument	
width: auto	auto length ratio
Width of the set. With auto, it is the measured width of the illustration. Give a smaller width to make the text wrap in the cells of a table with auto columns.	

Argument	
label: none	none label

Label of the figure, for cross-references (`@label`). In this function, the label is given as a parameter, not after the call.

Argument

`..args`

arguments

Arguments of `figure`: the content, `caption`, `kind` and `supplement`, among others.

3.10 Tables

What the standard asks for

NBR 14724:2024, 5.9; IBGE, Normas de apresentação tabular (1993)

Required

Implemented

The tables are cited in the text, inserted as close as possible to the passage they refer to and standardised according to the tabular presentation standards of the IBGE. According to these standards, the border of the table has at least three horizontal rules (one separates the top, one separates the header and one separates the footer) and has no vertical rules closing it on the left and on the right. The footer contains the source, the general note and the specific notes, each preceded by its call. A table that goes beyond one page repeats the title and the header on each page, with the indications “continua” (continues), “continuação” (continuation) and “conclusão” (conclusion); the rule that closes the table and the footer appear only on the last page.

A table presents numerical data; for textual information, use a frame (quadro) (Section 3.9). A table is written with Typst’s `table` function, with the header in `table.header`, inside the function `fitted`. The package draws the horizontal rules, reduces the text to size 10 and keeps the title and the footer within the width of the table. The author writes no rule.

The source and the notes are written after the table, with `source` and `note`. A specific note is written with `note(call: 1)`, and the matching call is inserted in the cell with `call(1)`, as in the example below.

```

1  #fitted(caption: [Production of silkworm cocoons,
2    by Federation Unit -- Brazil -- 1974])[
3    #table(columns: (4cm, 3cm, 3cm),
4      align: (left, right, right),
5      table.header([Federation Unit],
6        [Production (t)], [Percentage (%)]),
7        [Paraná], [4 210], [61.2],
8        [São Paulo #call(1)], [2 670], [38.8])
9    #source[IBGE (1975).]
10   #note[Data subject to revision.]
11   #note(call: 1)[Includes the production of the Ribeira Valley.]
12 ]

```

Table 1 — Production of silkworm cocoons, by
Federation Unit – Brazil – 1974

Federation Unit	Production (t)	Percentage (%)
Paraná	4 210	61.2
São Paulo ¹	2 670	38.8

Source: IBGE (1975).

Note: Data subject to revision.

¹ Includes the production of the Ribeira Valley.

A table that does not fit on one page continues on the next page, with the title, the header and the indications of the IBGE. No setting is needed. The following example shows a table of 40 rows on two pages.

```

1 #fitted(caption: [Production of silkworm cocoons, by municipality -- Paraná -- 1974])[
2   #table(columns: (4cm, 3cm, 3cm), align: (left, right, right),
3     table.header([Municipality], [Production (t)], [Percentage (%)]),
4     ..range(1, 41).map(i => ([Municipality #i], [#(i * 47)], [#(i * 13)]))..flatten())
5   #source[IBGE (1975).]
6   #note[Municipalities with declared production.]
7 ]

```

1 Results

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna quam quera voluptatem. Ut enim acque doleamus animo, cum corpore dolemus, fieri tamen permagna accessio potest, si aliquod aeternum et infinitum impendere malum nobis opinemur. Quod idem licet transferre in voluptatem, ut postea variari voluptas distinguere possit, augeri amplificarique non possit. At etiam Athenis, ut e patre audiebam facete et urbane Stoicos irridente, statua est in quo a nobis philosophia defensa et collaudata est, cum id, quod maxime placeat, facere possimus, omnis voluptas assumenda est, omnis dolor repellendus. Temporibus autem quibusdam et aut officiis debitis aut rerum necessitatibus saepe eveniet, ut et voluptates repudiandae sint et molestiae non recusandae. Itaque earum rerum defuturum, quas natura non depravata desiderat. Et quem ad me accedis, saluto: 'chaere,' inquam, 'Tite!' lictores, turma omnis chorusque: 'chaere, Tite!' hinc hostis mi Albucius, hinc inimicus. Sed iure Mucius.

Table 1 — Production of silkworm cocoons, by municipality – Paraná – 1974

(continued)		
Municipality	Production (t)	Percentage (%)
Municipality 1	47	13
Municipality 2	94	26
Municipality 3	141	39
Municipality 4	188	52
Municipality 5	235	65
Municipality 6	282	78
Municipality 7	329	91
Municipality 8	376	104
Municipality 9	423	117
Municipality 10	470	130
Municipality 11	517	143
Municipality 12	564	156
Municipality 13	611	169
Municipality 14	658	182
Municipality 15	705	195
Municipality 16	752	208
Municipality 17	799	221
Municipality 18	846	234
Municipality 19	893	247
Municipality 20	940	260
Municipality 21	987	273

Table 1 — Production of silkworm cocoons, by municipality – Paraná – 1974

(continued)		
Municipality	Production (t)	Percentage (%)
Municipality 22	1034	286
Municipality 23	1081	299
Municipality 24	1128	312
Municipality 25	1175	325
Municipality 26	1222	338
Municipality 27	1269	351
Municipality 28	1316	364
Municipality 29	1363	377
Municipality 30	1410	390
Municipality 31	1457	403
Municipality 32	1504	416
Municipality 33	1551	429
Municipality 34	1598	442
Municipality 35	1645	455
Municipality 36	1692	468
Municipality 37	1739	481
Municipality 38	1786	494
Municipality 39	1833	507
Municipality 40	1880	520

Source: IBGE (1975).

Note: Municipalities with declared production.

Outside `fitted`, a table in a plain figure takes the same rules with `ibge-table`, written with the arguments of `table`: the title, the source and the notes then keep the width of the text block, and the figure may float with `placement`. A figure does not go on over pages.

```
1 #figure(caption: [Production of silkworm cocoons,
2   by Federation Unit -- Brazil -- 1974])[
3   #ibge-table(columns: (4cm, 3cm, 3cm),
4     align: (left, right, right),
5     table.header([Federation Unit],
6       [Production (t)], [Percentage (%)]),
7     [Paraná], [4 210], [61.2],
8     [São Paulo], [2 670], [38.8])
9   #source[IBGE (1975).]
10 ]
```

Table 1 — Production of silkworm cocoons, by Federation Unit – Brazil – 1974

Federation Unit	Production (t)	Percentage (%)
Paraná	4 210	61.2
São Paulo	2 670	38.8

Source: IBGE (1975).

Remark

A table without `table.header`, or outside `fitted` and `ibge-table`, does not take the rules of the IBGE: it keeps the lines set by the author.

ibge-table()

```
ibge-table(
  ..args arguments
) -> content
```

Argument

```
..args
```

arguments

Arguments of `table`: `columns`, `align`, the header in `table.header(...)` and the cells, among others. A `stroke` is ignored: the rules are those of the IBGE.

call()

```
call(
  n int str
) -> content
```

Argument

```
n
```

int | str

Number of the call.

3.11 Equations

What the standard asks for NBR 14724:2024, 5.7

Recommended

Implemented

To make reading easier, it is recommended that the equations and formulas be set off in the text and, if necessary, numbered with Arabic numerals in parentheses, aligned to the right. In the following mentions, only the number may be used. In the text, a larger line spacing may be used, to hold the elements of the equation (exponents, indices and others).

The equations are written with Typst's math syntax. A display equation is numbered only if it has a label; the cross-reference to the label gives the number in parentheses. In an equation of several lines, each line can have its own label, as in the example below.

```

1  An equation without a label is not numbered:
2  $ E = m c^2 $
3  With a label, the equation takes a number:
4  $ F = m a $ <eq-newton>
5  With several lines, only the line with a label is numbered:
6  $ (a + b)^2 &= (a + b)(a + b) \
7      &= a^2 + 2 a b + b^2 #<eq-square> $
8  Equations @eq-newton and @eq-square are cited by number.
```

An equation without a label is not numbered:

$$E = mc^2$$

With a label, the equation takes a number:

$$F = ma \tag{1.1}$$

With several lines, only the line with a label is numbered:

$$\begin{aligned} (a + b)^2 &= (a + b)(a + b) \\ &= a^2 + 2ab + b^2 \end{aligned} \tag{1.2}$$

Equations (1.1) and (1.2) are cited by number.

Two parameters of the main function control the numbering:

- **equation-numbering** sets the format. The default, "(1.1)", numbers the equations by primary section **Design decision** "(1)" numbers them throughout the work, as in the examples of the standard;
- **equation-number-mode** sets which equations are numbered. The default, "label", numbers only the equations with a label; "line" numbers every line.

3.12 Cross-references

What the standard asks for NBR 14724:2024, 5.7, 5.8 and 5.9; NBR 6024:2012, 4.4

Required

Implemented

The illustrations and the tables must be cited in the text. In the mentions of an equation, only the number may be used. The sections are cited by their number, as in “na seção 3” (in section 3) or “ver 3.3” (see 3.3).

To cite an element in the text, give it a label (`<label>`) and use a cross-reference. There are three forms:

- `@label` gives only the number, as in “1” or “(1.1)”. The word that comes before it is written by the author;
- `@label[Figure]` gives the word given and the number, with a single link;
- `#auto-ref(<label>)` gives the word that suits the element (“Figure”, “Table”, “Section”, “Equation”) and the number. With `form: "page"`, it gives the page of the element.

In the function `fitted`, the label is given in the `label` parameter. The following example shows the three forms.

1

#figure(caption: [Structure of the work])[

2

#rect(width: 6cm, height: 1.5cm, fill: luma(200))

3

#source()

4

] <fig-structure>

5

6

#fitted(label: <tab-defences>,

7

caption: [Works defended])[

8

#table(columns: (3cm, 3cm), align: (left, right),

9

table.header([Year], [Works]),

10

[2024], [120], [2025], [135])

11

#source()

12

]

13

14

The structure is shown in figure @fig-structure and

15

detailed in @tab-defences[Table].

16

#auto-ref(<fig-structure>) is on

17

#auto-ref(<fig-structure>, form: "page").

Figure 1 — Structure of the work



Source: Prepared by the author.

Table 1 — Works defended

Year	Works
2024	120
2025	135

Source: Prepared by the author.

The structure is shown in figure 1 and detailed in Table 1. Figure 1 is on p. 60.

Remark

A semicolon right after `#auto-ref(...)` ends the expression and is not printed. To print it, write the semicolon with a backslash: `\;`.

auto-ref()

```
auto-ref(  
  target label  
  form: "normal" str  
) -> content
```

Argument

target

label

Label of the element.

Argument

form: "normal"

str

Form of the reference: "normal", for the name and the number, or "page", for the page.

3.13 Acronyms

What the standard asks for NBR 14724:2024, 5.6

Required

Implemented

An acronym, when mentioned for the first time in the text, must be given in parentheses, preceded by the full name.

An acronym can be written directly in the text, as in “Associação Brasileira de Normas Técnicas (ABNT)”. For the package to write the full name only on the first mention, register the acronyms as dictionaries in the function `list-of-acronyms` and cite them by the key, as in `@abnt` (Section 2.12).

4 Elements beyond the standard

This chapter describes the elements that the ABNT standards do not define, but that are common in academic works: algorithms, subfigures, parts, sideways figures and stamps. The algorithm and the subfigures are illustrations and follow the rules of [Section 3.9](#). For the others, the presentation is a decision of the package [Design decision](#).

4.1 Algorithms

What the standard asks for NBR 14724:2024, 5.8

[Design decision](#)

The standard does not deal with algorithms, but the list of designative words of the illustrations is open. Like any illustration, the algorithm has the designative word, the number, the dash and the title above it, and the source below it.

The function `algorithm` creates an illustration of code or of pseudocode, with the word “Algorithm” and its own numbering. It takes the same arguments as `figure`. The code is written in a Typst code block, and the source is given with `source`, as in the example below. A long algorithm continues on the next page.

```

1  #algorithm(caption: [Mean of a list of numbers])[
2    ```python
3    def mean(values):
4        total = 0
5        for v in values:
6            total = total + v
7        return total / len(values)
8    ```
9    #source()
10 ]

```

Algorithm 1 — Mean of a list of numbers

```

def mean(values):
    total = 0
    for v in values:
        total = total + v
    return total / len(values)

```

Source: Prepared by the author.

To create the list of algorithms, use `list-of(raw, title: [List of Algorithms])` ([Section 2.11](#)).

algorithm()

```
algorithm(  
  ..args arguments  
) -> content
```

Argument

```
..args
```

Arguments of **figure**: the content and **caption**, among others.

arguments

4.2 Subfigures


What the standard asks for

NBR 14724:2024, 5.8

Design decision

The standard does not deal with figures made of parts. The set follows the rules of the illustrations: the title above and the source, the legend and the notes below.

The function **subfigures** creates a figure made of parts. Each part is a **figure**, followed by its label. The title of the set goes above it, and the title of each part, below the part, preceded by a letter. The source of the set is given after the parts. The cross-reference to a part gives the number of the set and the letter, as in the example below. The function cannot be used inside **fitted**.

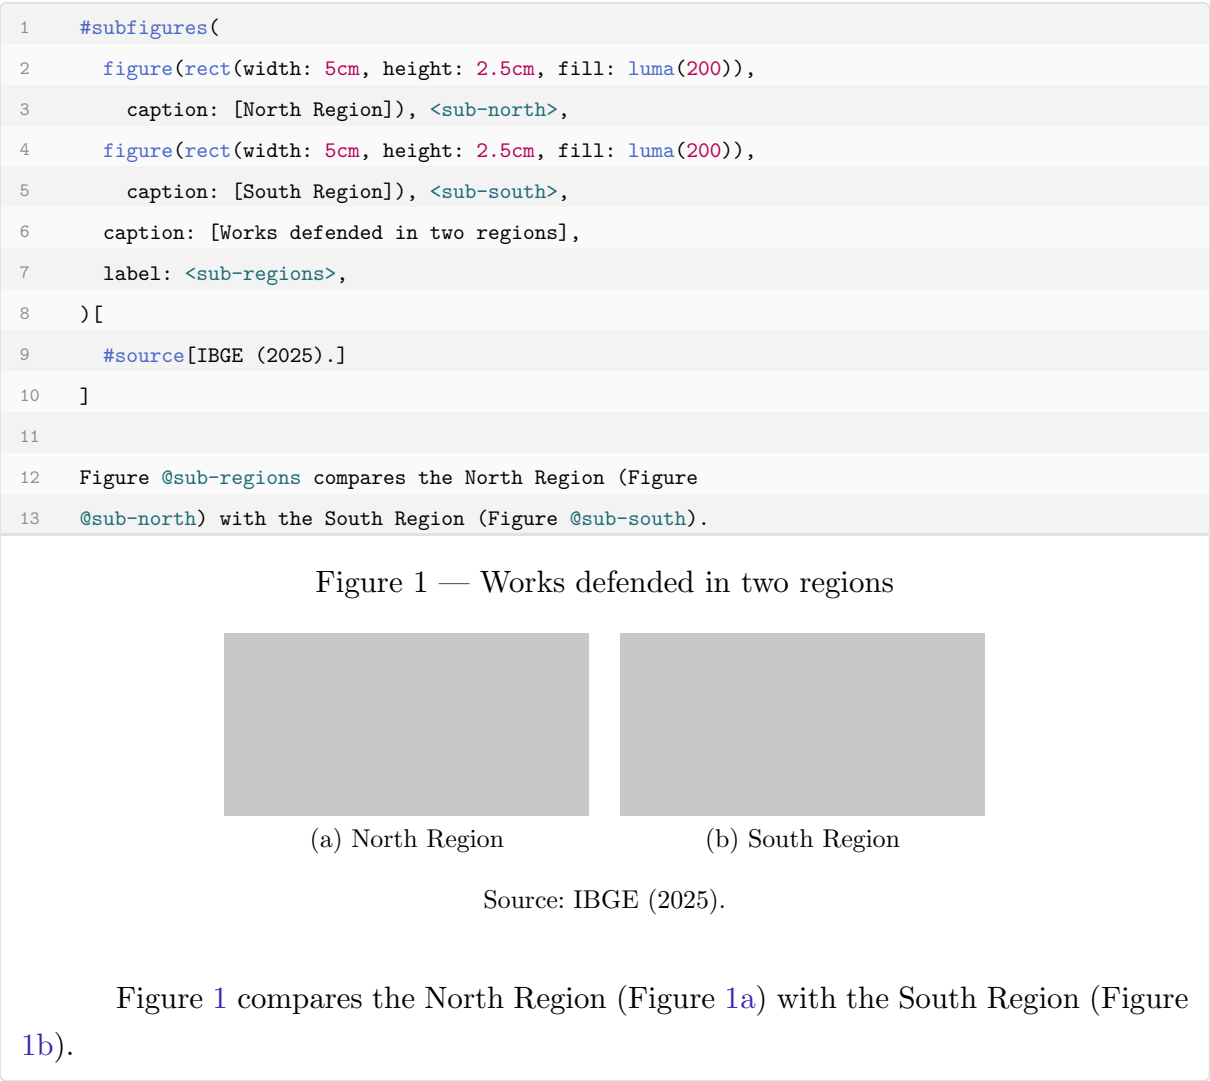

subfigures()

```
subfigures(  
  columns: 2  int  array  
  gutter: 1em  length  
  caption: none  content  
  label: none  none  label  
  ..args  arguments  
) ->  content
```

Argument

columns: 2 int | array

Number of columns, or a list with the width of each column.

Argument

gutter: 1em length

Horizontal and vertical space between the parts.

Argument

caption: none

content

Title of the set.

Argument

label: none

none | label

Label of the set.

Argument

..args

arguments

Parts (figure(...), each followed by its label) and, last, the content that goes under the set (source, legend, note).

4.3 Parts

The function `part` creates the opening page of a part, a division of the text above the primary sections. The page has neither a header nor a number and shows the word “Part”, the number in Roman numerals and the title. The primary section that follows starts on a new page, and the numbering of the sections continues from one part to the next, as in the example below.

1 #part[Foundations]

2

3 = Introduction

4

5 Text of the first section of the part.

Part I

Foundations

1 Introduction

Text of the first section of the part.

2

part()

```
part(  
  title content  
) -> content
```

Argument

title

content

Title of the part.

4.4 Sideways figures and tables

The function `sideways` turns a figure or a table by 90°, on a page of its own. It is meant for content wider than the text block. The page stays upright, with the same margins and the same header, and the text continues on the next page, as in the example below.

```
1 #sideways[  
2   #fitted(caption: [Works defended  
3     by region and by year]) [  
4   #table(  
5     columns: (3cm,) + (2.4cm,) * 6,  
6     align: (left,) + (right,) * 6,  
7     table.header([Region],  
8       [2019], [2020], [2021],  
9       [2022], [2023], [2024]),  
10    [North], [190], [210], [230], [250],  
11    [260], [280],  
12    [South], [390], [410], [420], [440],  
13    [450], [470])  
14   #source()  
15 ]  
16 ]
```

Chapter 1. Results2

Table 1 — Works defended by region and by year

Region	2019	2020	2021	2022	2023	2024
North	190	210	230	250	260	280
South	390	410	420	440	450	470

Source: Prepared by the author.

sideways()

```
sideways(  
  body content  
) -> content
```

Argument

body

content

Content to turn: a figure or a table in `fitted`, for example.

4.5 Stamps

The function `stamp` creates a watermark for the background of the page, such as “DRAFT”. It is used in the `background` parameter of the page: with `#set page(background: ...)`, the stamp appears on all the following pages, as in the example below.

1 `#set page(background: stamp(`

2 `note: [Version of October 1, 2026],`

3 `) [DRAFT])`

4

5 `= Introduction`

6

7 `#lorem(120)`

1

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quam ipsum accusantium. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

DRAFT
Version of October 1, 2026

The catalog card and the approval sheet have stamps of their own, controlled by the `draft` parameter (Section 2.4 and Section 2.6).

stamp()

stamp(
 body content
 note: none none content
 color: rgb(255, 0, 0) color
 angle: -45deg angle
 size: 10em / 3 length
) -> content

Argument

body

content

Text of the stamp.

Argument

note: none

none content

Smaller text, shown under the main text.

Argument

color: `rgb(255, 0, 0)`

color

Colour of the stamp. It is lightened (mixed with 70% of white) before it is applied.

Argument

angle: `-45deg`

angle

Angle of the turn. The default, `-45deg`, turns the text anticlockwise.

Argument

size: `10em / 3`

length

Size of the main text, in **em** of the body. The default is 40 pt in a body of 12 pt.

5 Citations and references

The citations follow ABNT NBR 10520:2023, and the list of references, ABNT NBR 6023:2025. The author records the works in a `.bib` file and cites them in the text by the key. The package sets the calls and the list with Typst's `cite` and `bibliography` functions.

5.1 Citation systems

What the standard asks for NBR 10520:2023, 6

Required

Implemented

The citations are indicated in the text by a call system: author-date or numeric. The system adopted must be followed throughout the work. In the numeric system, the numbering of the sources is consecutive, in Arabic numerals, and refers to the list of references, in the order in which the sources appear in the text. The numbering can be given in parentheses, in line with the text, or as a superscript. The numeric system cannot be used in a work with notes.

The citation system is set in the `citation-system` parameter of the main function. Table 4 lists the values accepted. The system defines the form of the calls and the order of the list of references.

Table 4 — Citation systems

Value	System	Call	List of references
"alf"	Author-date (default)	(Luck, 2010, p. 12)	In alphabetical order.
"num"	Numeric, in parentheses	(1, p. 12)	In the order of the citations, with the number before each reference.
"overcite"	Numeric, as a superscript	1, p. 12	As in "num".
"ieee"	Numeric, in brackets	[1, p. 12]	As in "num". The brackets are not provided for in the standard Design decision .

The following example shows a paragraph in the numeric system, with the top of the page of the text and of the page of the references.

```

1 #show: abntly.with(lang: "en", citation-system: "num")
2
3 = Introduction
4
5 School management is the subject of one of the works cited @luck2010[p. 12]. The work of
6 #cite(<oliveira1943>, form: "prose") deals with the geology of Brazil. Two works can be
7 cited in a single call @cruz1998 @maciel2019.
8
9 #bibliography("refs.bib")

```

1

1 Introduction

School management is the subject of one of the works cited (1, p. 12). The work of Oliveira and Leonardos (2) deals with the geology of Brazil. Two works can be cited

2

References

1 LUCK, Heloisa. **Liderança em gestão escolar**. 4. ed. Petrópolis: Vozes, 2010.

2 OLIVEIRA, Avelino Irmão dos; LEONARDOS, Otton Henry. *Geologia do*

The same paragraph, with the calls as superscripts:

```

1 #show: abntly.with(lang: "en", citation-system: "overcite")
2
3 = Introduction
4
5 School management is the subject of one of the works cited @luck2010[p. 12]. The work of
6 #cite(<oliveira1943>, form: "prose") deals with the geology of Brazil. Two works can be
7 cited in a single call @cruz1998 @maciel2019.
8
9 #bibliography("refs.bib")

```

1

1 Introduction

School management is the subject of one of the works cited¹, p. 12. The work of Oliveira and Leonardos ² deals with the geology of Brazil. Two works can be cited in a

And with the calls in brackets:

```

1 #show: abntly.with(lang: "en", citation-system: "ieee")
2
3 = Introduction
4
5 School management is the subject of one of the works cited @luck2010[p. 12]. The work of
6 #cite(<oliveira1943>, form: "prose") deals with the geology of Brazil. Two works can be
7 cited in a single call @cruz1998 @maciel2019.
8
9 #bibliography("refs.bib")

```

1

1 Introduction

School management is the subject of one of the works cited [1, p. 12]. The work of Oliveira and Leonardos [2] deals with the geology of Brazil. Two works can be cited

5.2 Citations in the text

What the standard asks for NBR 10520:2023, 6.1

Required

Partly implemented

In the author-date system, the source is indicated by the surname of the author or by the name of the entity, in upper and lower case, followed by the date. In direct citations, the page is added. When the author is part of the sentence, the date and the page go in parentheses. A source with four or more authors can be cited by the first author, followed by “et al.”. Authors with the same surname and the same date are distinguished by the initials of their given names, and works by the same author and of the same year, by lowercase letters after the date. Several works in the same call are separated by semicolons, preferably in alphabetical order. A source without an author is cited by the first word of the title, followed by “[...]”.

A work is cited by the key it has in the `.bib` file. [Table 5](#) lists the forms of citation. The page, or another location, is given in brackets, after the key.

Table 5 — Forms of citation

Code	Use
<code>@key</code>	Call in parentheses.
<code>@key[p. 12]</code>	Call with the page, for direct citations.
<code>#cite(<key>, form: "prose")</code>	Author in the sentence, with the date in parentheses.
<code>#cite(<key>, form: "prose", supplement: [p. 12])</code>	Author in the sentence, with the page.
<code>#cite(<key>, form: "author")</code>	Only the name of the author.
<code>#cite(<key>, form: "full")</code>	Full reference, in the text.
<code>@key-a @key-b</code>	Several works in the same call.
<code>#apud([Author], 1990, <key>)</code>	Citation of a citation (Section 5.3).

The following example shows the forms of citation in the author-date system, with the works of the list of references of this manual.

1	One author @luck2010, with the page @luck2010[p. 12] and in
2	the sentence:
3	#cite(<luck2010>, form: "prose", supplement: [p. 12]).
4	
5	Two authors @oliveira1943, three authors @cruz1998 and
6	four authors @maciel2019. In the sentence:
7	#cite(<oliveira1943>, form: "prose") and
8	#cite(<maciel2019>, form: "prose").
9	
10	Several works @luck2010 @cruz1998. Works by the same author
11	and of the same year @freyre1936a @freyre1936b. Authors with
12	the same surname @barbosaC1958 @barbosaO1958.
13	
14	Entity @abnt2024 and work without an author
15	@anteprojeto1987[p. 55].

One author (Luck, 2010), with the page (Luck, 2010, p. 12) and in the sentence: Luck (2010, p. 12).

Two authors (Oliveira; Leonardos, 1943), three authors (Cruz; Correa; Costa, 1998) and four authors (Maciel *et al.*, 2019). In the sentence: Oliveira and Leonardos (1943) and Maciel *et al.* (2019).

Several works (Cruz; Correa; Costa, 1998; Luck, 2010). Works by the same author and of the same year (Freyre, 1936a; 1936b). Authors with the same surname (Barbosa, C., 1958; Barbosa, O., 1958).

Entity (Associação Brasileira de Normas Técnicas, 2024) and work without an author (Anteprojeto [...], 1987, p. 55).

A work without an author is cited by the first word of the title, followed by “[...]”. If the title starts with an article or with a monosyllabic word, the next word is included too. To set another form, give the `shorttitle` field in the entry of the `.bib` file.

Remark

One point of the standard is not implemented Partly implemented. In the citations of several works by the same author, the dates are separated by semicolons, as in “(Dreyfuss, 1989; 1991)”, and not by commas.

5.3 Citation of a citation

What the standard asks for NBR 10520:2023, 7.3 Required Implemented

In the citation of a citation, the elements are given in this order: author or first word of the title of the original document; date; page of the original document, if any; the expression “apud”; author or first word of the title of the source consulted; date; page of the source consulted, if any. Only the source consulted is in the list of references.

The function `apud` creates the citation of a citation. The author and the date of the original document are written in the call, because that document is not in the `.bib` file. The source consulted is given by its key and goes to the list of references. The parameters `page` and `supplement` give the page of the original document and that of the source consulted. With `form: "prose"`, the author of the original document is part of the sentence, as in the example below.

```
1 In parentheses: #apud([Silva], 1990, <autor2026>,
2   page: [p. 5], supplement: [p. 10]).
3
4 In the sentence: #apud([Silva], 1990, <autor2026>,
5   form: "prose").
```

In parentheses: (Silva, 1990, p. 5 *apud* Autor, 2026, p. 10).

In the sentence: Silva (1990 *apud* Autor, 2026).

The function has the same name in both languages of the package, and its parameters follow those of the function `cite` of Typst. In the numeric systems, the source consulted is given by its number.

apud()

```
apud(
  author str content
  date int str content
  key label
  page: none none str content
  supplement: none none content
  form: "normal" str
) -> content
```

Argument

author

str | content

Author of the original work, as it is written in the call: the surname, or the first word of the title.

Argument

date

int | str | content

Date of the original work.

Argument

key

label

Key of the source consulted in the `.bib` file.

Argument

page: none

none | str | content

Page of the original work, as in [p. 104].

Argument

supplement: none

none | content

Page of the source consulted, as in [p. 55].

Argument

form: "normal" str

Form of the call: "normal", for the whole call between parentheses, or "prose", for the author in the sentence, as in "Freire (1994 apud Streck, 2017)".

5.4 List of references

What the standard asks for NBR 6023:2025, 6.3, 6.6, 6.7 and 9; NBR 14724:2024, 5.2 Required Implemented

The references are drawn up in single spacing, aligned to the left margin and separated from each other by one blank line of single spacing. The typographic device used to emphasise the title is uniform in all the references; a work without an author is entered by its title, with the first word in capital letters and without other emphasis. For online documents, the electronic address is recorded, preceded by “Disponível em:” (Available at:), and the date of access, preceded by “Acesso em:” (Accessed:). In the alphabetical system, the references are gathered in alphabetical order; in the numeric system, they follow the order in which the works are cited in the text.

The list of references is created by Typst’s `bibliography` function, called after the text:

```
1 #bibliography("refs.bib")
```

The package creates the title “References”, centred and without a number, and sets each reference according to the standard. The title of the work is emphasised in bold. By default, the list contains only the works cited in the text; with `full: true`, it contains all the works of the file. The list of references of this manual, on page 82, is created this way.

5.5 References file

The works are recorded in a `.bib` file, in the BibLaTeX format. Each entry has a type (`@book`, `@article`), a key and the fields of the work. Table 6 summarises how to write the most common cases.

Table 6 — Fields of the references file

Case	How to write
Subtitle	In the <code>title</code> field, after a colon: <code>title = {Title: subtitle}</code> . The emphasis ends at the colon.
Entity as author	With double braces: <code>author = {{Associação Brasileira de Normas Técnicas}}</code> .
Thesis and dissertation	<code>@phdthesis</code> , with the type and the degree in <code>type</code> , the institution in <code>publisher</code> , the location in <code>address</code> and the year in <code>year</code> .
Part of a book	<code>@incollection</code> , with the title of the part in <code>title</code> and that of the book in <code>booktitle</code> . The author of the book goes in <code>bookauthor</code> ; the organisers, in <code>editor</code> , with <code>editortype = {organizer}</code> .
Article	<code>@article</code> , with the journal in <code>journaltitle</code> , the location in <code>address</code> and the fields <code>volume</code> , <code>number</code> and <code>pages</code> .
Work in an event	<code>@inproceedings</code> , with the event in <code>eventtitle</code> , the number of the event in <code>edition</code> , the location in <code>venue</code> and <code>booktitle = {Anais [...]}</code> .
Online document	The address in <code>url</code> and the date of access in <code>urldate</code> , in the format 2026-10-01.
Work without an author	Without the <code>author</code> field. The <code>shorttitle</code> field sets the call, if needed.

The examples below show the entry of the `.bib` file and the reference generated, for the most used types of document. The works are examples from NBR 6023:2025.

5.5.1 Book

```
1  @book{luck2010,  
2    author   = {Luck, Heloisa},  
3    title    = {Liderança em gestão escolar},  
4    edition  = {4},  
5    address  = {Petrópolis},  
6    publisher = {Vozes},  
7    year     = {2010},  
8  }
```

LUCK, Heloisa. **Liderança em gestão escolar**. 4. ed. Petrópolis: Vozes, 2010.

5.5.2 Book by an entity

```
1  @book{abnt2024,  
2    author   = {{Associação Brasileira de Normas Técnicas}},  
3    title    = {ABNT NBR 14724: informação e documentação: trabalhos acadêmicos: apresentação},  
4    address  = {Rio de Janeiro},  
5    publisher = {ABNT},  
6    year     = {2024},  
7  }
```

ASSOCIAÇÃO BRASILEIRA DE NORMAS TÉCNICAS. **ABNT NBR 14724**: informação e documentação: trabalhos acadêmicos: apresentação. Rio de Janeiro: ABNT, 2024.

5.5.3 Thesis

```
1  @phdthesis{aguiar2009,  
2    author   = {Aguiar, André Andrade de},  
3    title    = {Avaliação da microbiota bucal em pacientes sob uso crônico de penicilina e  
4              benzatina},  
5    type     = {Tese (Doutorado em Cardiologia)},  
6    publisher = {Faculdade de Medicina, Universidade de São Paulo},  
7    address  = {São Paulo},  
8    year     = {2009},  
9  }
```

AGUIAR, André Andrade de. **Avaliação da microbiota bucal em pacientes sob uso crônico de penicilina e benzatina**. 2009. Tese (Doutorado em Cardiologia) – Faculdade de Medicina, Universidade de São Paulo, São Paulo, 2009.

5.5.4 Dissertation in electronic form

```

1  @phdthesis{coelho2009,
2      author    = {Coelho, Ana Cláudia},
3      title     = {Fatores determinantes de qualidade de vida física e mental em pacientes com
4                  doença pulmonar
5                  intersticial: uma análise multifatorial},
6      type      = {Dissertação (Mestrado em Ciências Médicas)},
7      publisher = {Faculdade de Medicina, Universidade Federal do Rio Grande do Sul},
8      address   = {Porto Alegre},
9      year      = {2009},
10     url       = {http://www.lume.ufrgs.br/bitstream/handle/10183/16359/000695147.pdf?sequence=1},
11     urldate   = {2009-09-04},
12 }

```

COELHO, Ana Cláudia. **Fatores determinantes de qualidade de vida física e mental em pacientes com doença pulmonar intersticial: uma análise multifatorial**. 2009. Dissertação (Mestrado em Ciências Médicas) – Faculdade de Medicina, Universidade Federal do Rio Grande do Sul, Porto Alegre, 2009. Available at: <http://www.lume.ufrgs.br/bitstream/handle/10183/16359/000695147.pdf?sequence=1>. Accessed: 4 sept. 2009.

5.5.5 Part of a book

```

1  @incollection{santos1994,
2      author    = {Santos, F. R.},
3      title     = {A colonização da terra do Tucujús},
4      bookauthor = {Santos, F. R.},
5      booktitle = {História do Amapá, 1º grau},
6      edition   = {2},
7      address   = {Macapá},
8      publisher = {Valcan},
9      year      = {1994},
10     pages     = {15--24},
11 }

```

SANTOS, F. R. A colonização da terra do Tucujús. In: SANTOS, F. R. **História do Amapá, 1º grau**. 2. ed. Macapá: Valcan, 1994. p. 15-24.

5.5.6 Part of a book with organisers

```
1  @incollection{romano1996,  
2    author      = {Romano, Giovanni},  
3    title       = {Imagens da juventude na era moderna},  
4    editor      = {Levi, G. and Schmidt, J.},  
5    editortype  = {organizer},  
6    booktitle   = {História dos jovens 2: a época contemporânea},  
7    address     = {São Paulo},  
8    publisher   = {Companhia das Letras},  
9    year        = {1996},  
10   pages       = {7--16},  
11 }
```

ROMANO, Giovanni. Imagens da juventude na era moderna. In: LEVI, G.; SCHMIDT, J. (org.). **História dos jovens 2**: a época contemporânea. São Paulo: Companhia das Letras, 1996. p. 7-16.

5.5.7 Journal article

```
1  @article{delucca2009,  
2    author      = {De Lucca, Gabriella},  
3    title       = {Notas curtas},  
4    journaltitle = {Getulio},  
5    address     = {São Paulo},  
6    volume      = {3},  
7    pages       = {9},  
8    year        = {2009},  
9  }
```

DE LUCCA, Gabriella. Notas curtas. **Getulio**, São Paulo, v. 3, p. 9, 2009.

5.5.8 Newspaper article in electronic form

```

1  @article{verissimo2010,
2    author      = {Veríssimo, L. F.},
3    title       = {Um gosto pela ironia},
4    journaltitle = {Zero Hora},
5    address     = {Porto Alegre},
6    number      = {16.414},
7    pages       = {2},
8    date        = {2010-08-12},
9    url         = {http://www.clicrbs.com.br/zerohora/jsp/default.jsp?uf=1&action=flip},
10   urldate     = {2010-08-12},
11  }

```

VERÍSSIMO, L. F. Um gosto pela ironia. **Zero Hora**, Porto Alegre, n. 16.414, p. 2, 12 aug. 2010. Available at: <http://www.clicrbs.com.br/zerohora/jsp/default.jsp?uf=1&action=flip>. Accessed: 12 aug. 2010.

5.5.9 Work presented at an event

```

1  @inproceedings{brayner1994,
2    author      = {Brayner, A. R. A. and Medeiros, C. B.},
3    title       = {Incorporação do tempo em SGBD orientado a objetos},
4    eventtitle  = {Simpósio Brasileiro de Banco de Dados},
5    booktitle   = {Anais [...]},
6    edition     = {9},
7    venue       = {São Paulo},
8    address     = {São Paulo},
9    publisher   = {USP},
10   year        = {1994},
11   pages       = {16--29},
12  }

```

BRAYNER, A. R. A.; MEDEIROS, C. B. Incorporação do tempo em SGBD orientado a objetos. *In*: SIMPÓSIO BRASILEIRO DE BANCO DE DADOS, 9., 1994, São Paulo. **Anais [...]**. São Paulo: USP, 1994. p. 16-29.

5.5.10 Work without an author

```
1  @article{anteprojeto1987,  
2    title   = {Anteprojeto de lei},  
3    journal = {Estudos e Debates},  
4    address = {Brasília, DF},  
5    number  = {13},  
6    pages   = {51--60},  
7    year    = {1987},  
8  }
```

ANTEPROJETO de lei. **Estudos e Debates**, Brasília, DF, n. 13, p. 51-60, 1987.

Remark

Some types of document of NBR 6023:2025 are not set according to the standard **Partly implemented**: the event as a whole, legislation and case law, patents, the issue of a periodical and cartographic documents in periodicals. Some elements also have no field of their own, such as the approximate date in brackets and the numbering of the year of a periodical (“ano 3”). In these cases, check the reference generated against the text of the standard.

6 Index of functions

This chapter lists the functions and the variables of the package, in alphabetical order, with the page on which each one is described. The package also exports the same functions with Portuguese names, described in the Portuguese version of this manual.

<code>abntly()</code> p. 5	<code>abstract()</code> p. 28
<code>acknowledgments()</code> p. 25	<code>algorithm()</code> p. 63
<code>annex()</code> p. 40	<code>appendix()</code> p. 40
<code>approval-page()</code> p. 21	<code>apud()</code> p. 74
<code>auto-ref()</code> p. 61	<code>back-matter()</code> p. 37
<code>call()</code> p. 57	<code>catalog-card()</code> p. 17
<code>config-info()</code> p. 10	<code>config-names()</code> p. 7
<code>cover()</code> p. 13	<code>dark-indigo</code> p. 6
<code>dedication()</code> p. 24	<code>epigraph()</code> p. 26
<code>errata()</code> p. 19	<code>fitted()</code> p. 53
<code>frame()</code> p. 53	<code>front-matter()</code> p. 37
<code>glossary()</code> p. 38	<code>ibge-table()</code> p. 57
<code>index()</code> p. 41	<code>keywords()</code> p. 28
<code>legend()</code> p. 52	<code>list-of()</code> p. 31
<code>list-of-acronyms()</code> p. 34	<code>list-of-figures()</code> p. 31
<code>list-of-frames()</code> p. 31	<code>list-of-symbols()</code> p. 34
<code>list-of-tables()</code> p. 31	<code>main-matter()</code> p. 37
<code>no-indent()</code> p. 45	<code>note()</code> p. 53
<code>part()</code> p. 66	<code>preamble()</code> p. 16
<code>sideways()</code> p. 66	<code>signature()</code> p. 22
<code>source()</code> p. 52	<code>stamp()</code> p. 67
<code>subfigures()</code> p. 64	<code>title-page()</code> p. 15
<code>with-info()</code> p. 14	

References

- AGUIAR, André Andrade de. **Avaliação da microbiota bucal em pacientes sob uso crônico de penicilina e benzatina**. 2009. Tese (Doutorado em Cardiologia) – Faculdade de Medicina, Universidade de São Paulo, São Paulo, 2009.
- ANTEPROJETO de lei. **Estudos e Debates**, Brasília, DF, n. 13, p. 51-60, 1987.
- ASSOCIAÇÃO BRASILEIRA DE NORMAS TÉCNICAS. **ABNT NBR 14724**: informação e documentação: trabalhos acadêmicos: apresentação. Rio de Janeiro: ABNT, 2024.
- AUTOR, Nome do. **Título da obra**: subtítulo. Rio Branco: Editora, 2026.
- BARBOSA, Cássio. **Teoria da literatura**. São Paulo: Cultrix, 1958.
- BARBOSA, Octávio. **Direito constitucional**. Rio de Janeiro: Forense, 1958.
- BRAYNER, A. R. A.; MEDEIROS, C. B. Incorporação do tempo em SGBD orientado a objetos. *In*: SIMPÓSIO BRASILEIRO DE BANCO DE DADOS, 9., 1994, São Paulo. **Anais [...]**. São Paulo: USP, 1994. p. 16-29.
- COELHO, Ana Cláudia. **Fatores determinantes de qualidade de vida física e mental em pacientes com doença pulmonar intersticial**: uma análise multifatorial. 2009. Dissertação (Mestrado em Ciências Médicas) – Faculdade de Medicina, Universidade Federal do Rio Grande do Sul, Porto Alegre, 2009. Available at: <http://www.lume.ufrgs.br/bitstream/handle/10183/16359/000695147.pdf?sequence=1>. Accessed: 4 sept. 2009.
- CRUZ, Anamaria da Costa; CORREA, Elisabeth; COSTA, Maria Inês. **Referências bibliográficas**. Niterói: Intertexto, 1998.
- DE LUCCA, Gabriella. Notas curtas. **Getulio**, São Paulo, v. 3, p. 9, 2009.
- FREYRE, Gilberto. **Casa-grande & senzala**. Rio de Janeiro: Maia & Schmidt, 1936a.
- FREYRE, Gilberto. **Sobrados e mucambos**. São Paulo: Nacional, 1936b.
- LUCK, Heloisa. **Liderança em gestão escolar**. 4. ed. Petrópolis: Vozes, 2010.
- MACIEL, Alvaro; BRUM, Benedito; DEL BIANCO, Carlos; COSTA, Dalila. Uma revisão. **Revista Brasileira de Educação**, Rio de Janeiro, v. 24, p. 160-170, 2019.
- OLIVEIRA, Avelino Ignácio de; LEONARDOS, Othon Henry. **Geologia do Brasil**. 2. ed. Rio de Janeiro: Serviço de Informação Agrícola, 1943.
- ROMANO, Giovanni. Imagens da juventude na era moderna. *In*: LEVI, G.; SCHMIDT, J. (org.). **História dos jovens 2**: a época contemporânea. São Paulo: Companhia das Letras, 1996. p. 7-16.
- SANTOS, F. R. A colonização da terra do Tucujús. *In*: SANTOS, F. R. **História do Amapá, 1º grau**. 2. ed. Macapá: Valcan, 1994. p. 15-24.
- VERÍSSIMO, L. F. Um gosto pela ironia. **Zero Hora**, Porto Alegre, n. 16.414, p. 2, 12 aug. 2010. Available at: <http://www.clicrbs.com.br/zerohora/jsp/default.jsp?uf=1&action=flip>. Accessed: 12 aug. 2010.