


SCHEMATIC

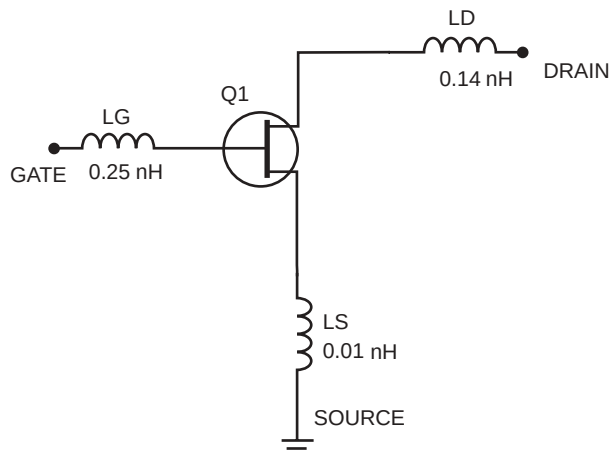

FET NONLINEAR MODEL PARAMETERS ⁽¹⁾

Parameters	Q1	Parameters	Q1
VTO	-0.85	RG	1
VTOSC	0	RD	4
ALPHA	6	RS	3
BETA	0.11	RGMET	0
TQGAMMA	0.07	TNOM	27
TQGAMMAAC	0.075	XTI	3
Q	2	EG	1.43
TQDELTA	0.4	VTOTC	0
VBI	0.715	BETATCE	0
IS	3e-13	FFE	1
N	1.22		
RIS	0		
RID	0		
TAU	3e-12		
CDS	0.1e-12		
RDB	1000		
CBS	1e-9		
CGS	0.3e-12		
CGD	0.033e-12		
DELTA1	0.3		
DELTA2	0.4		
FC	0.5		
VBR	Infinity		

MODEL RANGE

Frequency: 0.1 to 32 GHz
 Bias: $V_{DS} = 1\text{ V to }3\text{ V}$, $I_D = 5\text{ mA to }30\text{ mA}$
 Date: 3/2002

(1) ADS TOM Model

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.