

Bachelor Thesis

June 16, 2017

GUI usability and testing of mobile applications

Example subtitle

Lucas Pelloni

of 18.03.1993, Zurich, Switzerland (13-722-038)

supervised by

Prof. Dr. Harald C. Gall
Dr. Sebastiano Panichella
Giovanni Grano (PhD student)



University of
Zurich^{UZH}



software evolution & architecture lab

Bachelor Thesis

GUI usability and testing of mobile applications

Example subtitle

Lucas Pelloni



University of
Zurich^{UZH}



Bachelor Thesis

Author: Lucas Pelloni, lucas.pelloni@uzh.ch

URL: https://github.com/lucaspelloni2/BA_PROJ

Project period: 08.01.2017 - 08.07.2017

Software Evolution & Architecture Lab
Department of Informatics, University of Zurich

“Program testing can be used to show the presence of bugs, but never to show their absence.”
Edsger W. Dijkstra

Acknowledgements

The experience I lived with the implementation and subsequently the writing of my bachelor thesis was undoubtedly one of the most rewarding academic experiences of my life until now. During these six months, I learned to know more in-depth the programming world, appreciating more and more its challenges and its beauties. However, the realization of my thesis would not have been possible without the help of few people. First, I would like to thank all those people who have contributed directly to the realization of my bachelor thesis. After that, those who indirectly allowed me to reach such an important goal of my life: my bachelor's degree.

First of all, I would like to express my deepest gratitude to my thesis advisor, Giovanni Grano. I would like to thank him for the patience he has shown during the past six months, for its guidance and support, for its constructive criticism and for having always encouraged me to achieve my best. I think one of the best things of my thesis was that he always allowed me to experiment and to be creative with the assigned tasks. I could "bang my head" against the new challenges and this helped me to find the right solutions. The final result of my thesis would not have been possible without his help. I would like to offer special thanks to Dr. Sebastiano Panichella for believing in me from the beginning and for giving me such a high-level thesis. Thanks for allowing me to discover a branch of computer science that I did not know so in detail before. I thank also my two computer science schoolmates, Ile and Erion, who helped me a lot with their knowledge about android mobile devices. Finally, I would like to thank Professor Gall for giving me the opportunity to work together with the Software Evolution & Architecture Lab at the University of Zurich, allowing me to use the most state-of-the-art infrastructures and technologies for my thesis.

I would like to spend also some words for those people, who support me during the whole bachelor degree.

Abstract

Zusammenfassung

Contents

1	Introduction	1
1.1	Context	1
1.2	Motivation	3
1.3	Motivation Example	4
1.4	Research questions	4
1.4.1	Subsection	6
2	Related Work	7
2.1	Automated tools for Android Testing	7
2.2	Usage of users reviews in Software maintenance activities	9
2.3	Choice and motivation for the used automated testing tools	9
3	Approach	11
4	Tool	13
4.1	Testing	13
4.2	Clustering	14
4.3	Linking	14
4.4	How to start TACL	14
5	Results and Discussion	19
6	Conclusions and Future Work	21

List of Figures

1.1	imgs/seal logo	6
4.1	Class Diagram of the testing part of the tool	15
4.2	Class Diagram of the clustering part of the tool	16
4.3	Class Diagram of the linking part of the tool	17

List of Tables

2.1	Statistics on found crashes from the SAPIENZ experiment published on [20]	8
-----	---	---

List of Listings

1.1	An example code snippet	6
4.1	A set of needed parameters in order to start the testing process	14

Introduction

The following sections in this chapter give an overview about the context in which the thesis is placed, the motivation behind it and a brief introduction of the research questions prepared for it.

Afterwards, chapter 2 surveys the literature in the field of automated mobile testing, presenting the main approaches in this field and their exploration strategies. After that, it presents the literature available about the usage of users reviews in software maintenance activities.

Chapter 3 gives a general overview about the approaches and methodologies available in the literature, implemented in the presented tool.

Chapter 4 presents TACL, a tool which firstly tests and reports a set of android mobile apps using either MONKEY or *Sapienz*. Secondly, creates a cluster with the in the previous testing phase generated crash logs. Finally, uses a linking procedure for combing a set of user reviews with the stack trace that have been grouped together in the previous step. The tool enables developers to link natural language contained inside user feedbacks and pieces of source code, such as names of classes, methods, functions, etc.

Chapter 5 describes the obtained results after an experiment conducted on a set of mobile apps (available on *FDroid* ¹) with their correspondent reviews.

Finally, chapter 6 closes the main body of the thesis with concluding comments and proposals for future work.

1.1 Context

Testing is the action of inspecting the behaviour of a program, with the intention of finding anomalies or errors [25]. The goal behind software testing is to reach the highest *test coverage* finding the largest number of *errors* with the smallest number of *test cases*. A test case can be viewed as a set of program inputs, each of them gets associated with an expected result when they are executed.

Nowadays, software testing is widely recognised as an essential part of any software development process, presenting however an extremely expensive activity. This because, trying to test all combinations of all possible input values for an application [9] requires a lot of workforce and it is almost always unthinkable to reach a testing-coverage of 100%. The reason is that, testing needs to be performed under time and budget constraints [11] and big and complex applications might have a very large number of potential test scenarios, many of which are really difficult to predict. In this sense, *Dijkstra* [8] observed, that testing a software does not imply a demonstration of the right behaviour of the program, but it only aims to demonstrate the presence of faults, not their absence. But then, why try to test a program even knowing that a full coverage (and

¹<https://f-droid.org>

so a complete validation of the software) cannot be reached? Well, the answer is quite simple. A program, that would be carefully tested and all bugs found would be consequently fixed, increase the probability that this software would behave as expected in the untested cases [9].

In general, there are four testing levels a tester should perform in order to investigate the behaviour of a traditional software:

1. Unit testing;
2. Integration testing;
3. System testing;
4. Acceptance testing.

With *unit testing*, the application components are viewed and split into individual *units* of source code, which are normally functions or small methods. Intuitively, one can view a unit as the smallest testable part of an application. This kind of testing is usually associated with a *white-box* approach (see later). *Integration testing* is the activity of finding faults after testing the previous individually tested units combined and tested as a group together. *System testing* is conducted on a complete, integrated system to evaluate the compliance with its requirements. You can imagine system testing as the last checkpoint before the end customer. Indeed, *acceptance testing* (or *customer testing*) is the last level of the testing process, which states whether the application meets the user needs and whether the implemented system works for the user. This kind of testing is usually associated with a *black-box* approach.

These mentioned testing levels shall be sequentially executed and are driven by two testing methodologies [30,34]:

- black-box testing;
- white-box testing.

With *black-box* testing, also called functional testing, the tester doesn't need to have any prior knowledge of the interior structure of the application. He tests only the functionalities provided by the software without any access to the source code. Typically, when performing a black box test, a tester will interact with the system's user interface by providing inputs and examining outputs without knowing how and where the inputs are worked upon. On the other side, with *white-box* testing, also *glass testing* or *open box testing* [11], the test cases are extrapolated from the internal software's structure. Indeed, the tester writes the test cases defining a paths through the code, which has to provide a sensible output.

In practice, the whole testing process is strictly structured and it gets implemented through the use of different testing models. Usually, the selection of one model rather than another has a huge impact on the final testing result is carried out. The most popular and applied testing process models in practice are the *V-model* [32], the *Waterfall model* [33] and the *Spiral model* [31].

As shown, there exist few testing steps, methodologies and different models to accompany a testing process of a traditional software. However, when a tester is intent to define and choose the right pieces for testing a software in a careful manner, the common goal behind the testing stays always the same, i.e. generate a *test suite* (a set of *test cases*), with the smallest number of test cases causing the largest number of failures in the system [11], in order to increase the reliability of the system. However as mentioned before, the process of finding the correct test scenarios, afterwards execute them and finally report their results and compare them to the previously written specifications, might be time-consuming and cost-intensive. In fact, testing costs have been estimated at being at least half of the entire development cost [3]. For this reason, it is necessary to reduce them, trying to improve the effectiveness of the whole testing process, with the aim to automate it.

1.2 Motivation

With the advent of the *mobile age*, the traditional software market has been always more complemented with a new point of view. Indeed, nowadays, application running on mobile devices are becoming so widely adopted, so that they have represented a remarkable revolution in the IT sector. In fact, in three years, over 300,000 mobile applications have been developed, [23], 149 billions downloaded only in 2016 [29] and 12 million mobile app developers (expected to reach up 14 million in 2020) maintaining them [7].

This majestic revolution in the IT sector has had also a huge impact on the software testing area. This because, mobile applications differ from traditional software and so differ also their testing techniques. In fact, mobile applications are structured around Graphical User Interface (GUI) events and activities, thus exposing them to new kinds of bugs and leading to a higher defect density compared to traditional desktop and server applications [13]. Furthermore, they are context-aware [23]. Therefore, each mobile application is aware of the environment in which it is running and provides inputs according to its current context. This has some implications for the testing, because a test case running on a specific context may lead to its expected results, while the same test case running on another environment may be error-prone. In fact, bugs related to contextual inputs are quite frequent [23].

For this reason, mobile applications require new specialized and different testing techniques [23] in order to ensure their reliability. In this sense, an extremely valid approach has been the GUI testing. In particular, in this kind of testing, each test case is designed and run in the form of sequences of GUI interaction events, with the aim to state whether an application meets its written requirements.

As traditional testing, GUI testing can be performed either manual or automatic. However, a manual approach would require a lot of programming and may be time-consuming.

For this purpose, with the aim to support developers in building high-quality applications, the research community has recently developed novel techniques and tools to automate their testing process [13, 17, 20, 23].

These techniques consist of automatically create test cases through the generation of UI and system events, which are transmitted to the application under test, with the aim to cause some crashes. Afterwards, if an exception occurred, these tools usually save in log files the correspondent stack traces, along with the sequence of events that led to the exceptions [23]. However, despite a strong evidence for automated testing approaches in verifying GUI application and revealing bugs, these state-of-art tools cannot always achieve a high code coverage [24]. One reason is that an automated event-test-generation tool is not suited for generating inputs that require human intelligence (e.g. *"inputs to text boxes that expect valid passwords, or playing and winning a game with a strategy"* [17], etc.). This because, current solutions generate redundant/random inputs that are insufficient to properly simulate the human behaviour, thus leaving feature and crash bugs undetected until they are encountered by the users. Furthermore, the crash reports that they generate usually lack of contextual information and are difficult to understand and analyze [4, 14]. For these reasons, sometimes a time-consuming manual approach can be needed for testing an application [24].

However, GUI testing could not be the only approach to help developers find bugs in a mobile application. Nowadays, the exponential growth of the mobile stores offers an enormous amount of informations and feedbacks from users. In fact, these users feedback are playing more and more a paramount role in the development and maintenance of mobile applications. Therefore, another different strategy for giving further support to developers during the testing phase of their applications is to incorporate opinions and reviews of the end-users during the software's evolution process.

Indeed, information contained within *user reviews* can be exploited to overcome the limitations of state-of-the-art tools for automated testing of mobile apps in the following ways [?]:

1. they can complement the capabilities of automated testing tools, by identifying bugs that they cannot reveal;
2. they can facilitate the diagnosis and reproducibility of bugs (or crashes), since user reviews often describe the actions that led to a failure;
3. they can be used to prioritize bug resolution activities based on the users' requests, possibly helping developers in increasing the ratings of their apps.

1.3 Motivation Example

Following, I provide a concrete example of how we plan to compare and analyse the two sources of information: user reviews and reports generated by automated mobile applications testing tools. Given app reviews, we first plan to automatically select the ones describing crashes and bugs in features or in UI elements. One such example is the following:

"Barely works I only installed this for the android sharing function but it usually loads a white screen when I try to use this feature. It's no better than using a browser to view Facebook otherwise."

The user complains about the app sharing function that shows a white screen when activated. A report generated by one of available automated testing tools, SAPIENZ [20], includes the stack trace below, where SAPIENZ is able to find a `NullPointerException` while exercising the sharing functionality.

```
java.lang.NullPointerException
  at com.danvelazco.fbwrapper.activity.BaseFacebookWebViewActivity.shareCurrentPage(BaseFacebookWebViewActivity.java:418)
  at com.danvelazco.fbwrapper.FbWrapper.access$700(FbWrapper.java:26)
  at com.danvelazco.fbwrapper.FbWrapper$MenuDrawerButtonListener.onClick(FbWrapper.java:376)
  at android.view.View.performClick(View.java:4438)
  at android.view.View.onKeyUp(View.java:8241)
  ....
  ....
  at com.android.internal.os.ZygoteInit.main(ZygoteInit.java:611)
  at dalvik.system.NativeStart.main(Native Method)
```

The aim behind my thesis is to investigate the correlation between these *user reviews* and the *crash logs* generated from the automated state-of-the-art tools described in the previous sections. I combine these two sources of information implementing a linking procedure to add contextual details to the logs generated by automated mobile testing tools. I argue that this approach can be fruitfully used to support developers in determining which bugs should be addressed first, prioritizing the arose failures. It is worth to notice that such prioritization is directly guided by the user feedback with the aim to maximize their satisfaction and consequentially, the app rating. I argue that this investigation might improve the automated testing process and might help other developers in validating their mobile applications, using TACL, the implemented tool described in the *Chapter 4*.

1.4 Research questions

In this thesis, I conduct a preliminary study to investigate the first and most important point from the previous list: *the complementarity between user feedback and the outcomes of automated testing tools*. This research represents a first fundamental step toward the integration of user feedback into the

testing process of mobile apps. Thus, I conducted my thesis to answer the following research questions:

- **RQ₁**: *Which are the most important tools for automatic testing of Android applications?*
- **RQ₂**: *To what extent can we link the defects arose from automated testing tools with user reviews?*
- **RQ₃**: *What kind of defects are detected by state-of-art tools proposed for GUI testing? How these defects are effectively perceived by users?*

For answering the **RQ₁**, I want to investigate which are the most important automated testing tools used for testing Android mobile applications. For this purpose, I present in the Chapter 2 the main research in this field, giving an accurate overview about the testing tools in general, their pros and cons and their exploration strategies.

For the **RQ₂**, I implement a linking procedure which uses a experimental-based threshold in order to state whether a review refers to a specific *crash log*. Based on the result of this linking approach I am able to discuss and answer the second research question.

For the **RQ₃**, TODO!

Subsubsection



Figure 1.1: imgs/seal logo

1.4.1 Subsection

Paragraph. Always with a point.

```
/**
 * Javadoc comment
 */
public class Foo {
    // line comment
    public void bar(int number) {
        if (number < 0) {
            return; /* block comment */
        }
    }
}
```

Listing 1.1: An example code snippet

Related Work

In the following two sections, I summarize the main related works on *automated testing tools for Android apps* and on *the broadly usage of user reviews from app store in Software maintenance activities*. An overview of the recent research in the field can be found in the survey by Martin *et al.* [21].

2.1 Automated tools for Android Testing

Depending on their exploration strategy, there are in general three approaches for creating a generation of user inputs on a mobile device [6, 17]: *random testing* [10, 17], *systematic testing* [18] and *model-based testing* [2, 5, 16].

Fuzz testing

When test automation does occur, it typically relies on Google's Android MONKEY command-line [10]. Since it comes directly integrated in Android Studio, the standard IDE for Android Development, it is regarded as the current state-of-practice [19]. This tool simply generates, for the specified Android applications, pseudo-random streams of user events into the system, with the goal to stress the *AUT*¹ [10]. The effort required for using MONKEY is very low [6]. Users have to specify in the command-line the type and the number of the UI events they want to generate and in addition they can establish the verbosity level of the MONKEY log. The set of possible MONKEY parameters can be found in the official *User Guide* for MONKEY on [10].

The kind of testing implemented by MONKEY follows a black-box approach. Despite the robustness, the user friendliness [6, 17] and the capacity to find out new bugs outside the stated scenarios [1], this tool may be inefficient if the *AUT* would require some human intelligence (e.g. a login field) for providing sensible inputs [17].

For this reason, MONKEY may cause highly redundant and senseless user events. Even though it would find out a new bug for a given app, the steps for reproducing it may be very difficult to follow, due also to the randomness in the testing strategy implemented by it [1].

Dynodroid [17] is also a random-based testing approach. However, this tool has been discovered being more efficient than MONKEY in the exploration process [6].

One of the reasons behind a better efficacy has been that DYNODROID is able to generate both *UI inputs* and *system events* (unlike MONKEY, which can only generate UI events) [6].

Indeed, DYNODROID can simulate an incoming SMS message on a mobile device, a notification of another app or an request of use for available wifi networks in the neighborhood [17]. All these

¹Application Under Test

events represent *non-UI events* and they are often unpredictable and therefore difficult to simulate in a suitable context. DYNODROID views the AUT as an event-driven program and follows a cyclical mechanism, also known as the *observe-select-execute* cycle [17]. First of all, it *observes* which events are relevant to the AUT in the current state, grouping them together (an event must be considered relevant if it triggers a part of code which is part of the AUT). After that, it *selects* one of the previously observed events with a randomized algorithm [6, 17] and finally *executes* it. After the execution of that event the AUT reaches a new state and the cycle again starts again. Another advantage of DYNODROID compared to MONKEY is that it allows users to interact in the testing process providing UI inputs. In doing so, DYNODROID is able to exploit the benefits of combining automated with manual testing [17].

Systematic testing

The tools using a systematic explorations strategy rely on more sophisticated techniques, such as symbolic execution and evolutionary algorithms [6].

SAPIENZ [20] introduced a new Pareto multi-objective search-based technique (the first one to Android testing) to simultaneously maximize coverage and fault revelation, while minimizing the sequence lengths. Its approach combines the above mentioned random-based techniques with a new systematic exploration. SAPIENZ starts its work-flow by instrumenting the AUT, which can be achieved using a *white-box* approach, whether the source code is available. Otherwise the "instrumenting-process" follows a *black-box* approach whether only the APK² is given. Afterwards, SAPIENZ extracts string constants after an accurate analysis of the APK. These strings are used as inputs for inserting realistic strings into the AUT, which has been demonstrated to improve the testing efficiency [20]. After that, UI events are generated and executed by an internal component called *MotifCore*. This component, as highlighted before, combines random-based testing approaches with systematic exploration strategies. When it gets invoked, it initialises an *initial population* via *MotifCore's Test Generator* and starts the genetic evolution process. During this process, another component called *Test Replayer* manages genetic individuals during the evaluation process of the individual fitness. After that, the individual test cases are translated into Android events by the *Gene Interpreter*, which is in charge of communicate with the mobile device. Another component called *States Logger* checks whether the tests cases find some faults and produces statistics for another component, called *Fitness Extractor*, which compute the fitness. Finally, reports containing data about testing results, such as code coverage, stack traces and "steps for reproducing the faults" are generated and stored at the end of the process.

The experiment results published on [20] show that SAPIENZ is an out-performer in the automated mobile testing area. The table below compares the above mentioned tools MONKEY and DYNODROID with SAPIENZ, illustrating the strength of the SAPIENZ's approach.

Table 2.1: Statistics on found crashes from the SAPIENZ experiment published on [20]

App crashes	Monkey	Dynodroid	Sapienz
Nr. App crashes	24	13	41
Nr. Unique crashes	41	13	104
Nr. Total crashes	1'196	125	6'866

As represented in the table above, SAPIENZ found from a set of 68 benchmark apps, 104 unique crashes (while MONKEY 41 and DYNODROID 13).

²Android Package Kit, extension used by Android OS for installing a mobile app on an android device

Model-based testing

Model-based tools for testing Android applications are quite popular [20]. Most of these tools [2,5,16,22] generate UI events from models, which are either manually designed or created from XML configuration files [20].

For example, *SwiftHand* [5] uses a machine learning algorithm to learn a model of the current *AUT*. This final state machine model [6] generates UI events and due their execution the app reaches new unexplored states. After that, it exploits the execution of these events to adapt and refine the model [5]. *SwiftHand*, in a similar way to *MONKEY* generates only touching and scrolling UI events and is not able to generate System events [6].

2.2 Usage of users reviews in Software maintenance activities

The concept of app store mining was first introduced by *Harman et al.* [12]. In this context, many researchers focused on the analysis of user reviews to support the maintenance and evolution of mobile applications [21]. *Pagano et al.* [26] empirically analyzed the feedback content and their impact on the user community, while *Khalid et al.* [15] conducted a study on iOS apps discovering 12 types of user complaints posted in reviews. Several approaches have been proposed with the aim to classify useful reviews. *AR-MINER* [4] represents the first approach proposed in the literature able to discern informative reviews. In this direction, in a recent work *Panichella et al.* introduced a tool called *SURF* (Summarizer of User Reviews Feedback), that is able to analyse the useful informations contained in app reviews and to performs a systematic summarisation of thousands of user reviews through the generation of an interactive agenda of recommended software changes [28].

Finally, *Palomba et al.* [27] proposed *CHANGEADVISOR*, a tool able to suggest the source code artifacts to maintain according to user feedback.

2.3 Choice and motivation for the used automated testing tools

For the implementation of *TACL*, we have chosen to use the following two automated testing tools:

- *MONKEY*
- *SAPIENZ*

The selection of *MONKEY* is justified by the fact that (i) *MONKEY* represents the current state-of-practice in the field of automated mobile testing [19] and therefore is well supported and documented by the community, (ii) the effort for using it is very low [6] and (iii) being it a command-line tool, it can easily be combined with the terminal and so be launched by and integrated into an external tool which provides and supports command-line functions.

The aim of selecting *SAPIENZ* is driven by the fact that (i) *SAPIENZ* has been found to be (based on the experimental results presented on [20] and mentioned in the previous section) an out-performer in the automated mobile testing area. Indeed its approach has been discovered to be much more reliable and high-performing compared to other testing strategies (as those of *MONKEY* or *DYNODROID*). (ii) The source code of *SAPIENZ* is readily accessible on *GitHub* and

therefore the whole source code can be integrated into another tool (iii) SAPIENZ can also be started using some command-lines.

Approach

Tool

The tool I implemented, called TACL, is a *Java*-program aimed at helping further developers during the testing process of their Android mobile applications.

For giving a cleaner and more understandable explanation how TACL works, I would like to split its key features into three main categories (which should also be executed in a sequential way, in order to exploit the whole TACL's potentiality):

1. the TESTING part is in charge of testing a given set of *APKs*, reporting their testing results and extracting possible *crashes* from the before generated testing logs;
2. the CLUSTERING part investigates the similarity between the previous extracted crash logs, using different metrics and strategies, in order to collect them together and create a crash log *bucket*;
3. the LINKING part represents the core feature of TACL. It pre-processes a set of given *user reviews* as well as the previous created set of crash logs, in order to prepare and "clean" them for the linking procedure. Afterwards, it investigates whether it exists a correlation between the stack traces and the user feedbacks, with the aim to link, whether possible, the reviews with the crash logs.

4.1 Testing

First of all, if there is no a set of *APKs* yet, TACL can be also used for downloading the needed mobile application from the *F-Droid API*¹. In this direction, as shown in the picture 4.1, the component FDROID CRAWLER, first is in charge of parsing a static structured file, which contains a set of android packages names. The path of this file is located in the CONFIGURATION MANAGER file, which contains a set of static properties elaborated by TACL. Second, FDROID CRAWLER searches and then extracts a set of *HTTP links* for those android packages. Afterwards, it builds the correct *HTTP request* in accord with the *FDroid endpoint* and finally starts the downloading process, where all the found packages in the API gets downloaded and stored in a given directory.

Once the set of *APKs* is built (either using FDROID CRAWLER or manually) and once all the parameters needed have been specified in the CONFIGURATION MANAGER, the testing process is able to gets started.

Figure 4.1, shows an example of parameters which must be given in order to launch the testing session.

¹LINK API

```
/**
 * Testing logs directories
 */
MONKEY_DIR = Reports/MonkeyReports
SAPIENZ_DIR = Reports/SapienzReports

/**
 * Monkey parameters
 */
LOG_VERBOSITY = -v
PACKAGE_ALLOWED = -p
NR_INJECTED_EVENTS = 5000
DELAY_BETWEEN_EVENTS = 10
PERCENTAGE_TOUCH_EVENTS = 15
PERCENTAGE_SYSTEM_EVENTS = 15
PERCENTAGE_MOTION_EVENTS = 15
IGNORE_CRASH = True

/**
 * Sapienz parameters
 */
SEQUENCE_LENGTH_MIN = 20
SEQUENCE_LENGTH_MAX = 500
SUITE_SIZE = 5
POPULATION_SIZE = 50
OFFSPRING_SIZE = 50
GENERATION = 100
CXPB = 0.7
MUTPB = 0.3
```

Listing 4.1: A set of needed parameters in order to start the testing process

In addition, the automated testing tool is going to be used has to been given as parameter in `MAIN args` (as mentioned in the section 2.2, either `MONKEY` or `SAPIENZ`). It must be also specified on which kind of device (*i.e.*, a real device, such as a *tablet* or a virtual device, such as an *emulator*) the testing is going to be performed.

First of all, TACL recognizes all the *APKs* stored in the given folder and validates its body, *i.e.* whether they are able to be installed on a android mobile device. As shown in the picture 4.1,

Afterwards, TACL stores the from these automated testing tools generated reports, it scans them and whether a bug occurred, it extracts the *crash* from the documented *stack trace* and accurately writes it on a new file, in order to differentiate stack traces without crashes

4.2 Clustering

4.3 Linking

4.4 How to start TACL

First of all, a set of parameters and directories have to be inserted in the static *Configuration Manager* file.

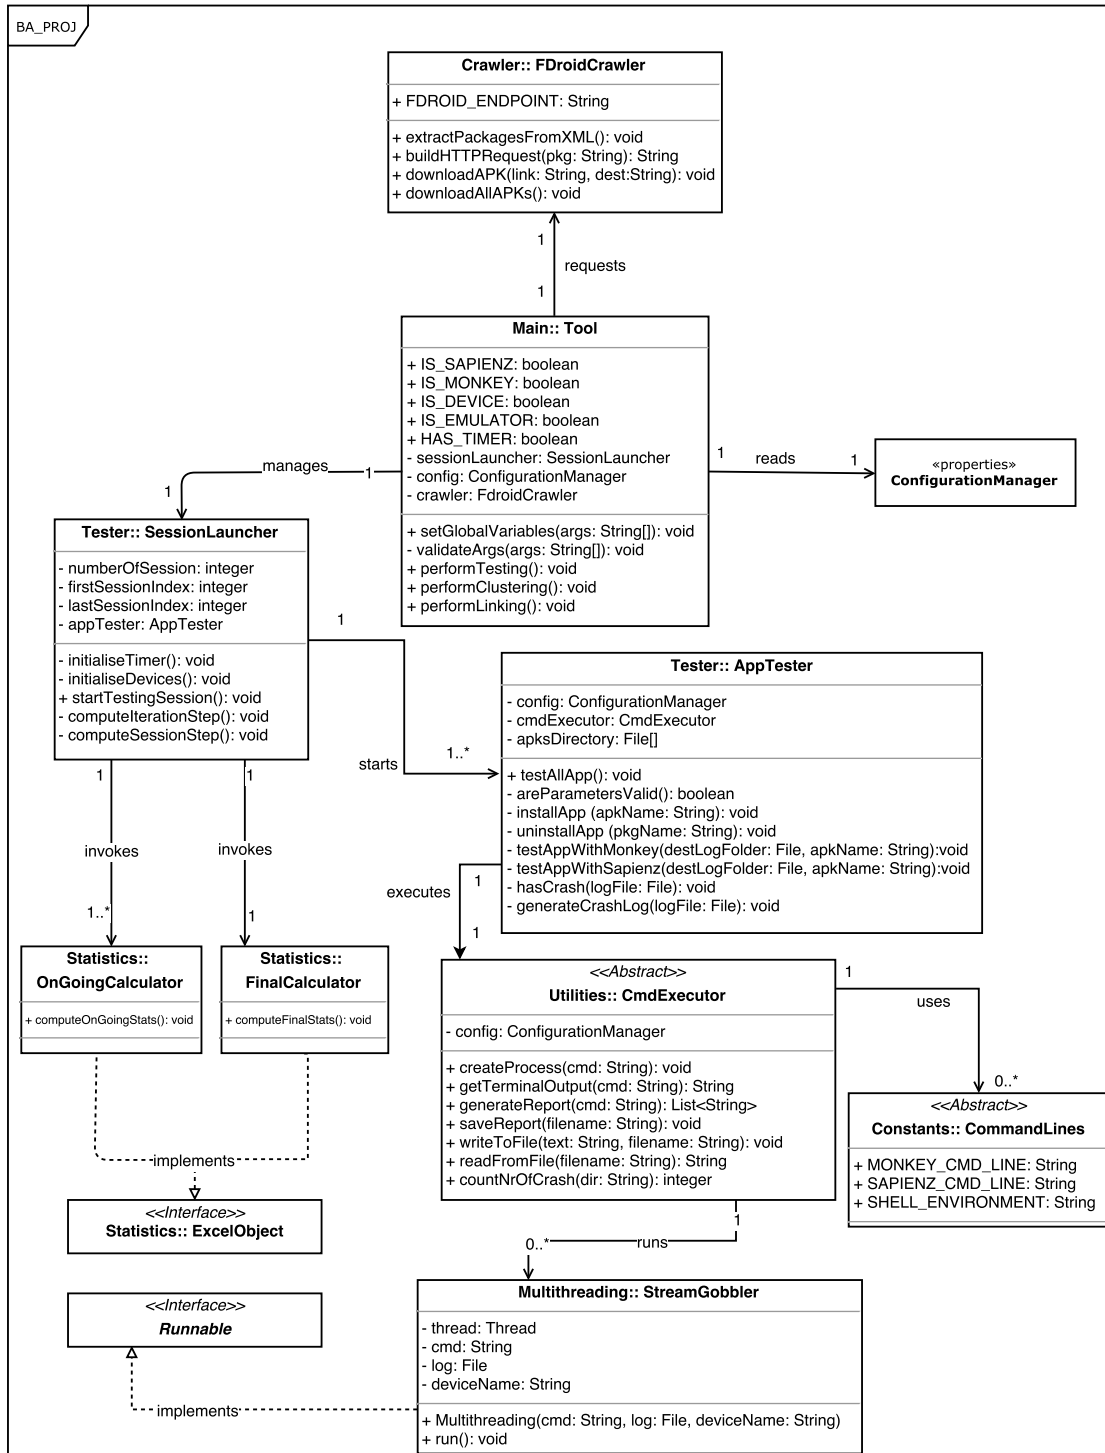


Figure 4.1: Class Diagram of the testing part of the tool

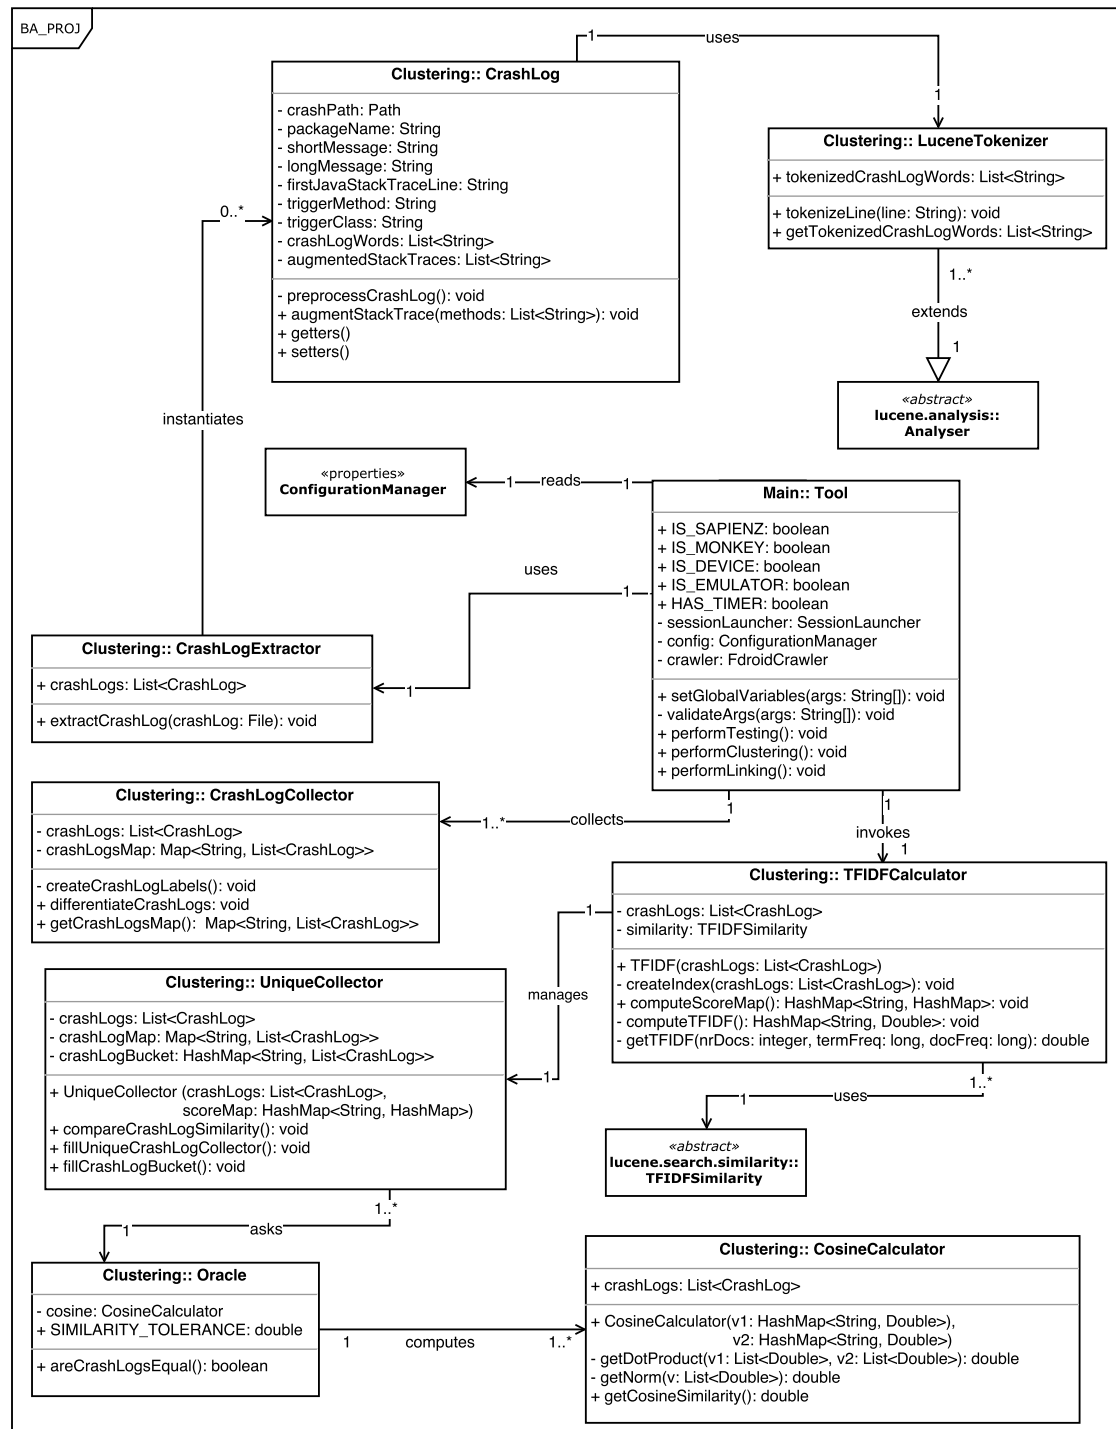


Figure 4.2: Class Diagram of the clustering part of the tool

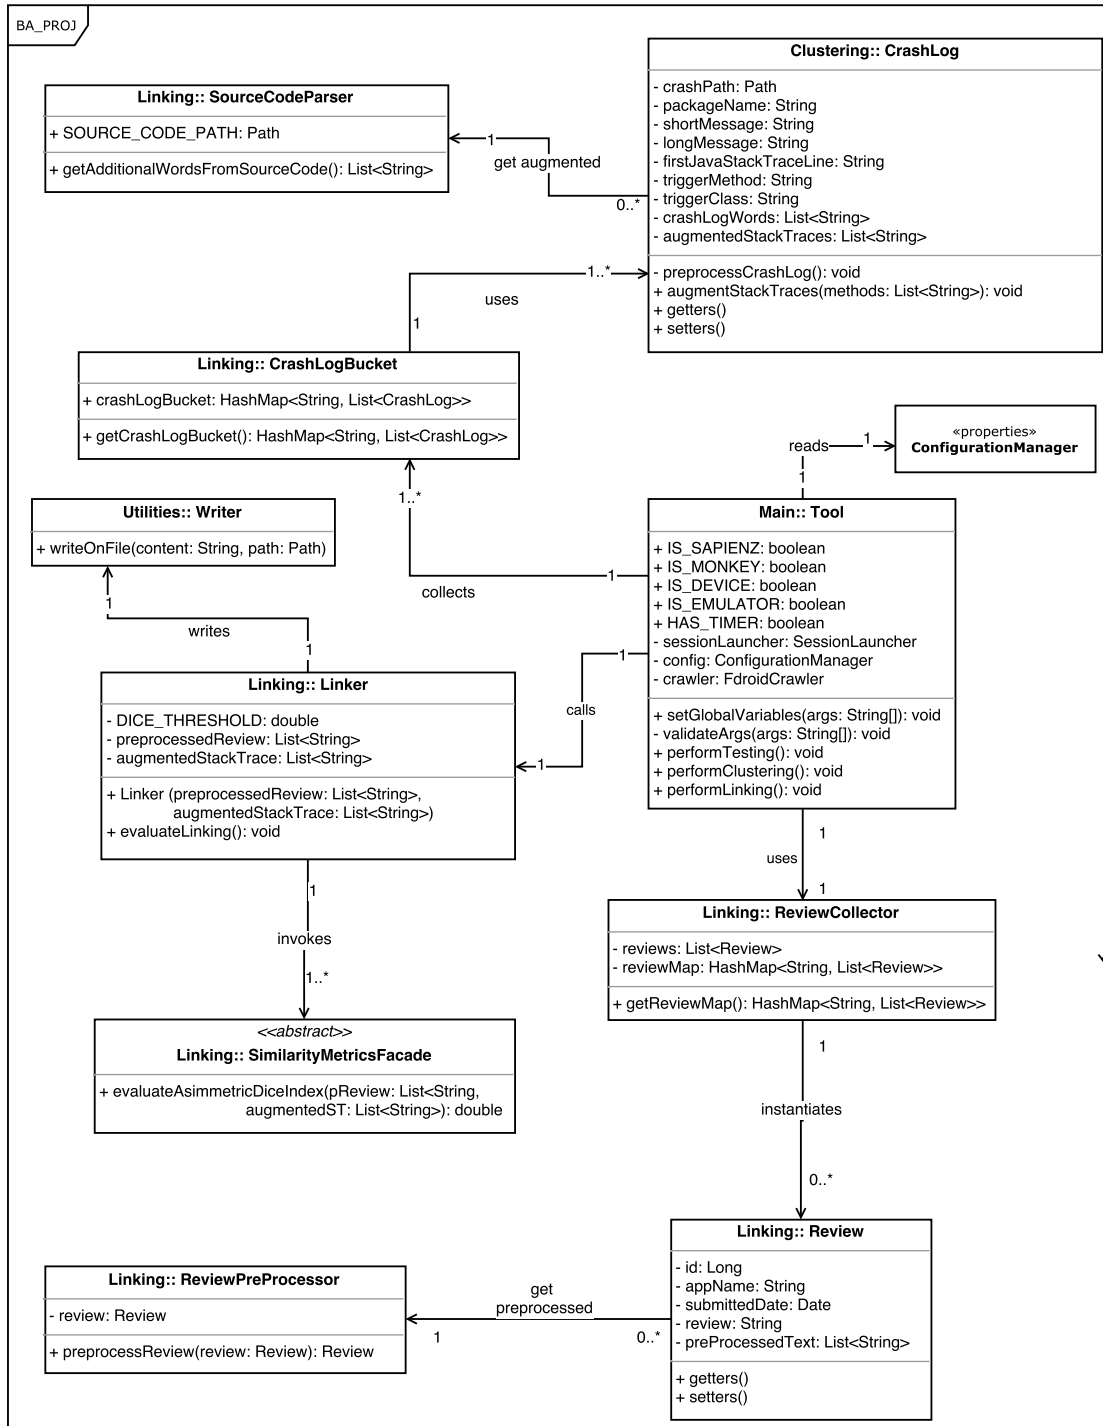


Figure 4.3: Class Diagram of the linking part of the tool

Results and Discussion

Conclusions and Future Work

Bibliography

- [1] What is monkey testing? types, advantages and disadvantages. .
- [2] D. Amalfitano, A. R. Fasolino, P. Tramontana, B. D. Ta, and A. M. Memon. Mobiguitar: Automated model-based testing of mobile apps. volume 32, pages 53–59, 2015.
- [3] B. Beizer. *Software testing techniques*. Van Nostrand Reinhold Co., 1990.
- [4] N. Chen, J. Lin, S. C. H. Hoi, X. Xiao, and B. Zhang. Ar-miner: Mining informative reviews for developers from mobile app marketplace. In *Proceedings of the 36th International Conference on Software Engineering, ICSE 2014*, pages 767–778, New York, NY, USA, 2014. ACM.
- [5] W. Choi. Swifthand. .
- [6] S. R. Choudhary, A. Gorla, and A. Orso. Automated test input generation for android: Are we there yet? (e). In *Proceedings of the 2015 30th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, ASE '15, pages 429–440, Washington, DC, USA, 2015. IEEE Computer Society.
- [7] E. D. Corporation. Global development population and demographics study. Technical report, goo.gl/SKellVs, 2016.
- [8] W. E. W. Dijkstra. Edsger w. dijkstra. .
- [9] M. Glinz and T. Fritz. *Kapitel 8: Testen von Software*. University of Zurich, 2006-2013.
- [10] Google. Android monkey. .
- [11] G. Grano. Implementation and comparison of novel techniques for automated search based test data generation. Master's thesis, University of Salerno, 2015.
- [12] M. Harman, Y. Jia, and Y. Zhang. App store mining and analysis: Msr for app stores. In *2012 9th IEEE Working Conference on Mining Software Repositories (MSR)*, pages 108–111, June 2012.
- [13] C. Hu and I. Neamtii. Automating gui testing for android applications. In *Proceedings of the 6th International Workshop on Automation of Software Test, AST '11*, pages 77–83, New York, NY, USA, 2011. ACM.
- [14] M. E. Joorabchi, A. Mesbah, and P. Kruchten. Real challenges in mobile app development. In *2013 ACM / IEEE International Symposium on Empirical Software Engineering and Measurement*, pages 15–24, Oct 2013.
- [15] H. Khalid, E. Shihab, M. Nagappan, and A. E. Hassan. What do mobile app users complain about? *IEEE Software*, 32(3):70–77, May 2015.

- [16] M. Linares-Vásquez, M. White, C. Bernal-Cárdenas, K. Moran, and D. Poshyanyk. Mining android app usages for generating actionable gui-based execution scenarios. In *Proceedings of the 12th Working Conference on Mining Software Repositories, MSR '15*, pages 111–122, Piscataway, NJ, USA, 2015. IEEE Press.
- [17] A. Machiry, R. Tahiliani, and M. Naik. Dynodroid: An input generation system for android apps. In *Proceedings of the 2013 9th Joint Meeting on Foundations of Software Engineering, ES-EC/FSE 2013*, pages 224–234, New York, NY, USA, 2013. ACM.
- [18] R. Mahmood, N. Mirzaei, and S. Malek. Evodroid: Segmented evolutionary testing of android apps. In *Proceedings of the 22Nd ACM SIGSOFT International Symposium on Foundations of Software Engineering, FSE 2014*, pages 599–609, New York, NY, USA, 2014. ACM.
- [19] R. Mahmood, N. Mirzaei, and S. Malek. Evodroid: Segmented evolutionary testing of android apps. In *Proceedings of the 22Nd ACM SIGSOFT International Symposium on Foundations of Software Engineering, FSE 2014*, pages 599–609, New York, NY, USA, 2014. ACM.
- [20] K. Mao, M. Harman, and Y. Jia. Sapienz: Multi-objective automated testing for android applications. In *Proceedings of the 25th International Symposium on Software Testing and Analysis, ISSTA 2016*, pages 94–105, New York, NY, USA, 2016. ACM.
- [21] W. Martin, F. Sarro, Y. Jia, Y. Zhang, and M. Harman. A survey of app store analysis for software engineering. *IEEE Transactions on Software Engineering*, PP(99):1–1, 2016.
- [22] A. M. Memon, I. Banerjee, and A. Nagarajan. Gui ripping: Reverse engineering of graphical user interfaces for testing. In *WCRE*, volume 3, page 260, 2003.
- [23] H. Muccini, A. Di Francesco, and P. Esposito. Software testing of mobile applications: Challenges and future research directions. In *Proceedings of the 7th International Workshop on Automation of Software Test*, pages 29–35. IEEE Press, 2012.
- [24] M. Nagappan and E. Shihab. Future Trends in Software Engineering Research for Mobile Apps. *Saner'15*, 2015.
- [25] M. D. Network. Testing process. .
- [26] D. Pagano and B. Brügge. User involvement in software evolution practice: A case study. In *Proceedings of the 2013 International Conference on Software Engineering, ICSE '13*, pages 953–962, Piscataway, NJ, USA, 2013. IEEE Press.
- [27] F. Palomba, P. Salza, A. Ciurumelea, S. Panichella, H. Gall, F. Ferrucci, and A. De Lucia. Recommending and localizing change requests for mobile apps based on user reviews. In *Proceedings of the 39th International Conference on Software Engineering, ICSE 2017*, page to appear. ACM, 2018.
- [28] A. D. Sorbo, S. Panichella, C. V. Alexandru, J. Shimagaki, C. A. Visaggio, G. Canfora, and H. C. Gall. What would users change in my app? summarizing app reviews for recommending software changes. In *Proceedings of the 24th ACM SIGSOFT International Symposium on Foundations of Software Engineering, FSE 2016, Seattle, WA, USA, November 13-18, 2016*, pages 499–510, 2016.
- [29] Statista. Number of apps available in leading app stores as of march 2017. , Mar. 2017.
- [30] Wikipedia. black-box testing. .
- [31] Wikipedia. Spiral model. .

-
- [32] Wikipedia. V-model. .
 - [33] Wikipedia. Waterfall model. .
 - [34] Wikipedia. white-box testing. .