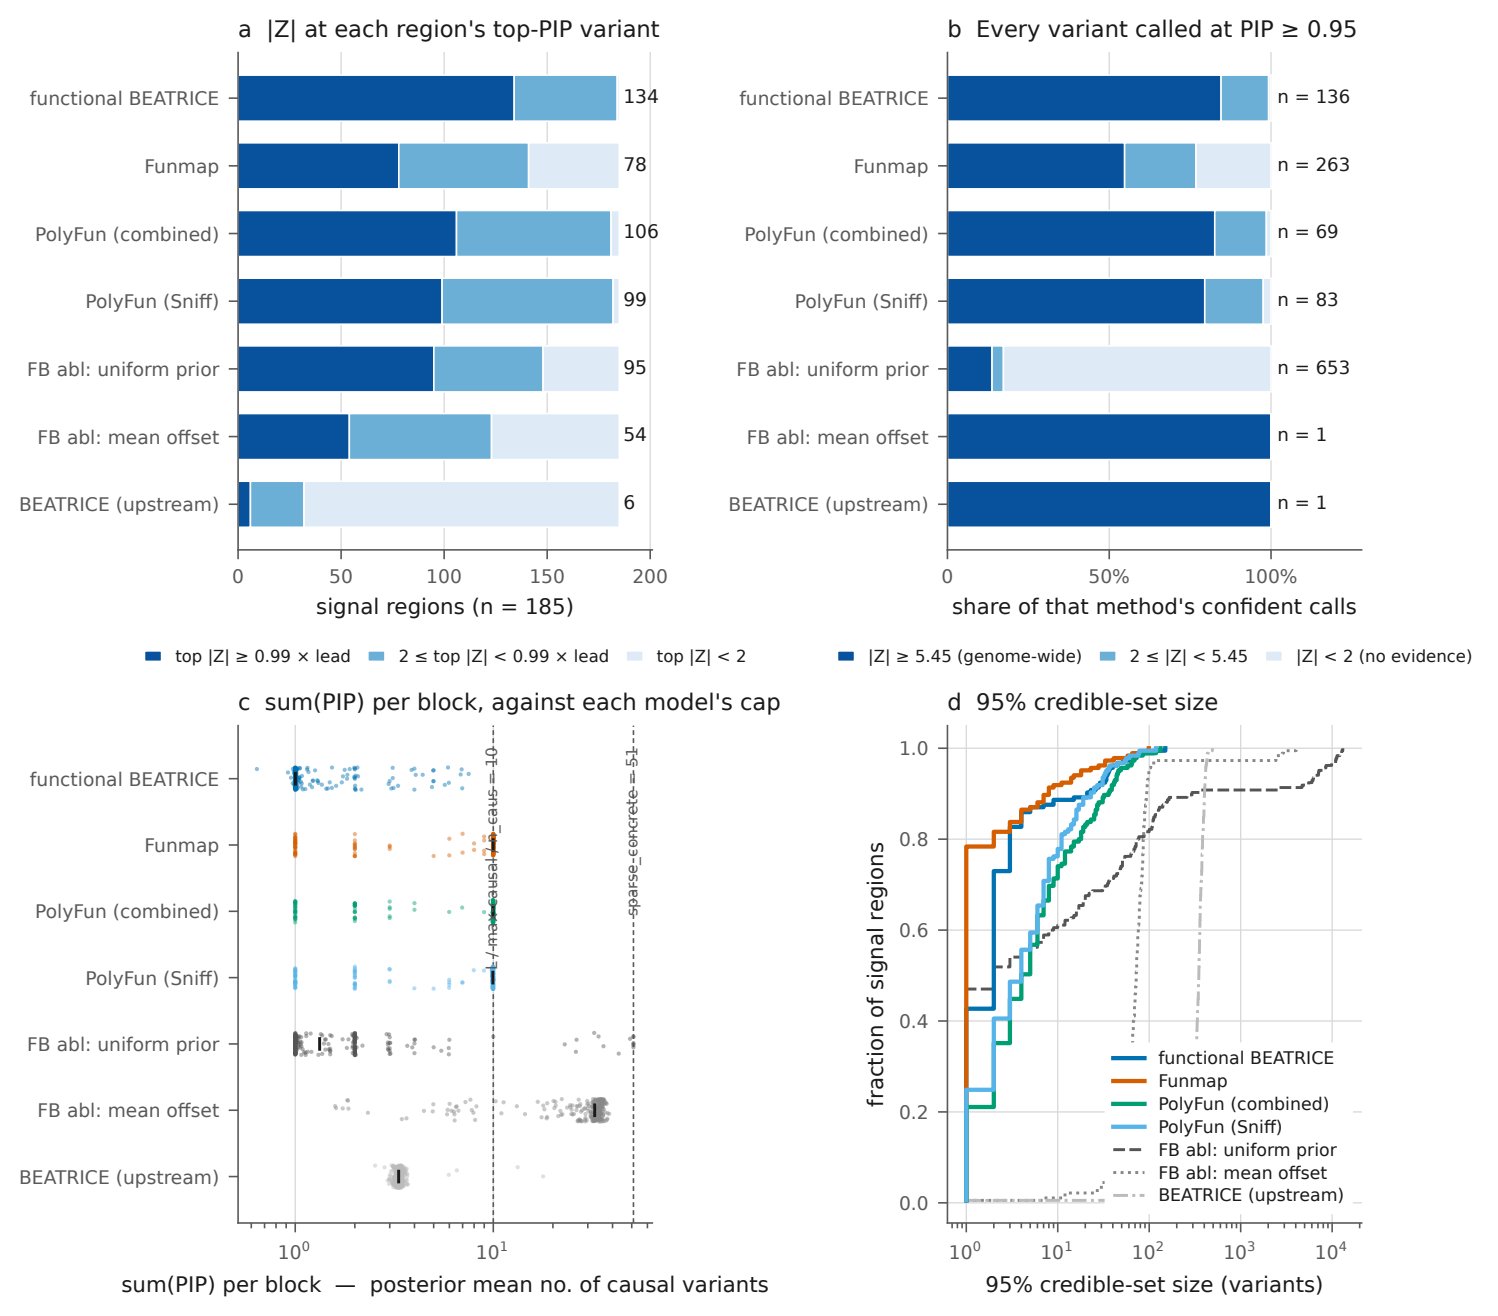

a |Z| at each region's top-PIP variant
functional BEATRICE
Funmap
PolyFun (combined)
PolyFun (Sniff)
FB abl: uniform prior
FB abl: mean offset
BEATRICE (upstream)
134
78
106
99
95
54
6
0
50
100
150
200
signal regions (n = 185)
top |Z| ≥ 0.99 × lead
2 ≤ top |Z| < 0.99 × lead
top |Z| < 2
b Every variant called at PIP ≥ 0.95
n = 136
n = 263
n = 69
n = 83
n = 653
n = 1
n = 1
0
50%
100%
share of that method's confident calls
|Z| ≥ 5.45 (genome-wide)
2 ≤ |Z| < 5.45
|Z| < 2 (no evidence)
c sum(PIP) per block, against each model's cap
more causal than cap = 10
sparse_concrete = 51
10^0
10^1
sum(PIP) per block — posterior mean no. of causal variants
d 95% credible-set size
fraction of signal regions
1.0
0.8
0.6
0.4
0.2
0.0
functional BEATRICE
Funmap
PolyFun (combined)
PolyFun (Sniff)
FB abl: uniform prior
FB abl: mean offset
BEATRICE (upstream)
10^0
10^1
10^2
10^3
10^4
95% credible-set size (variants)