

ECR17 Protocol Specification

Contents

ECR17 Protocol Specification	1
1. Introduction	3
2. Logical communication protocol	4
2.1. Protocol rules and flow.....	4
3. Payment procedure flow	4
3.1. Basic Payment	4
3.2. Payment with additional TAG data and receipt managed by the ECR	6
4. Communication protocol	8
4.1. Application packet format.....	8
4.2. Procedure progress update packet format.....	8
4.3. Confirmation/refusal packet format	8
5. Application Messages	10
5.1. Payment	10
5.1.1. Payment request message (from ECR)	10
5.1.2. Payment response message without currency exchange data (from Terminal)	10
5.1.3. Payment response message with currency exchange data (from Terminal)	12
5.2. Payment with extended result	15
5.2.1. Extended payment request message (from ECR)	15
5.2.2. Extended payment response message (from Terminal)	15
5.3. Refund.....	18
5.3.1. Refund request message (from ECR)	18
5.4. Close session.....	19
5.4.1. Close Session request message (from ECR)	19
5.5. Terminal totals.....	21
5.5.1. Terminal Totals request message (from ECR)	21
5.6. Reversal	22
5.6.1. Reversal request message (from ECR)	22
5.6.2. Reversal response message (from Terminal).....	22
5.7. Card verification.....	24

5.7.1.	Card Verification request message (from ECR)	24
5.7.2.	Card Verification response message (from Terminal)	24
5.8.	Run DLL	26
5.8.1.	Run DLL request message (from ECR)	26
5.8.2.	Run DLL response message (from Terminal)	26
5.9.	POS status	28
5.9.1.	POS status request message (from ECR)	28
5.9.2.	POS status response message (from Terminal)	28
5.10.	Additional data to/from host - TAG	30
5.10.1.	Additional data for GT delivery message (from ECR)	30
5.10.2.	Additional data from GT result message (from Terminal)	31
5.11.	Send last result	32
5.11.1.	Receipt reprint request message (from ECR)	32
5.11.2.	Last result request feedback message (from ECR)	32
5.12.	Enable/disable printing receipt on ECR	33
5.12.1.	Enable/disable printing receipt on ECR message (from ECR)	33
5.13.	Send ticket	34
5.13.1.	Send ticket message (from Terminal)	34
5.14.	Reprint ticket	36
5.14.1.	Send ticket message (from Terminal)	36
5.15.	Pre-authorization request	37
5.15.1.	Pre-authorization request message (from ECR)	37
5.15.2.	Pre-authorization response message (from Terminal)	37
5.16.	Incremental authorization transaction	39
5.16.1.	Incremental authorization request message (from ECR)	39
5.16.2.	Incremental authorization response message (from Terminal)	39
5.17.	Pre-authorization closure	41
5.17.1.	Pre-authorization closure request message (from ECR)	41
5.17.3.	Pre-authorization closure response message with currency exchange data (from Terminal)	42
5.18.	Retroactive Reversal	45

1. Introduction

This document describes the communication protocol “ECR 17” and operative flows between a cash register (“ECR”) and a payment terminal (“POS”).

Using this protocol is possible to automate financial and/or accountable procedures, directly from an ECR connected to the terminal.

The connection between the “POS” terminal and the “ECR” is made through a standard RS232 serial channel or Ethernet TCP / IP or USB channel where required.

NOTES

- PAX Android terminal

For PAX Android terminal the communication with ECR is managed by Paxtools application (© PAX Italia Srl).

- **PAN – Card data**

Complying with the VISA / MC provisions on the clear transfer of the credit card PAN, when the transmission of this data is expected, the terminal adopts the masking of the field in which only the last 4 digits of the PAN are sent in plain text. The remaining digits are transmitted to “0”.

- **“J” Command**

If it is necessary to implement a new cash command, the “J” command must never be used. If the terminal receives a “J” command, it must reject it as an unexpected message (NAK).

- **RFU**

In this document the term (RFU) has the meaning of “reserved for future uses” and indicates functions or characteristics not yet implemented.

2. Logical communication protocol

2.1. Protocol rules and flow

Communication is always started by the ECR, that sends the transaction request message to the terminal. For payments and refunds the message includes the transaction amount.

All messages are exchanged in plain text, the characters composing the messages are not altered in any way.

All messages include a control byte: LRC. LRC character is computed executing an exclusive OR on any message byte, using as base value 0x7F.

Both terminal and cash register shall validate incoming messages. If validation fails for one of these reasons:

- protocol error (invalid message code, invalid terminal ID);
- parity error;
- LRC error;

a NAK shall be sent to the ECR.

Both the terminal and the cash register repeat the message transmission for maximum 3 times on those events:

- wait message time out expiration.
- NAK received.

If the function is enabled, the terminal will verify that the terminal ID specified in cash register messages, is equal to the one sent to cash register, or 00000000.

3. Payment procedure flow

Before initiating any operation, the ECR must verify the POS status using the POS status API, which ensures the connection between the ECR and the POS.


3.1. Basic Payment

The ECR requests a Payment to the POS by using the command Payment request message (from ECR), with the payment amount filled.

POS will process the transaction and response with the transaction Result. For detail see Payment request message (from ECR) (command "P" or "X").

Below is shown the basic payment flow:

Base Payment Flow

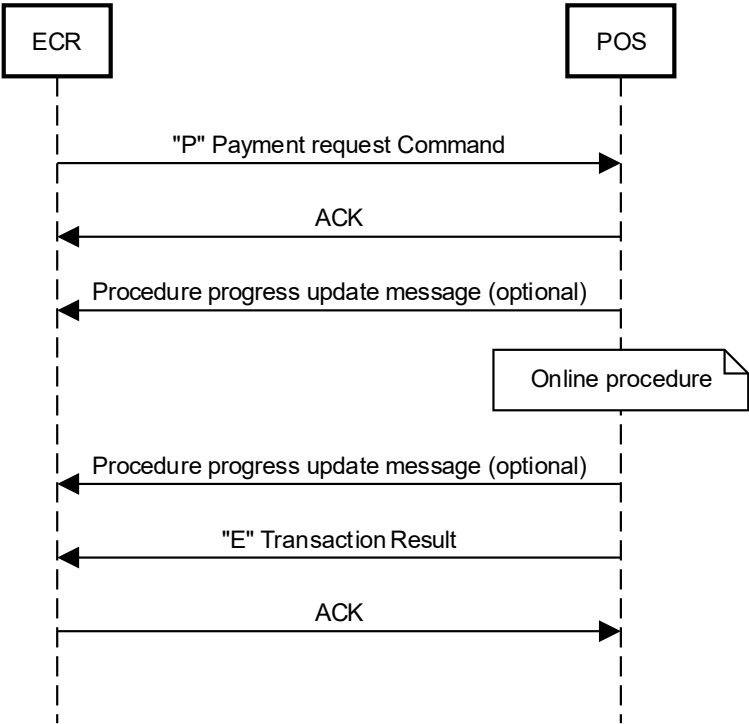

3.2. Payment with additional TAG data and receipt managed by the ECR

This use case addresses the following requirements:

- The integrator requires full control over the receipt management, with printing handled by the ECR instead of the POS;
- Additional TAGs must be sent both to the POS and online (e.g., for reconciliation purposes).

The integrator shall send the following commands:

- Receipt Management Mode: command E Enable/disable printing receipt on ECR, management mode 1
- Payment Function: command P , followed by the additional tag command U


The ECR will receive:

- Transaction Result via message E
- Receipt Data via one or more S messages. When multiple S messages are received, the ECR is responsible for concatenating them.

Additional Notes

- The receipt is formatted by the POS in compliance with the requirements of the Payment Schemes.
- The receipt data format may change without prior notice.

Payment Flow with additional data and ticket

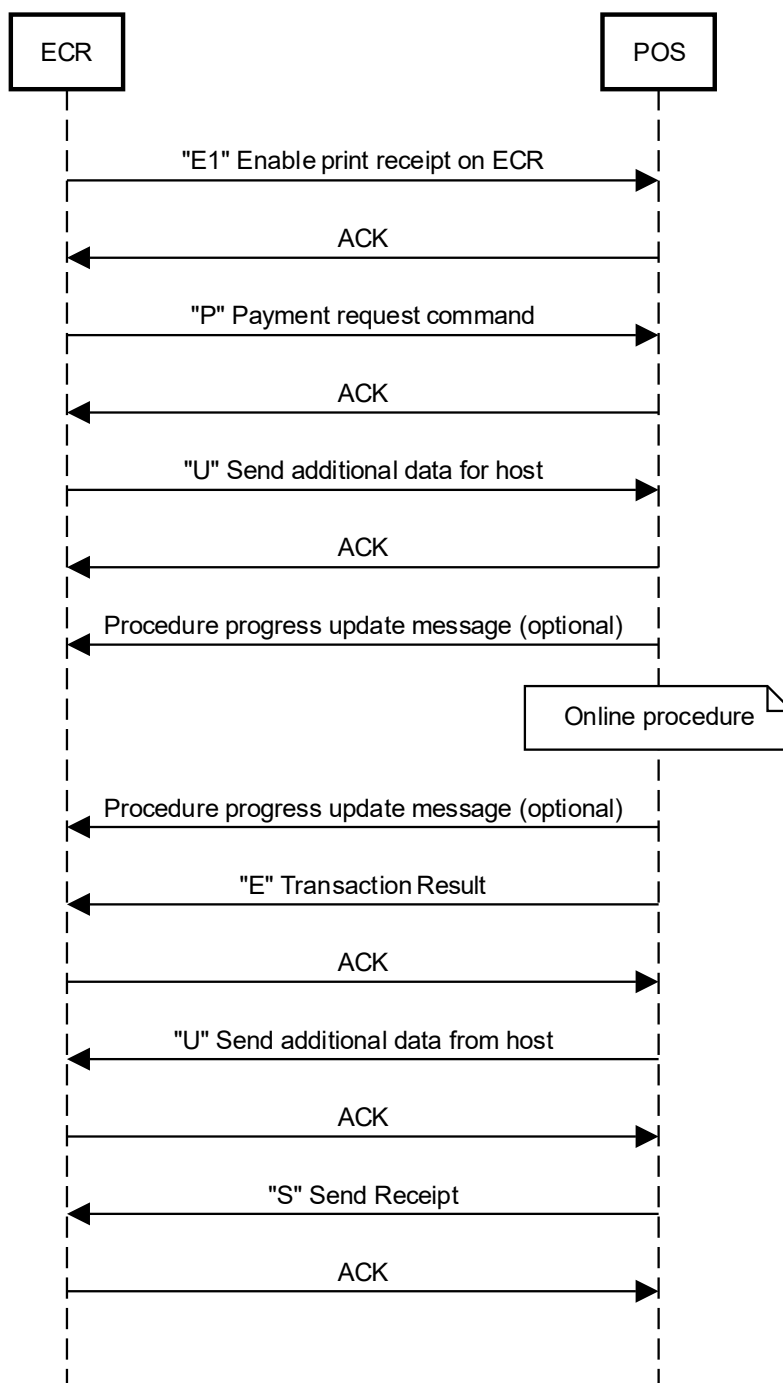

4. Communication protocol

4.1. Application packet format

The format used for application packets related to payment, reversal, refund, open session, close session, terminal status, send ticket, enable/disable ECR print and receipt reprint, is defined as follows.

This is possible because all data composing application messages is ASCII (0 to 127).

Pos	Field name	Value	Type	Lenght (bytes)
1	Start of text	0x02	Binary	1
2...N	Application message		Binary	N
N+1	End of Text	0x03	Binary	1
N+2	LRC		Binary	1

All the application-level packets have a physical confirmation message in response from the peer.

4.2. Procedure progress update packet format

During the procedures that implies a connection to the host, the terminal can transmit a message containing information about the progress of current procedure. The messages are 20 chars long to be easily displayed on the ECR display. The progress update messages does not require the physical confirmation message from the cash register.

Pos	Field name	Value	Type	Lenght (bytes)
1	Start of heading	0x01	Binary	1
2	Message		Binary	20
22	End of trasmission	0x04	Binary	1

4.3. Confirmation/refusal packet format

The confirmation/denial messages sent to the peer always have the following format:

Confirmation message (ACK):

Pos	Field name	Value	Type	Lenght (bytes)
1	ACK	0x06	Binary	1
2	ETX	0x03	Binary	1
3	LRC		Binary	1

Refusal message (NAK):

Pos	Field name	Value	Type	Lenght (bytes)
1	NAK	0x15	Binary	1
2	ETX	0x03	Binary	1
3	LRC		Binary	1

5. Application Messages

5.1. Payment

5.1.1. Payment request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'P' (0x50)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	2	N	Reserved – fixed to '0' (0x30)
22	1	N	Start transaction when card already present: '0' = start with card not yet inserted in the terminal '1' = start with card already inserted in the terminal
23	1	N	Payment type: '0' = automatic card recognition on terminal with customer selection in case of cobranded cards '1' = only debit cards '2' = only credit cards '3' = other cards
24	8	N	Transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	128	AN	Text to be print (Code contract) at the end of the payment receipt. The field is always 128 chars long, it's right aligned, filled with ' ' (0x20) on the left. The terminal shall only print valid chars, skipping the blanks.
160	8	N	Reserved – fixed to '0' (0x30)

5.1.2. Payment response message without currency exchange data (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)

11	2	N	Transaction result: "00" = OK "01" = KO "05" = card not present (valid only if field 22 in request message is '1' = start with card already present) "09" = received unknown Tag from GT
----	---	---	--

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.

5.1.3. Payment response message with currency exchange data (from Terminal)

Fabrick S.p.A.

P.zza Gaudenzio Sella 1
13900 Biella

Iscritta nel Reg. Impr. C.C.I.A.A.
Monte Rosa Laghi Alto Piemonte
REA BI- 202965

CF 02654890025
Appartenente al Gruppo IVA Maurizio
Sella S.A.A. con P.IVA 02675650028

Capitale sociale € 18.240.338,00
segreteria.fabrick@pec.fabrick.com
www.fabrick.com

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'V' (0x56)
11	2	N	Transaction result: "00" = OK "01" = KO "05" = card not present (valid only if field 22 in request message is '1' = start with card already present) "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved - fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the

			right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action code related to current payment operation.
75	8	N	Transaction amount original, right aligned, with '0' filling on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
83	1	N	Currency exchange transaction flag. The value is set to '1' only when the transaction has been performed with a currency different from terminal currency. Important: if this value is '0', following fields are not meaningful.
84	8	N	Exchange rate, right aligned with 4 decimal digits. – Received by the host "DCC".
92	3	A	Alphanumeric currency code of transaction currency, as received by the host "DCC"
95	12	N	Transaction amount in the transaction currency, right aligned with '0' (0x30) filler on the left - Received by the host "DCC".
107	1	N	Precision (number of decimals) of transaction currency.
108	10	N	Reserved – fixed to '0' (0x30)

5.2. Payment with extended result

5.2.1. Extended payment request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'X' (0x58)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	2	N	Reserved - fixed to '0' (0x30)
22	1	N	Start transaction when card already present: '0' = start with card not yet inserted in the terminal '1' = start with card already inserted in the terminal
23	1	N	Payment type: '0' = automatic card recognition on terminal with customer selection in case of cobranded cards '1' = only debit cards '2' = only credi cards '3' = other cards
24	8	N	Transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	128	AN	Text to be print (Code contract) at the end of the payment receipt. The field is always 128 chars long, it's right aligned, filled with ' ' (0x20) on the left. The terminal shall only print valid chars, skipping the blanks.
160	8	N	Reserved - fixed to '0' (0x30)

5.2.2. Extended payment response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)

11	2	N	Transaction result: "00" = OK "01" = KO "05" = card not present (valid only if field 22 in request message is '1' = start with card already present) "09" = received unknown tag from GT
----	---	---	--

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action code related to current payment operation.

75	8	N	Transaction amount received by host, right aligned, with '0' filling on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
83	10	N	Reserved – fixed to '0' (0x30)

5.3. Refund

5.3.1. Refund request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'A' (0x41)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	4	N	Reserved – fixed to '0' (0x30)
24	8	N	Transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	8	N	Reserved – fixed to '0' (0x30)

5.3.2. Refund response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'A' (0x41)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT
13	19	A	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	11	A	Acquirer ID. The field is left aligned, filled with blanks on the right.
52	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

5.4. Close session

5.4.1. Close Session request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'C' (0x43)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	7	N	Reserved - fixed to '0' (0x30)

5.4.2. Close Session response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'C' (0x43)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	16	N	POS Total amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
29	16	N	Host Total amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	19	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
32	3	N	Action code related to current payment operation

35	10	N	Reserved - fixed to '0' (0x30)
----	----	---	--------------------------------

5.5. Terminal totals

5.5.1. Terminal Totals request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'T' (0x54)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	7	N	Reserved – fixed to '0' (0x30)

5.5.2. Terminal Totals response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'T' (0x54)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT
13	16	N	POS Total amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
29	6	A	Reserved – fixed to '0' (0x30)

5.6. Reversal

5.6.1. Reversal request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'S' (0x53)
11	8	N	Cash register ID
19	6	N	STAN of the transaction to be reversed. If the field is filled with '0' (0x30) no check is performed. If the value is different from "000000", the terminal performs the reversal only if the value is equal to the last payment transaction STAN.
25	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
26	1	N	Reserved – fixed to '0' (0x30) (Terminal requires the same card to perform the reversal) This field could be set with also other two values "1" and "2" – NOT MANAGED by Pax Terminal: "1" => terminal doesn't require the card and no ticket is printed "2" => terminal doesn't require the card and standard reversal ticket is printed

5.6.2. Reversal response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.

32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Reserved – fixed to '0' (0x30)
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action code related to current payment operation.
75	10	N	Reserved – fixed to '0' (0x30)

5.7. Card verification

5.7.1. Card Verification request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'H' (0x48)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	2	N	Reserved – fixed to '0' (0x30)
22	1	N	Card Verification for "Terminale Telematico" '0' = standard card verification '1' = "Terminale Telematico" card verification
23	1	N	Payment type: '0' = automatic card recognition on terminal with customer selection in case of cobranded cards '1' = only debit cards '2' = only credit cards '3' = other cards
24	16	N	Reserved – fixed to '0' (0x30)

5.7.2. Card Verification response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.

32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	3	N	Action code related to current payment operation.
40	8	N	Reserved - fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.

5.8. Run DLL

The “RUN DLL” application message lets you run the DLL profile procedure with the reference GT on a POS terminal.

Additional TAG management cannot be used in the DLL run message.

5.8.1. Run DLL request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'D' (0x44)
11	6	N	Reserved – fixed to '0' (0x30)
17	1	N	Transaction type Flag: 0 = run the manual DLL procedure. 1 = run the “First DLL” procedure. 2 = return Acquirer Data (RFU)
18	1	N	Reserved – fixed to '0' (0x30)
19	2	N	Reserved – fixed to '0' (0x30)
21	100	AN	Reserved – fixed to '0' (0x30)

5.8.2. Run DLL response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)
11	2	N	Transaction result: “00” = OK “01” = KO
13	6	N	STAN. Transaction sequence number.
19	6	N	ID online. Online operation progressive number.

If transaction result is positive (00)

Pos	Lenght	Type	Content
25	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.
32	220	AN	Reserved – fixed to '0' (0x30)

If transaction result is negative (01)

Pos	Lenght	Type	Content
25	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
49	11	N	Reserved – fixed to '0' (0x30)

5.9. POS status

"POS Status" request messages report the terminal status to the ECR operation and software versions of the applications on board the terminal itself.

The software version for each application on board the terminal is always identified by one string of alphanumeric characters consisting of:

- 3 letters: module identification
- 5 characters: release identification

5.9.1. POS status request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 's' (0x73)

5.9.2. POS status response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	N	Message code: 's' (0x73)
11	10	N	Reserved - fixed to '0' (0x30)
21	10	N	Terminal date and time in format "DDMMYYhhmm"
31	1	N	Terminal status: '0' = Terminal not configured; '1' = Terminal configured, no DLL; '2' = terminal operative (after a DLL) '3' = terminal not aligned (First DLL requested); '4' = KMPB/KPOS key corrupted (first DLL requested); '5' = DLL solicited by GT pending '6' = remote SW updated request pending If the terminal ECR connection parameters are not configured, the command will not have response.

32	N*8	AN	Terminal SW release. The three letters identifying the packages are defined as: “SYS” = operating system; “MAN” = manager; “SSA” = system security application; “MST” = master; “EMV” = payment application; “ECR” = cash register module; “SSL” = SSL manager; “EXT” = external manager. ES: SYS03.4ESSA05.5CMST08.55EMV08.81ECR01.55
----	-----	----	--

5.10. Additional data to/from host - TAG

The ADDITIONAL DATA FOR GT application message is only expected from the POS terminal when, in the single procedure activation commands, the relevant flag is found ("Presence of message with additional data for the GT")

There are two fields in this message that inform the terminal whether it should send the "additional data from GT message" after the procedure result message. The message with additional data is the only message that contains fields with variable length, indicated with the letter V in the LENGTH column in the table below.

5.10.1. Additional data for GT delivery message (from ECR)

Pos	Length	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'U' (0x55)
11	6	N	Payment Type: "0" => Standard payment "1" => Bill payment
17	2	N	ISO field number. Indicates the ISO-8583 field where data from GT that must be sent to ECR is found. This field is "00" by default and indicates that there is not data from GT to return to ECR. A value other than "00" alerts the terminal of: data from GT retrieval coordinates obligation to send additional data from GT message CURRENTLY THE FIELD IS SET AT "62"
19	8	A	TAG number. Indicates the TAG where data from GT that must be sent to ECR is found. This field is only significant if the previous field is not "00". The field is flush left, blank justified. TAG from GT length is fixed at 255 CURRENTLY THE FIELD IS FIXED AT 'DF8D01'
27	1	N	Reserved (fixed at "0" 30 hex)

28	4	N	Exclusive TAG index with additional data to be sent to GT. The field is considered as a byte map for which each byte corresponds to a single index. "0" corresponds to no TAG to be sent to GT. A value from 1 to 9 indicates the TAG base value, i.e.: 2) DF8102. The common TAG root to be sent corresponds to "DF81" The value "*" indicates a fixed Tag = Tag DF802A from ECRDLL >= 3.54. Example: no Tags to sent to G = "0000" a Tag index 2 to send to GT = "2000" (DF8102) a Tag index 5 and another index 8 to send to GT = "5800" (DF8105- DF8108" a Tag DF802A to send to GT = "*000" (DF802A) a Tag index 5 and DF802A Tg send to GT = "5*00" (DF8105- DF802A" Note: These additional Tag and relative value are sent to GT in the ISO field 47. There is an exception for some acquirer: - the root TAG is DF80 and not DF81 - the ISO field is 48 and not 47
32	5	N	Reserved (fixed at "0" 30 hex)
37	100-V	A	Privative TAG content. Max 100 characters - Min 1 character. The field is always closed by an end-of-field character 01B hex

The "Exclusive TAG content" field can be repeated for a maximum of 4 times.

5.10.2. Additional data from GT result message (from Terminal)

The additional data from GT message is only sent by the POS terminal if the ISO number field in the "Message with additional data for GT" is not "00".

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'U' (0x55)
11	6	N	Reserved (fixed at "0" 30 hex)
17	3	N	Data from GT field length. Indicates the length of the next field
20	255-V	A	Additional data from GT that must be sent to ECR
20+n	10	N	Reserved (fixed at "0" 30 hex)

5.11. Send last result

Whenever the POS terminal runs one of the following transactions, commanded by the remote device: Payment (all types), Offset, Credit, Pre-authorisation (request, integration, and closure) and Card check, it saves the transaction result message sent by the remote device in its static memory. If saved, it includes the “additional data from GT result” message. When the remote device wants to retrieve these results, it sends the terminal this command.

The terminal does not run any sequence check and always keeps this message even if any other transaction was run that does not require the result message to be saved (example, DLL, totals, etc.).

5.11.1. Receipt reprint request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'G' (0x47)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	3	N	Reserved (fixed at "0" 30 hex)

5.11.2. Last result request feedback message (from ECR)

The feedback message is exactly the same as the last RESULT message saved during the foreseen procedures. If required by the command message, the additional data from GT message is also sent.

The sequence is the same as a normal command result.

5.12. Enable/disable printing receipt on ECR

The application message of "Enable/disable printing receipt on ECR" has as only reply the confirmation message (ACK-ETX-LRC).

The "POS" terminal when it goes back to idle, automatically enable receipts printing on its printer. At the beginning of each procedure triggered by the "ECR", if it's required to print the receipt on the "ECR" printer, the "enable printing receipt on ECR" command shall be sent.

- If the terminal does not receive any "Enable/disable printing receipt on ECR", or if receives the command of "Disable printing receipt on ECR", the receipt of the requested procedure is printed by the terminal.
- If the terminal receives the "Enable printing receipt on ECR" command, the receipt of the requested procedure is always sent to the "ECR". The "POS" terminal sends the receipt lines using the "S" command

In any case, at the end of any procedure requested by the cash register, the terminal returns automatically in the "print on terminal enabled" status.

5.12.1. Enable/disable printing receipt on ECR message (from ECR)

Pos	Lenght	Type	Content	
1	8	N	Terminal ID (00000000-99999999)	
9	1	A	Reserved – fixed to '0' (0x30)	
10	1	A	Message code: 'E' (0x45)	
11	1	N	Enable disable printing receipt on ECR flag:	
			Value	Meaning
			'0'	disable printing receipt on ECR (any receipt will be print by terminal)
			'1'	enable printing receipt on ECR (any receipt shall be sent to the ECR using 'S' command)
			'2'	enable printing both on terminal and on ECR (terminal prints on own printer the standard receipts – merchant and customer - and then sends it to ECR via "S" command) For "Payment with extended result", terminal works as this flag was set to '1'.
'3'	enable printing merchant receipt on ECR and customer copy on terminal's printer. For "Payment with extended result", this value is not accepted.			

5.13. Send ticket

The "POS" terminal, through this command, sends the lines of the receipt to be printed. Every message can contain up to a maximum of 200 characters; multiple lines of printing, with different formats indicated by specific control characters can be sent.

- In standard format, or double height format, both normal and bold, any line is composed by 24 characters; pos terminal sends the ticket with all rows composed by 24 characters.
- In double width format, both normal and bold, any line is composed by 12 characters;
- In compressed format, any line is composed by 42 characters.

Important

- The new line character 0x7D reset the format to standard, 24 characters and if it's the first character of a new line, it should be interpreted as a request to print a "empty line" (24 black).
- If the line is long 24 character the 0x7D is not required because and the printer should consider automatically the line as "completed" and the next character will be printed in a new line.
- In case the line of printing is preceded by the characters 0x7B, 0x7C or 0x5E the number of characters after which a line wrap is inserted is always 12 or 42, therefore it is not necessary to insert an end-of-line character 0x7D.
- If the row should be printed in "double height bold" (example the row with the amount when the transaction is successful) the first character of this row must be 0x7F; If the line is long 24 character, the next one will be printed automatically in the normal format without the presence of any special character.

5.13.1. Send ticket message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	N	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'S' (0x53)
11	1-200	A	Lines to be printed; formatted to 12, 14 or 42 chars per line.

Field 11 can contain the following special characters, with the specified meaning:

- 0x7D = new line (CR+LF) and normal character format reset; - USED
- 0x7E = start of double height normal characters; - NOT USED
- 0x7F = start of double height bold characters; - USED
- 0x7B = start of double width normal characters; - NOT USED
- 0x7C = start of double width bold characters; - NOT USED
- 0x5E = start of compressed characters. - NOT USED

Last Send ticket message shall contain as last characters of field 11, the following sequence:



- 0x7D = new line (CR+LF);
- 0x7D = new line (CR+LF);
- 0x7D = new line (CR+LF);
- 0x7D = new line (CR+LF);
- 0x7D = new line (CR+LF);
- 0x7D = new line (CR+LF);
- 0x1B = ticket end.

Fabrick S.p.A.

P.zza Gaudenzio Sella 1
13900 Biella

Iscritta nel Reg. Impr. C.C.I.A.A.
Monte Rosa Laghi Alto Piemonte
REA BI- 202965

CF 02654890025
Appartenente al Gruppo IVA Maurizio
Sella S.A.A. con P.IVA 02675650028

Capitale sociale € 18.240.338,00
segreteria.fabrick@pec.fabrick.com
www.fabrick.com

Iscritta all'Albo degli Istituti di Pagamento - Soggetta all'attività di direzione e coordinamento di Banca Sella Holding S.p.A.

5.14. Reprint ticket

This command can be used to ask the "POS" terminal to print a copy of the last financial receipt created. The command contains the indication whether the copy of the receipt must be printed directly from the terminal on its own printer or if the copy must be sent to the ECR.

In this last case the POS terminal, after having confirmed the "reprint ticket" command, sends the copy of the receipt to the ECR using the "S" type commands.

If the "POS" terminal is without a printer, the "reprint ticket" command with direct printing on the terminal does not produce any results.

5.14.1. Send ticket message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	N	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'R' (0x52)
11	1	N	Enable disable printing receipt on ECR flag: '0' = disable printing receipt on ECR (any receipt will be print by terminal) '1' = enable printing receipt on ECR (any receipt shall be sent to the ECR using 'S' command)
12	1	N	Ticket type flag: '0' = last financial ticket; '1' = last service ticket.
13	10	A	Reserved - fixed to '0' (0x30)

5.15. Pre-authorization request

5.15.1. Pre-authorization request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'p' (0x70)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	2	N	Reserved - fixed to '0' (0x30)
22	1	N	Start transaction when card already present: '0' = start with card not yet inserted in the terminal '1' = start with card already inserted in the terminal
23	1	N	Payment type: '0' = automatic card recognition on terminal with customer selection in case of cobranded cards '1' = only debit cards '2' = only credit cards '3' = other cards
24	8	N	Pre-authorization transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	128	AN	Text to be print (Code contract) at the end of the payment receipt. The field is always 128 chars long, it's right aligned, filled with ' ' (0x20) on the left. The terminal shall only print valid chars, skipping the blanks.
160	8	N	Reserved - fixed to '0' (0x30)

5.15.2. Pre-authorization response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved - fixed to '0' (0x30)
10	1	A	Message code: 'e' (0x65)
11	2	N	Transaction result: "00" = OK "01" = KO "05" = card not present (valid only if field 22 in request message is '1' = start with card already present) "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	8	N	Amount pre-authorized by the Host, right-aligned, with filler "0" (30 hex) on the left. The amount is always understood in euro cents (e.g. 6,50€ = 650).
49	9	N	Unique identifier of the pre-authorization received from Host and printed on the pre-authorization receipt issued by the terminal (Preauthorization Code)
58	3	N	Action Code of transaction received from Host.
61	7	N	The temporal parameters of transaction are received from Host in DDDHHMM format. The day is expressed as a sequential number from Jan 1st = 1 to Dec 31st = 365/366 of the current year.
68	3	N	Reserved – fixed to '0' (0x30)

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	3	N	Action Code of transaction received from Host.
40	31	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
71	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
72	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
83	6	N	STAN. Transaction sequence number.
89	6	N	ID online. Online operation progressive number.
95	12	N	Reserved – fixed to '0' (0x30)

5.16. Incremental authorization transaction

5.16.1. Incremental authorization request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'i' (0x69)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	4	N	Reserved – fixed to '0' (0x30)
24	8	N	Authorization transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	128	AN	Text to be print (Code contract) at the end of the payment receipt. The field is always 128 chars long, it's right aligned, filled with ' ' (0x20) on the left. The terminal shall only print valid chars, skipping the blanks.
160	9	N	Unique identifier of the pre-authorization received from Host and printed on the pre-authorization receipt issued by the terminal (Original Preauthorization Code)
169	8	N	Reserved – fixed to '0' (0x30)

5.16.2. Incremental authorization response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'i' (0x69)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	11	N	Acquirer ID. The field is left-aligned with filler Blank on the right.
46	6	A	Authorization code received from host
52	6	N	STAN. Transaction sequence number.

58	6	N	ID online. Online operation progressive number.
64	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.
71	3	N	Action Code of transaction received from Host.
74	2	N	Reserved – fixed to '0' (0x30)

5.17. Pre-authorization closure

5.17.1. Pre-authorization closure request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'c' (0x63)
11	8	N	Cash register ID
19	1	N	Presence of message with additional data for the GT '0' = additional data message not present '1' = additional data message present
20	4	N	Reserved – fixed to '0' (0x30)
24	8	N	Transaction amount, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
32	128	AN	Text to be print (Code contract) at the end of the payment receipt. The field is always 128 chars long, it's right aligned, filled with ' ' (0x20) on the left. The terminal shall only print valid chars, skipping the blanks.
160	9	N	Unique identifier of the pre-authorization received from Host and printed on the pre-authorization receipt issued by the terminal (Original Preathorization Code)
169	12	N	Reserved – fixed to '0' (0x30)

5.17.2. Pre-authorization closure response message without currency exchange data (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'c' (0x63)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.

32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action Code relating to the current payment operation. The field, if present, applies either to the positive and negative transactions.

5.17.3. Pre-authorization closure response message with currency exchange data (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'v' (0x76)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Authorization code received from host
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action Code relating to the current payment operation. The field, if present, applies either to the positive and negative transactions.
75	1	N	Currency exchange transaction flag. The value is set to '1' only when the transaction has been performed with a currency different from terminal currency. Important: if this value is '0', following fields are not meaningful.
76	8	N	Exchange rate, right aligned with 4 decimal digits. – Received by the host "DCC"
84	3	A	Alphanumeric currency code of transaction currency, as received by the host.

87	12	N	Transaction amount in the transaction currency, right aligned with '0' (0x30) filler on the left - Received by the host "DCC".
99	1	N	Precision (number of decimals) of transaction currency.
100	10	N	Reserved - fixed to '0' (0x30)

5.18. Retroactive Reversal

Terminal receives the “Q” command from ECR with all data needed to perform a retroactive reversal.

If the terminal is not able to manage this procedure it sends the result message with the transaction result set to “91”.

If terminal can manage this procedure, it sends the request to the Host as data had been inputted by keyboard.

In the message sent to Host, the ISO field 56 must contain the correct “Original Message Type Identifier” basing on the value of the field “Transaction Type to reverse” received from ECR in the request message:

0 => 1206

1 => 1106

2 => 1226

Terminal doesn't perform any check on the retroactive reversal data received from ECR.

5.18.1. Retroactive Reversal request message (from ECR)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'Q' (0x51)
11	8	N	Cash register ID
19	5	A	Reserved – fixed to '0' (0x30)
24	1	N	Transaction Type to reverse '0' = reversal of a purchase '1' = reversal of a pre-authorization '2' = reversal of a pre-authorization closure
25	6	N	STAN, Transaction sequence number, of the transaction to reverse in retroactive mode
31	5	A	Card data (used for transaction to reverse in retroactive mode): International Card = last 4 digits In this case the first byte is set to “C” – example = “C1234” Italian debit card (Pagobancomat) = ABI Code – es: “12345”
36	11	N	Acquirer ID of the transaction to reverse in retroactive mode. The field is left aligned, filled with blanks on the right.
47	8	N	Transaction amount of the transaction to reverse in retroactive mode, right aligned, filled with '0' (0x30) on the left. Amount is always considered to be expressed in cents (e.g. 650 = 6,50)
55	6	A	Authorization code of the transaction to reverse in retroactive mode

61	10	N	Date&Time of the transaction to reverse in retroactive mode, in this format: "DMMYYhhmm"
71	10	N	Reserved – fixed to '0' (0x30)

5.18.2. Retroactive Reversal response message (from Terminal)

Pos	Lenght	Type	Content
1	8	N	Terminal ID (00000000-99999999)
9	1	A	Reserved – fixed to '0' (0x30)
10	1	A	Message code: 'E' (0x45)
11	2	N	Transaction result: "00" = OK "01" = KO "09" = received unknown tag from GT

If transaction result is positive (00)

Pos	Lenght	Type	Content
13	19	N	Card PAN, right aligned, filled with '0' (0x30) on the left. The PAN is sent following PAN truncation rules.
32	3	A	Transaction type: "ICC" = ICC card "MAG" = magnetic stripe card "MAN" = manual PAN entry "CLM" = c-less magstripe "CLI" = c-less ICC
35	6	A	Reserved – fixed to '0' (0x30)
41	7	A	Transaction date and time received from host in DDDHHMM. The day is expressed as number of days since 01/01 of current year. For example, July 29, 15:20 is sent as 2111520.

If transaction result is negative (01)

Pos	Lenght	Type	Content
13	24	A	Result description. This field shall report, using only ASCII characters, the reason of the denial. The field is left aligned, filled with blank on the right.
37	11	N	Reserved – fixed to '0' (0x30)

Common to any response

Pos	Lenght	Type	Content
-----	--------	------	---------

48	1	N	Card type: '1' = Bancomat card '2' = Credit card '3' = Other card
49	11	N	Acquirer ID. The field is left aligned, filled with blanks on the right.
60	6	N	STAN. Transaction sequence number.
66	6	N	ID online. Online operation progressive number.
72	3	N	Action Code relating to the current payment operation. The field, if present, applies either to the positive and negative transactions.
75	10	A	Reserved - fixed to '0' (0x30)

Fabrick S.p.A.

P.zza Gaudenzio Sella 1
13900 Biella

Iscritta nel Reg. Impr. C.C.I.A.A.
Monte Rosa Laghi Alto Piemonte
REA BI- 202965

CF 02654890025
Appartenente al Gruppo IVA Maurizio
Sella S.A.A. con P.IVA 02675650028

Capitale sociale € 18.240.338,00
segreteria.fabrick@pec.fabrick.com
www.fabrick.com

Iscritta all'Albo degli Istituti di Pagamento - Soggetta all'attività di direzione e coordinamento di Banca Sella Holding S.p.A.